



US 20230091879A1

(19) **United States**

(12) **Patent Application Publication**
Bollinger et al.

(10) **Pub. No.: US 2023/0091879 A1**

(43) **Pub. Date: Mar. 23, 2023**

(54) **PUMPED HEAT ENERGY STORAGE
SYSTEM WITH HOT-SIDE THERMAL
INTEGRATION**

F02C 1/10 (2006.01)

F02C 6/14 (2006.01)

F28D 20/00 (2006.01)

(71) Applicant: **MALTA INC.**, Cambridge, MA (US)

(52) **U.S. CL.**

CPC *F02C 1/005* (2013.01); *F02C 1/007*
(2013.01); *F02C 1/05* (2013.01); *F02C 1/10*
(2013.01); *F02C 6/14* (2013.01); *F28D*
20/0056 (2013.01); *F05D 2260/213* (2013.01);
F28D 2020/0078 (2013.01); *F28D 2020/0082*
(2013.01)

(72) Inventors: **Benjamin R. Bollinger**, Cambridge,
MA (US); **Bao H. Truong**, Cambridge,
MA (US)

(21) Appl. No.: **17/952,722**

(22) Filed: **Sep. 26, 2022**

(57)

ABSTRACT

Related U.S. Application Data

(63) Continuation of application No. 16/991,859, filed on
Aug. 12, 2020, now Pat. No. 11,454,167.


A system including: (i) a pumped-heat energy storage sys-
tem (“PHES system”), wherein the PHES system is operable
in a charge mode to convert electricity into stored thermal
energy in a hot thermal storage (“HTS”) medium; (ii) an
electric heater in thermal contact with the hot HTS medium,
wherein the electric heater is operable to heat the hot HTS
medium above a temperature achievable by transferring heat
from a working fluid to a warm HTS medium in a thermo-
dynamic cycle.

Publication Classification

(51) **Int. Cl.**

F02C 1/00 (2006.01)

F02C 1/05 (2006.01)

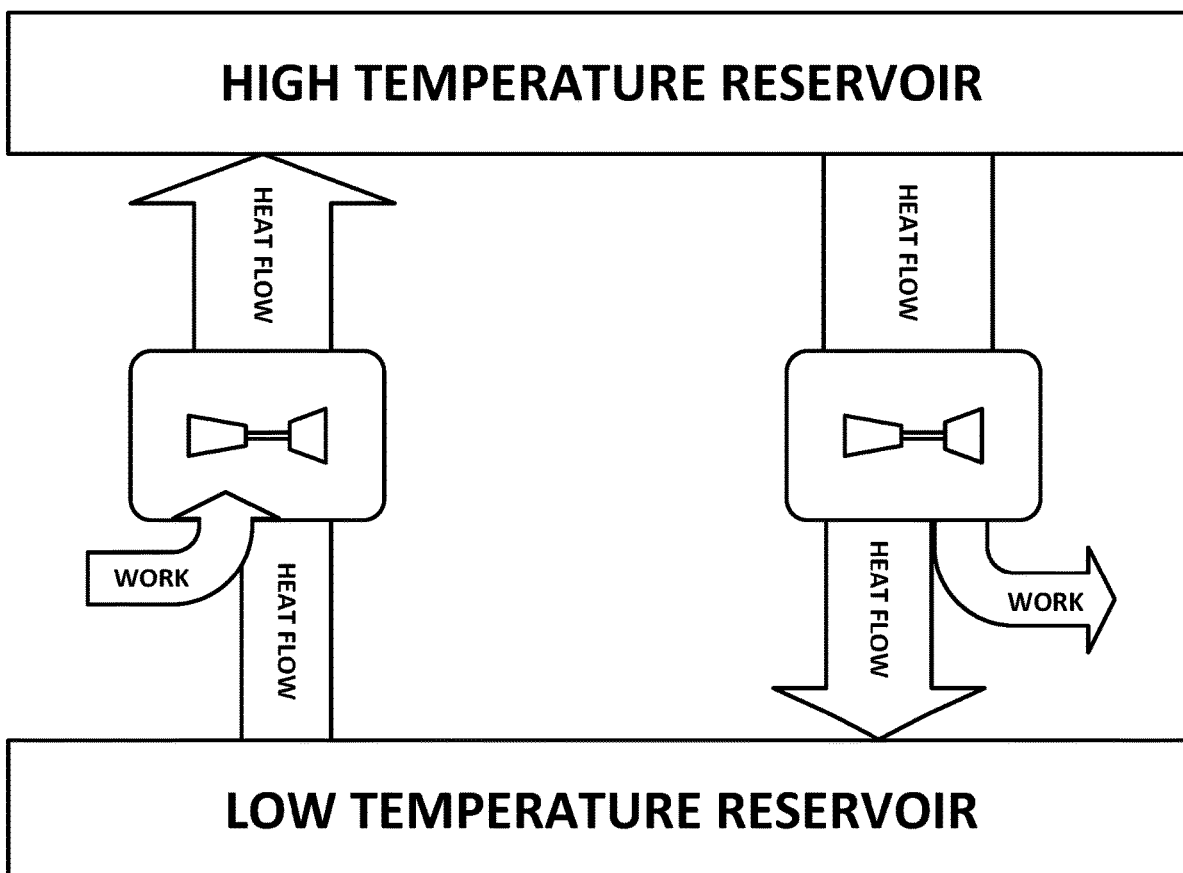

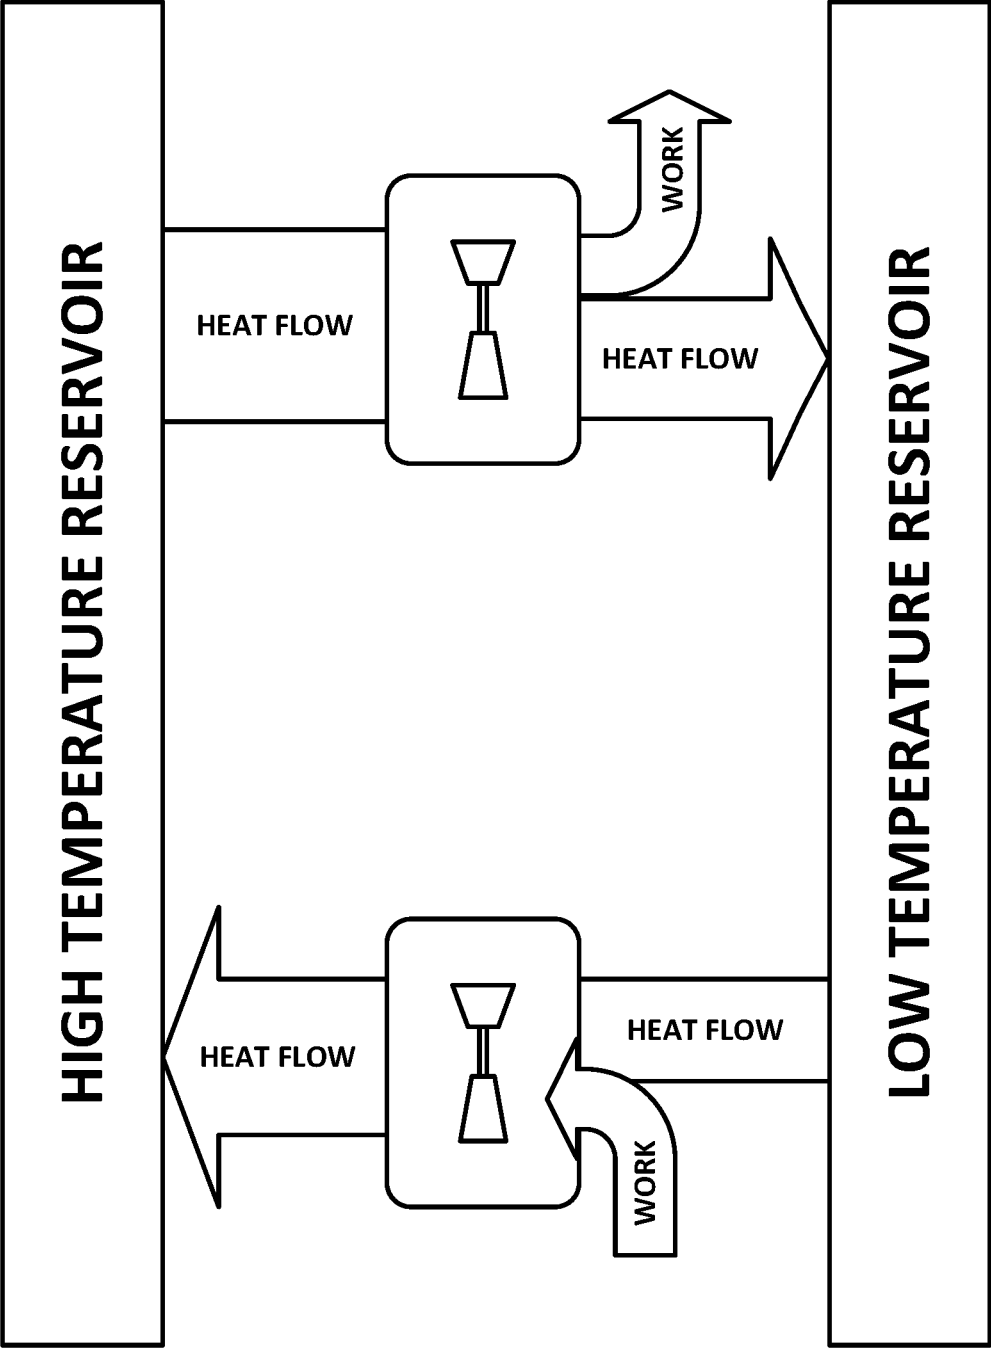


FIG. 1

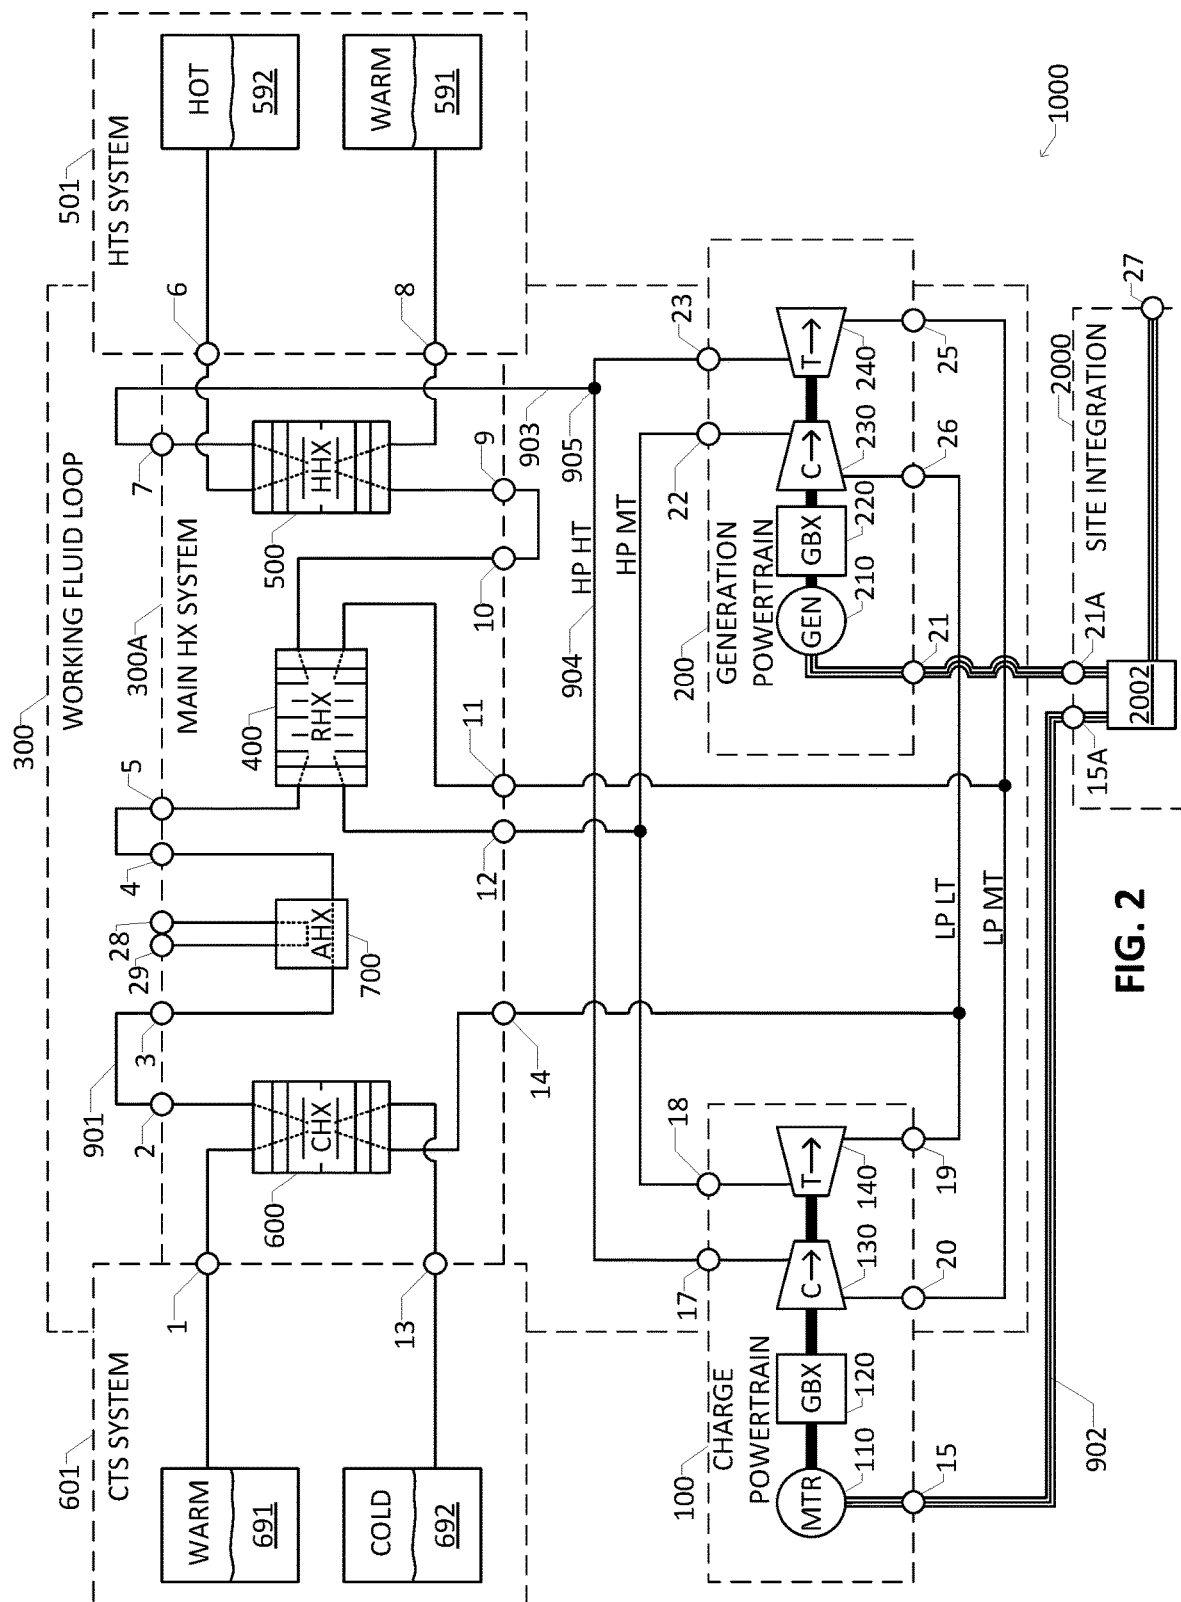
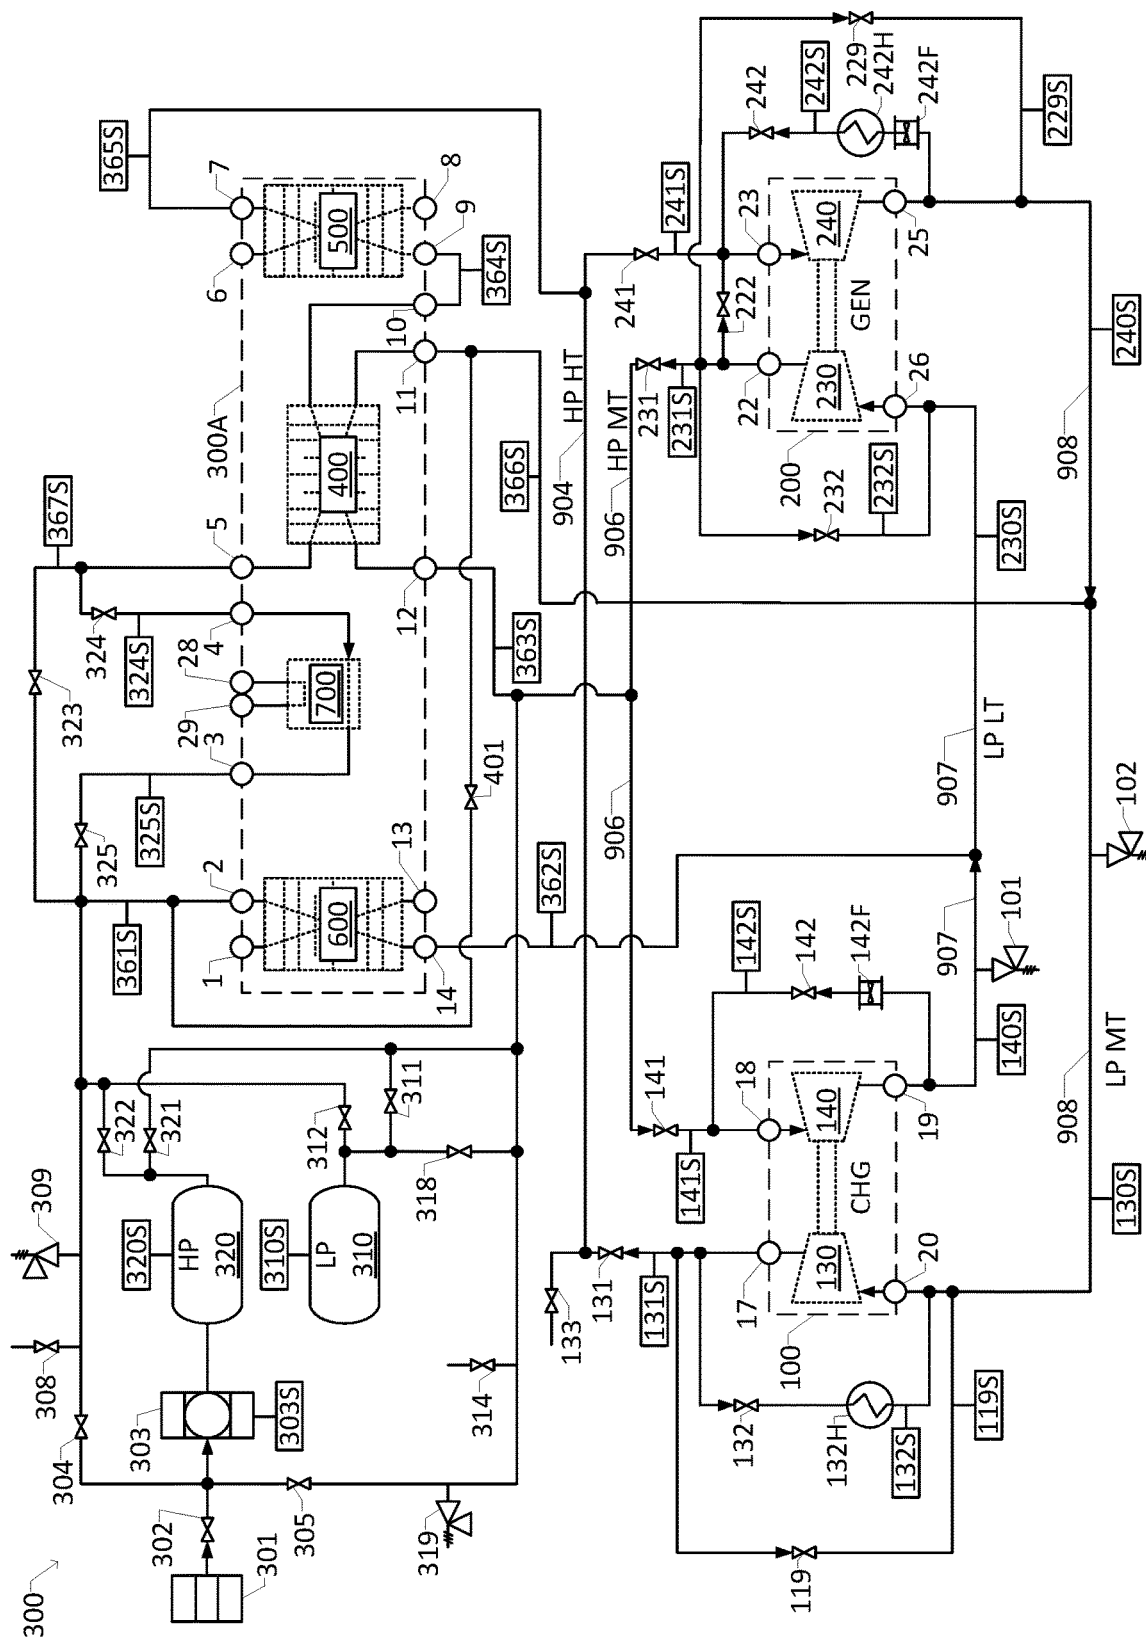
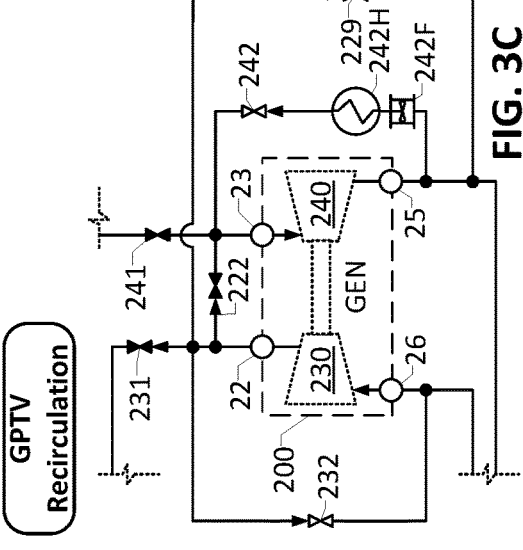
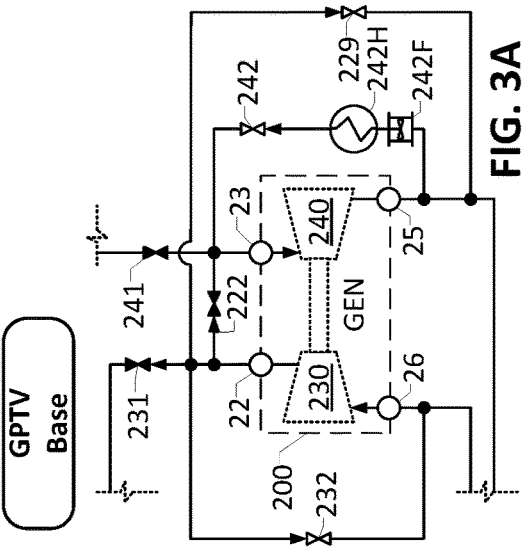
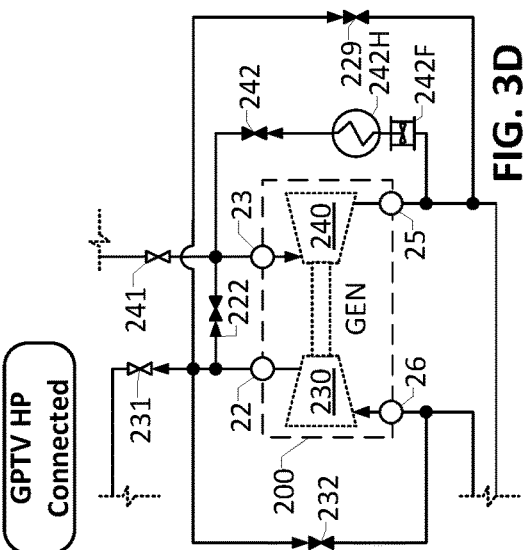
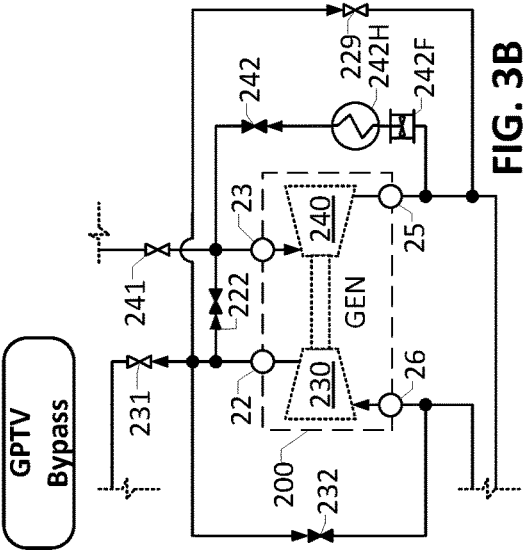


FIG. 2





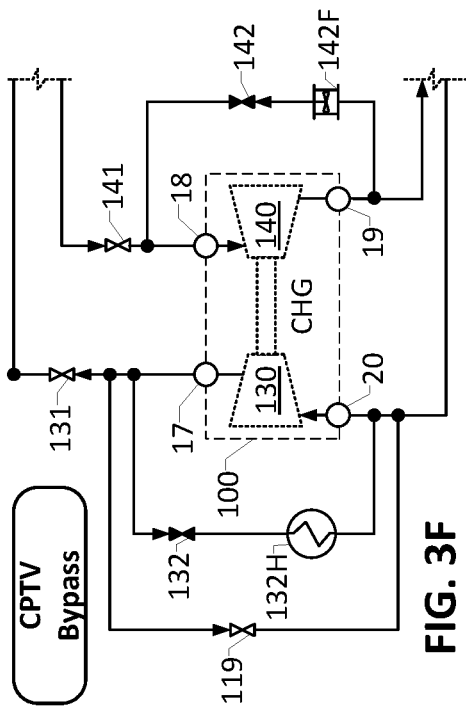


FIG. 3F

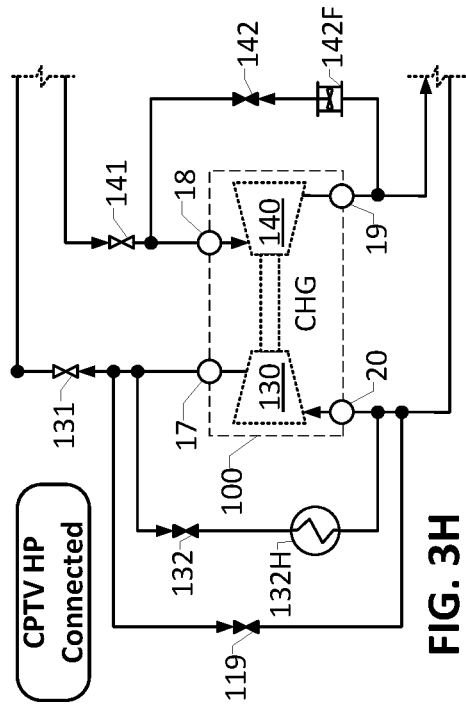


FIG. 3H

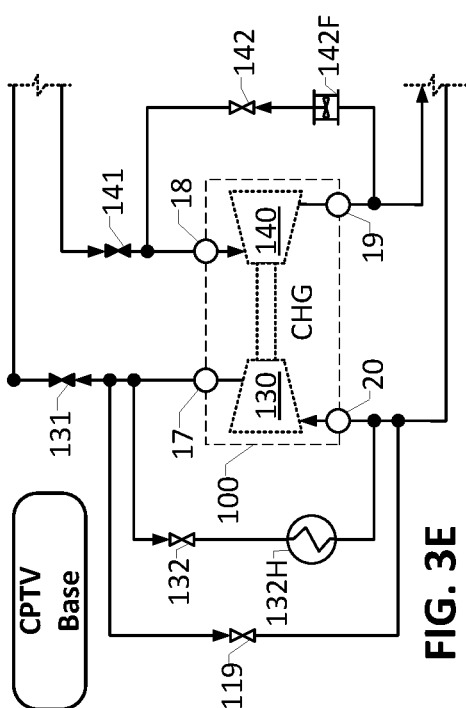


FIG. 3E

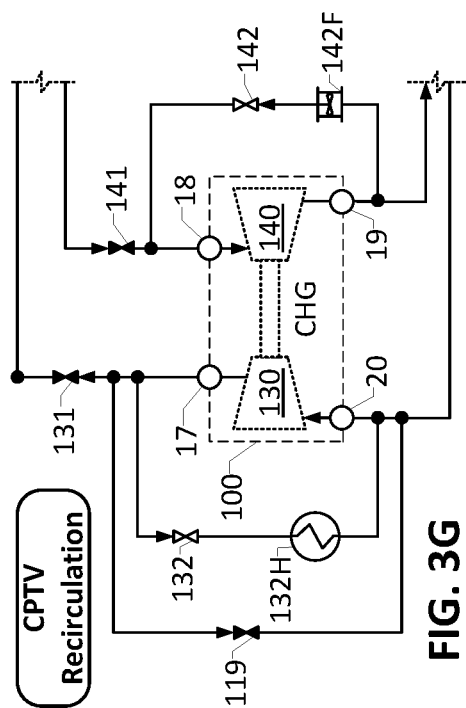


FIG. 3G

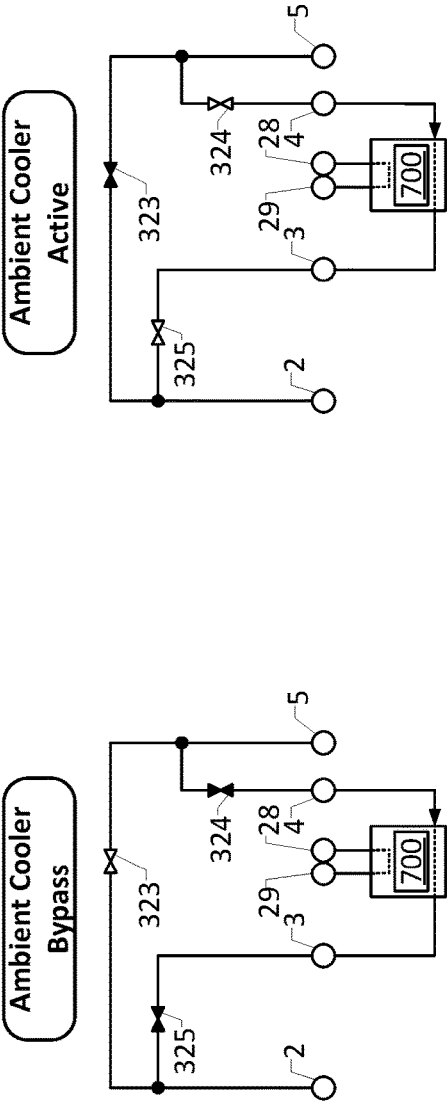


FIG. 3I

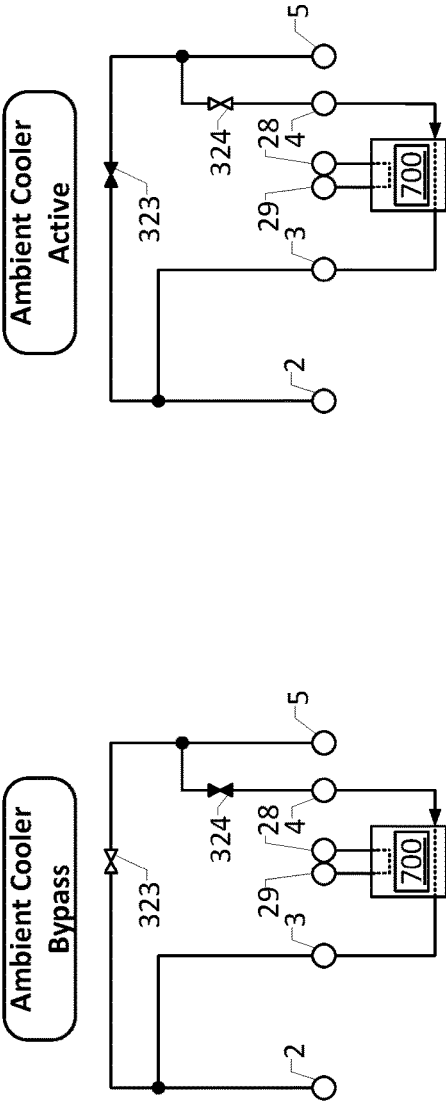


FIG. 3J

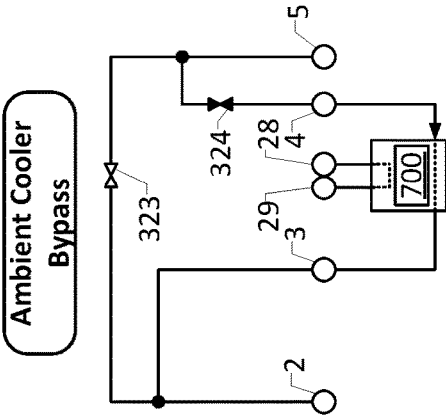


FIG. 3K

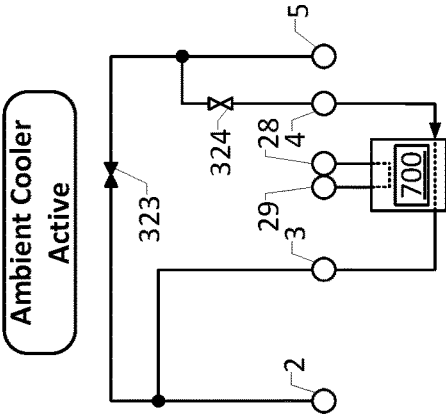


FIG. 3L

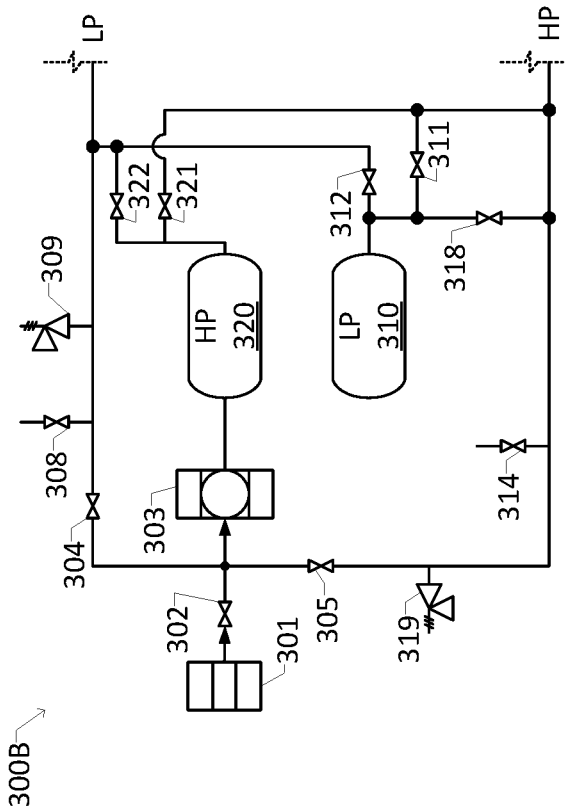


FIG. 3M

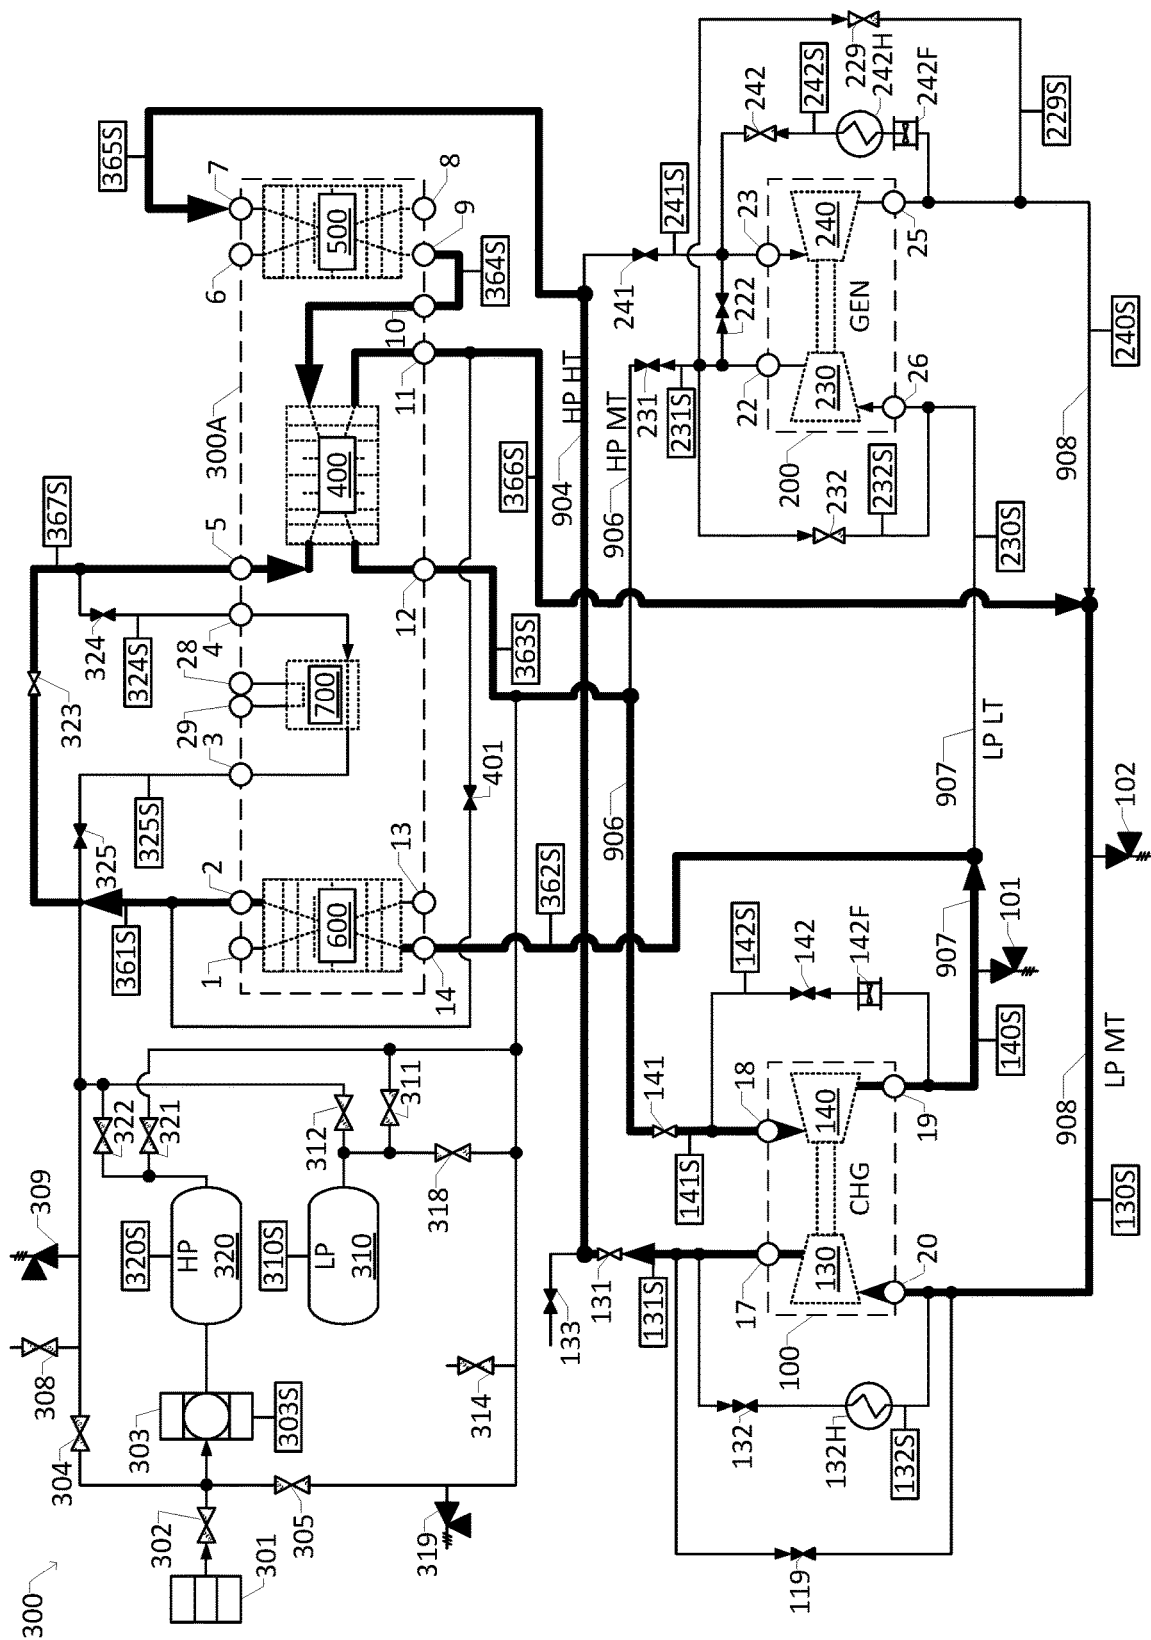


FIG. 3N

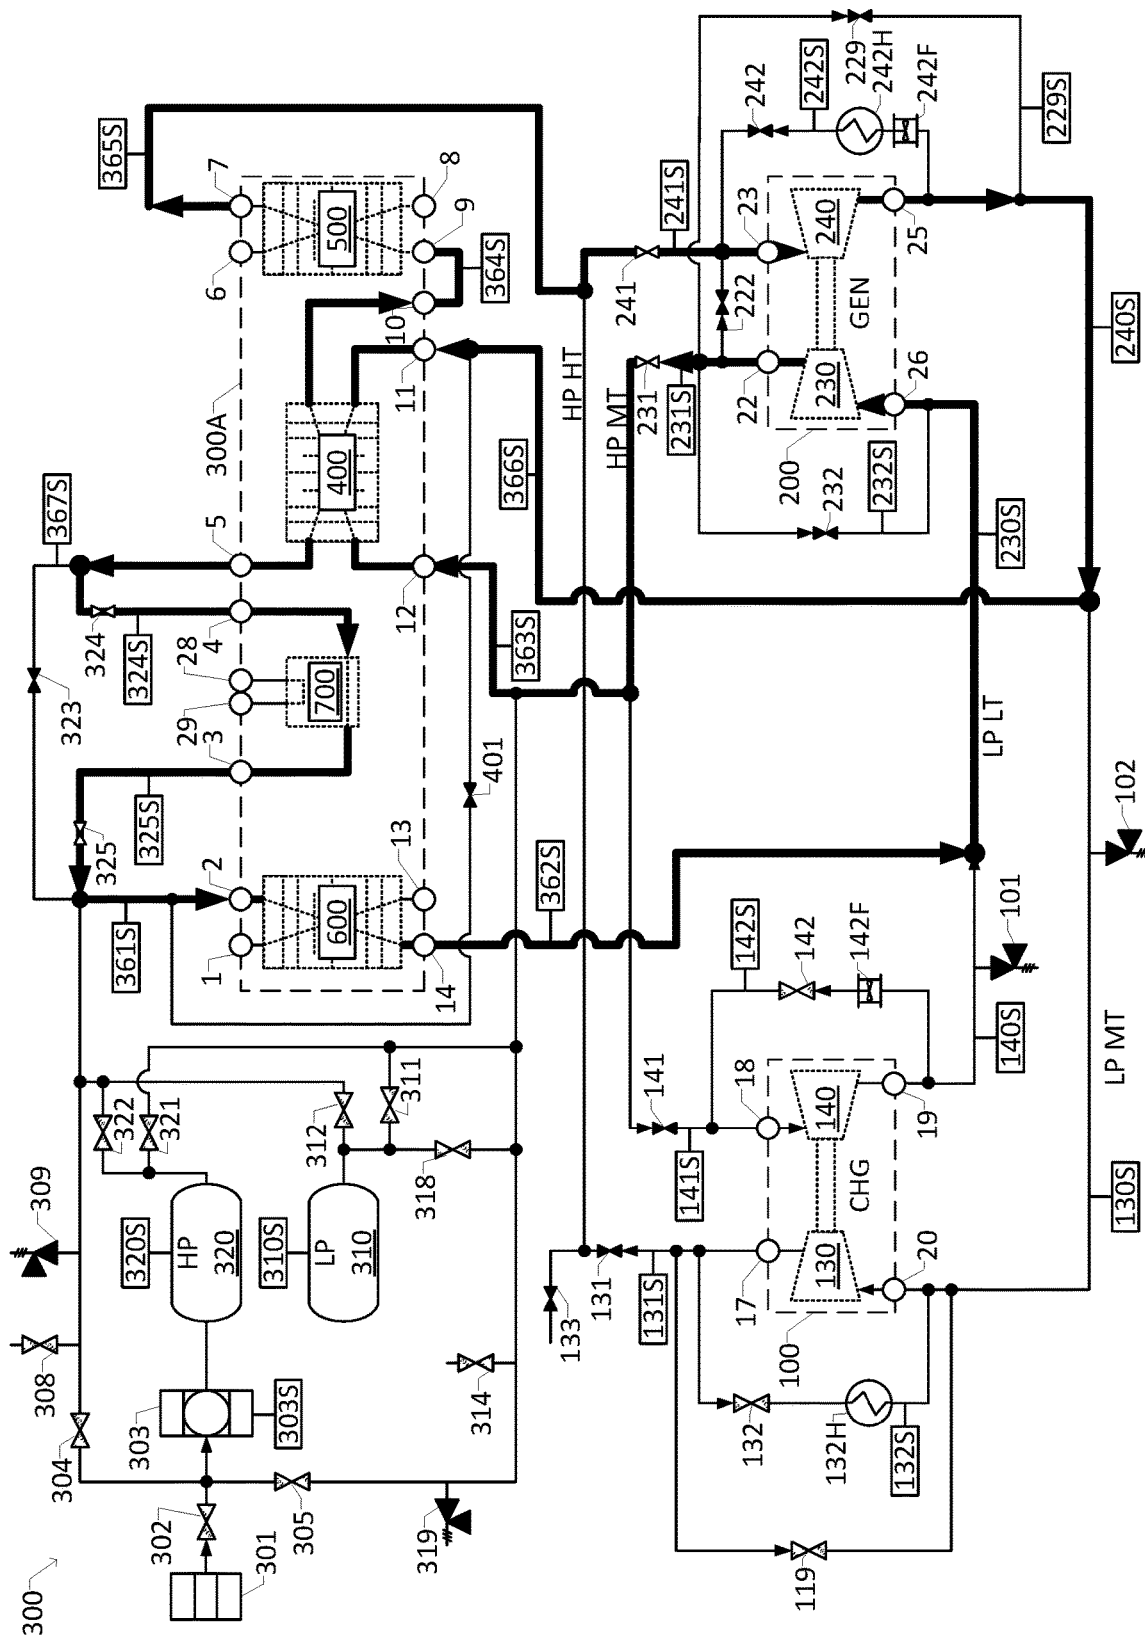


FIG. 30

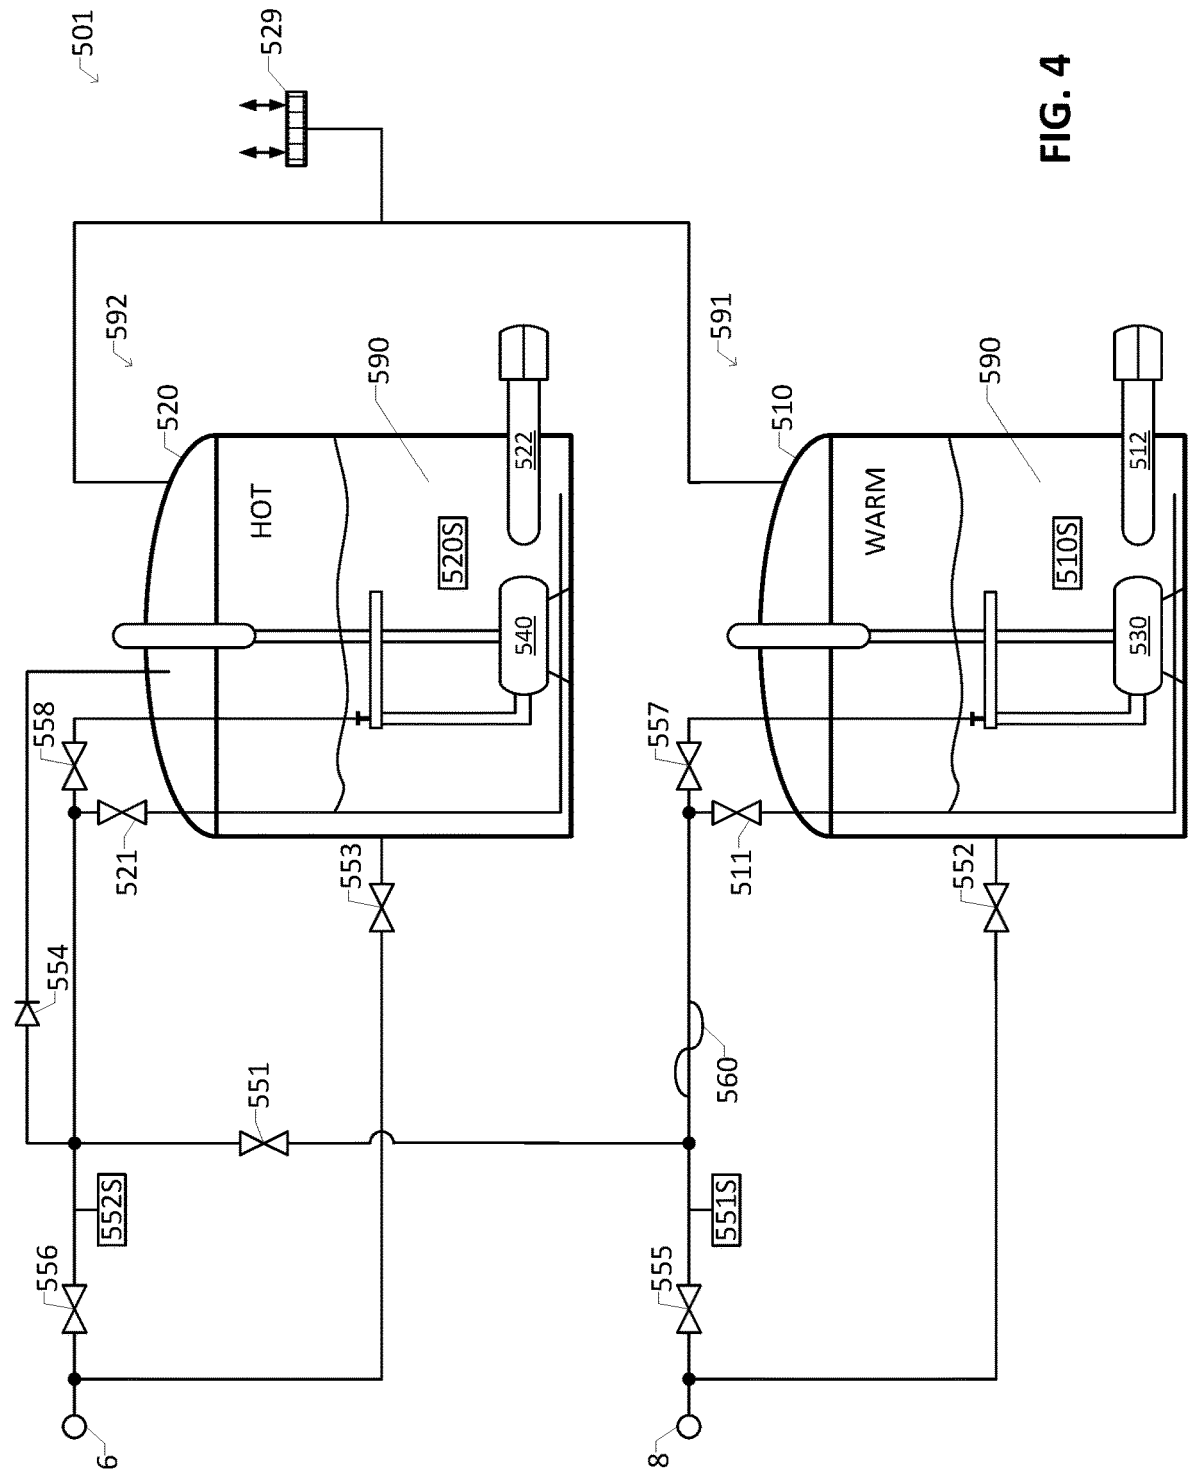


FIG. 4

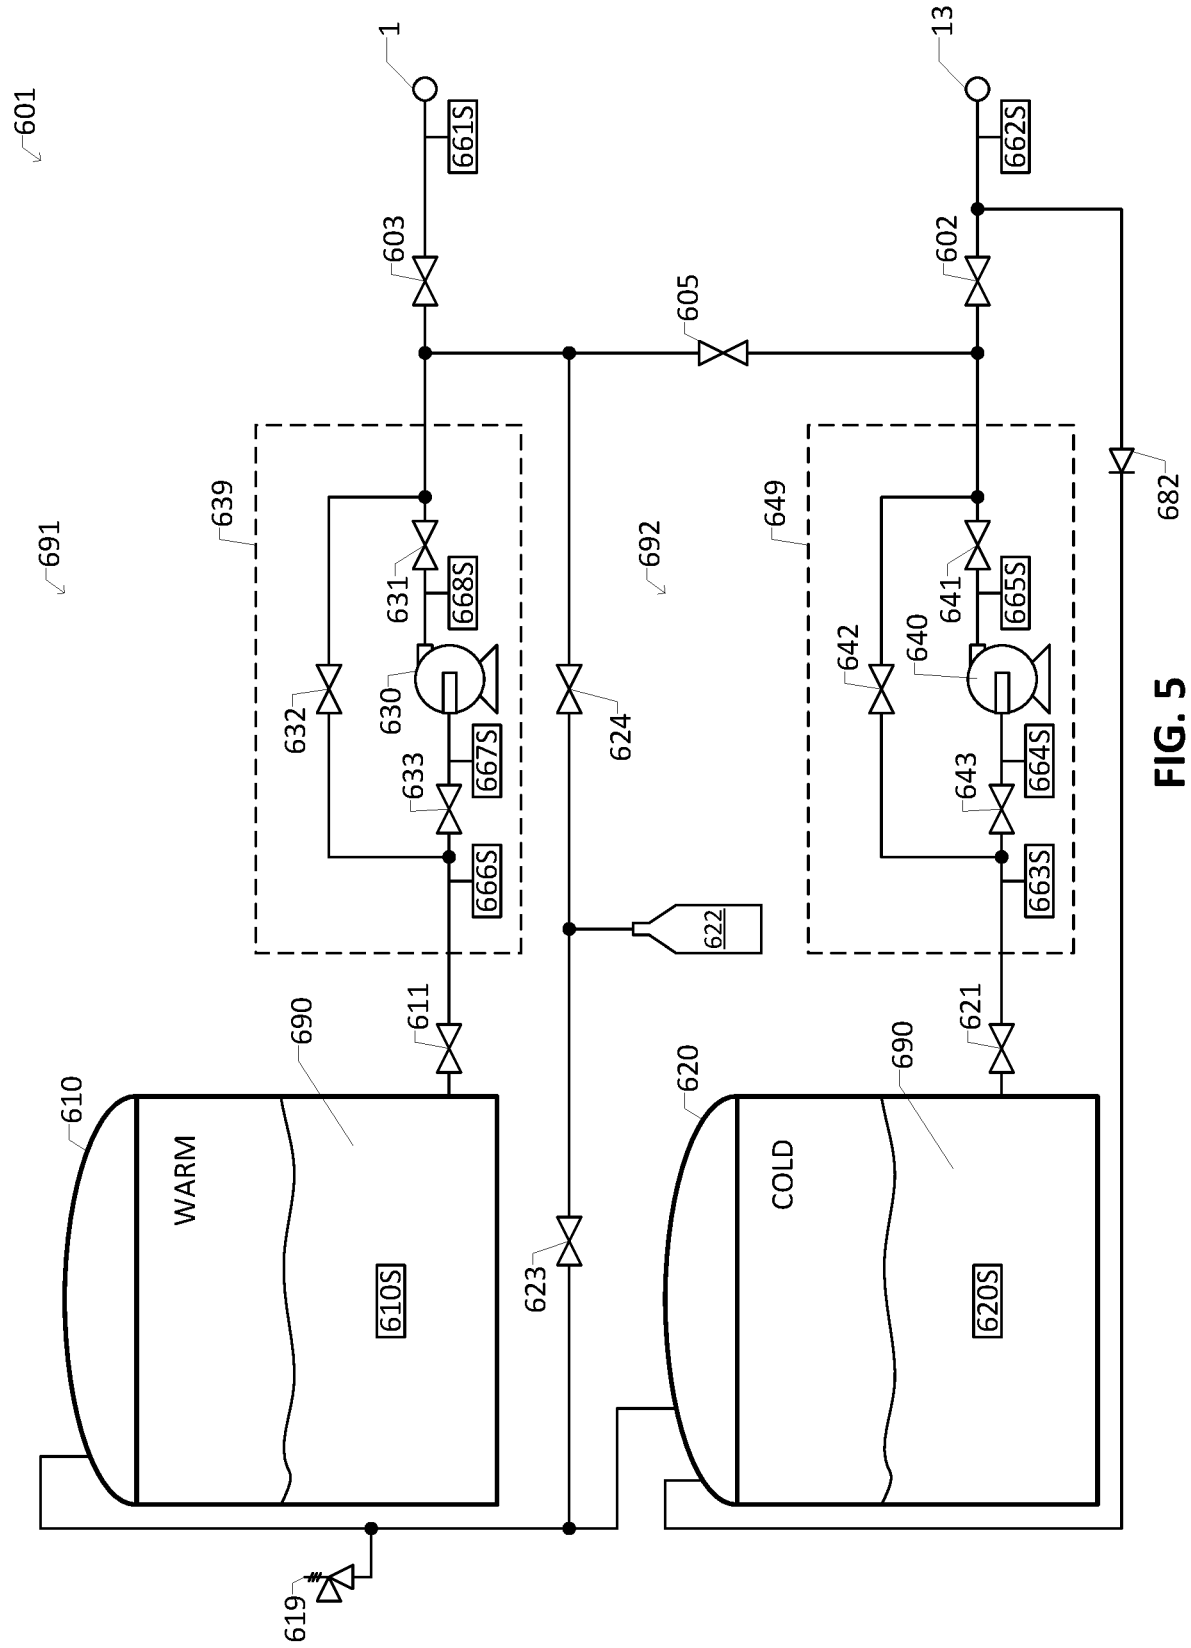


FIG. 5

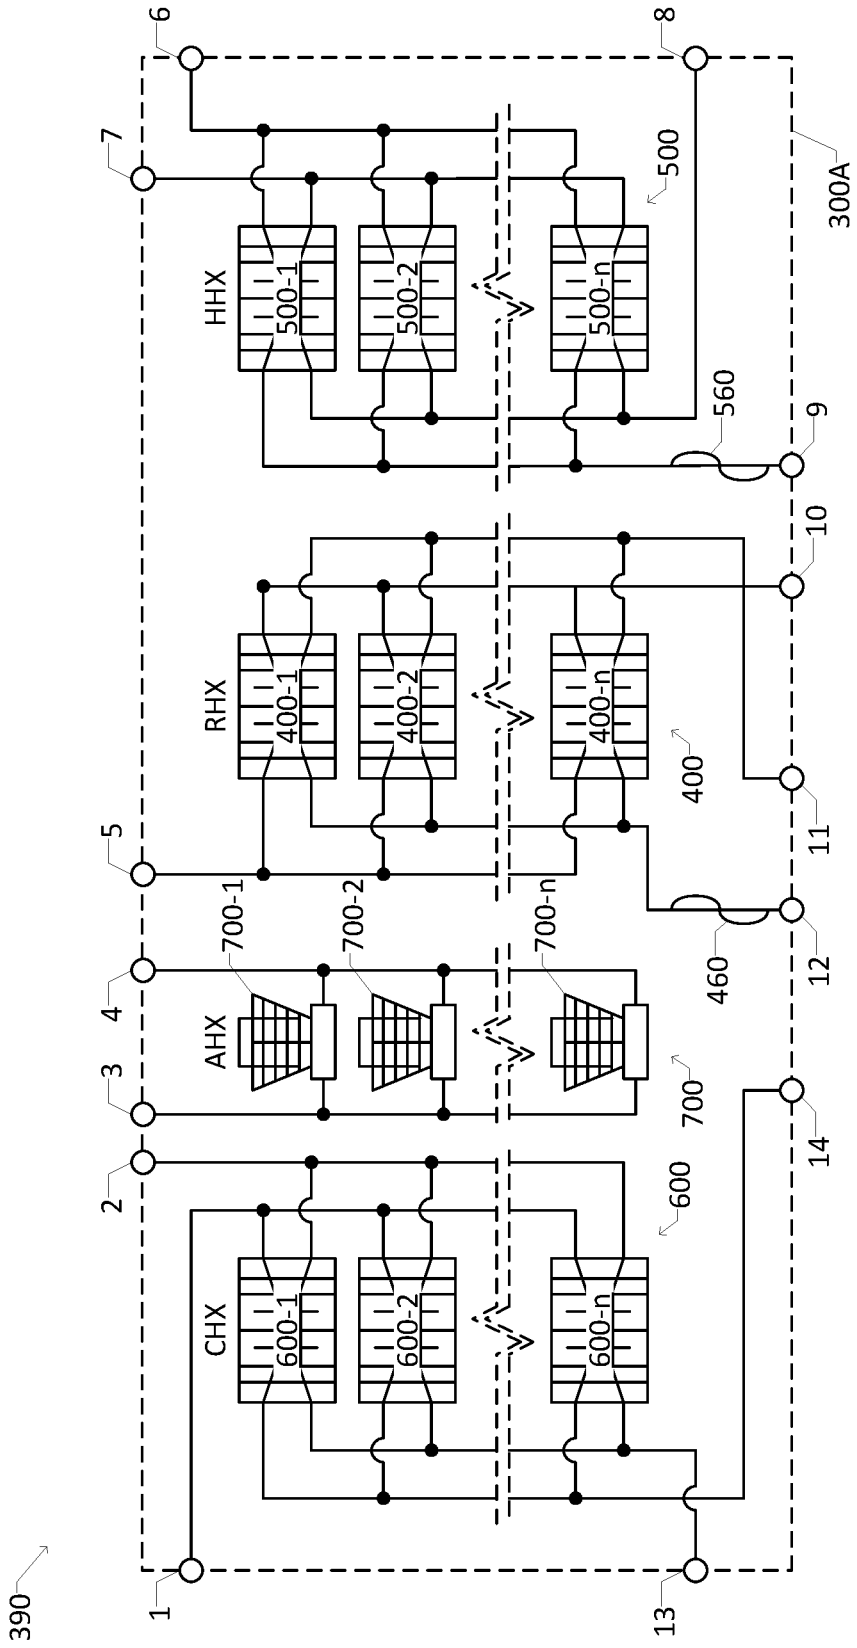


FIG. 6A

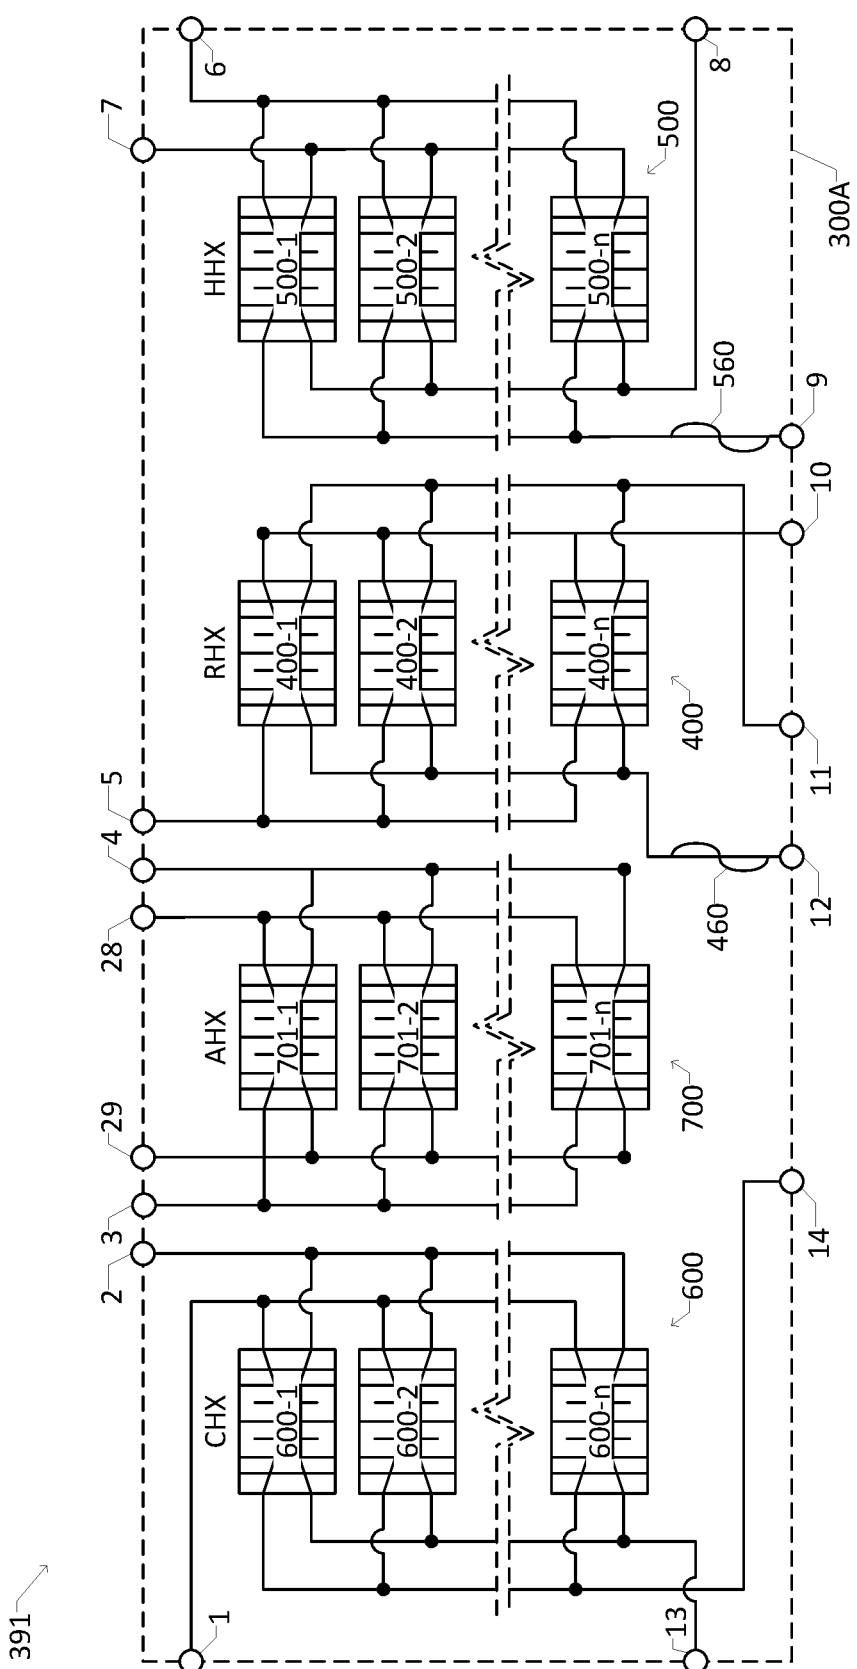


FIG. 6B

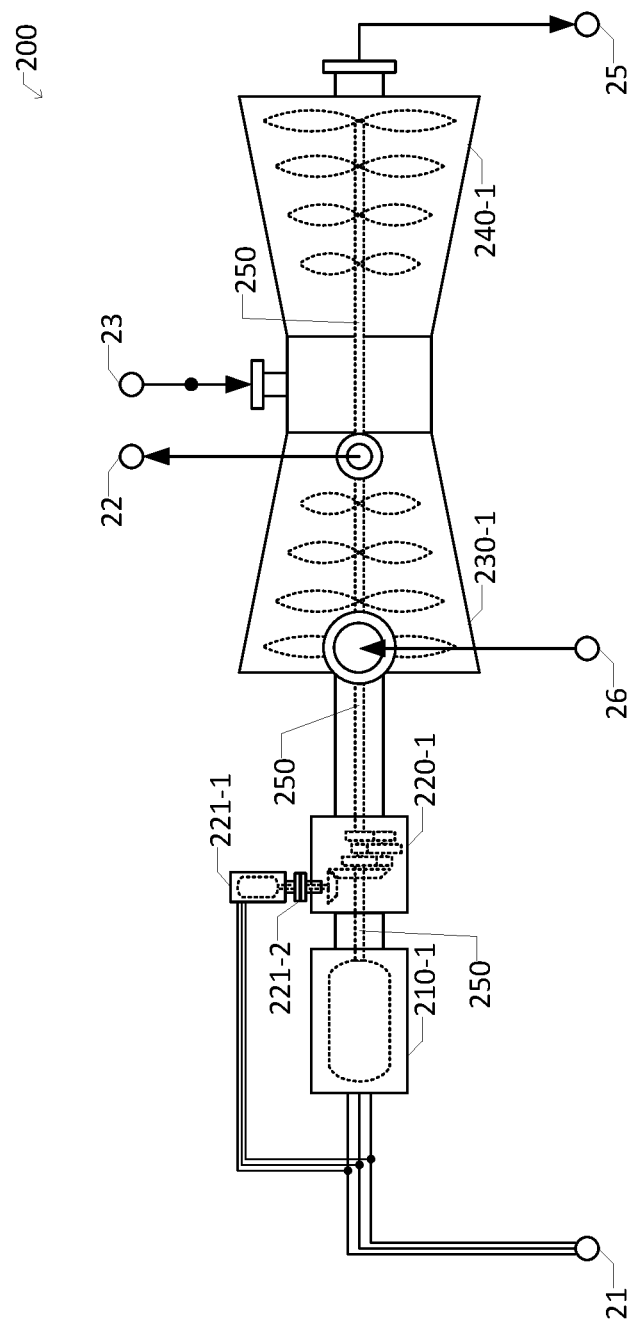


FIG. 7

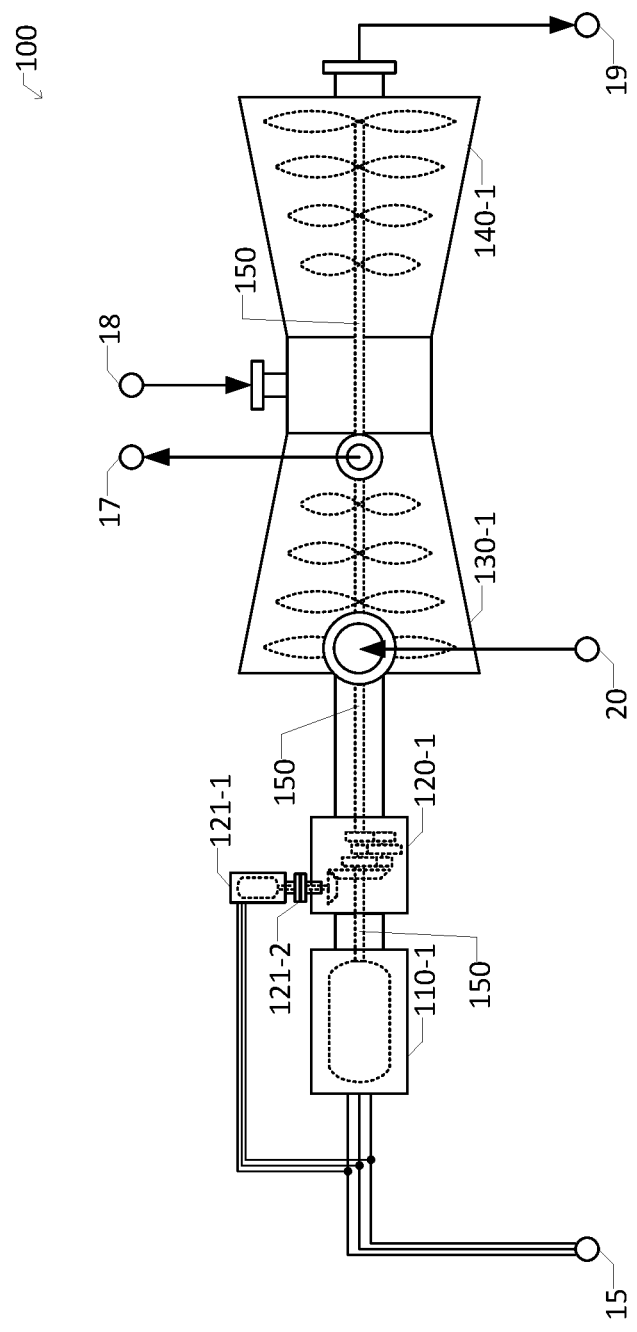


FIG. 8

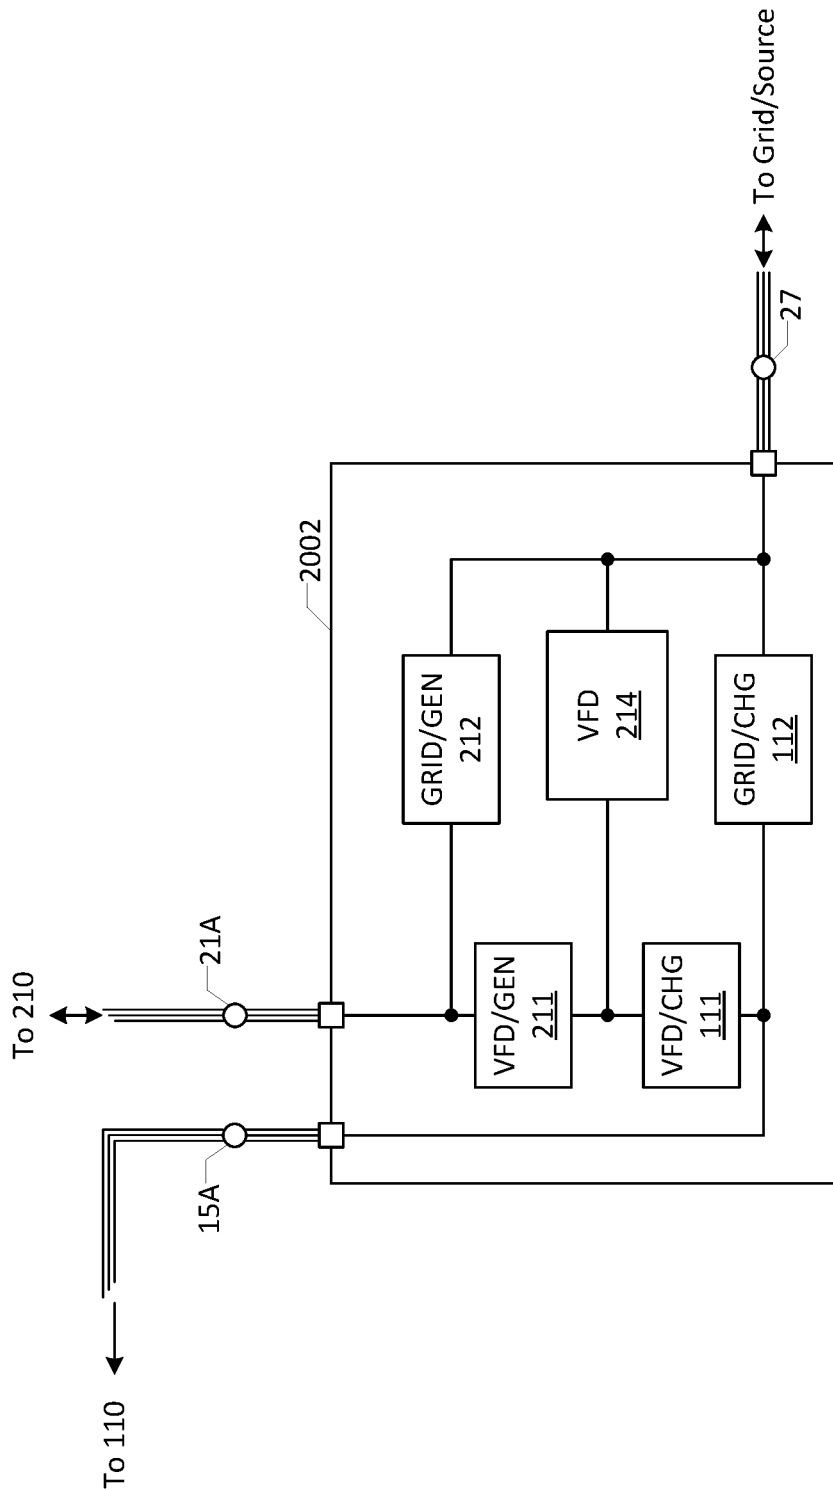


FIG. 9

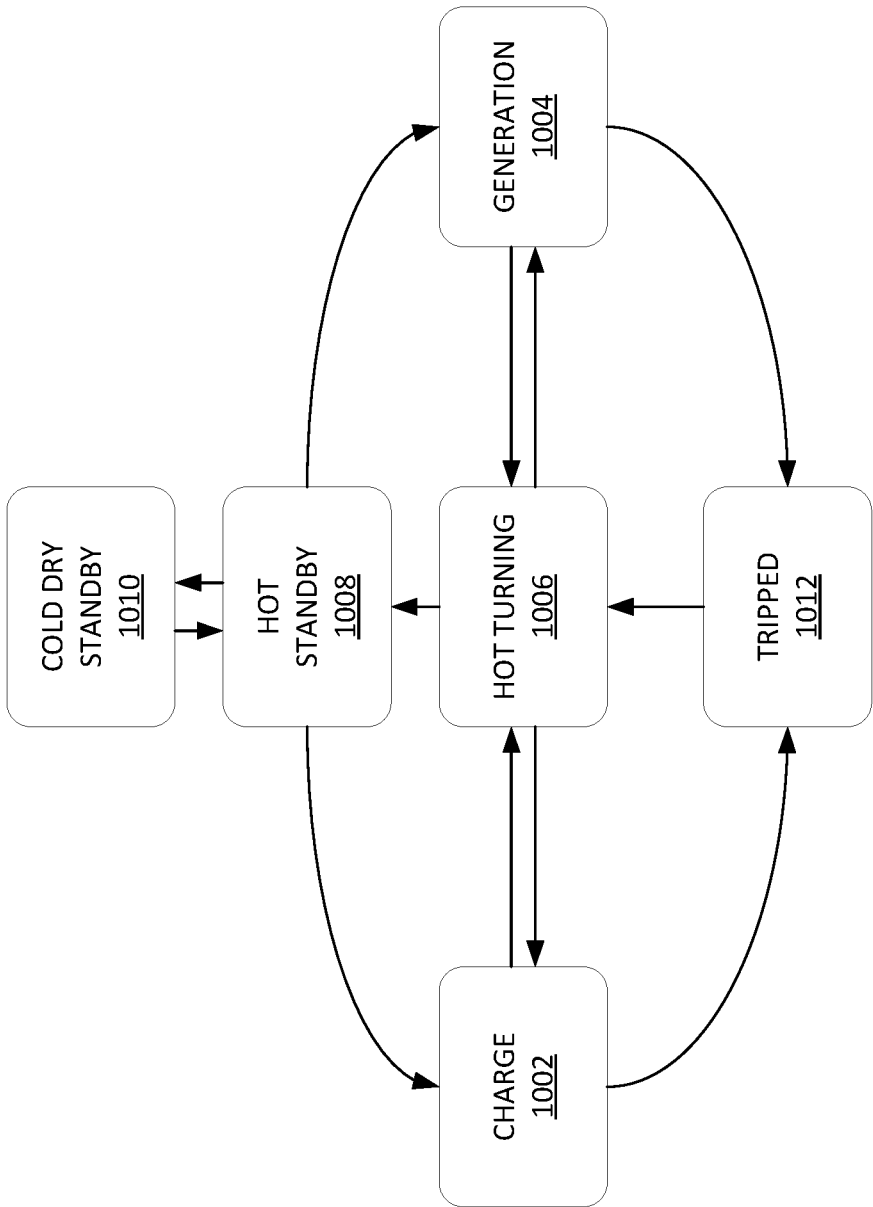
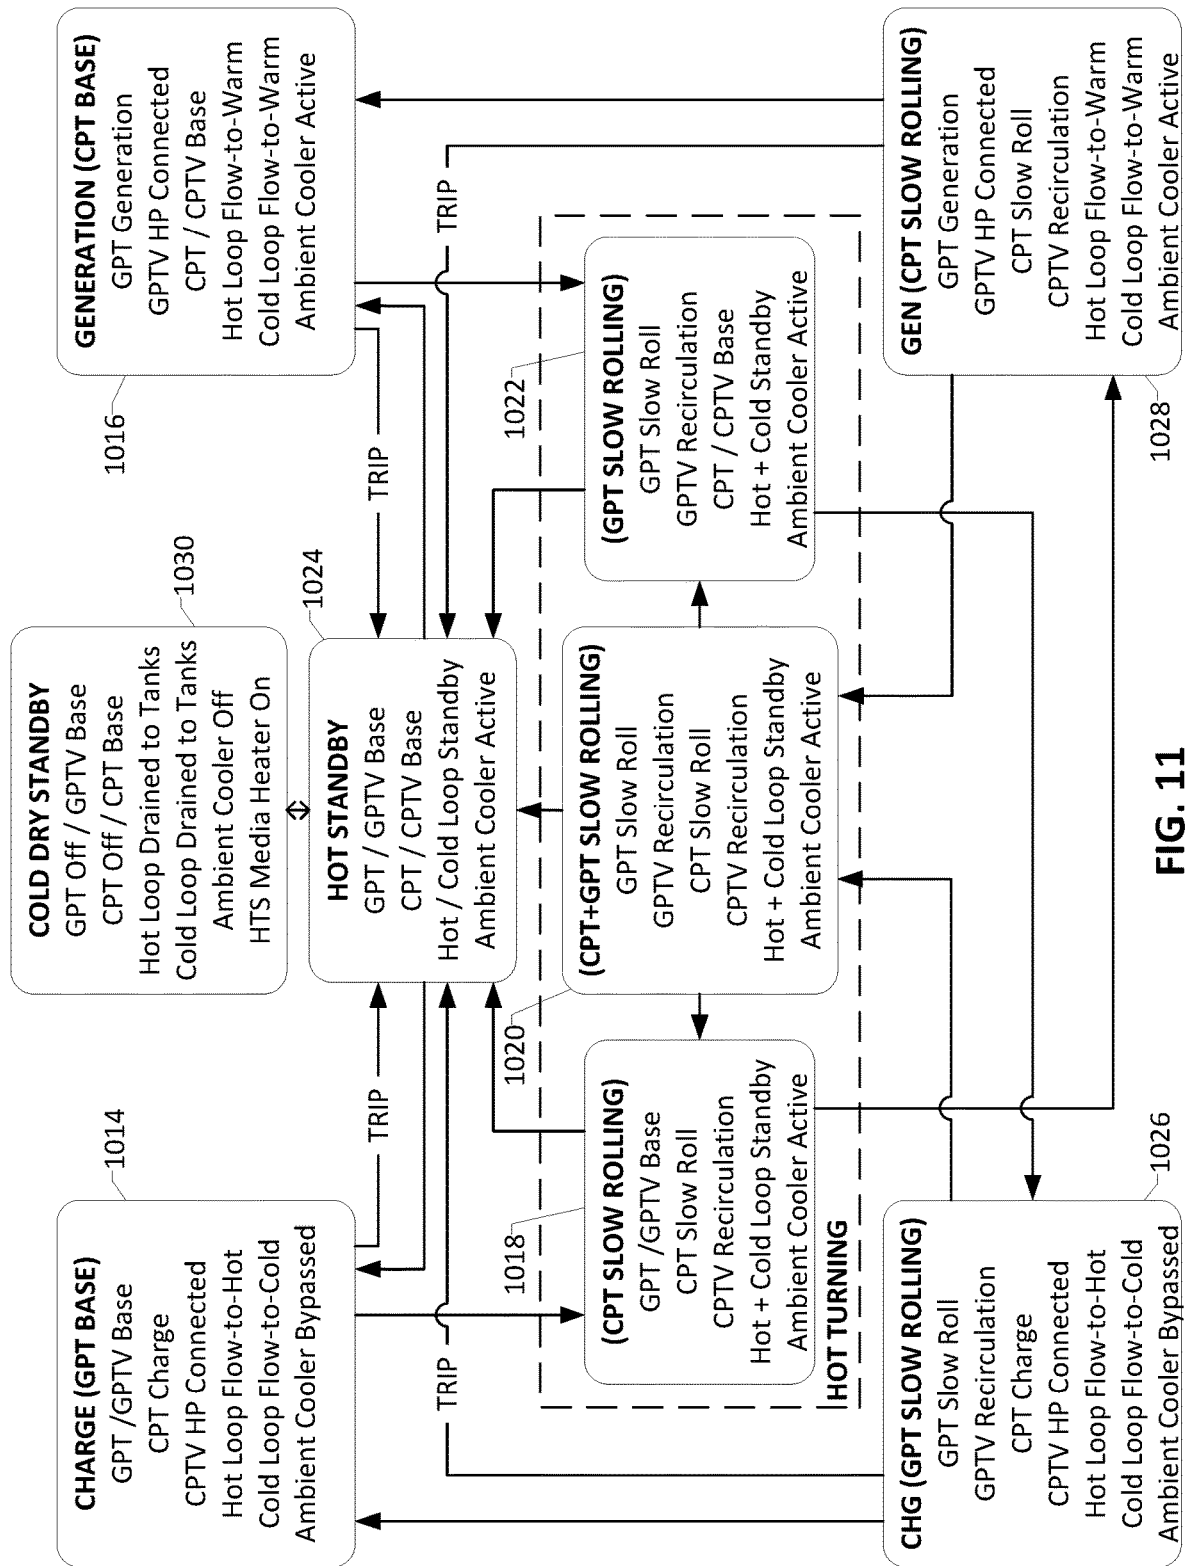


FIG. 10



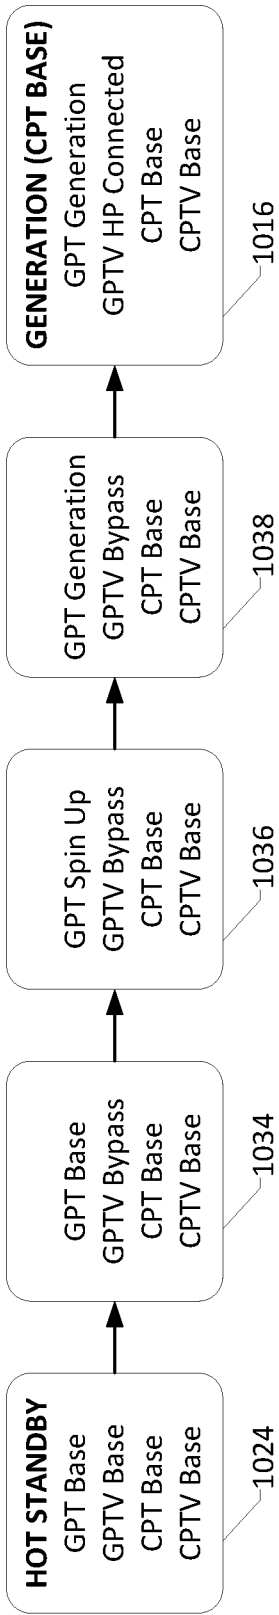


FIG. 12

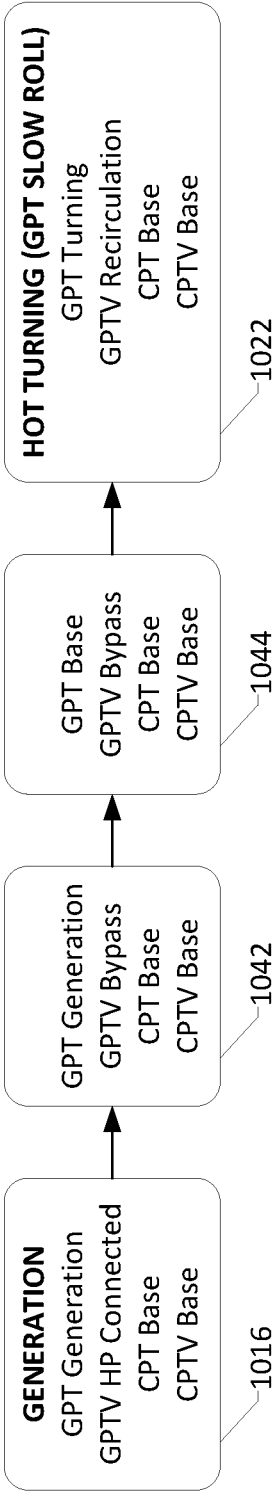


FIG. 13

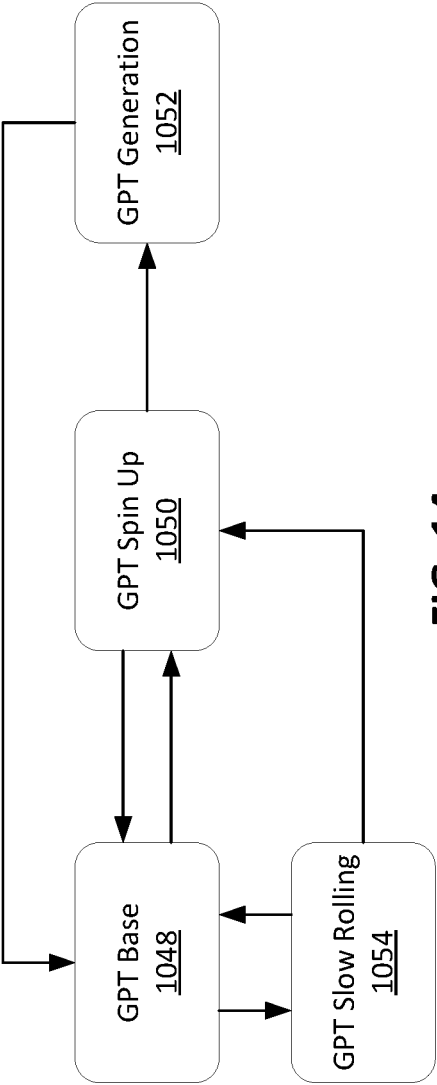


FIG. 14

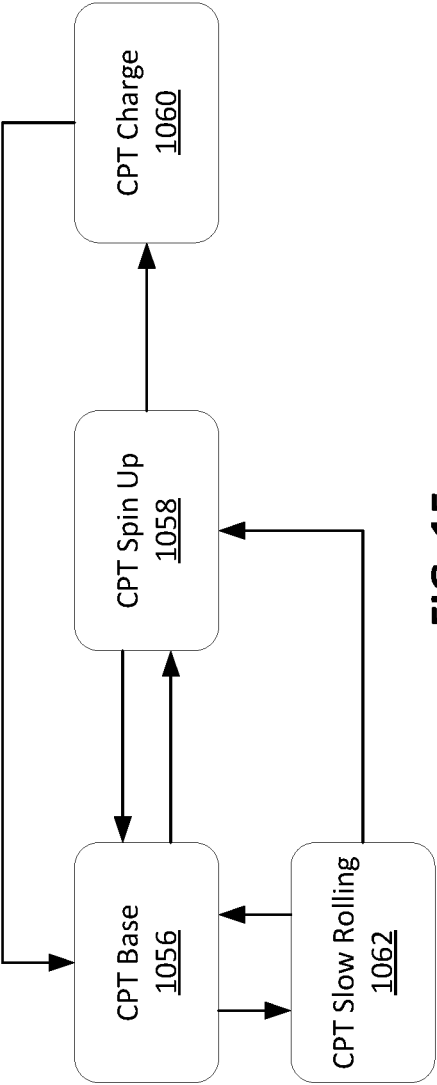
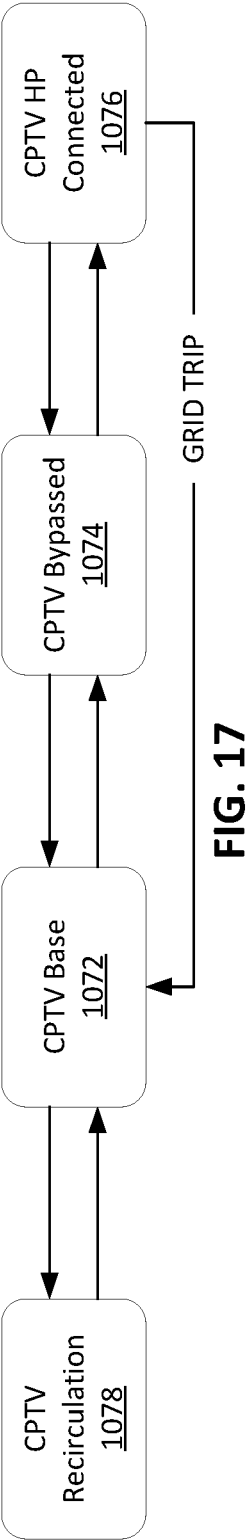
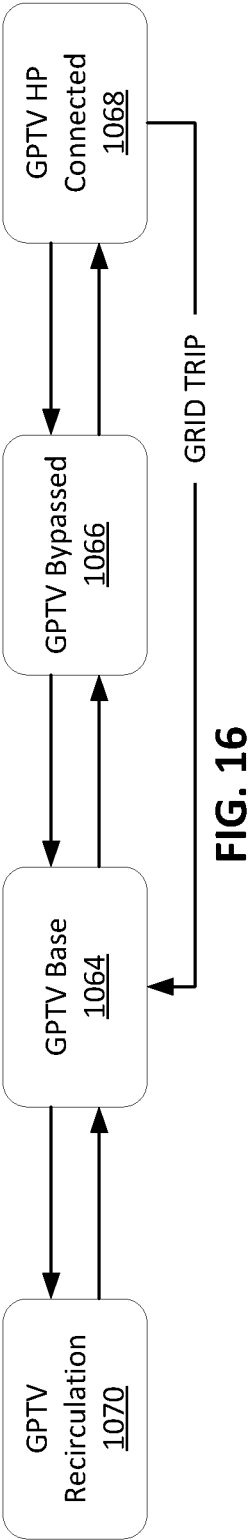


FIG. 15



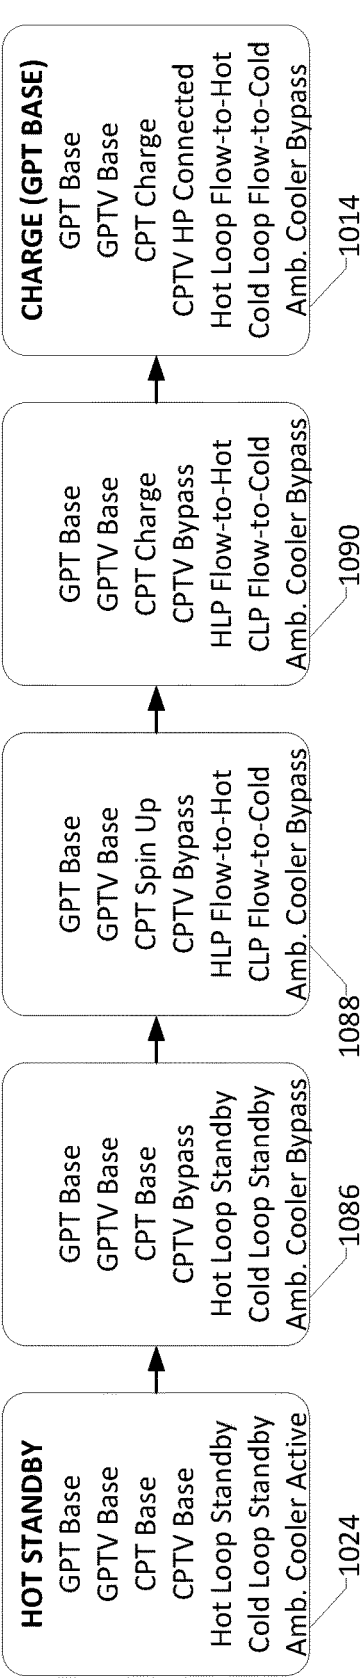


FIG. 19

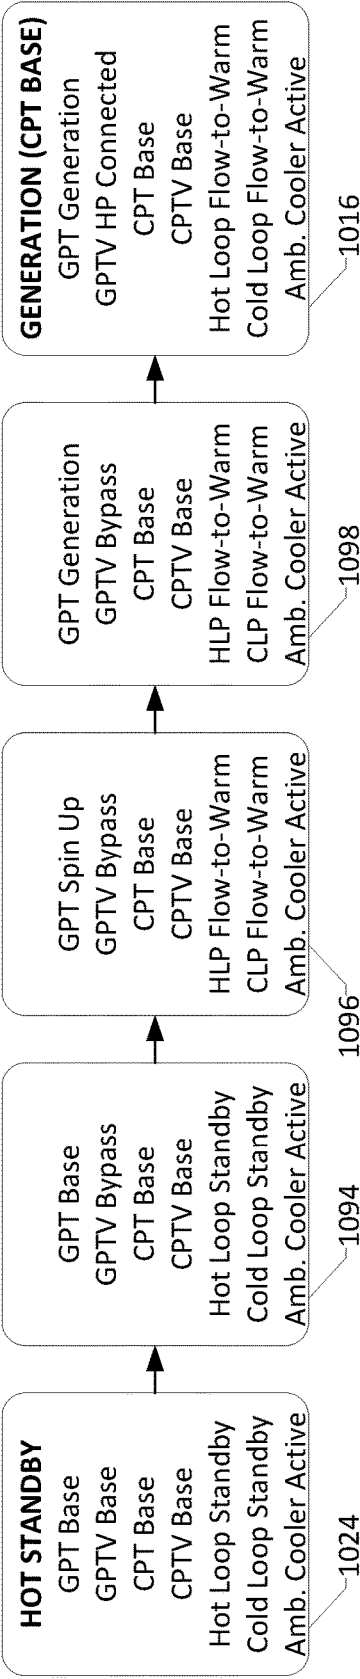


FIG. 20

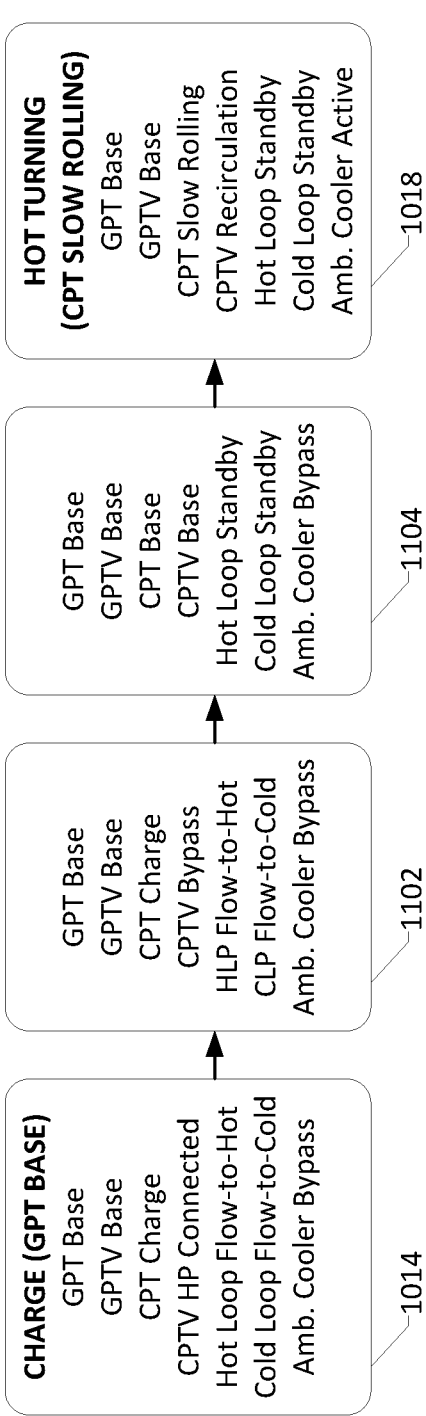


FIG. 21

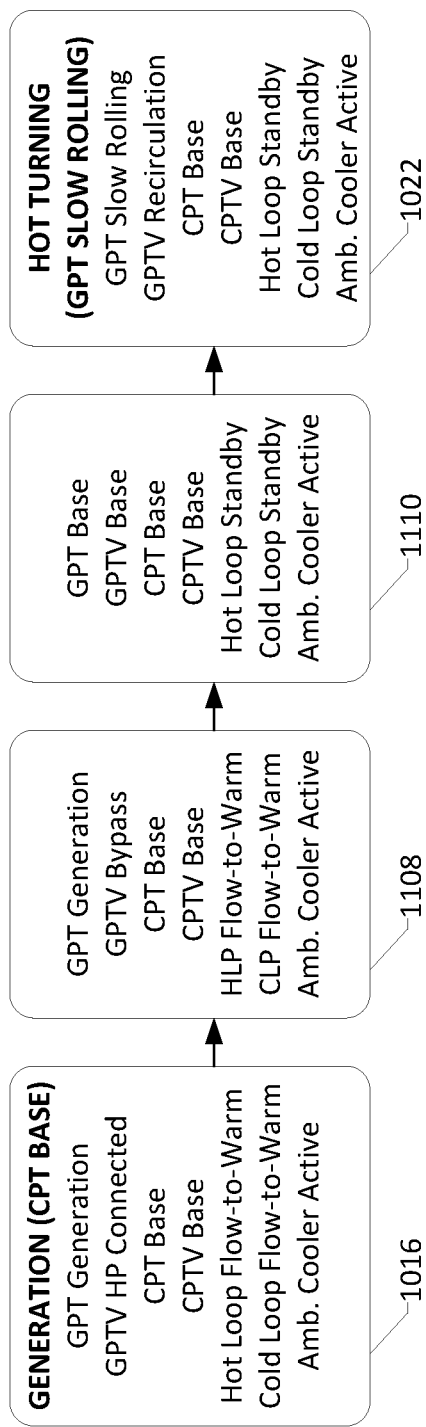


FIG. 22

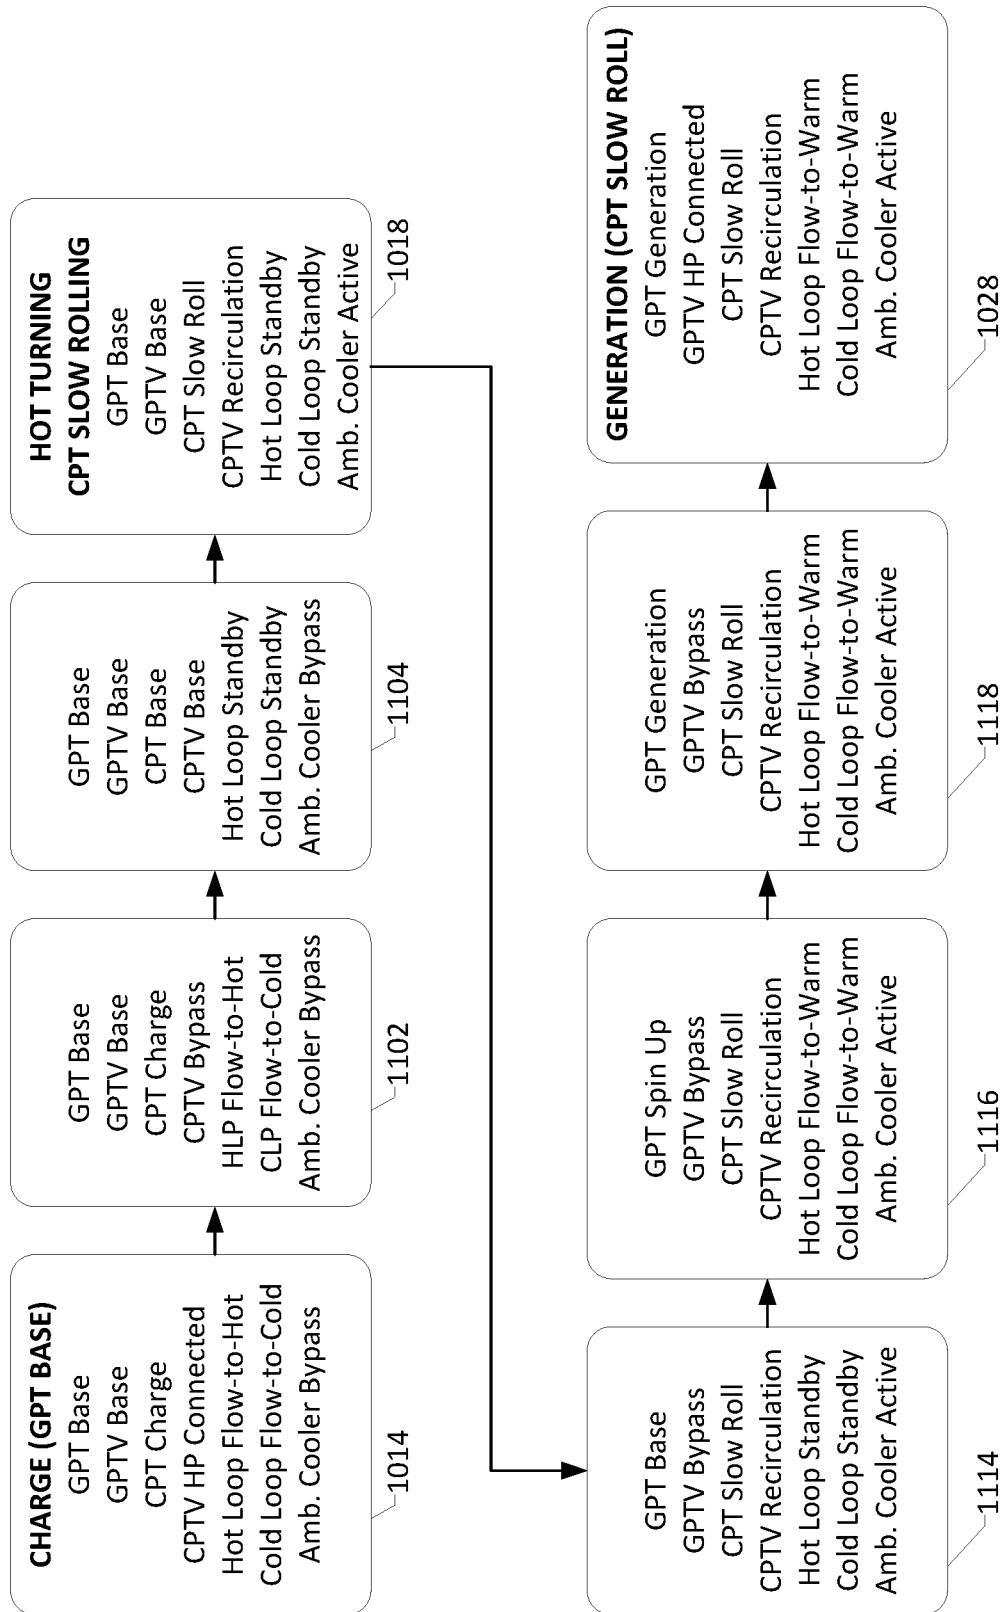


FIG. 23

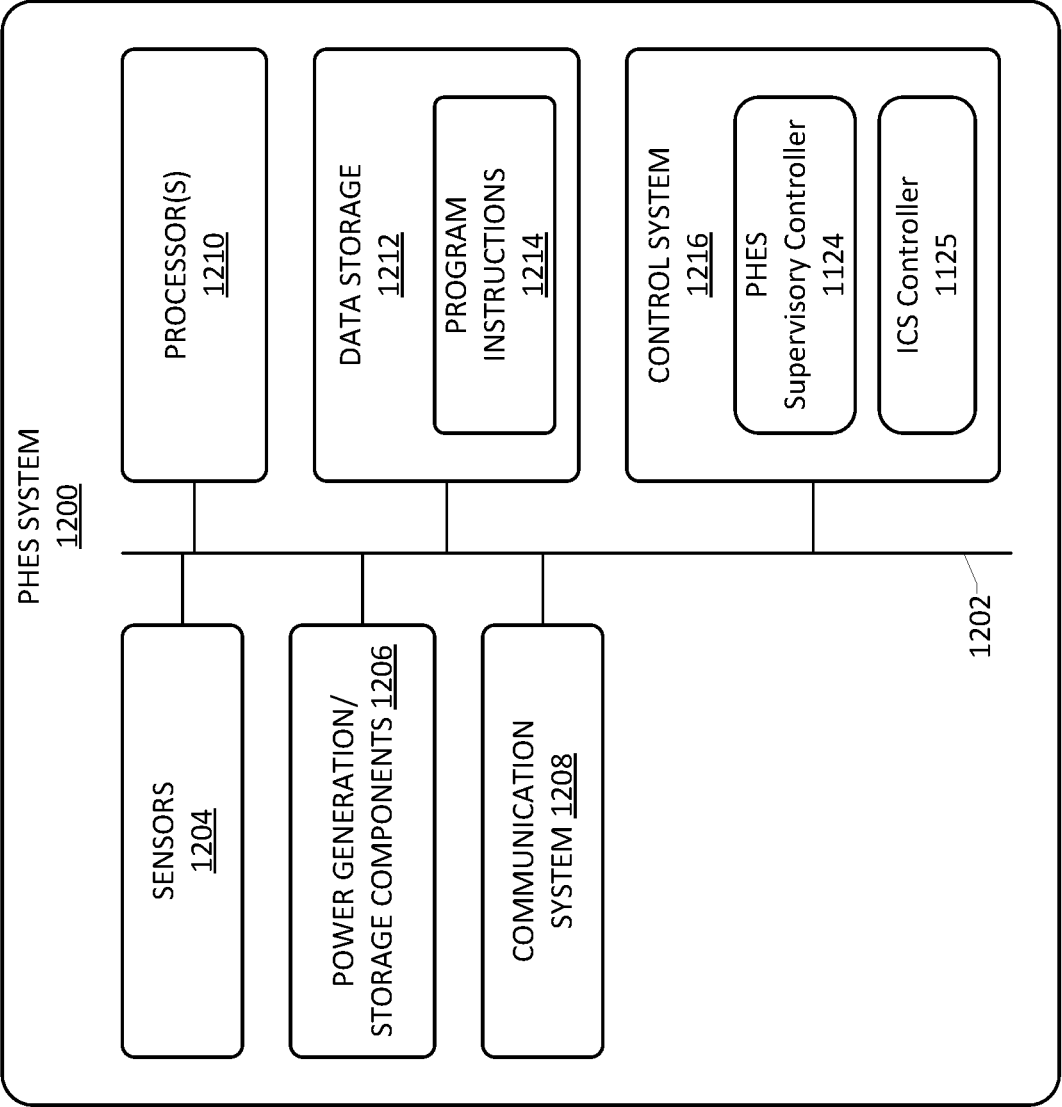


FIG. 24

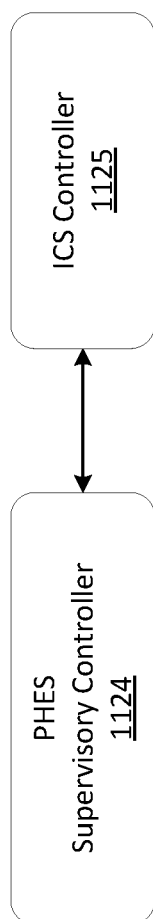


FIG. 24A

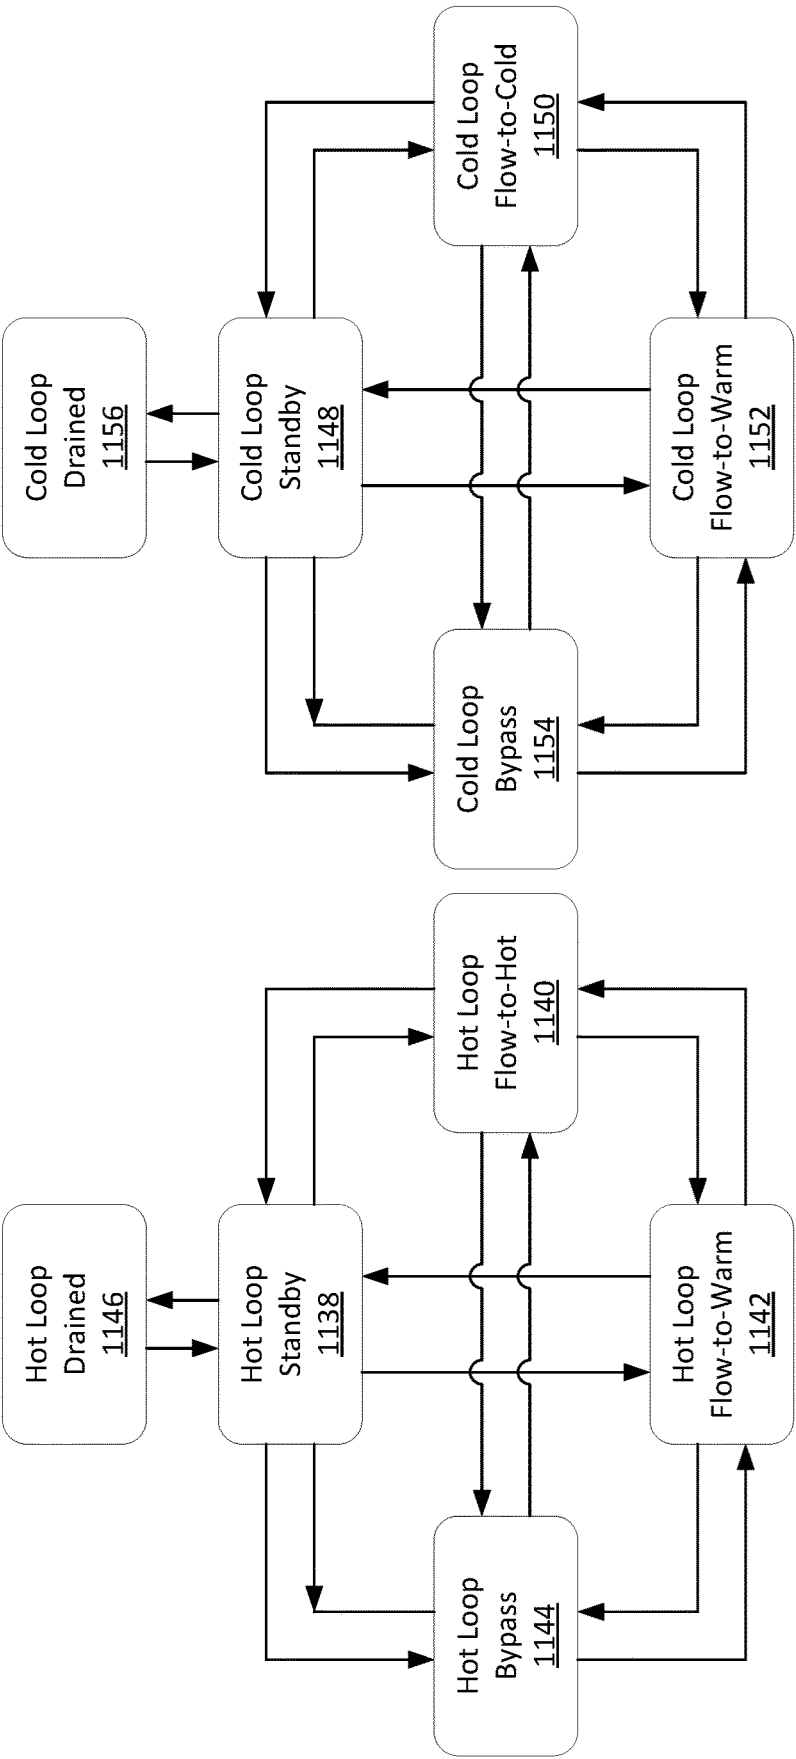


FIG. 26

FIG. 25

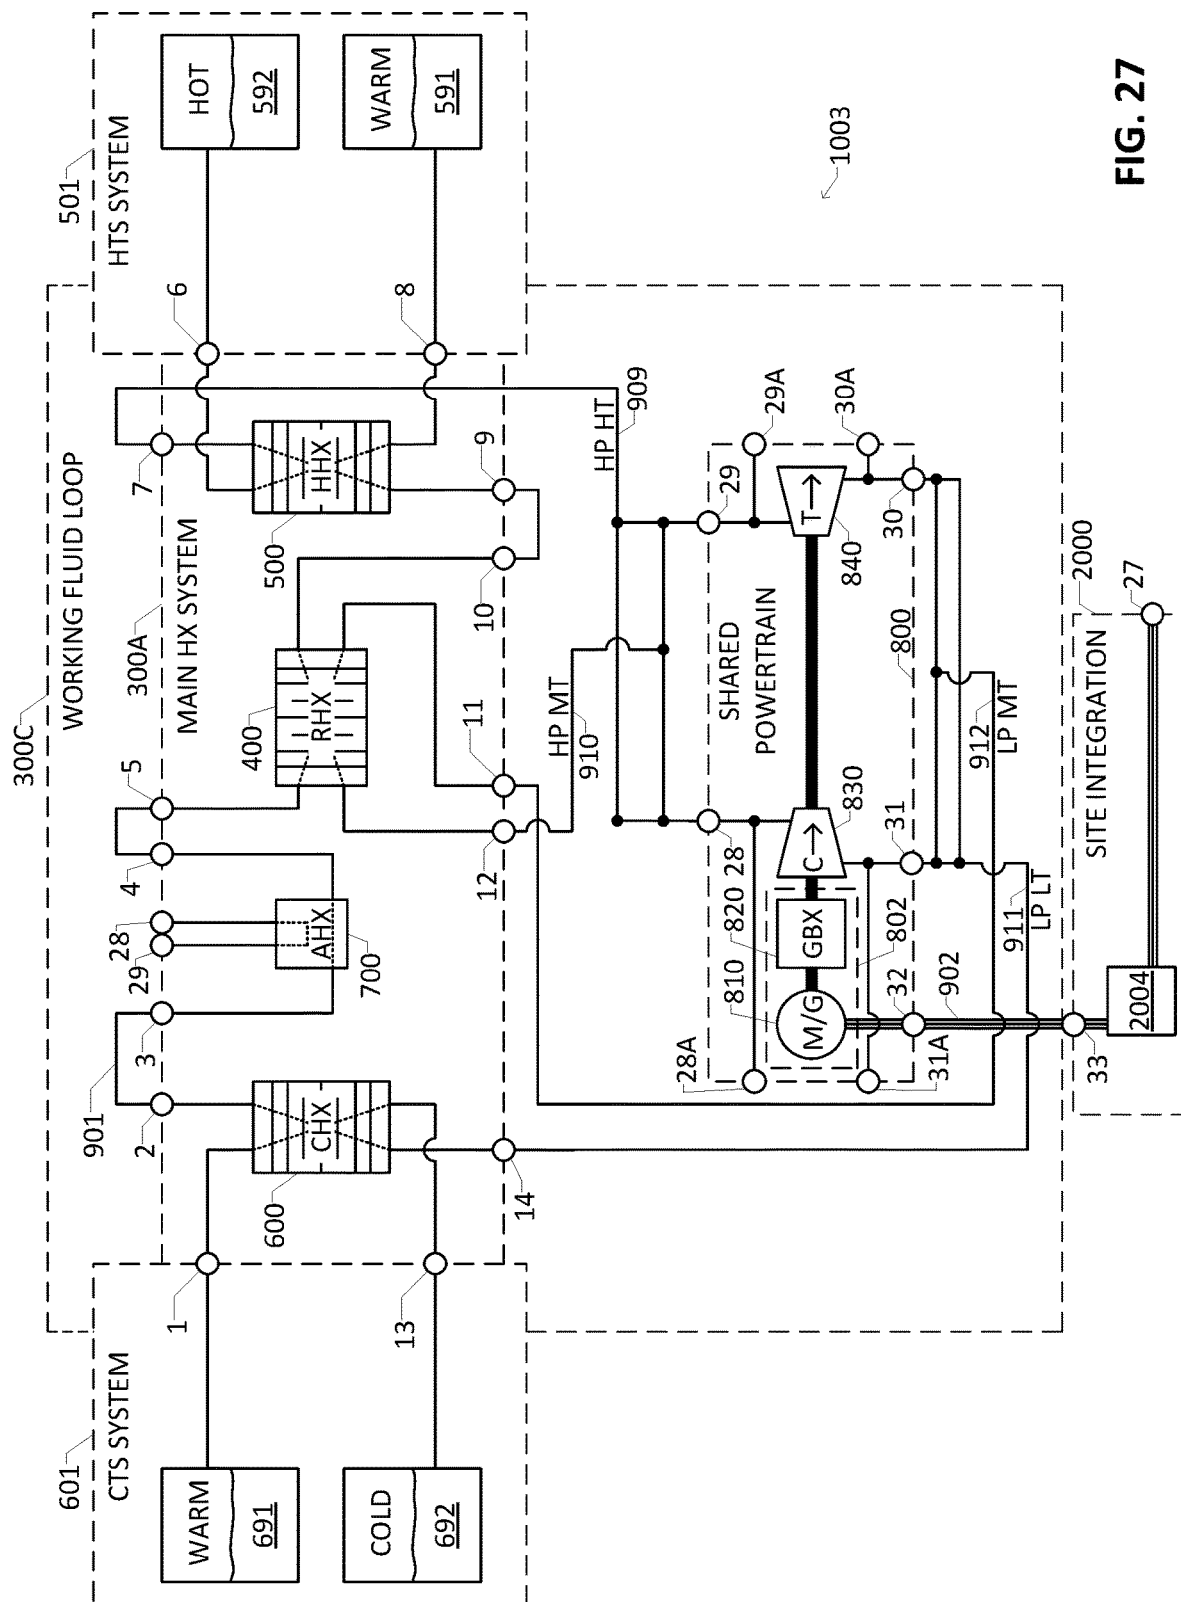


FIG. 27

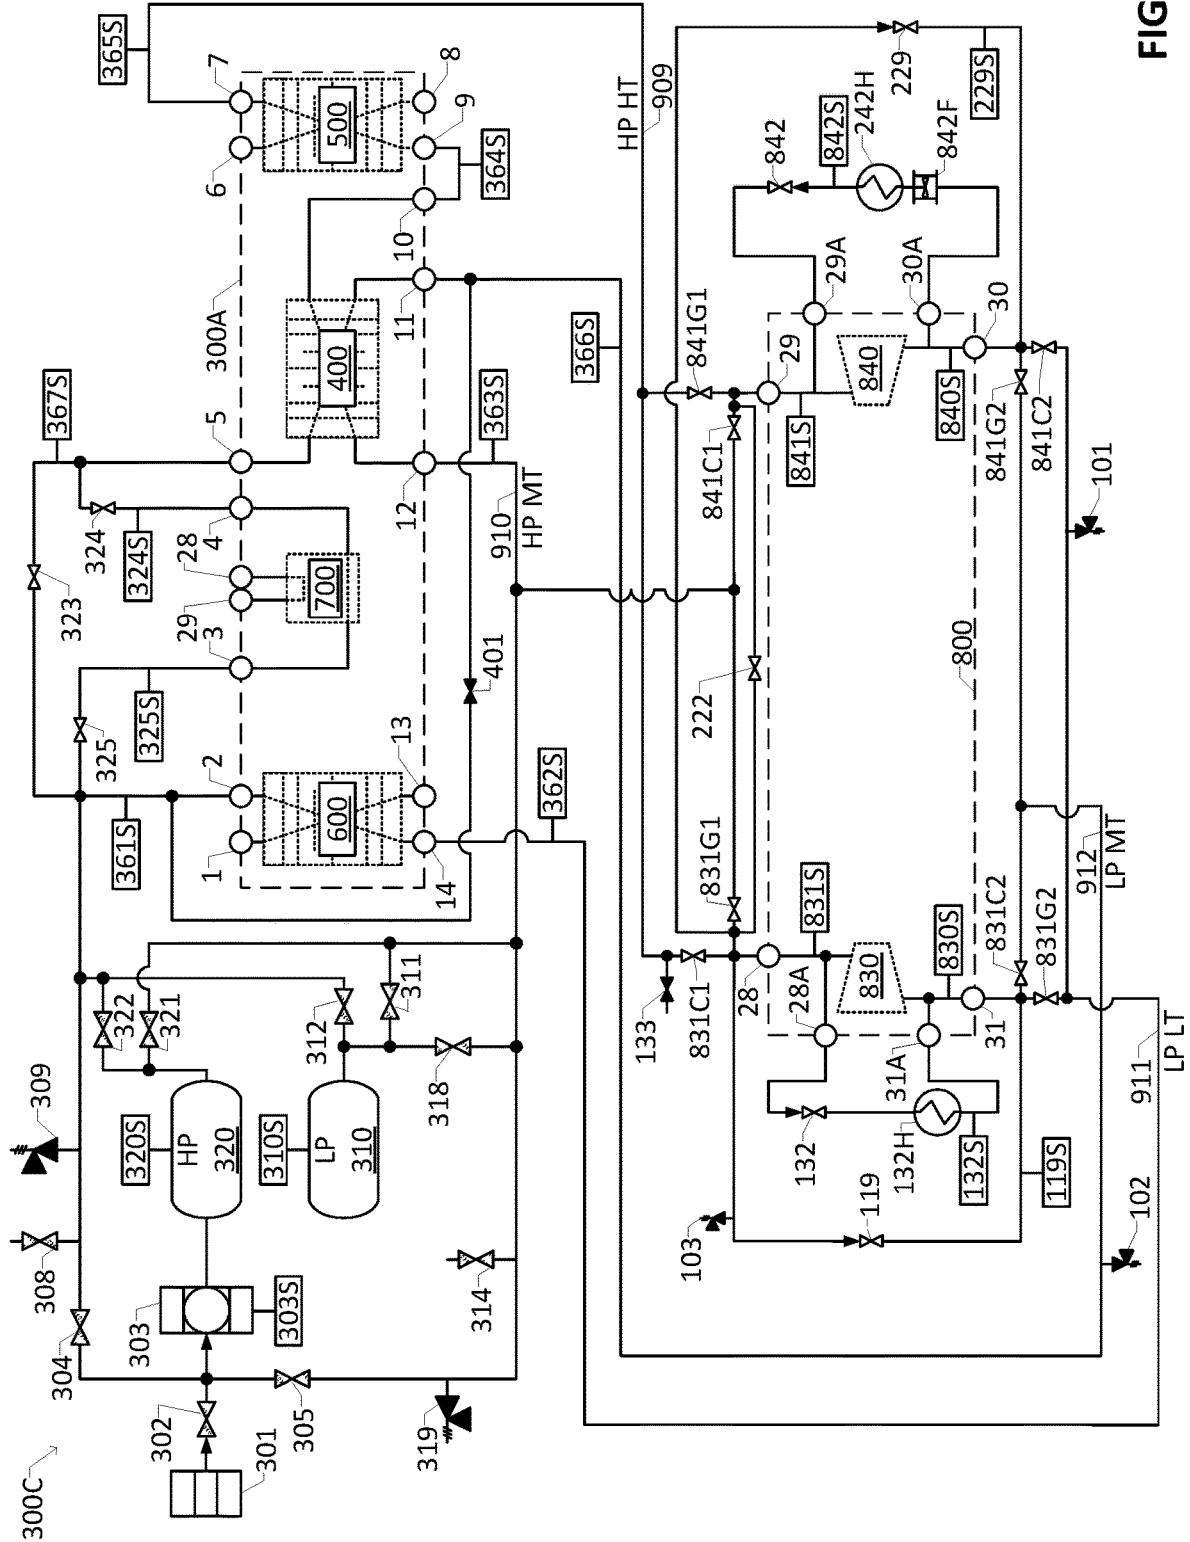
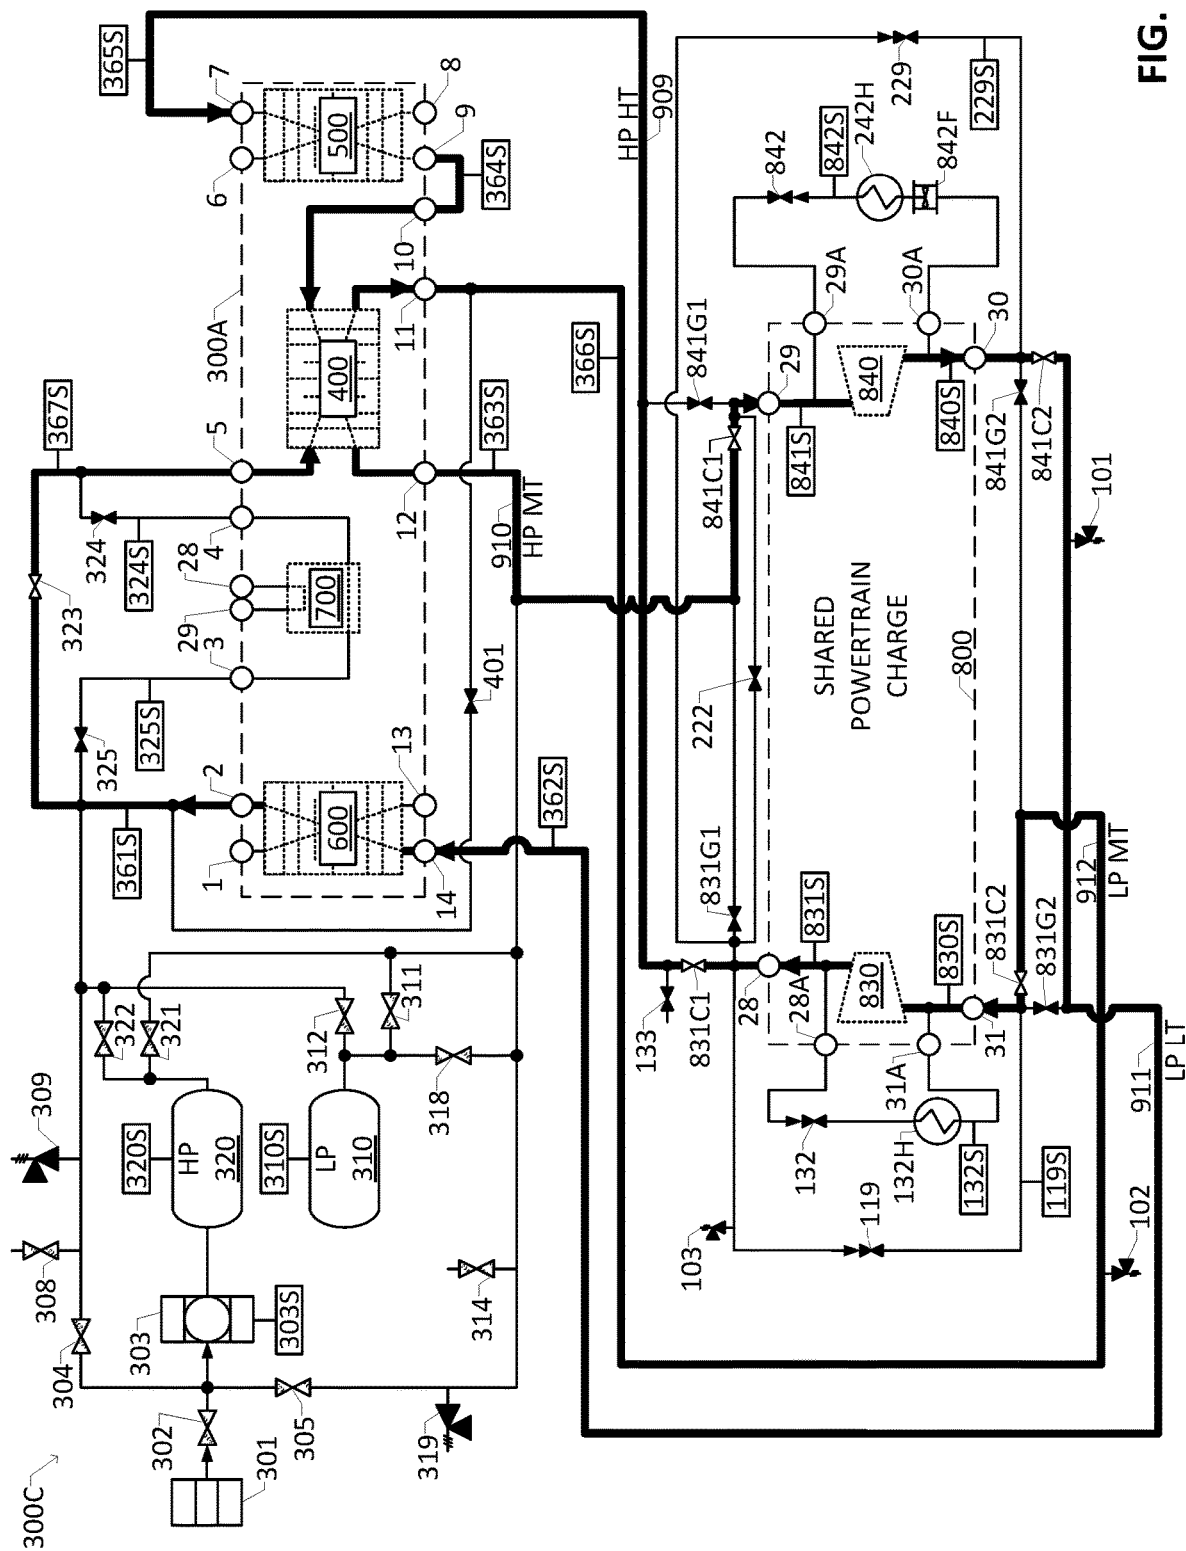


FIG. 28



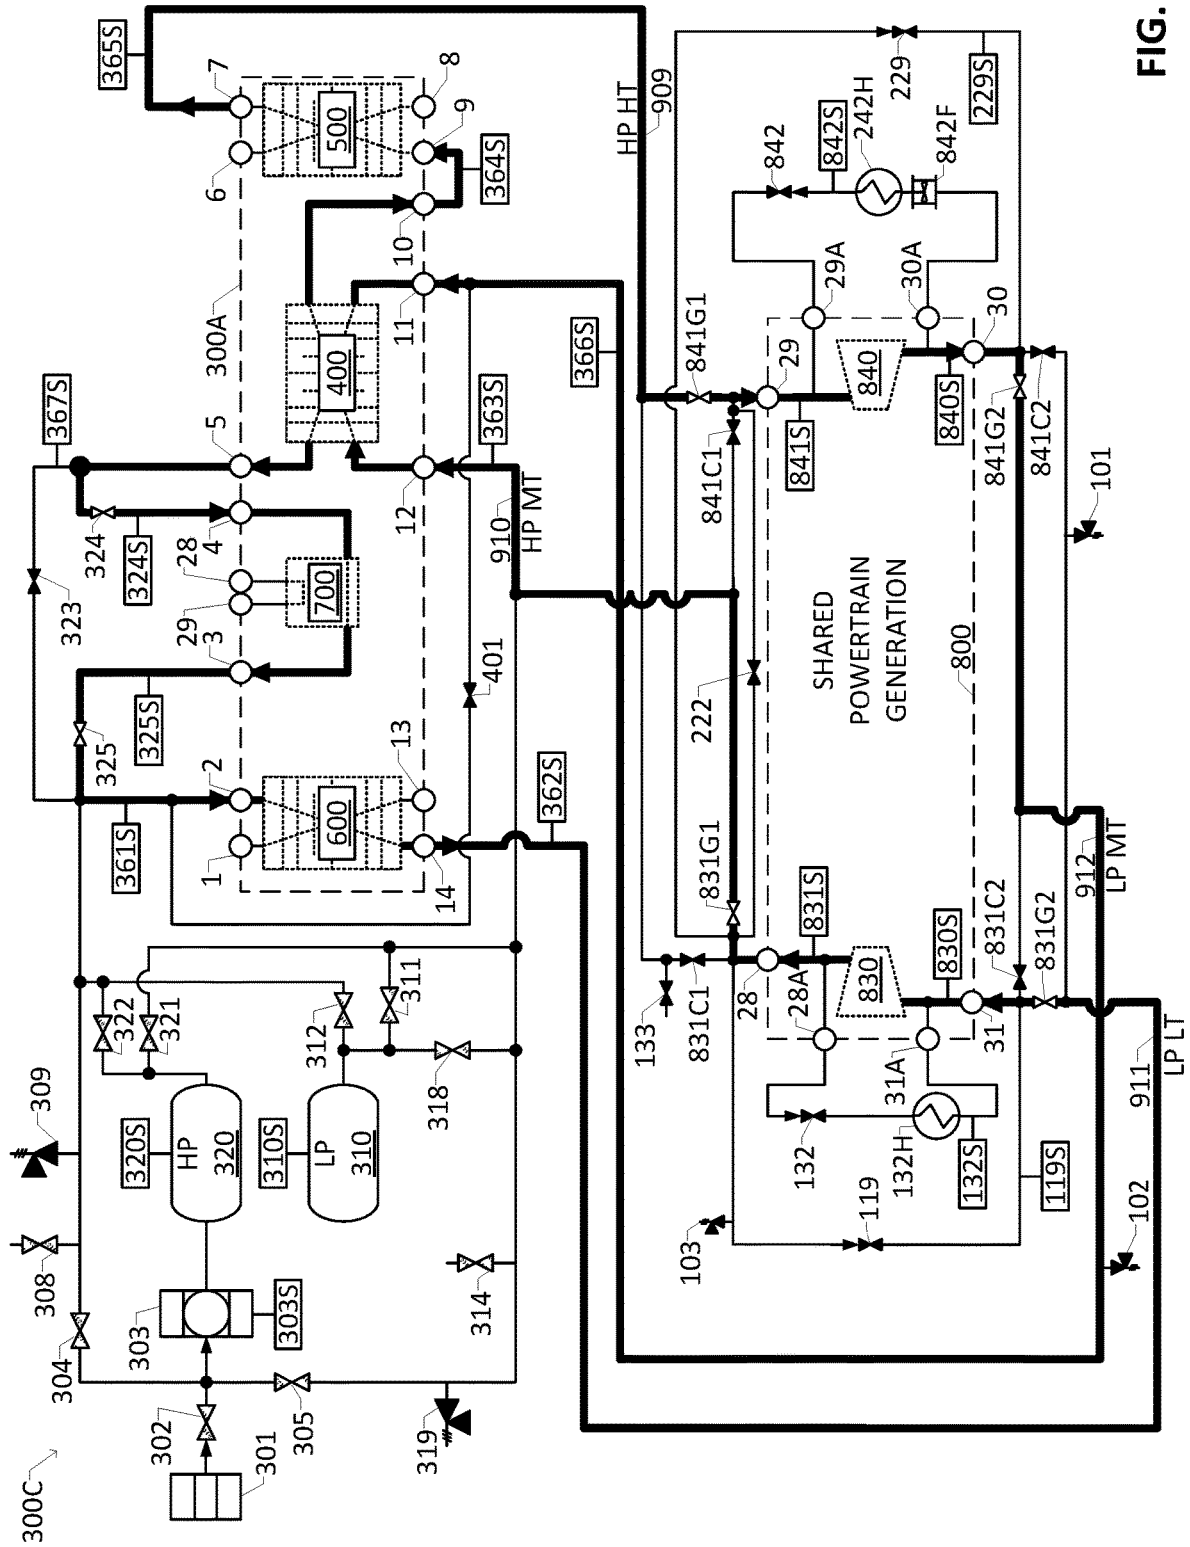


FIG. 28B

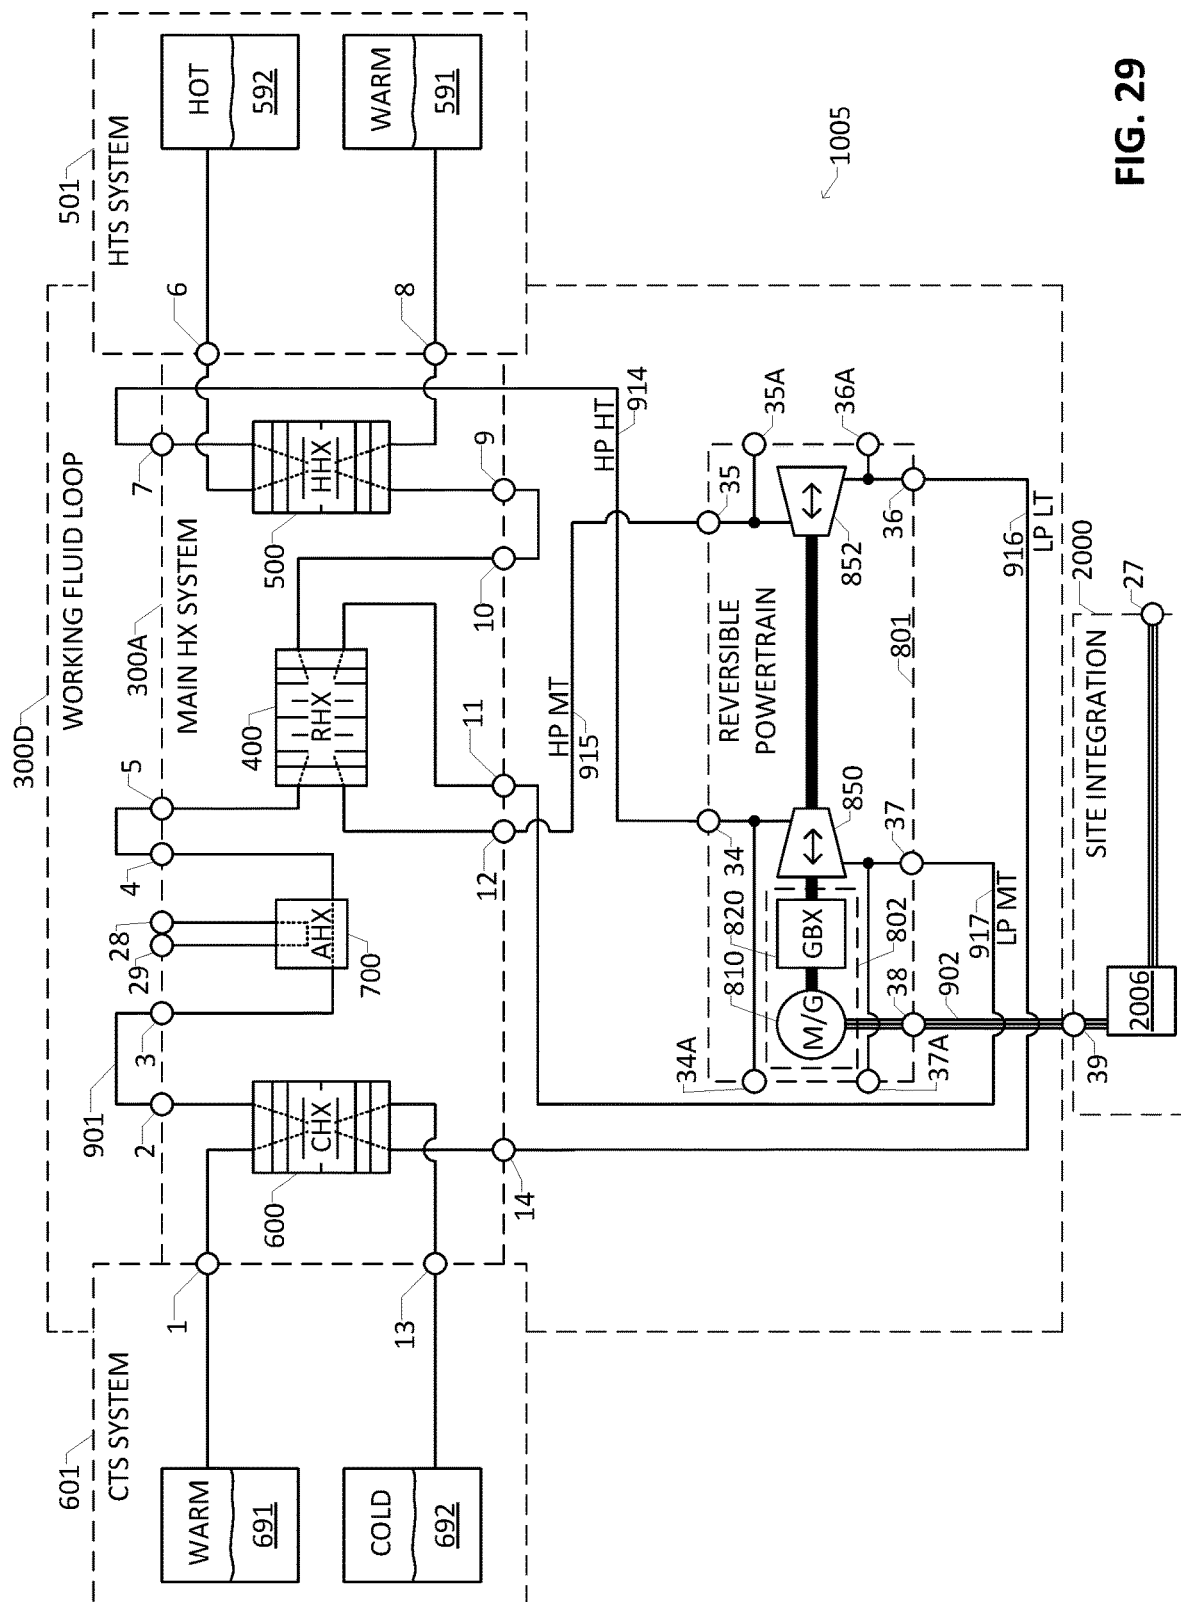
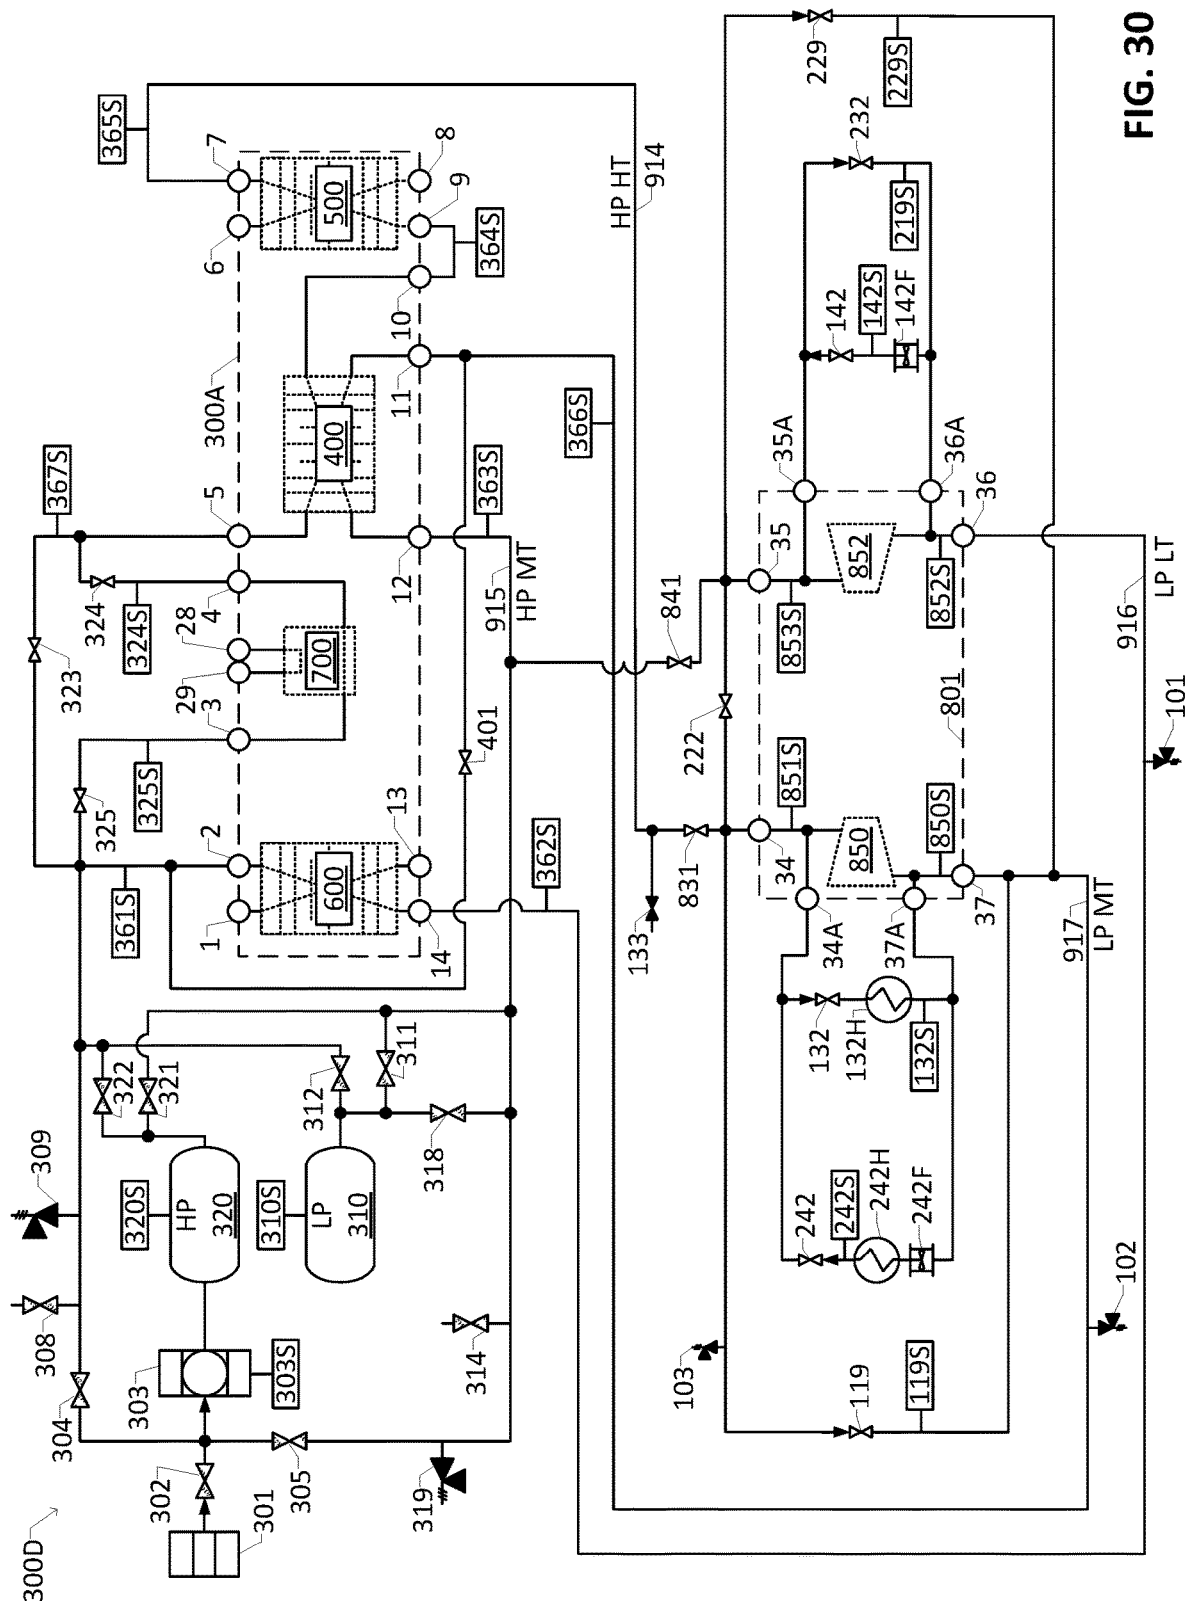


FIG. 29



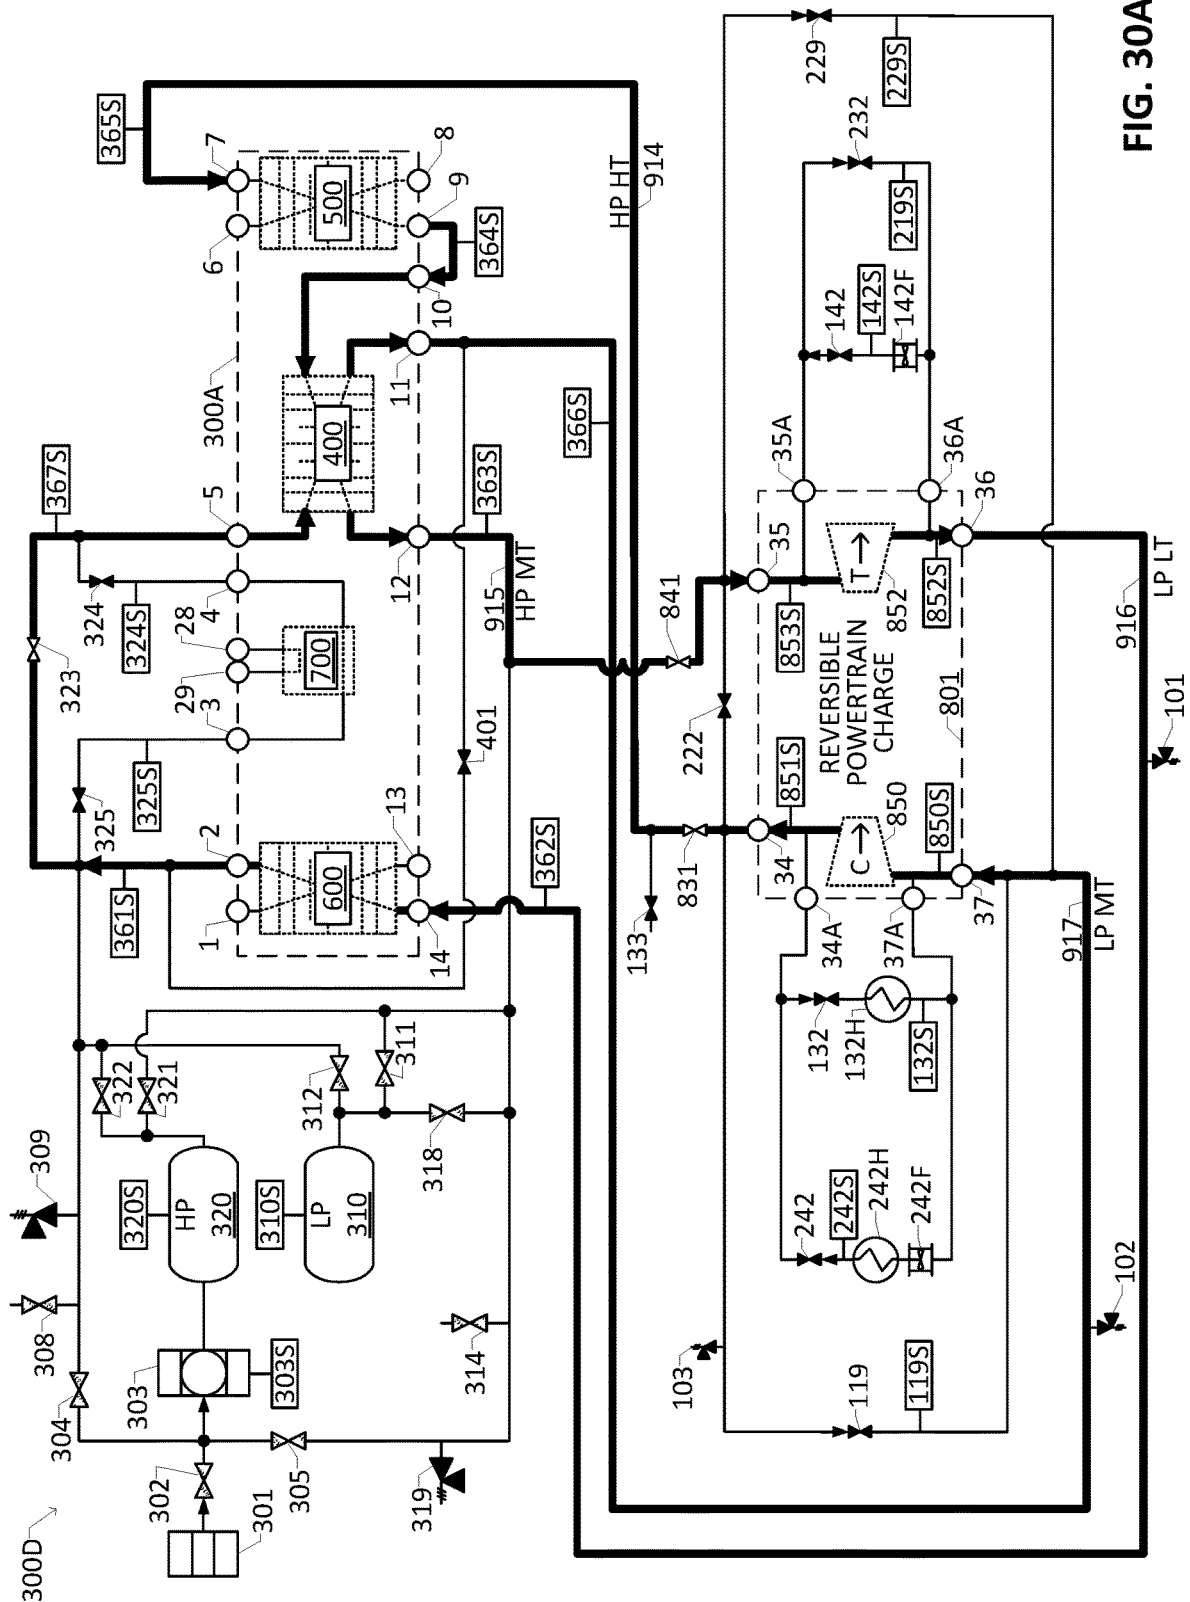
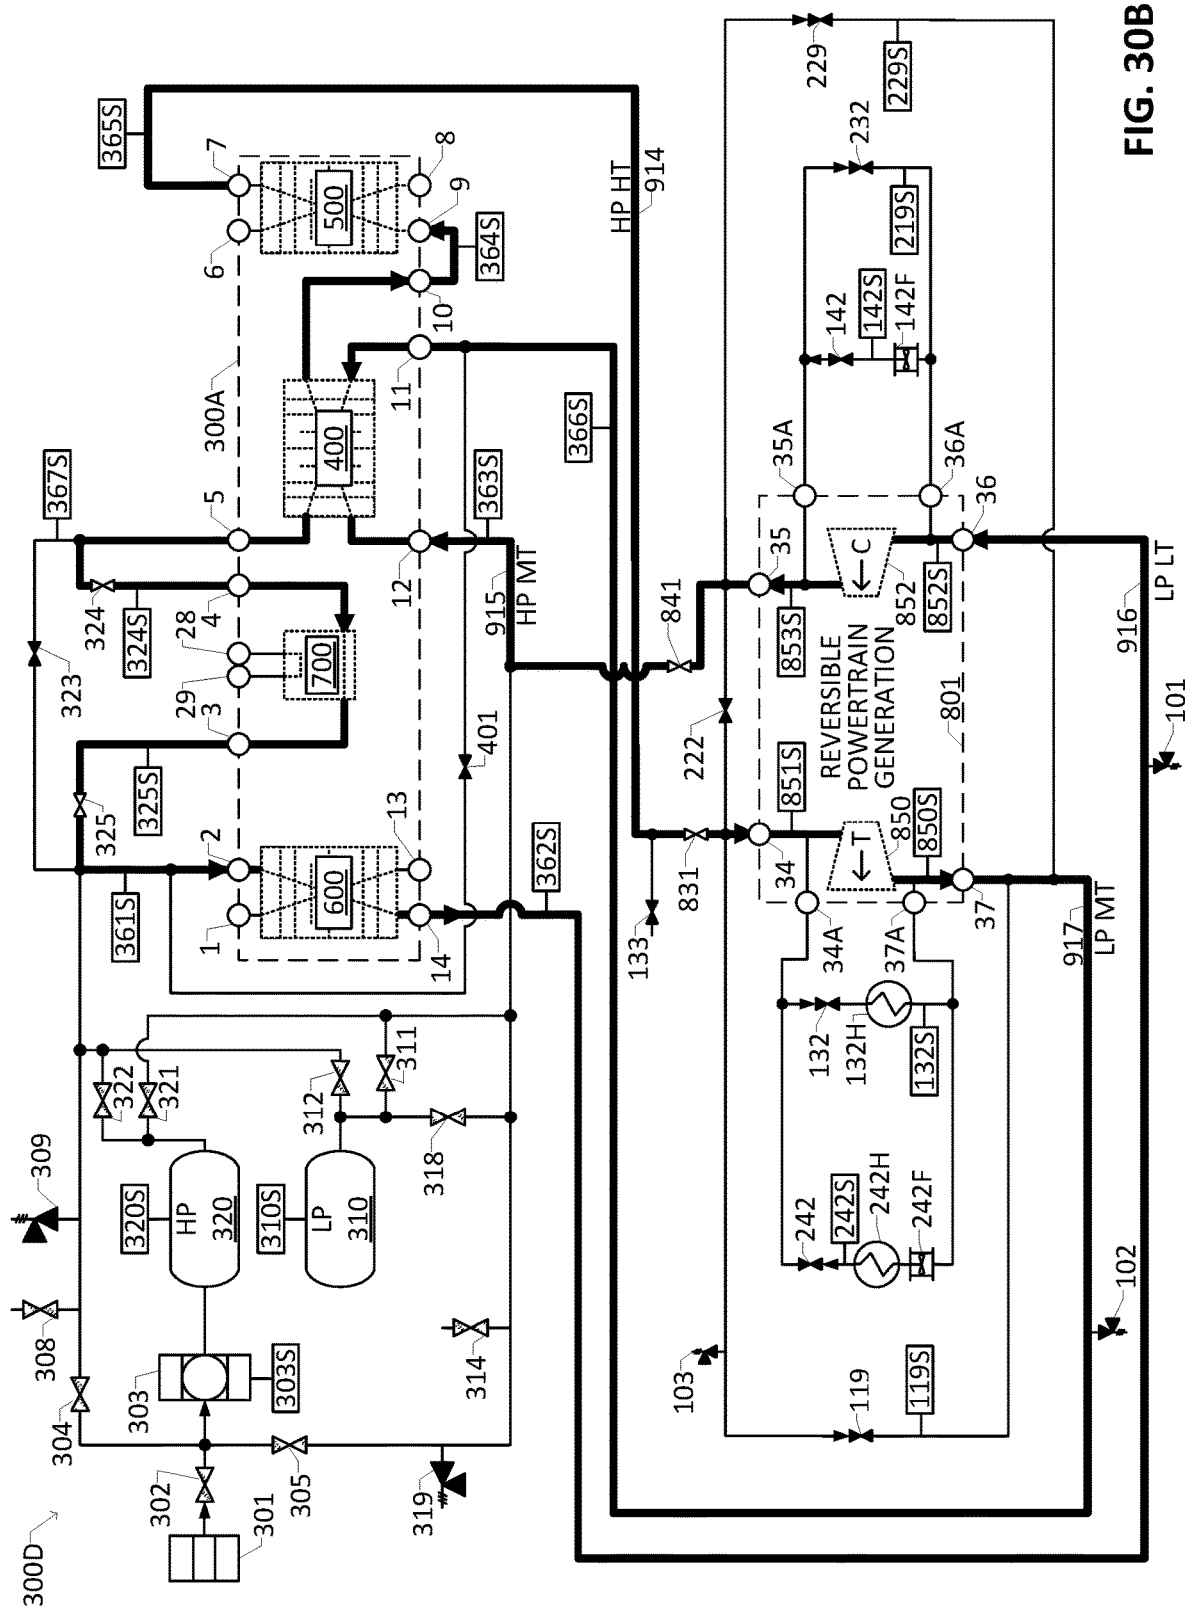


FIG. 30A





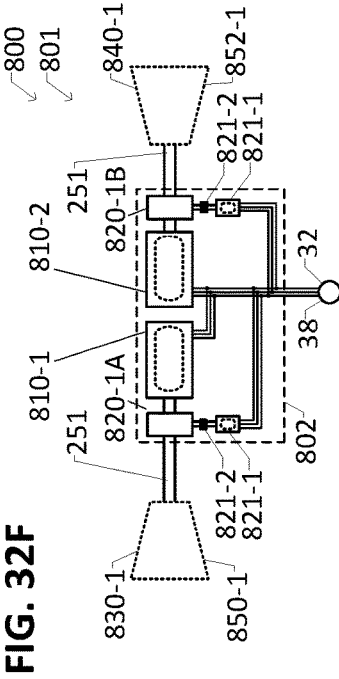
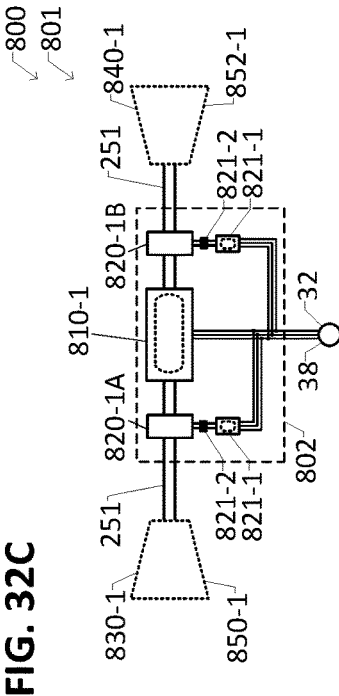
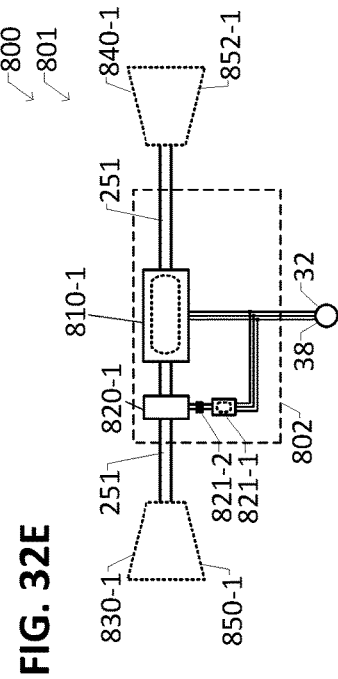
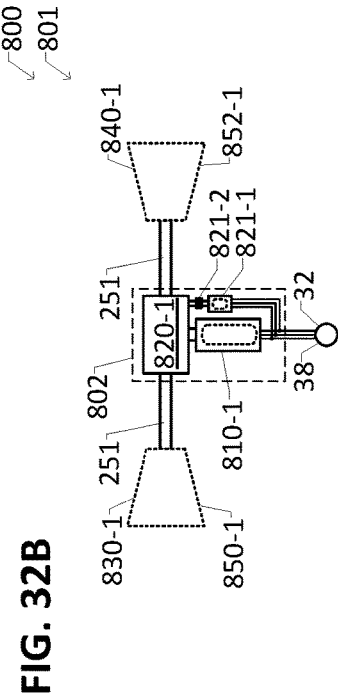
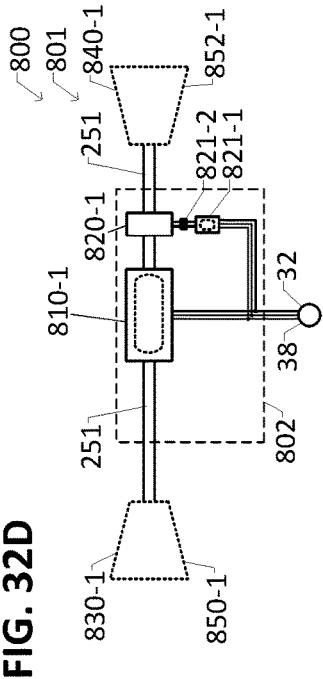
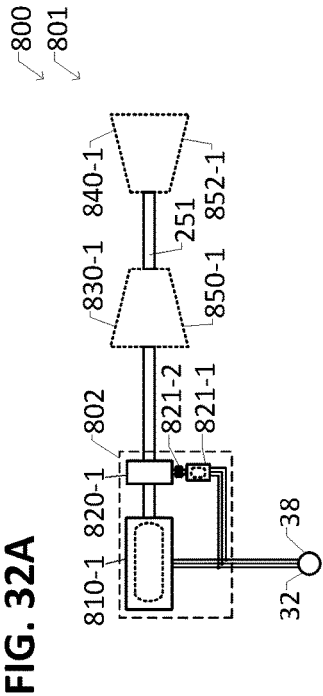


FIG. 33A

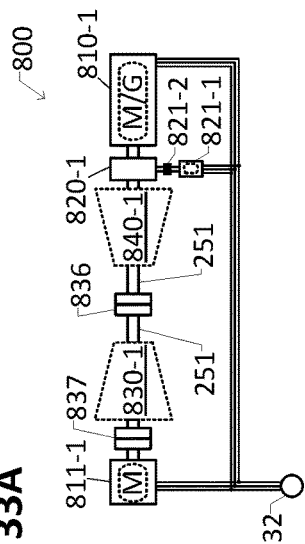


FIG. 33B

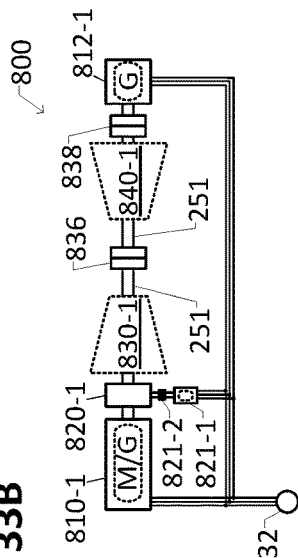
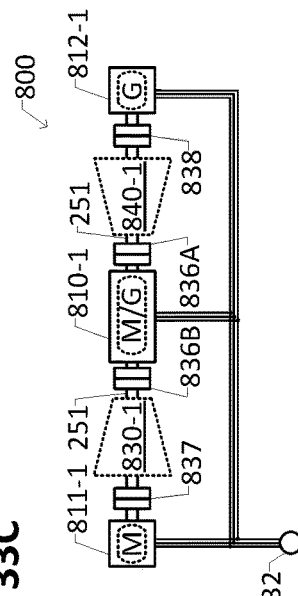
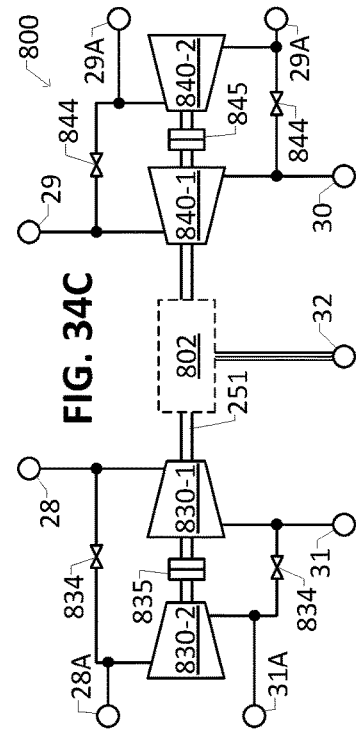
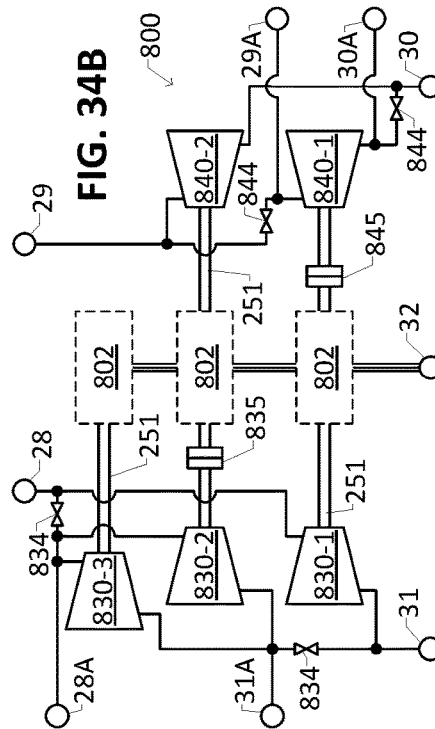
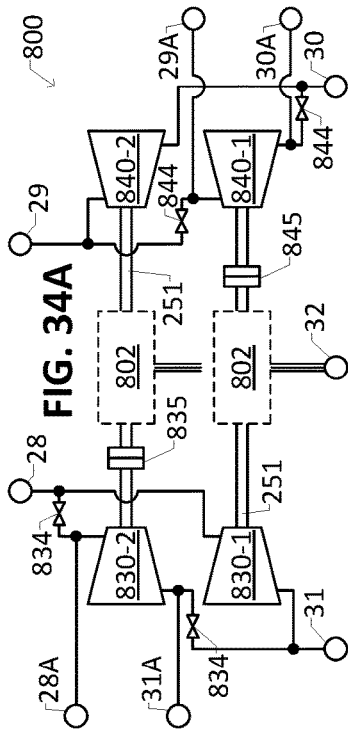
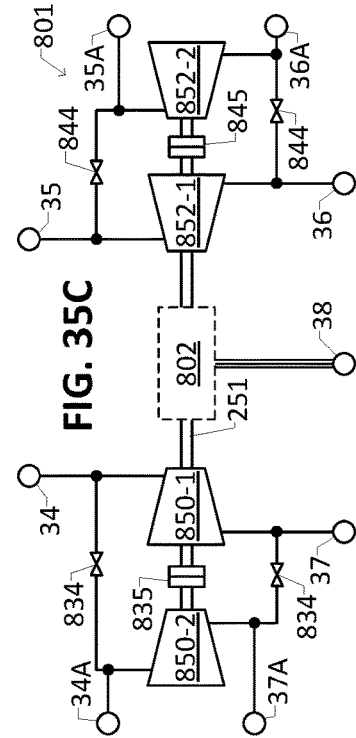
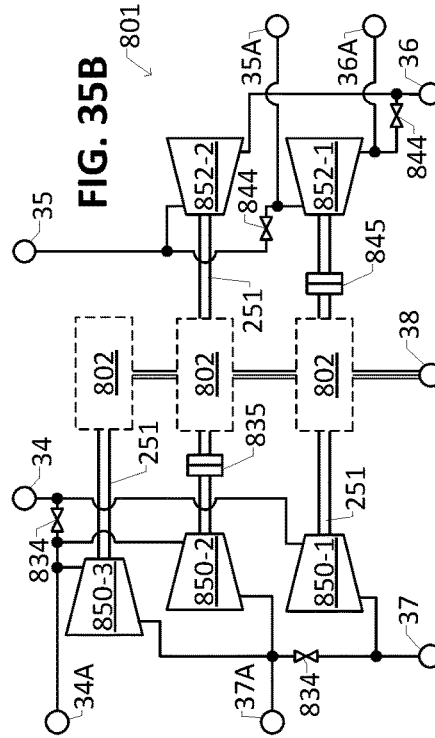
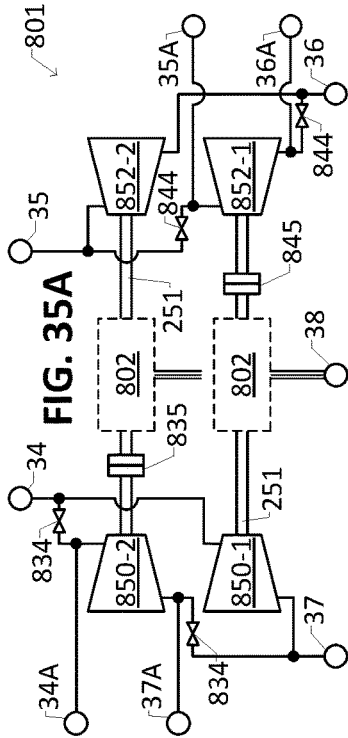


FIG. 33C





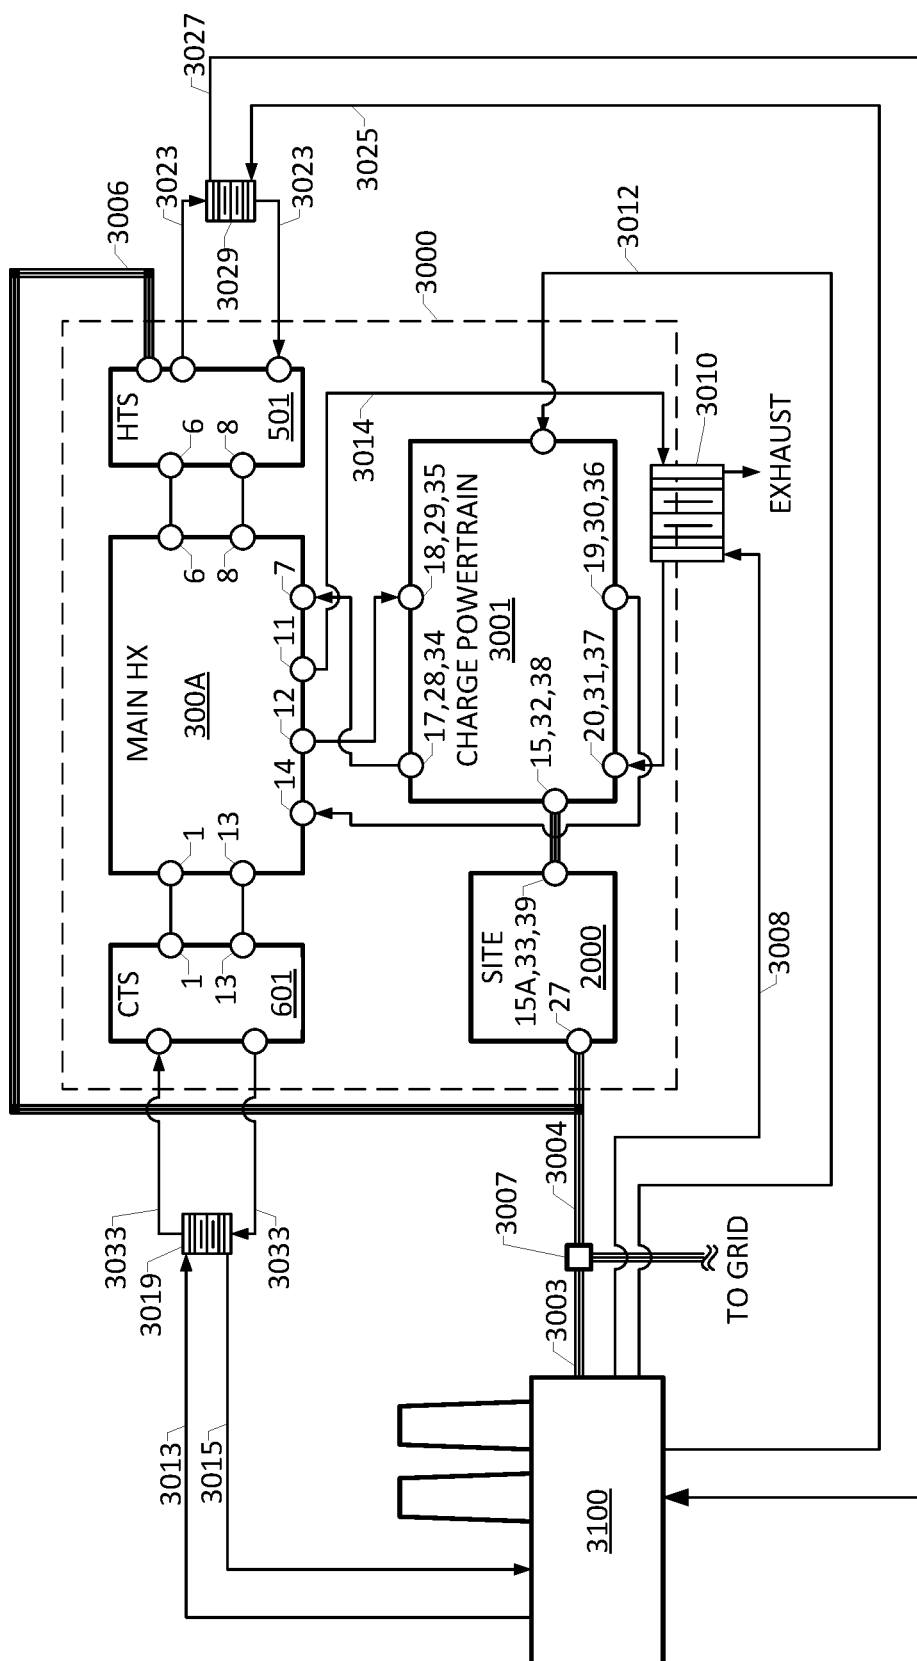


FIG. 36

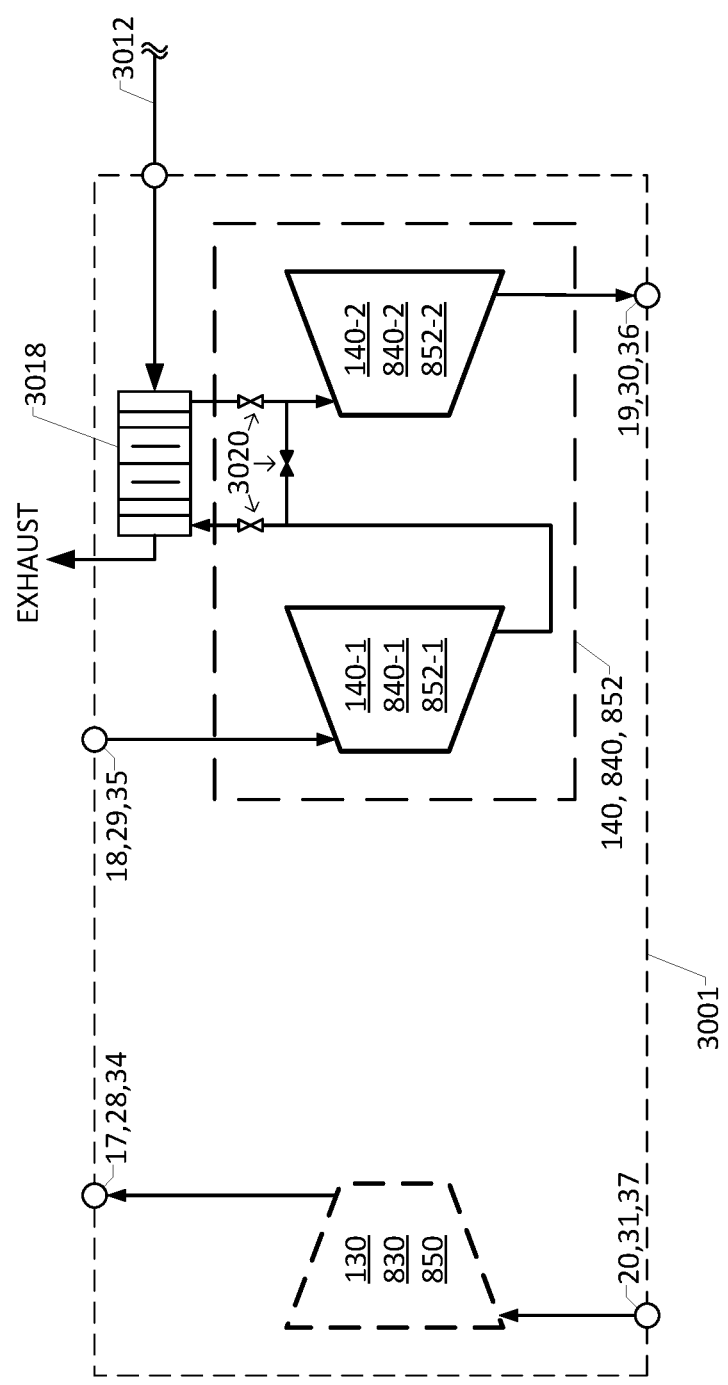
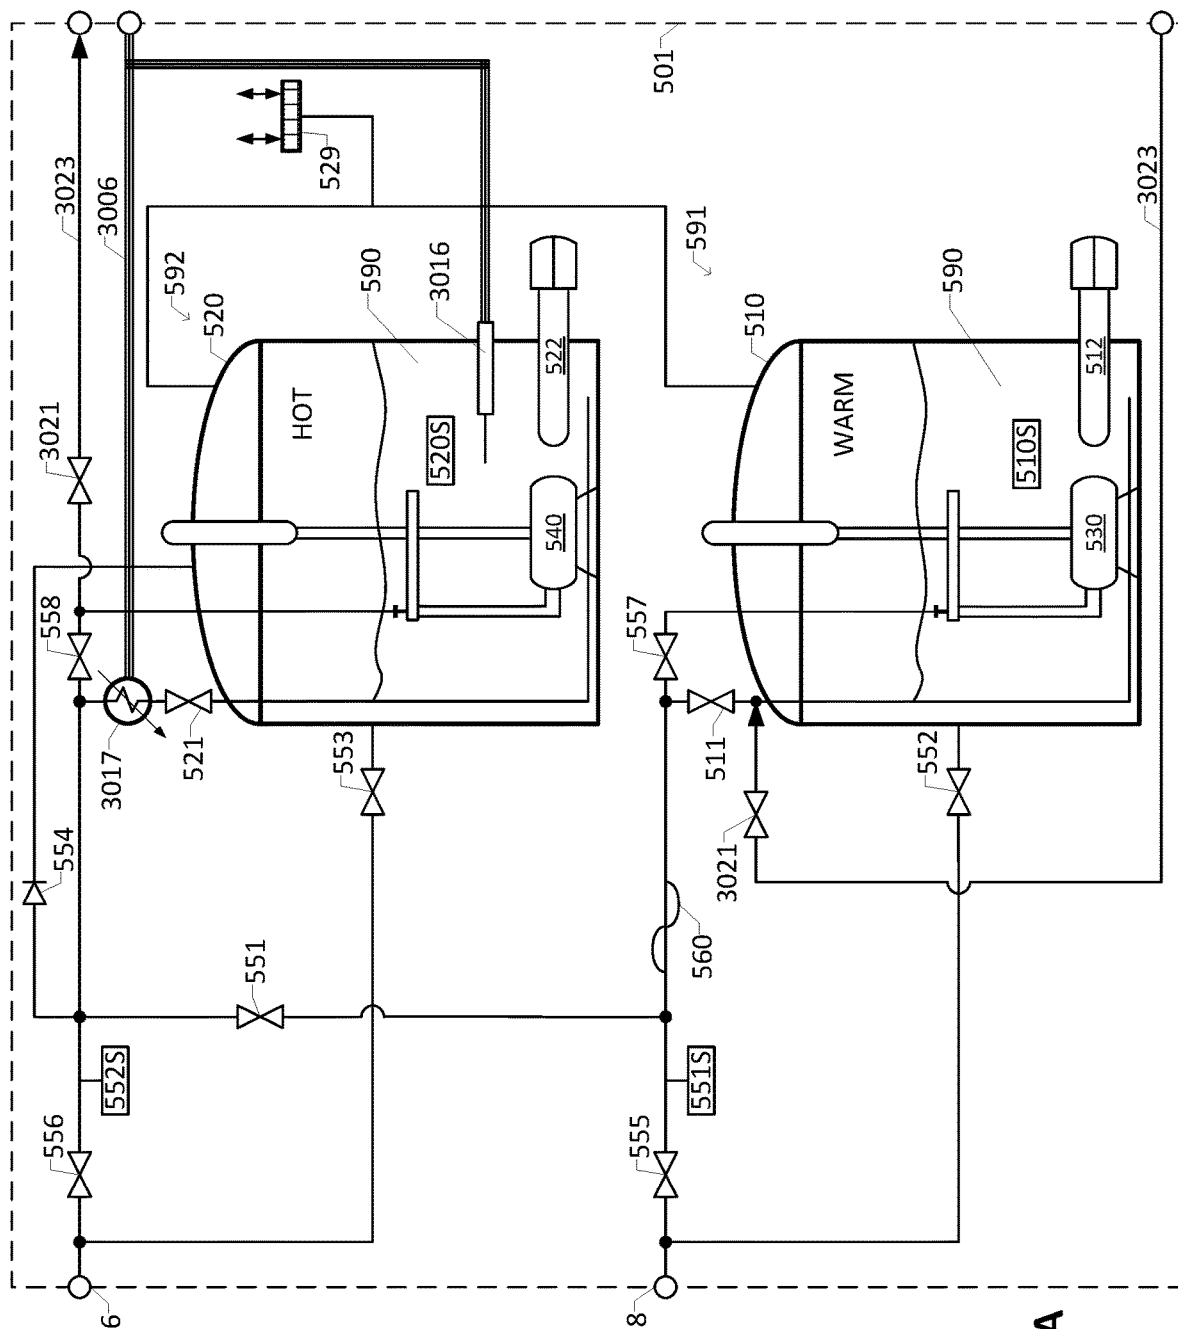


FIG. 36A



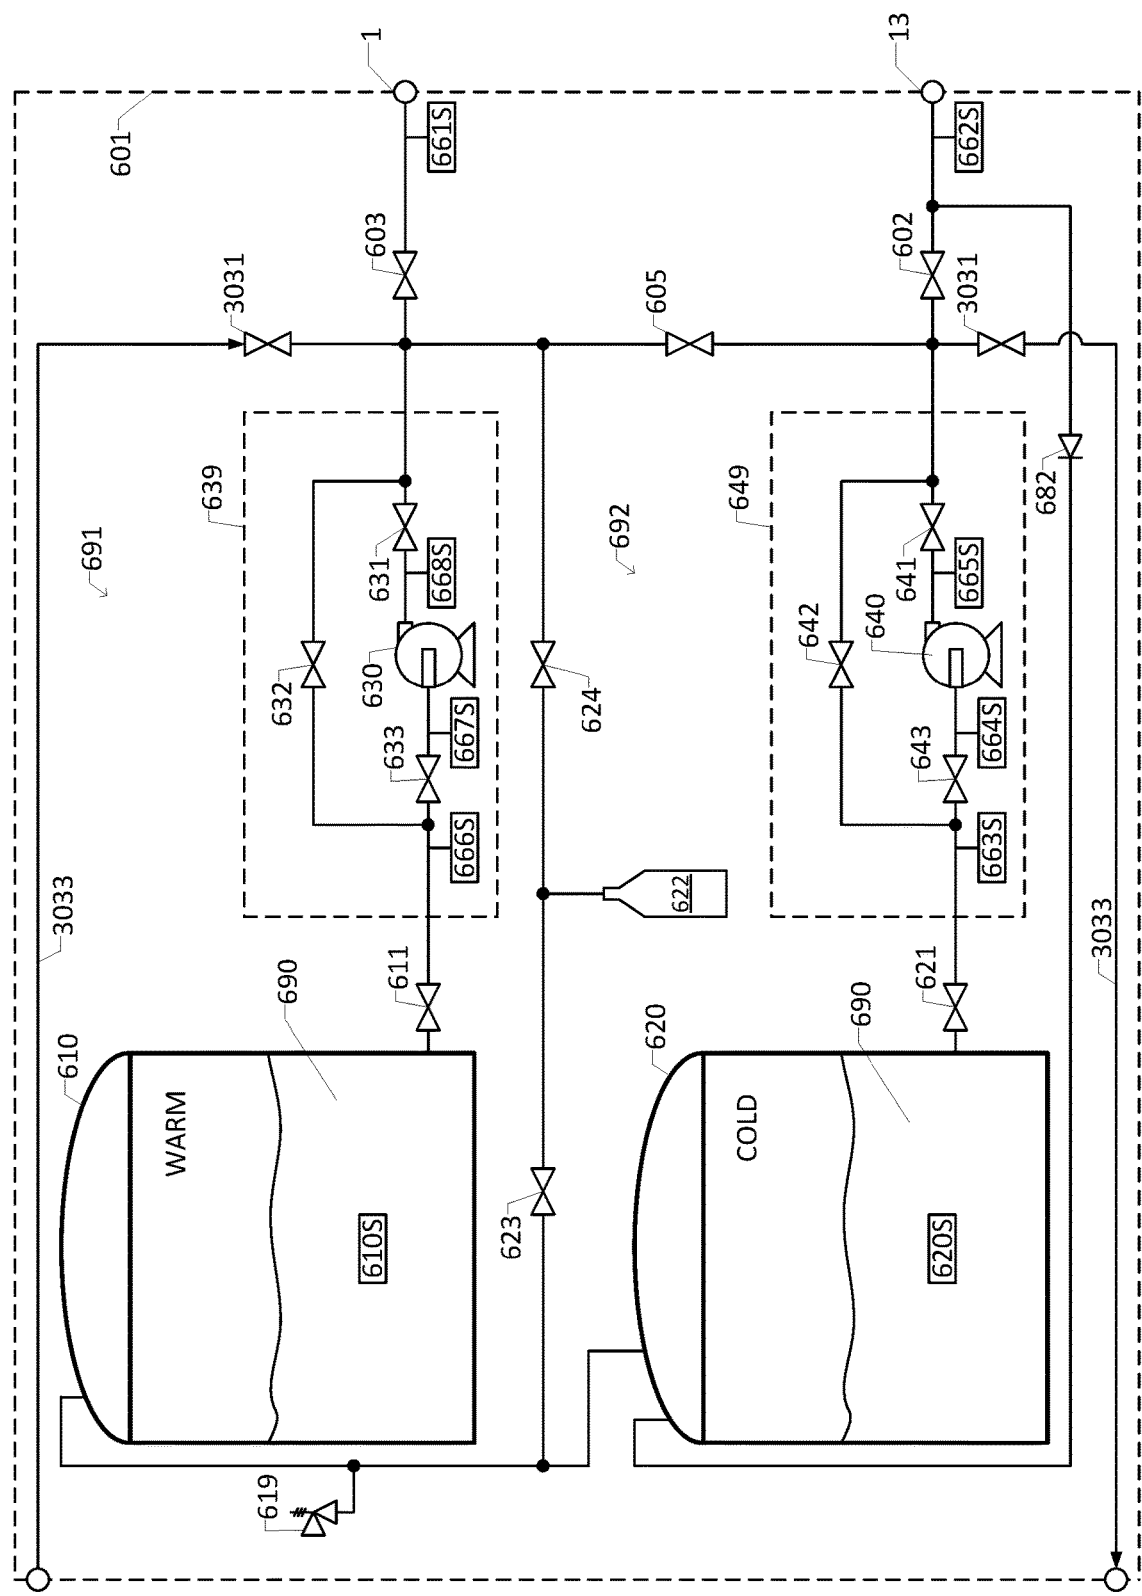


FIG. 37B

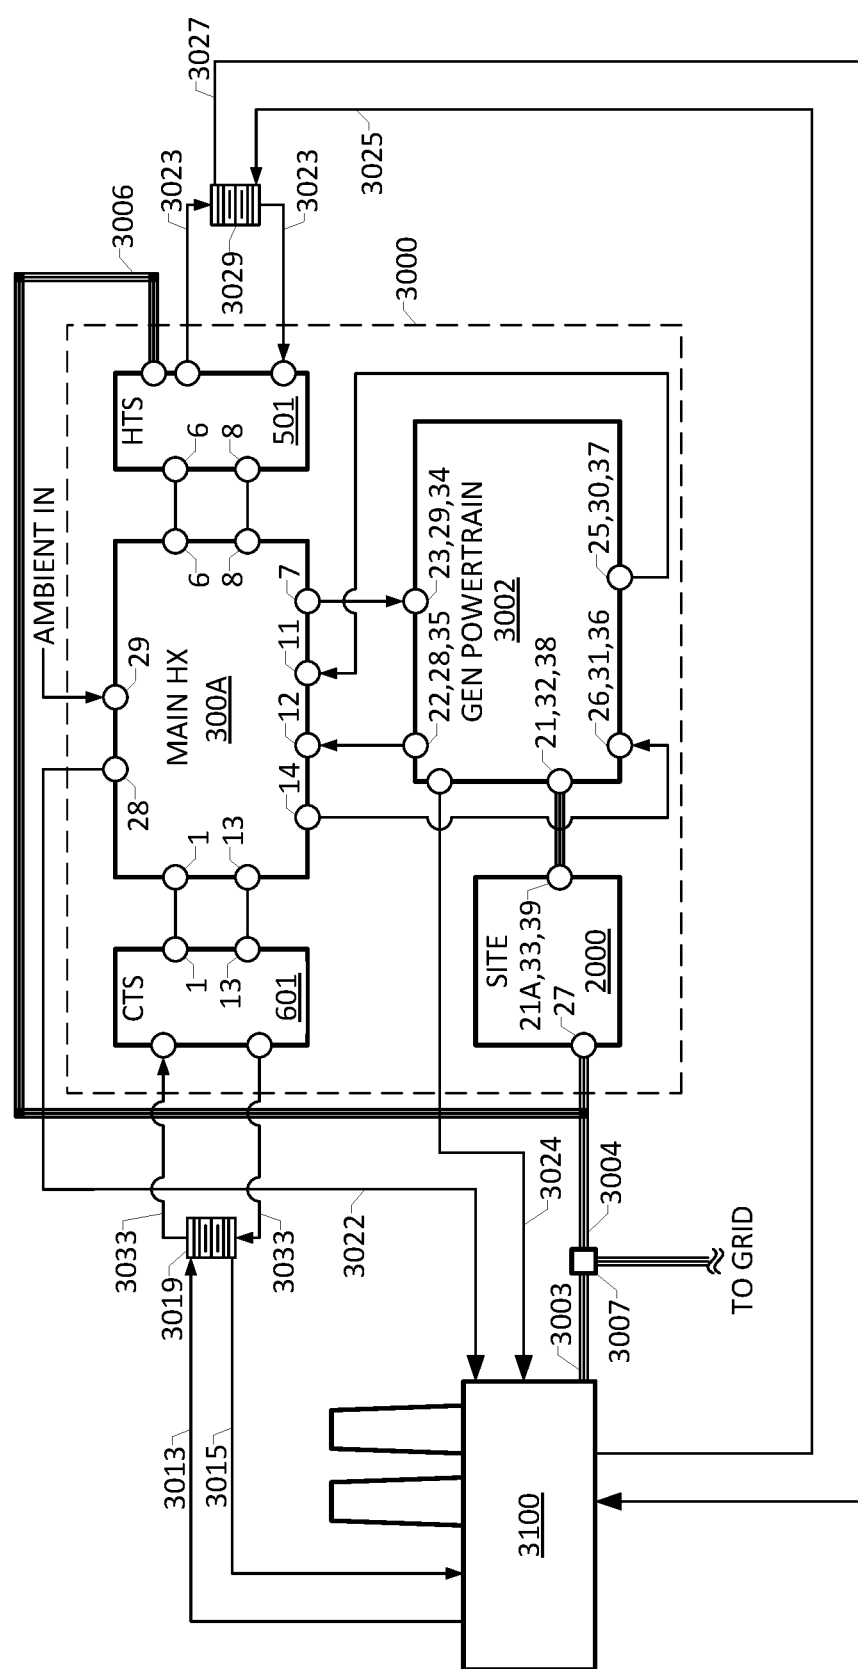


FIG. 38

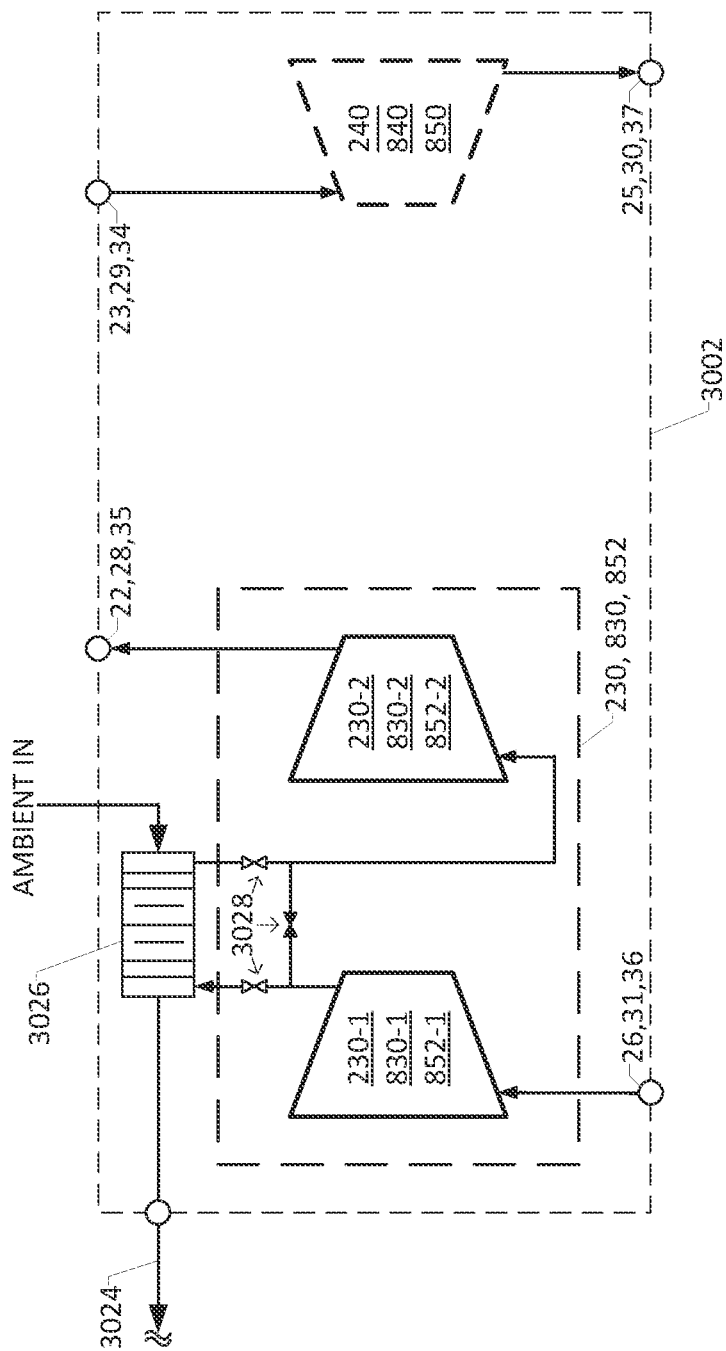


FIG. 38A

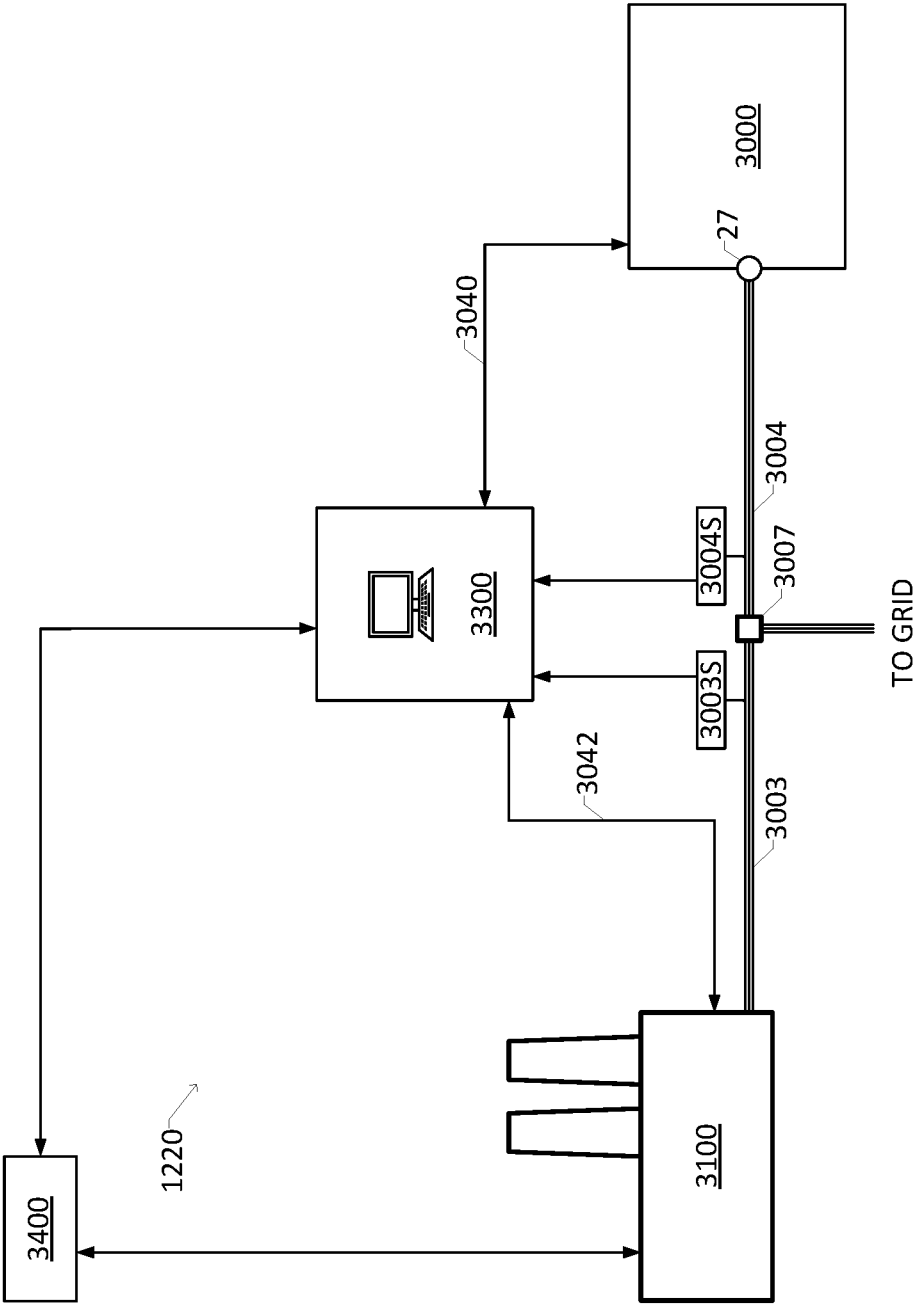


FIG. 39

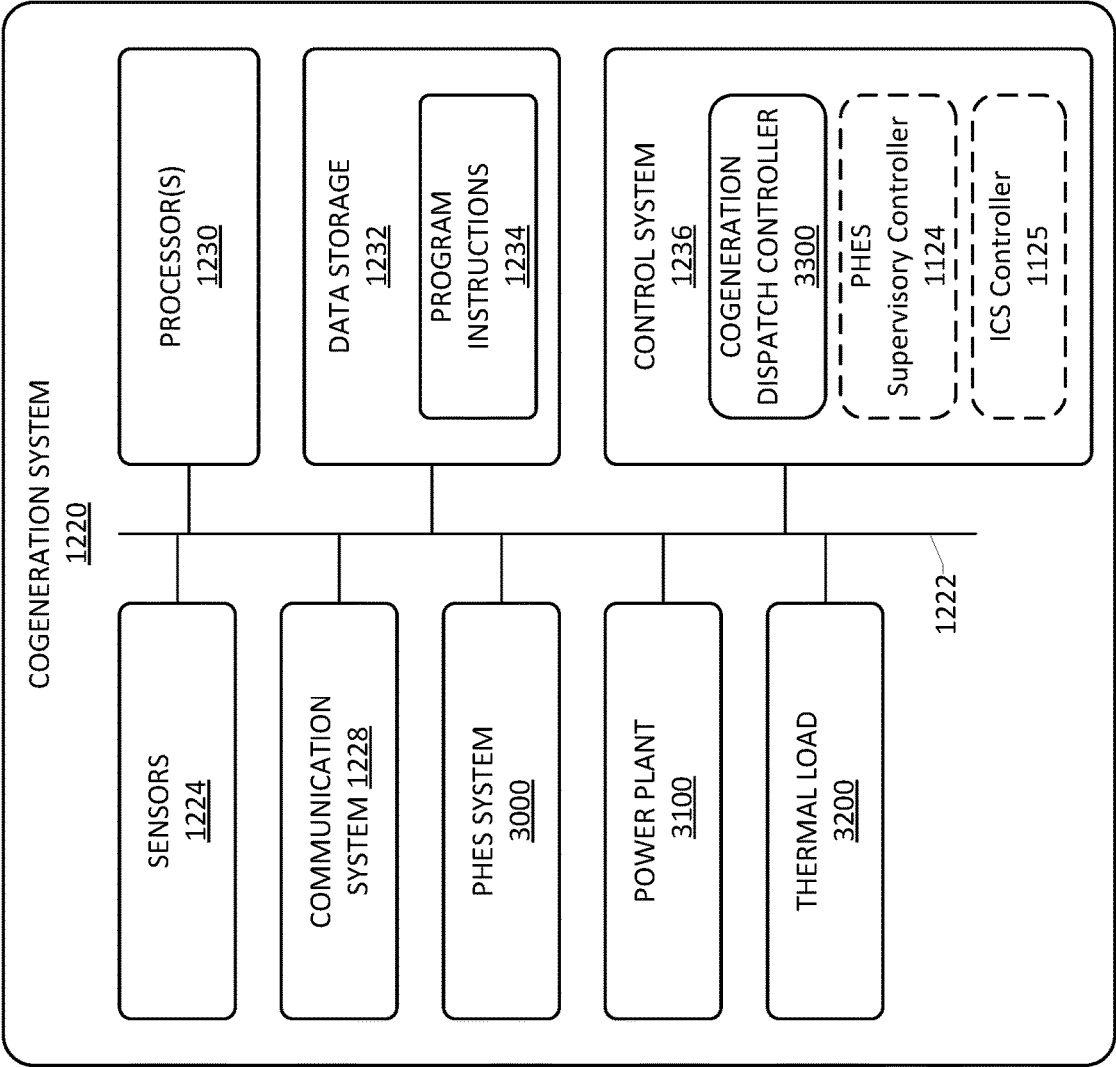


FIG. 40

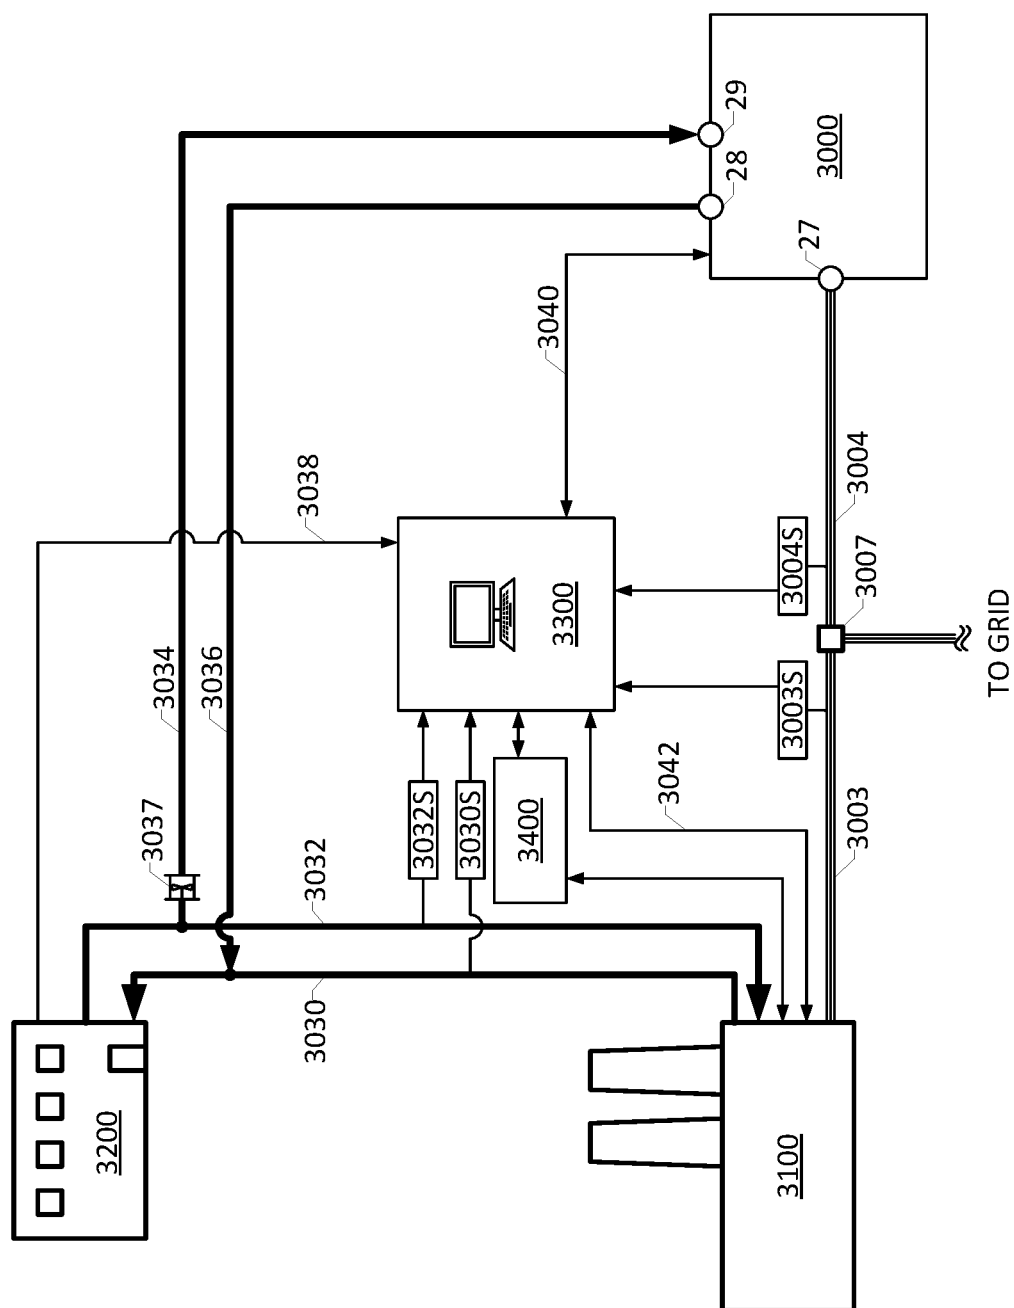


FIG. 41

PUMPED HEAT ENERGY STORAGE SYSTEM WITH HOT-SIDE THERMAL INTEGRATION

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application is a Continuation of U.S. patent application Ser. No. 16/991,859, filed Aug. 12, 2020, the disclosure of which is incorporated herein by reference in its entirety.

BACKGROUND

[0002] In a heat engine or heat pump, a heat exchanger may be employed to transfer heat between a thermal storage material and a working fluid for use with turbomachinery. The heat engine may be reversible, e.g., it may also be a heat pump, and the working fluid and heat exchanger may be used to transfer heat or cold to thermal storage media.

SUMMARY4

[0003] A Pumped Heat Electric Storage (“PHES”) system may include at least a working fluid circulated through a closed cycle fluid path including at least two heat exchangers, at least one turbine, and at least one compressor. In some systems, one or more recuperative heat exchangers may also be included. One or more thermal reservoirs may hold one or more thermal fluids which may be sent through the heat exchangers, providing thermal energy to, and/or extracting thermal energy from, the working fluid. One or more motor/generators may be used to obtain work from the thermal energy in the system, preferably by generating electricity from mechanical energy received from the turbine.

[0004] A first system herein may include: (i) a pumped-heat energy storage system (“PHES system”), wherein the PHES system is operable in a charge mode to convert electricity into stored thermal energy in a hot thermal storage (“HTS”) medium by transferring heat from a working fluid to a warm HTS medium, resulting in a hot HTS medium, and wherein the PHES system is further operable in a generation mode to convert at least a portion of the stored thermal energy into electricity, and wherein the PHES system may include, when operating in the generation mode, a working fluid path circulating a working fluid through, in sequence, at least a compressor system, a hot-side heat exchanger system, a turbine system, a cold-side heat exchanger system, and back to the compressor system; (ii) an electric heater in thermal contact with the hot HTS medium, wherein the electric heater is operable to heat the hot HTS medium above a temperature achievable by transferring heat from the working fluid to the warm HTS medium; (iii) an HTS heat exchanger; (iv) an HTS medium fluid path operable to circulate hot HTS medium through the HTS heat exchanger; and (iv) a first fluid path operable to circulate a first fluid through the HTS heat exchanger in thermal contact with the hot HTS medium and directing the first fluid to a power generation plant.

[0005] In the first system, the electric heater may be electrically connected to the power generation plant and may receive electricity from the power generation plant. In the first system, the power generation plant may be a thermal plant. In the first system, the first fluid may be directed to a water reheater in the power generation plant. In the first system, the PHES system, when in the charge mode, may

receive the electricity for conversion into the stored thermal energy from the power generation plant. In the first system, the PHES system may further include a recuperator heat exchanger, wherein the working fluid path of the PHES system, when operating in the generation mode, may include circulating the working fluid through, in sequence, at least the compressor system, the recuperator heat exchanger system, the hot-side heat exchanger system, the turbine system, the recuperator heat exchanger system, the cold-side heat exchanger system, and back to the compressor system.

[0006] A second system herein may include: (i) a pumped-heat energy storage system (“PHES system”), wherein the PHES system is operable in a charge mode to convert electricity into stored thermal energy in a hot thermal storage (“HTS”) medium by transferring heat from a working fluid to a warm HTS medium, resulting in a hot HTS medium, and wherein the PHES system is further operable in a generation mode to convert at least a portion of the stored thermal energy into electricity, and wherein the PHES system comprises, when operating in the generation mode, a working fluid path circulating a working fluid through, in sequence, at least a compressor system, a hot-side heat exchanger system, a turbine system, a cold-side heat exchanger system, and back to the compressor system; (ii) an electric heater in thermal contact with the hot HTS medium, wherein the electric heater is operable to heat the hot HTS medium above a temperature achievable by transferring heat from the working fluid to the warm HTS medium; (iii) an HTS heat exchanger; (iv) an HTS medium fluid path operable to circulate hot HTS medium through the HTS heat exchanger; (v) a first fluid path operable to circulate a first fluid through the HTS heat exchanger in thermal contact with the hot HTS medium and directing the first fluid to a power generation plant; and (vi) a second fluid path operable to direct a second fluid through an intercooler and to the power generation plant, wherein the working fluid path through the compressor system, when the PHES system is operating in generation mode, comprises circulating the working fluid through, in sequence, at least a first compressor, the intercooler, and a second compressor, and wherein the intercooler thermally contacts the working fluid with the second fluid, transferring heat from the working fluid to the second fluid.

[0007] In the second system, the first compressor and the second compressor may be stages in a single physical turbomachine. In the second system, the electric heater may be electrically connected to the power generation plant and may receive electricity from the power generation plant. In the second system, the power generation plant may be a thermal plant. In the second system, the first fluid may be directed to a water reheater in the power generation plant. In the second system, the second fluid may be directed to a water preheater in the power generation plant. In the second system, the PHES system, when in the charge mode, may receive the electricity for conversion into the stored thermal energy from the power generation plant. In the second system,

[0008] the PHES system may further include a recuperator heat exchanger, wherein the working fluid path of the PHES system, when operating in the generation mode, may include circulating the working fluid through, in sequence, at least the compressor system, the recuperator heat exchanger system, the hot-side heat exchanger system, the turbine system, the recuperator heat exchanger system, the cold-side heat exchanger system, and back to the compressor system.

[0009] A third system herein may include: (i) a pumped-heat energy storage system (“PHES system”), wherein the PHES system is operable in a charge mode to convert electricity into stored thermal energy in a hot thermal storage (“HTS”) medium by transferring heat from a working fluid to a warm HTS medium, resulting in a hot HTS medium, and wherein the PHES system is further operable in a generation mode to convert at least a portion of the stored thermal energy into electricity, and wherein the PHES system includes, when operating in the generation mode, a working fluid path circulating a working fluid through, in sequence, at least a compressor system, a hot-side heat exchanger system, a turbine system, an ambient heat exchanger, a cold-side heat exchanger system, and back to the compressor system; (ii) an electric heater in thermal contact with the hot HTS medium, wherein the electric heater is operable to heat the hot HTS medium above a temperature achievable by transferring heat from the working fluid to the warm HTS medium; (iii) an HTS heat exchanger; (iv) an HTS medium fluid path operable to circulate hot HTS medium through the HTS heat exchanger; (v) a first fluid path operable to circulate a first fluid through the HTS heat exchanger in thermal contact with the hot HTS medium and directing the first fluid to a power generation plant; (vi) a second fluid path operable to direct a second fluid through an intercooler and to the power generation plant, wherein the working fluid path through the compressor system, when the PHES system is operating in generation mode, includes circulating the working fluid through, in sequence, at least a first compressor, the intercooler, and a second compressor, and wherein the intercooler thermally contacts the working fluid with the second fluid, transferring heat from the working fluid to the second fluid; and (vii) a third fluid path operable to direct a third fluid through the ambient heat exchanger and to the power generation plant, wherein, when the PHES system is operating in generation mode, the ambient heat exchanger thermally contacts the working fluid with the third fluid, transferring heat from the working fluid to the third fluid.

[0010] In the third system, the first compressor and the second compressor may be stages in a single physical turbomachine. In the third system, the electric heater may be electrically connected to the power generation plant and may receive electricity from the power generation plant. In the third system, the first fluid may be directed to a water reheater in the power generation plant. In the third system, the PHES system, when in the charge mode, may receive the electricity for conversion into the stored thermal energy from the power generation plant. In the third system, the PHES system may further include a recuperator heat exchanger, wherein the working fluid path of the PHES system, when operating in the generation mode, may include circulating the working fluid through, in sequence, at least the compressor system, the recuperator heat exchanger system, the hot-side heat exchanger system, the turbine system, the recuperator heat exchanger system, ambient heat exchanger, the cold-side heat exchanger system, and back to the compressor system.

[0011] A first method herein may include: (i) operating a PHES system in a charge mode using electricity from a power plant operating in a generation mode; and (ii) using electricity from the power plant to heat a hot HTS medium in the PHES system above a temperature achievable by transferring heat from the working fluid to the warm HTS medium.

[0012] A second method herein may include: (i) operating a PHES system in a charge mode using electricity from a power plant operating in a generation mode; and (ii) using heat from the power plant to heat a working fluid in a powertrain of the PHES system.

[0013] A third method herein may include: (i) operating a PHES system in a charge mode using electricity from a power plant operating in a generation mode; and (ii) using heat from the power plant to heat a working fluid at a location downstream from a cold-side heat exchanger system and upstream from a compressor system.

[0014] A fourth method herein may include: (i) operating a PHES system in a charge mode using electricity from a power plant operating in a generation mode; and (ii) using heat from the power plant to heat a working fluid in a low-pressure medium-temperature fluid path at a location downstream from a recuperator heat exchanger system and upstream from a compressor system.

[0015] A fifth method herein may include: (i) operating a PHES system in a charge mode using electricity from a power plant operating in a generation mode; (ii) transferring heat from a hot HTS medium in the PHES to a fluid; and (iii) sending the fluid to the power plant.

[0016] A sixth method herein may include: (i) operating a PHES system in an idle mode; (ii) transferring heat from a hot HTS medium in the PHES system to a fluid; and (iii) sending the fluid to a power plant operating in a generation mode.

[0017] A seventh method herein may include: (i) operating a PHES system in a generation mode; (ii) transferring heat from a hot HTS medium in the PHES system to a fluid; and (iii) sending the fluid to a power plant operating in a generation mode.

[0018] An eighth method herein may include: (i) operating a PHES system in a charge mode using electricity from a power plant operating in a generation mode; and (ii) transferring heat from the power plant to a cold CTS medium in the PHES system.

[0019] A ninth method herein may include: (i) operating a PHES system in an idle mode; and (ii) transferring heat from a power plant operating a generation mode to a cold CTS medium in the PHES system.

[0020] A tenth method herein may include: (i) operating a PHES system in a generation mode; and (ii) transferring heat from a power plant operating a generation mode to a cold CTS medium in the PHES system.

[0021] An eleventh method herein may include: (i) operating a PHES system in a generation mode; (ii) transferring heat from a working fluid at a location within a powertrain of the PHES system to a fluid; and (iii) sending the fluid to a power plant operating in a generation mode.

[0022] A twelfth method herein may include: (i) operating a PHES system in a generation mode; (ii) transferring heat from a working fluid at a location within an ambient heat exchanger of the PHES system to a fluid; and (iii) sending the fluid to a power plant operating in a generation mode.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] FIG. 1 schematically illustrates operating principles of a pumped heat electric storage system.

[0024] FIG. 2 is a top-level schematic diagram of a PHES system with a dual powertrain, according to an example embodiment.

[0025] FIG. 3 is a schematic fluid path diagram of a working fluid loop subsystem in a PHES system, according to an example embodiment.

[0026] FIGS. 3A-3D are schematic fluid path diagrams of a generation powertrain system and associated valves, according to example embodiments.

[0027] FIGS. 3E-3H are schematic fluid path diagrams of a charge powertrain system and associated valves, according to example embodiments.

[0028] FIGS. 3I-3J are schematic fluid path diagrams of an ambient cooler system and associated valves, according to example embodiments.

[0029] FIGS. 3K-3L are schematic fluid path diagrams of an ambient cooler system and associated valves, according to example embodiments.

[0030] FIG. 3M is a schematic fluid path diagram of an inventory control system, according to an example embodiment.

[0031] FIG. 3N is a schematic fluid path diagram of circulatory flow paths during charge mode.

[0032] FIG. 3O is a schematic fluid path diagram of circulatory flow paths during generation mode.

[0033] FIG. 4 is a schematic fluid path diagram of a hot-side thermal storage system, according to an example embodiment.

[0034] FIG. 5 is a schematic fluid path diagram of a cold-side thermal storage system, according to an example embodiment.

[0035] FIG. 6A is a schematic fluid path diagram of a main heat exchanger system, according to an example embodiment.

[0036] FIG. 6B is a schematic fluid path diagram of a main heat exchanger system, according to an example embodiment.

[0037] FIG. 7 is a schematic diagram of a generation powertrain ("GPT") system, according to an example embodiment.

[0038] FIG. 8 is a schematic diagram of a charge powertrain ("CPT") system, according to an example embodiment.

[0039] FIG. 9 is a schematic electrical diagram of a power interface, according to an example embodiment.

[0040] FIG. 10 illustrates primary modes of operation of a PHES system, according to an example embodiment.

[0041] FIG. 11 is a state diagram illustrating operating states of a PHES system, according to an example embodiment.

[0042] FIG. 12 is a state diagram illustrating select operating and transitional states of a PHES system, according to an example embodiment.

[0043] FIG. 13 is a state diagram illustrating select operating and transitional states of a PHES system, according to an example embodiment.

[0044] FIG. 14 is a state diagram illustrating generation powertrain states of a PHES system, according to an example embodiment.

[0045] FIG. 15 is a state diagram illustrating charge powertrain states of a PHES system, according to an example embodiment.

[0046] FIG. 16 is a state diagram illustrating generation powertrain valve states of a PHES system, according to an example embodiment.

[0047] FIG. 17 is a state diagram illustrating charge powertrain valve states of a PHES system, according to an example embodiment.

[0048] FIG. 18 is a state diagram illustrating ambient cooler states of a PHES system, according to an example embodiment.

[0049] FIG. 19 is a state diagram illustrating select operating and transitional states of a PHES system, according to an example embodiment.

[0050] FIG. 20 is a state diagram illustrating select operating and transitional states of a PHES system, according to an example embodiment.

[0051] FIG. 21 is a state diagram illustrating select operating and transitional states of a PHES system, according to an example embodiment.

[0052] FIG. 22 is a state diagram illustrating select operating and transitional states of a PHES system, according to an example embodiment.

[0053] FIG. 23 is a state diagram illustrating select operating and transitional states of a PHES system, according to an example embodiment.

[0054] FIG. 24 is a simplified block diagram illustrating components of a PHES system, according to an example embodiment.

[0055] FIG. 24A illustrates select controllers that can be implemented in a PHES system, according to an example embodiment.

[0056] FIG. 25 is a state diagram illustrating hot-side loop states of a PHES system, according to an example embodiment.

[0057] FIG. 26 is a state diagram illustrating cold-side loop states of a PHES system, according to an example embodiment.

[0058] FIG. 27 is a top-level schematic diagram of a PHES system with a shared powertrain, according to an example embodiment.

[0059] FIG. 28 is a schematic fluid path diagram of a working fluid loop subsystem in a PHES system with a shared powertrain, according to an example embodiment.

[0060] FIG. 28A is a schematic fluid path diagram of circulatory flow paths during charge mode.

[0061] FIG. 28B is a schematic fluid path diagram of circulatory flow paths during generation mode.

[0062] FIG. 29 is a top-level schematic diagram of a PHES system with a reversible powertrain, according to an example embodiment.

[0063] FIG. 30 is a schematic fluid path diagram of a working fluid loop subsystem in a PHES system with a reversible powertrain, according to an example embodiment.

[0064] FIG. 30A is a schematic fluid path diagram of circulatory flow paths during charge mode.

[0065] FIG. 30B is a schematic fluid path diagram of circulatory flow paths during generation mode.

[0066] FIG. 31A is a schematic fluid path diagram of circulatory flow paths of a main heat exchanger system during charge mode.

[0067] FIG. 31B is a schematic fluid path diagram of circulatory flow paths of a main heat exchanger system during generation mode.

[0068] FIG. 32A is a schematic diagram of a power transmission system, according to an example embodiment.

[0069] FIG. 32B is a schematic diagram of a power transmission system, according to an example embodiment.

[0070] FIG. 32C is a schematic diagram of a power transmission system, according to an example embodiment.

[0071] FIG. 32D is a schematic diagram of a power transmission system, according to an example embodiment.

[0072] FIG. 32E is a schematic diagram of a power transmission system, according to an example embodiment.

[0073] FIG. 32F is a schematic diagram of a power transmission system, according to an example embodiment.

[0074] FIG. 33A is a schematic diagram of a power transmission system, according to an example embodiment.

[0075] FIG. 33B is a schematic diagram of a power transmission system, according to an example embodiment.

[0076] FIG. 33C is a schematic diagram of a power transmission system, according to an example embodiment.

[0077] FIG. 34A is a schematic diagram of modular turbomachinery with shared powertrains, according to an example embodiment.

[0078] FIG. 34B is a schematic diagram of modular turbomachinery with shared powertrains, according to an example embodiment.

[0079] FIG. 34C is a schematic diagram of modular turbomachinery with a shared powertrain, according to an example embodiment.

[0080] FIG. 35A is a schematic diagram of modular turbomachinery with reversible powertrains, according to an example embodiment.

[0081] FIG. 35B is a schematic diagram of modular turbomachinery with reversible powertrain, according to an example embodiment.

[0082] FIG. 35C is a schematic diagram of modular turbomachinery with a reversible powertrain, according to an example embodiment.

[0083] FIG. 36 is a top-level schematic diagram of a PHES system in charge mode integrated with a power generation plant, according to an example embodiment.

[0084] FIG. 36A is a schematic diagram of a portion of a powertrain system integrated with a power generation plant, according to an example embodiment.

[0085] FIG. 37A is a schematic diagram of a hot-side thermal storage system integrated with a power generation plant, according to an example embodiment.

[0086] FIG. 37B is a schematic diagram of cold-side thermal storage system integrated with a power generation plant, according to an example embodiment.

[0087] FIG. 38 is a top-level schematic diagram of a PHES system in generation mode integrated with a power generation plant, according to an example embodiment.

[0088] FIG. 38A is a schematic diagram of a portion of a powertrain system integrated with a power generation plant, according to an example embodiment.

[0089] FIG. 39 is a schematic diagram of cogeneration control of a PHES system integrated with a power generation plant, according to an example embodiment.

[0090] FIG. 40 is a simplified block diagram illustrating components of a cogeneration system, according to an example embodiment.

[0091] FIG. 41 is a schematic diagram of district heating with a PHES system integrated with a power generation plant, according to an example embodiment.

DETAILED DESCRIPTION

I. Overview

[0092] The Pumped Heat Electric Storage (“PHES”) systems, modes of operations, and states disclosed herein, as illustrated via multiple embodiments, are grid-scale energy storage systems that provide dispatchable power generation and power absorption. The terms grid and electrical grid are used interchangeably herein, and may refer to, for example, regional, national, and/or transnational electrical grids where an interconnected network delivers electricity from power generation plants and energy storage systems to consumers or other electrical grids. Advantageously, the PHES systems may provide increased grid stability and resilience. Additionally or alternatively, embodiments disclosed herein can achieve very fast dispatch response times, with spinning reserve capabilities comparable to natural gas peaker and cyclic units, but without the fossil fuel consumption. The PHES systems disclosed herein, utilizing thermal storage media also disclosed herein, may advantageously provide a safe, non-toxic and geography-independent energy (e.g., electricity) storage alternative.

[0093] The PHES systems function as thermodynamic cycle power generation and/or energy storage systems. Embodiments of the PHES systems may work as Brayton cycle systems. Alternatively or additionally, embodiments of the PHES systems may work as reversible Brayton cycle systems. Preferably, the PHES systems may operate as closed working-fluid loop systems. The PHES systems may use one or more generator and/or motor systems, which connect to one or more turbines and/or compressors which act on a working fluid (e.g., air) circulating in the system.

[0094] The PHES systems may have a hot side and a cold side. Each side may include one or more heat exchanger systems coupled to one or more thermal reservoirs. The PHES systems may employ liquid thermal storage medium on both or either the hot side and/or the cold side. The liquid thermal storage media preferably include liquids that are stable at high temperatures, such as molten nitrate salt or solar salt, and/or liquids that are stable at low temperatures, such as methanol/water coolant mixtures, glycols, and/or alkanes such as hexane. In one embodiment, cold-side and hot-side thermal reservoirs may include tanks of liquid thermal storage media, such as, but not limited to, methanol/water coolant and molten salt, respectively.

[0095] During a charge cycle (i.e., charge mode), the PHES systems act as a heat pump, converting electrical energy from an electrical grid or other source to thermal energy that is stored in thermal reservoirs. The heat-pumping action may be done via motor-driven turbomachinery (e.g., a compressor system and a turbine system) in a closed-loop Brayton cycle using a working fluid (e.g., air).

[0096] During a generation cycle (i.e., generation mode), the PHES systems act as a heat engine, converting stored thermal energy from the thermal reservoirs to electrical energy that can be dispatched back to the grid or another load. The working fluid loop during generation may be a closed-loop Brayton cycle, may use the same working fluid as the charge cycle, may use the same or different heat exchangers as the charge cycle, and may use the same turbomachinery as the charge cycle or may use different turbomachinery than the charge cycle. The generation turbine system may drive one or more generators that are grid synchronous.

[0097] Embodiments of the disclosed PHES systems enable fast cycling from full charge to full discharge.

[0098] Embodiments of the PHES systems also enable fast mode switching, such that the PHES system can switch modes from full load (i.e., charge) to full generation in a very short duration. This is particularly useful for providing spinning reserve type capabilities to address energy shifting needs related to high penetration of solar (e.g., photovoltaic) energy generation on an electrical grid or grid segment. During ramp periods when solar generation is coming online or going offline, the ability of the PHES systems to quickly change from full load to full generation is critical for helping to address slope of the solar “duck curve” that reflects a timing imbalance between peak demand and renewable energy production.

[0099] Embodiments of the PHES systems also enable partial turndown. Various power generation applications (e.g. wind farms, natural gas peaker power plants) benefit from the ability for generation and load assets such as the PHES systems to ramp power up and down from full power based on a dispatching signal.

[0100] FIG. 1 schematically illustrates operating principles of the PHES systems. Electricity may be stored in the form of thermal energy of two thermal storage media at different temperatures (e.g., thermal energy reservoirs comprising thermal storage media such as heat storage fluids) by using one or more heat pump and heat engine systems. In a charging (heat pump) mode, work may be consumed by the PHES system for transferring heat from a cold thermal medium to a hot thermal medium, thus lowering the temperature of the cold thermal medium and increasing the temperature of the hot thermal medium. In a generation (heat engine or discharging) mode, work may be produced by the PHES systems by transferring heat from the hot thermal medium to the cold thermal medium, thus lowering the temperature (i.e., sensible energy) of the hot thermal medium and increasing the temperature of the cold thermal medium. The PHES systems may be configured to ensure that the work produced by the system during generation is a favorable fraction of the energy consumed during charge. Excess heat from inefficiency may be dumped to ambient or an external heat sink. The PHES systems are configured to achieve high roundtrip efficiency, defined herein as the work produced by the system during generation divided by the work consumed by the system during charge. Further, the design of the PHES systems permits high roundtrip efficiency using components of a desired (e.g., acceptably low) cost.

[0101] The PHES systems may include a working fluid to and from which heat is transferred while undergoing a thermodynamic cycle. The PHES systems operating in a closed cycle allows, for example, a broad selection of working fluids, operation at elevated hot side pressures, operation at lower cold side temperatures, improved efficiency, and reduced risk of compressor and turbine damage. One or more aspects of the disclosure described in relation to the PHES systems having working fluids undergoing closed thermodynamic cycles may also be applied to the PHES systems having working fluids undergoing open or semi-open thermodynamic cycles.

[0102] The working fluid may undergo a thermodynamic cycle operating at one, two, or more pressure levels. For example, the working fluid may operate in a closed cycle between a low-pressure limit on a cold side of the system

and a high-pressure limit on a hot side of the system. In some implementations, a low-pressure limit of about 10 atmospheres (atm) or greater can be used. In some instances, the low pressure limit may be at least about 1 atm, at least about 2 atm, at least about 5 atm, at least about 10 atm, at least about 15 atm, at least about 20 atm, at least about 30 atm, at least about 40 atm, at least about 60 atm, at least about 80 atm, at least about 100 atm, at least about 120 atm, at least about 160 atm, or at least about 200 atm, 500 atm, 1000 atm, or more. In some instances, a sub-atmospheric low-pressure limit may be used. For example, the low-pressure limit may be less than about 0.1 atm, less than about 0.2 atm, less than about 0.5 atm, or less than about 1 atm. In some instances, the low-pressure limit may be about 1 atmosphere (atm). In the case of a working fluid operating in an open cycle, the low-pressure limit may be about 1 atm or equal to ambient pressure.

[0103] Working fluids used in embodiments of the PHES systems may include air, argon, other noble gases, carbon dioxide, hydrogen, oxygen, or any combination thereof, and/or other fluids in gaseous state throughout the working fluid loop. In some implementations, a gas with a high specific heat ratio may be used to achieve higher cycle efficiency than a gas with a low specific heat ratio. For example, argon (e.g., specific heat ratio of about 1.66) may be used rather than air (e.g., specific heat ratio of about 1.4). In some cases, the working fluid may be a blend of one, two, three, or more fluids. In one example, helium (having a high thermal conductivity and a high specific heat) may be added to the working fluid (e.g., argon) to improve heat transfer rates in heat exchangers.

[0104] The PHES systems may utilize thermal storage media, such as one or more heat storage fluids. Alternatively or additionally, the thermal storage media may be solids or gasses, or a combination of liquids, solids, and/or gasses. The PHES systems may utilize a thermal storage medium on a hot side of the PHES system (“HTS medium”) and a thermal storage medium on a cold side of the system (“CTS medium”). Preferably, the thermal storage media have high heat capacities per unit volume (e.g., heat capacities above about 1400 Joule (kilogram Kelvin)-1) and high thermal conductivities (e.g., thermal conductivities above about 0.7 Watt (meter Kelvin)-1). In some implementations, several different thermal storage media on either the hot side or the cold side, or both the hot side and the cold side, may be used.

[0105] The operating temperatures and pressures of the HTS medium may be entirely in the liquid range of the HTS medium, and the operating temperatures and pressures of the CTS medium may be entirely in the liquid range of the CTS medium. In some examples, liquids may enable a more rapid exchange of large amounts of heat than solids or gases. Thus, in some cases, liquid HTS and CTS media may advantageously be used.

[0106] In some implementations, the HTS medium may be a molten salt or a mixture of molten salts. A salt or salt mixture that is liquid over the operating temperature range of the HTS medium may be employed. Molten salts can provide numerous advantages as thermal storage media, such as low vapor pressure, lack of toxicity, chemical stability, low reactivity with typical steels (e.g., melting point below the creep temperature of steels, low corrosiveness, low capacity to dissolve iron and nickel), and low cost. In one example, the HTS medium is a mixture of sodium nitrate and potassium nitrate. In another example, the HTS

medium is a eutectic mixture of sodium nitrate and potassium nitrate. In another example, the HTS medium is a mixture of sodium nitrate and potassium nitrate having a lowered melting point than the individual constituents, an increased boiling point than the individual constituents, or a combination thereof. Other examples of HTS media include potassium nitrate, calcium nitrate, sodium nitrate, sodium nitrite, lithium nitrate, mineral oil, or any combination thereof. Further examples include any gaseous (including compressed gases), liquid or solid media (e.g., powdered solids) having suitable (e.g., high) thermal storage capacities and/or are capable of achieving suitable (e.g., high) heat transfer rates with the working fluid. For example, a mix of 60% sodium nitrate and 40% potassium nitrate (also referred to as a solar salt) can have a heat capacity of approximately 1500 Joule (Kelvin mole)⁻¹ and a thermal conductivity of approximately 0.75 Watt (meter Kelvin)⁻¹ within a temperature range of interest. Advantageously, the HTS medium may be operated in a temperature range that is compatible with structural steels used in unit components of the PHES system.

[0107] In some cases, liquid water at temperatures of about 0° C. to 100° C. (about 273 K-373 K) and a pressure of about 1 atm may be used as the CTS medium. Due to a possible explosion hazard associated with the presence of steam at or near the boiling point of water, the operating temperature can be kept below 100° C. while maintaining an operating pressure of 1 atm (i.e., no pressurization). In some cases, the temperature operating range of the CTS medium may be extended (e.g., to -30° C. to 100° C. at 1 atm) by using a mixture of water and one or more antifreeze compounds (e.g., ethylene glycol, propylene glycol, or glycerol), or a water/alcohol mixture such as water and methanol.

[0108] Improved efficiency may be achieved by increasing the temperature difference at which the PHES system operates, for example, by using a CTS medium capable of operating at lower temperatures. In some examples, the CTS medium may comprise hydrocarbons, such as, for example, alkanes (e.g., hexane or heptane), alkenes, alkynes, aldehydes, ketones, carboxylic acids (e.g., HCOOH), ethers, cycloalkanes, aromatic hydrocarbons, alcohols (e.g., butanol), other type(s) of hydrocarbon molecules, or any combinations thereof. In some examples, cryogenic liquids having boiling points below about -150° C. or about -180° C. may be used as CTS medium (e.g., propane, butane, pentane, nitrogen, helium, neon, argon, krypton, air, hydrogen, methane, or liquefied natural gas, or combinations thereof). In some implementations, choice of CTS medium may be limited by the choice of working fluid. For example, when a gaseous working fluid is used, a liquid CTS medium having a liquid temperature range at least partially or substantially above the boiling point of the working fluid may be required.

[0109] In some cases, the operating temperature range of CTS and/or HTS media can be changed by pressurizing (i.e., raising the pressure) or evacuating (i.e., lowering the pressure) the thermal media fluid paths and storage tanks, and thus changing the temperature at which the storage media undergo phase transitions.

[0110] The HTS medium and/or CTS medium may be in a liquid state over all, or over at least a portion, of the operating temperature range of the respective side of a PHES system. The HTS medium and/or CTS medium may

be heated, cooled or maintained to achieve a suitable operating temperature prior to, during or after various modes of operation of a PHES system.

[0111] The thermal reservoirs of the PHES systems may cycle between charged and discharged modes, in conjunction with, or separate from, the charge and generation cycles of the overall PHES system embodiment. In some examples, the thermal reservoirs of the PHES systems may be fully charged, partially charged or partially discharged, or fully discharged. In some cases, cold-side thermal reservoir(s) may be charged (also “recharged” herein) independently from hot-side thermal reservoir(s). Further, in some implementations, charging (or some portion thereof) of thermal reservoirs and discharging (or some portion thereof) of thermal reservoirs can occur simultaneously. For example, a first portion of a hot-side thermal reservoir may be recharged while a second portion of the hot-side thermal reservoir together with a cold-side thermal reservoir are being discharged.

[0112] Embodiments of the PHES systems may be capable of storing energy for a given amount of time. In some cases, a given amount of energy may be stored for at least about 1 second, at least about 30 seconds, at least about 1 minute, at least about 5 minutes, at least about 30 minutes, at least about 1 hour, at least about 2 hours, at least about 3 hours, at least about 4 hours, at least about 5 hours, at least about 6 hours, at least about 7 hours, at least about 8 hours, at least about 9 hours, at least about 10 hours, at least about 12 hours, at least about 14 hours, at least about 16 hours, at least about 18 hours, at least about 20 hours, at least about 22 hours, at least about 24 hours (1 day), at least about 2 days, at least about 4 days, at least about 6 days, at least about 8 days, at least about 10 days, 20 days, 30 days, 60 days, 100 days, 1 year or more.

[0113] Embodiments of the PHES systems may be capable of storing/receiving input of, and/or extracting/providing output of, a substantially large amount of energy for use with power generation systems (e.g., intermittent power generation systems such as wind power or solar power), power distribution systems (e.g. electrical grid), and/or other loads or uses in grid-scale or stand-alone settings. During a charge mode of the PHES systems, electric power received from an external power source (e.g., a wind power system, a solar photovoltaic power system, an electrical grid, etc.) can be used to operate the PHES systems in the heat pump mode (i.e., transferring heat from a low temperature reservoir to a high temperature reservoir, thus storing energy). During a generation mode of the PHES systems, the system can supply electric power to an external power system or load (e.g., one or more electrical grids connected to one or more loads, a load, such as a factory or a power-intensive process, etc.) by operating in the heat engine mode (i.e., transferring heat from a high temperature reservoir to a low temperature reservoir, thus extracting energy). As described elsewhere herein, during charge and/or generation, the system may receive or reject thermal power, including, but not limited to electromagnetic power (e.g., solar radiation) and thermal power (e.g., sensible energy from a medium heated by solar radiation, heat of combustion etc.).

[0114] In some implementations, the PHES systems are grid-synchronous. Synchronization can be achieved by matching speed and frequency of motors and/or generators and/or turbomachinery of a system with the frequency of one or more grid networks with which the PHES systems

exchange power. For example, a compressor and a turbine can rotate at a given, fixed speed (e.g., 3600 revolutions per minute (rpm)) that is a multiple of North American grid frequency (e.g., 60 hertz (Hz)). In some cases, such a configuration may eliminate the need for additional power electronics. In some implementations, the turbomachinery and/or the motors and/or generators are not grid synchronous. In such cases, frequency matching can be accomplished through the use of power electronics. In some implementations, the turbomachinery and/or the motors and/or generators are not directly grid synchronous but can be matched through the use of gears and/or a mechanical gearbox. As described in greater detail elsewhere herein, the PHES systems may also be power and/or load rampable. Such capabilities may enable these grid-scale energy storage systems to operate as peaking power plants and/or as a load following power plants. In some cases, the PHES systems of the disclosure may be capable of operating as base load power plants.

[0115] Embodiments of the PHES systems can have a given power capacity. In some cases, power capacity during charge may differ from power capacity during discharge. For example, embodiments of the PHES system can have a charge and/or discharge power capacity of less than about 1 megawatt (MW), at least about 1 megawatt, at least about 2 MW, at least about 3 MW, at least about 4 MW, at least about 5 MW, at least about 6 MW, at least about 7 MW, at least about 8 MW, at least about 9 MW, at least about 10 MW, at least about 20 MW, at least about 30 MW, at least about 40 MW, at least about 50 MW, at least about 75 MW, at least about 100 MW, at least about 200 MW, at least about 500 MW, at least about 1 gigawatt (GW), at least about 2 GW, at least about 5 GW, at least about 10 GW, at least about 20 GW, at least about 30 GW, at least about 40 GW, at least about 50 GW, at least about 75 GW, at least about 100 GW, or more.

[0116] Embodiments of the PHES systems can have a given energy storage capacity. In one example, a PHES system embodiment may be configured as a 100 MW unit operating for 10-hour cycles. In another example, a PHES system embodiment may be configured as a 1 GW plant operating for 12-hour cycles. In some instances, the energy storage capacity can be less than about 1 megawatt hour (MWh), at least about 1 megawatt hour, at least about 10 MWh, at least about 100 MWh, at least about 1 gigawatt hour (GWh), at least about 5 GWh, at least about 10 GWh, at least about 20 GWh, at least about 50 GWh, at least about 100 GWh, at least about 200 GWh, at least about 500 GWh, at least about 700 GWh, at least about 1000 GWh, or more.

[0117] In some cases, a given power capacity may be achieved with a given size, configuration and/or operating conditions of the heat engine/heat pump cycle. For example, size of turbomachinery and/or heat exchangers, number of turbomachinery and/or heat exchangers, or other system components, may correspond to a given power capacity. In some embodiments, the rate at which a PHES system reaches capacity may vary between cycles depending on configuration and/or operating conditions of the heat engine/heat pump cycle. For example, size of turbomachinery and/or number of turbomachinery may vary between cycles.

[0118] In some implementations, a given energy storage capacity may be achieved with a given size and/or number of hot-side thermal reservoir(s) and/or cold-side thermal reservoir(s). For example, the heat engine/heat pump cycle

can operate at a given power capacity for a given amount of time set by the heat storage capacity of the thermal reservoir(s). The number and/or heat storage capacity of the hot-side thermal reservoir(s) may be different from the number and/or heat storage capacity of the cold-side thermal reservoir(s). The number of thermal reservoir(s) may depend on the size of individual thermal reservoir(s).

[0119] Embodiments of the PHES systems may include any suitable number of cold-side and/or hot-side thermal storage units (e.g., CTS medium and/or HTS medium storage tanks, respectively), such as, but not limited to, at least about 1 (divided into two sections), at least about 2, at least about 4, at least about 10, at least about 50, at least about 100, and the like. In some examples, embodiments of the PHES system include 2, 3, 4, 5, 6, 7, 8, 9, 10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100, or more thermal storage units (e.g., CTS medium and/or HTS medium storage tanks).

[0120] While various embodiments of the invention are shown and described herein, it will be obvious to those skilled in the art that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions may occur to those skilled in the art without departing from the invention. It should be understood that various alternatives to the embodiments of the invention described herein may be employed. It shall be understood that different aspects of the invention can be appreciated individually, collectively, or in combination with each other.

[0121] Descriptions and illustrations provided herein in the context of a particular PHES system embodiment (e.g., PHES system 1000), including components, fluids, controls, functions, operations, capabilities, systems, subsystems, configurations, arrangements, modes, states, benefits, and advantages should be considered applicable to other PHES system embodiments (e.g., PHES systems 1003 and 1005), and vice-versa.

[0122] It is to be understood that the terminology used herein is used for the purpose of describing specific embodiments, and is not intended to limit the scope of the present invention. It should be noted that as used herein, the singular forms of “a,” “an” and “the” include plural references unless the context clearly dictates otherwise. In addition, unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs.

[0123] While preferable embodiments of the present invention are shown and described herein, it will be obvious to those skilled in the art that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions will now occur to those skilled in the art without departing from the invention. It should be understood that various alternatives to the embodiments of the invention described herein may be employed in practicing the invention. It is intended that the following claims define the scope of the invention and that methods and structures within the scope of these claims and their equivalents be covered thereby.

[0124] The term “reversible,” as used herein, generally refers to a process or operation that can be reversed. In some examples, in a reversible process, the direction of flow of energy is reversible. As an alternative, or in addition to, the general direction of operation of a reversible process (e.g., the direction of fluid flow) can be reversed, such as, e.g., from clockwise to counterclockwise, and vice versa.

[0125] The term “sequence,” as used herein, generally refers to elements (e.g., unit operations) in order. Such order can refer to process order, such as, for example, the order in which a fluid flows from one element to another. In an example, a compressor, heat exchange unit, and turbine in sequence includes the compressor upstream of the heat exchange unit, and the heat exchange unit upstream of the turbine. In such a case, a fluid can flow from the compressor to the heat exchange unit and from the heat exchange unit to the turbine. A fluid flowing through unit operations in sequence can flow through the unit operations sequentially. A sequence of elements can include one or more intervening elements. For example, a system comprising a compressor, heat storage unit and turbine in sequence can include an auxiliary tank between the compressor and the heat storage unit. A sequence of elements can be cyclical.

II. Illustrative PHES System-Dual Powertrain

[0126] FIG. 2 is a top-level schematic diagram of a PHES system 1000 with dual powertrains, according to an example embodiment, in which PHES system embodiments herein may be implemented. As a top-level schematic, the example embodiment PHES system 1000 in FIG. 2 illustrates major subsystems and select components, but not all components. Additional components are further illustrated with respect to additional figures detailing various subsystems. Additionally or alternatively, in other embodiments, additional components and/or subsystems may be included, and/or components and/or subsystems may not be included. FIG. 2 further illustrates select components and subsystems that work together in the PHES system 1000. FIG. 2 schematically shows how the select components and subsystems connect, how they are grouped into major subsystems, and select interconnects between them.

[0127] In FIG. 2 and other figures, for example, FIGS. 27 and 29, connections between subsystems are illustrated as interconnects, such as fluid interconnects 3, 4 and electrical interconnects 15, 21. Illustrated connections between fluid interconnects, electrical interconnects, and/or components reflect fluid paths or power/signal paths, as appropriate. For example, fluid path 901 connects fluid interconnect 2 and fluid interconnect 3, thereby allowing fluid flow between CHX system 600 and AHX system 700, described in further detail below. As another example, power/signal path 902 connects electrical interconnect 15 and electrical interconnect 15A, which can carry power/signals between power interface 2002 and motor system 110. Junctions between illustrated paths are shown as a solid dot. For example, fluid path 903 exiting the main heat exchanger system 300A at fluid interconnect 7 joins the fluid path 904 between fluid interconnect 17 and fluid interconnect 23 at junction 905. Fluid paths may include components, connections, valves, and piping between components, and each fluid path may, in practice, include a single flow path (e.g., a single pipe) or multiple (e.g. parallel) flow paths (e.g., multiple pipes) between components. Valves may interrupt or make fluid connections between various fluid paths, as elsewhere illustrated, such as in FIGS. 3, 28, 30. Valves may be actively controllable through actuators or other known devices in response to control signals, or may change state (e.g., open to close) in response to a physical condition at the valve, such as an overpressure condition at a pressure relief device. Further, valves may include variable position valves (e.g., capable of partial flow such as in proportional or servo

valves) or switching valves (e.g., either open or closed). If an illustrated valve is on a fluid path that in practice includes multiple flow paths (e.g., multiple pipes), then each flow path may connect to the single valve or there may be multiple valves connecting the multiple flow paths. For power/signal paths, switches, breakers, or other devices may interrupt or make power/signal connections between various power/signal paths, such as in FIG. 9.

[0128] Major subsystems of PHES system 1000 include a charge powertrain system (“CPT system”) 100, a generation powertrain system (“GPT system”) 200, a working fluid loop 300, a main heat exchanger system 300A, a hot-side thermal storage system (“HTS system”) 501, a cold-side thermal storage system (“CTS system”) 601, and site integration systems 2000.

[0129] In FIG. 2, illustrated components in CPT system 100 include charge motor system 110, charge gearbox system 120, charge compressor system 130, and charge turbine system 140. Depending on operational mode, state, and embodiment configuration, CPT system 100 may connect to other components and subsystems of PHES system 1000 through various interconnects, including electrical interconnect 15 and fluid interconnects 17, 18, 19, and 20. Additionally, CPT system 100 may include more or fewer interconnects than shown in FIG. 2. The CPT system 100 takes electrical power in at electrical interconnect 15 and converts the electrical energy to working fluid flows through one or more of its fluid interconnects.

[0130] In FIG. 2, illustrated components in GPT system 200 include generator system 210, generation gearbox system 220, generation compressor system 230, and generation turbine system 240. Depending on operational mode, state, and embodiment configuration, GPT system 200 may connect to other components and subsystems of PHES system 1000 through various interconnects, including electrical interconnect 21 and fluid interconnects 22, 23, 25, and 26. Additionally, GPT system 200 may include more or fewer interconnects than shown in FIG. 2. GPT system 200 outputs electrical power at electrical interconnect 21 by taking energy from the working fluid flows through one or more of fluid interconnects. In some operating conditions or states, GPT system 200 may also receive power through one or more of electrical interconnects, such as electrical interconnect 21.

[0131] In FIG. 2, working fluid loop 300 includes a main heat exchanger system 300A, which includes recuperator heat exchanger (“RHX”) system 400, hot-side heat exchanger (“HHX”) system 500, cold-side heat exchanger (“CHX”) system 600, and ambient cooler (heat exchanger) (“AHX”) system 700. Depending on operational mode, state, and embodiment configuration, components in the main heat exchanger system 300A may connect to other components and subsystems of the PHES system 1000, and/or other components within the main heat exchanger system 300A or the working fluid loop 300, through various interconnects, including fluid interconnects 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 28, and 29.

[0132] In FIG. 2, working fluid loop 300 further includes the charge compressor system 130, and charge turbine system 140 of the CPT system 100, and the generation compressor system 230, and generation turbine system 240 of the GPT system 200. Depending on operational mode, state, and embodiment configuration, components in the working fluid loop 300 may connect to other components

and subsystems of the PHES system 1000, and/or other components within the working fluid loop 300, through various interconnects, including fluid interconnects 17, 18, 19, 20, 22, 23, 25, and 26.

[0133] In the PHES system 1000, working fluid loop 300 may act as a closed fluid path through which the working fluid circulates and in which desired system pressures of the working fluid can be maintained. The working fluid loop 300 provides an interface for the working fluid between the turbomachinery (e.g., charge compressor system 130 and charge turbine system 140, and/or generation compressor system 230 and generation turbine system 240) and the heat exchangers in the main heat exchanger system 300A. In a preferred embodiment, the working fluid is air. Example embodiments, and portions thereof, of working fluid loop 300, are illustrated in FIGS. 3 and 3A-O.

[0134] The working fluid loop 300 includes a fluid path that, in some operational modes and/or states of PHES system 1000, carries high-temperature and high-pressure working fluid between charge compressor system 130 and HHX system 500. In other operational modes and/or states a fluid path carries high-temperature and high-pressure working fluid between HHX system 500 and generation turbine system 240. Other configurations are possible as well. These configurations are further detailed with respect to the mode of operation and state descriptions herein and FIGS. 3 and 3A-O.

[0135] The working fluid loop 300 includes a fluid path that, in some operational modes and/or states of PHES system 1000, carries medium-temperature and high-pressure working fluid between RHX system 400 and charge turbine system 140. In other operational modes and/or states, a fluid path carries medium-temperature and high-pressure working fluid between generation compressor system 230 and RHX system 400. Other configurations are possible as well. These configurations are further detailed with respect to the mode of operation and state descriptions herein and FIGS. 3 and 3A-O.

[0136] The working fluid loop 300 includes a fluid path that, in some operational modes and/or states of PHES system 1000, carries low-temperature and low-pressure working fluid between charge turbine system 140 and CHX system 600. In other operational modes and/or states a fluid path carries low-temperature and low-pressure working fluid between CHX system 600 and generation compressor system 230. Other configurations are possible as well. These configurations are further detailed with respect to the mode of operation and state descriptions herein and FIGS. 3 and 3A-O.

[0137] The working fluid loop 300 includes a fluid path that, in some operational modes and/or states of PHES system 1000, carries medium-temperature and low-pressure working fluid between RHX system 400 and charge compressor system 130. In other operational modes and/or states, a fluid path carries medium-temperature and low-pressure working fluid between generation turbine system 240 and RHX system 400. Other configurations are possible as well. These configurations are further detailed with respect to the mode of operation and state descriptions herein and FIGS. 3 and 3A-O.

[0138] The main heat exchanger system 300A facilitates heat transfer between the working fluid circulating through the working fluid loop 300, a CTS medium circulating from/to the CTS system 601, an HTX medium circulating

from/to the HTS system 501, and the ambient environment or other heat sink via AHX system 700. The CTS medium circulates between a warm CTS system 691 and a cold CTS system 692 via the CHX system 600, and that circulation may be referred to as the “CTS loop” or “cold-side loop,” as further described, e.g., with respect to a CTS system 601 embodiment illustrated in FIG. 5. In a preferred embodiment, the CTS medium is a coolant fluid, such as a methanol and water mixture. The HTS medium circulates between a warm HTS system 591 and a hot HTS system 592 via the HHX system 500, and that circulation may be referred to as the “HTS loop” or “hot-side loop,” as further described, e.g., with respect to an HTS system 601 embodiment illustrated in FIG. 4. In a preferred embodiment, the HTX medium is a molten salt.

[0139] In FIG. 2, illustrated components in CTS system 601 include a representation of a cold-side thermal reservoir, including warm CTS system 691 and cold CTS system 692. Depending on operational mode, state, and embodiment configuration, CTS system 601 may connect to other components and subsystems of PHES system 1000 through various interconnects, including fluid interconnects 1 and 31. An example embodiment of CTS system 601, including pumps and supporting fluid paths, valves, and other components is illustrated in FIG. 5.

[0140] In FIG. 2, illustrated components in HTS system 501 include a representation of a hot-side thermal reservoir, including warm HTS system 591 and hot HTS system 592. Depending on operational mode, state, and embodiment configuration, HTS system 501 may connect to other components and subsystems of PHES system 1000 through various interconnects, including fluid interconnects 6 and 8. An example embodiment of HTS system 501, including pumps and supporting fluid paths, valves, and other components is illustrated in FIG. 4.

[0141] Components in PHES system 1000, including but not limited to valves, fans, sensors, pumps, heaters, heat traces, breakers, VFDs, working fluid compressors, etc., may each be connected to a power source and may be independently controllable, either or both proportionally and/or switchably, via one or more controllers and/or control systems. Additionally, each such component may include, or be communicatively connected via, a signal connection with another such component, through, for example, a wired, optical, or wireless connections. For example, a sensor may transmit data regarding temperature of the working fluid at a location in the working fluid loop; and, a control system may receive that data and responsively send a signal to a valve to close a fluid path. Data transmission and component control via signaling is known in the art and not illustrated herein, except wherein a particular arrangement is new and/or particularly relevant to the disclosed PHES systems, as with, for example, FIG. 9.

A. Charge Powertrain Subsystem

[0142] FIG. 8 is a schematic diagram of the charge powertrain system 100, according to an example embodiment. FIG. 8 provides additional detail concerning CPT system 100 beyond that shown in the top-level schematic of FIG. 2. The CPT system 100 may be implemented in PHES systems disclosed herein, including the PHES system 1000 embodiment illustrated in FIG. 2. Other embodiments of a charge powertrain system operable in PHES systems disclosed herein are possible as well.

[0143] In FIG. 8, CPT system 100 includes a motor 110-1 as part of the charge motor system 110 of FIG. 2, a gearbox 120-1 as part of the charge gearbox system 120 of FIG. 2, a compressor 130-1 as part of charge compressor system 130, and a turbine 140-1 as part of charge turbine system 140. These components are connected via a drivetrain 150, such that the motor 110-1 is capable of driving the gearbox 120-1, the compressor 130-1, and the turbine 140-1. Drivetrain 150 may include a fixed connection between compressor 130-1 and turbine 140-1, and/or may include one or more shafts, flexible couplings, clutches, and/or gearboxes between compressor 130-1 and turbine 140-1. CPT system 100 further includes a turning motor 121-1 that is additionally capable of driving the compressor 130-1 and/or the turbine 140-1. Within CPT system 100, gearbox 120-1 provides a speed conversion between the motor 110-1 and turning motor 121-1 and the turbomachinery. In other embodiments of a charge powertrain system, the gearbox 120-1 may act only on one of the motors 110-1 and 121-1. Alternatively or additionally, gearbox 120-1 may act only on motor 110-1 and another gearbox (or no gearbox) may act on turning motor 121-1. In another embodiment, gearbox 120-1 may be omitted, therefore resulting in no speed conversion.

[0144] Turning motor 121-1 may be used for spinning CPT system 100 turbomachinery at low speeds (e.g., “slow roll”), for example, to cool the compressor 130-1 following a shutdown, and before bringing the rotating equipment to rest. The turning motor 121-1 may be mounted to the gearbox 120-1 or the drivetrain 150 or the motor 110-1, or elsewhere, and preferably rotates the turbomachinery at a very low RPM compared to the motor 110-1. The turning motor 121-1 is fitted with an overrunning clutch 121-2 that disengages when the drivetrain 150 side of the clutch is operating at higher speeds than the turning motor 121-1. This results in the turning motor 121-2 engaging with the drivetrain 150 when the slowing drivetrain 150 reaches the speed of the turning motor 121-1. The turning motor 121-1 will then maintain the slow roll speed.

[0145] CPT system 100 can receive power into the subsystem (via, e.g., electrical interconnect 15) and supply power to the motor system 110 (e.g., motor 110-1) and/or the turning motor 121-1. Depending on operational mode, state, and embodiment configuration, and as further illustrated in FIG. 2, CPT system 100 may receive power via a power interface 2002 and from the generator system 210 and/or an external source such as an electrical grid or local external generation source (e.g., power plant, renewable energy source, etc.) via interconnect 27.

[0146] Depending on operational mode and state, compressor 130-1 may raise the pressure of working fluid flowing through the compressor 130-1 by using rotational energy transmitted through the drivetrain 150. For example, during a charging mode (e.g., charge 1002 in FIG. 10), compressor 130-1 will compress working fluid flowing through it. As another example, during a slow rolling mode (e.g., CPT slow rolling 1062 in FIG. 15), the compressor 130-1, though spinning (e.g., via torque from the turning motor 121-1), may not cause an operationally significant increase in pressure of the working fluid.

[0147] Compressor 130-1 has at least one fluid inlet which connects to fluid interconnect 20 and allows working fluid to enter the low-pressure side of the compressor 130-1. Compressor 130-1 also has at least one fluid outlet which connects to fluid interconnect 17 and allows working fluid to

exit the high-pressure side of the compressor 130-1. The schematic illustration represented in FIG. 8 is not meant to limit the CPT system 100 to a particular arrangement. For example, the turning motor 121-1 may be oriented differently or located at a different location where it is still capable of turning the drivetrain 150. As another example, inlets and outlets to the turbomachinery may be located at sides other than the top, side, and ends depicted.

[0148] A variable frequency drive (“VFD”) (e.g., VFD 214 in FIG. 9) may be shared between the CPT system 100 and the GPT system 200. In one embodiment, the VFD may be utilized for startup and slow-rolling of the system only and is configured to exert only positive loads on the drivetrain 150. For example, VFD 214 may provide variable frequency power to motor 110-1 during CPT system 100 spinup.

[0149] Depending on operational mode and state, turbine 140-1 may reduce the pressure (e.g., through expansion) of working fluid flowing through the turbine 140-1, and energy derived from that pressure reduction may be transformed into rotational energy in the drivetrain 150. Turbine 140-1 has a fluid inlet which connects to fluid interconnect 18 and allows working fluid to enter the high-pressure side of the turbine 140-1. Turbine 140-1 also has a fluid outlet which connect to fluid interconnect 19 and allows working fluid to exit the low-pressure side of the turbine 140-1.

B. Generation Powertrain Subsystem

[0150] FIG. 7 is a schematic diagram of the generation powertrain system 200, according to an example embodiment. FIG. 7 provides additional detail concerning GPT system 200 than is shown in the top-level schematic of FIG. 2. The GPT system 200 may be implemented in PHES systems disclosed herein, including the PHES system 1000 embodiment illustrated in FIG. 2. Other embodiments of a generation powertrain system operable in PHES systems disclosed herein are possible as well.

[0151] In FIG. 7, GPT system 200 includes a generator 210-1 as part of the generator system 210 of FIG. 2, a gearbox 220-1 as part of the generation gearbox system 220 of FIG. 2, a compressor 230-1 as part of generation compressor system 230, and a turbine 240-1 as part of generation turbine system 240. These components are connected via a drivetrain 250, such that the generator 210-1 is capable of being driven by the gearbox 220-1 and the turbine 240-1, and vice-versa. Depending on operational mode and system states, the generator system 210, and generator 210-1, may generate net positive electrical power that is sent outside and/or elsewhere within the PHES system 1000. Additionally, depending on the operating condition and state, the generator 210-1 may act as a motor. For example, during spinup of the GPT system 200, the generator 210-1 may receive electrical power and drive the gearbox 220-1 and the turbomachinery. Drivetrain 250 may include a fixed connection between compressor 230-1 and turbine 240-1, and/or may include one or more shafts, flexible couplings, clutches, and/or gearboxes between compressor 230-1 and turbine 240-1.

[0152] GPT system 200 further includes a turning motor 221-1 that is capable of driving the compressor 230-1 and the turbine 240-1. Within GPT system 200, gearbox 220-1 provides a speed conversion between the generator 210-1 and turning motor 221-1 and the turbomachinery. In other embodiments of a generation powertrain system, the gear-

box **220-1** may act only on one of the generator **210-1** and turning motor **221-1**. Alternatively or additionally, gearbox **220-1** may act only on generator **210-1** and another gearbox (or no gearbox) may act on turning motor **221-1**. In another embodiment, gearbox **220-1** may be omitted, therefore resulting in no speed conversion.

[0153] Turning motor **221-1** may be used for spinning GPT system **200** turbomachinery under slow roll, for example, to cool the turbine **240-1** following a shutdown, and before bringing the rotating equipment to rest. The turning motor **221-1** may be mounted to the gearbox **220-1** or the drivetrain **250** or the generator **210-1**, or elsewhere, and preferably rotates the turbomachinery at a very low RPM compared to normal operational speed of the turbomachinery. The turning motor **221-1** is fitted with an overrunning clutch **221-2** that disengages when the drivetrain **250** side of the clutch is operating at higher speeds. This results in the turning motor **221-2** engaging with the drivetrain **250** when the slowing drivetrain **250** reaches the speed of the turning motor **221-1**. The turning motor **221-1** will then maintain the slow roll speed.

[0154] GPT system **200** may send electrical power out of, and receive power into, the subsystem via electrical interconnect **21** and via power interface **2002**. Depending on operational mode, state, and embodiment configuration, the power interface **2002** may receive electrical power from the generator **210-1** via electrical interconnect **21A** and send electrical power to an external source, such as an electrical grid or other load via electrical interconnect **27**. The power interface **2002** may also send electrical power from an electrical grid or other source to GPT system **200**. The power interface **2002** may alternatively or additionally route power received from the GPT system **200** to the CPT system **100**.

[0155] Depending on operational mode and state, compressor **230-1** may raise the pressure of working fluid flowing through the compressor **230-1** by using rotational energy transmitted through the drivetrain **250** from, e.g., the turbine **240-1**. For example, during a generation mode (e.g., generation **1004** in FIG. 10), compressor **230-1** will compress working fluid flowing through it. As another example, during a slow rolling mode (e.g., GPT slow rolling **1054** in FIG. 14), the compressor **230-1**, though spinning (e.g., via torque from the turning motor **221-1**), may not cause an operationally significant increase in pressure of the working fluid. Compressor **230-1** has a fluid inlet which connects to fluid interconnect **26** and allows working fluid to enter the low-pressure side of the compressor **230-1**. Compressor **230-1** also has a fluid outlet which connects to fluid interconnect **22** and allows working fluid to exit the high-pressure side of the compressor **230-1**. The schematic illustration represented in FIG. 7 is not meant to limit the GPT system **200** to a particular arrangement. For example, the turning motor **221-1** may be oriented differently or located at a different location where it is still capable of turning the drivetrain **250**. As another example, inlets and outlets to the turbomachinery may be located at sides other than the top, side, and ends depicted.

[0156] As previously disclosed, a VFD (e.g., VFD **214** in FIG. 9) may be shared between the CPT system **100** and the GPT system **200**. In one embodiment, the VFD may be utilized for startup and slow-rolling of the system only and is configured to exert only positive loads on the drivetrain **250**. For example, VFD **214** may provide variable frequency power to generator **210-1** during GPT system **200** startup.

[0157] Depending on operational mode and state, turbine **240-1** may reduce the pressure (e.g., through expansion) of working fluid flowing through the turbine **240-1**, and energy derived from that pressure reduction may be transformed into rotational energy in the drivetrain **250**. In some modes and states, that rotational energy may be used to rotate the compressor **230-1** and/or generate electrical power at the generator **210-1**. Turbine **240-1** has one or more fluid inlets which connect to fluid interconnect **23** and allow working fluid to enter the high-pressure side of the turbine **240-1**. Turbine **240-1** also has a fluid outlet which connects to fluid interconnect **25** and allows working fluid to exit the low-pressure side of the turbine **240-1**.

C. Site Integration Subsystem

[0158] FIG. 9 is a schematic electrical diagram of a power interface, according to an example embodiment, that can be implemented in power interface **2002** in site integration subsystem **2000**. Power interface **2000** includes a VFD **214**, a VFD-to-generator breaker **211**, a generator-to-grid breaker **212**, a VFD-to-charge-motor breaker **111**, and a charge-motor-to-grid breaker **112**, with each component in power interface **2002** electrically connected as illustrated. Breakers can be set to closed or open mode and may be remotely controlled. Other embodiments of a power interface may include additional or fewer breakers, additional or fewer VFDs, different electrical connections, and/or additional components.

[0159] For spinning up the GPT system **200**, VFD-to-generator breaker **211** can be closed to connect VFD **214** to generator system **210** (e.g., generator **210-1** and/or turning motor **221-1**), thus routing power from an external source via electrical interconnect **27**, through VFD **214**, through breaker **211**, and to generator system **210**. For generation mode, generator-to-grid breaker **212** can be closed to connect generator system **210** (e.g., generator **210-1**) to an external electrical grid or other external load through electrical interconnects **21A** and **27**. For spinning up the CPT system **100**, VFD-to-charge-motor breaker **111** can be closed to connect VFD **214** to the motor system **110** (e.g., motor **110-1** and/or turning motor **121-1**) in the CPT system **100** through electrical interconnects **15A** and **27**. For charge mode, charge-motor-to-grid breaker **112** can be closed to connect motor system **110** (e.g., motor **110-1**) in the CPT system **100** to an external electrical grid or other electrical power source through electrical interconnects **15A** and **27**.

D. Main Heat Exchanger Subsystem

[0160] FIGS. 6A and 6B are schematic fluid path diagrams of example embodiments of main heat exchanger systems, that can be implemented as main heat exchanger system in a PHES system (e.g., PHES systems **1000**, **1003**, **1005**). FIGS. 6A and 6B provide additional details, in separate embodiments, concerning main heat exchanger system **300A** than is shown in the top-level schematics of FIG. 2, 27 or 29.

[0161] The main heat exchanger system **390** embodiment in FIG. 6A and/or the main heat exchanger system **391** embodiment in FIG. 6B can be implemented as the main heat exchanger system **300A** in PHES systems **1000**, **1003**, **1005**, or other disclosed PHES systems. Other main heat exchanger system embodiments are also possible. Refer-

ences herein to main heat exchanger system **300A** can be understood with reference to embodiments **390** and/or **391**.

[0162] In general terms, main heat exchanger system **300A** consists of four different heat exchanger systems, but all operate together within a PHES system, such as PHES systems **1000**, **1003**, **1005** to provide the desired operating conditions for operational modes. Each heat exchanger system consists of one or more heat exchanger units that may be connected via manifolds and/or other fluid routing systems.

[0163] The main heat exchanger system **300A** has two major modes of operation, minor the PHES system main modes of operation. During PHES system generation (e.g., generation **1004** in FIG. 10), the heat exchangers can operate in a forward flow direction at a flow rate between a maximum power (operational maximum) mass flow rate and a maximum turndown (operational minimum) mass flow rate. In this generation mode, heat is transferred from an HTS medium to a working fluid at HHX system **500**, from the working fluid to a CTS medium at CHX system **600**, from a low-pressure working fluid stream to a high-pressure working fluid stream at RHX system **400**, and from the working fluid to the ambient environment or other heat sink at AHX system **700**. During PHES system charge (e.g., charge **1002** in FIG. 10), the heat exchangers operate in the reverse flow direction at a flow rate between the maximum power mass flow rate and the maximum turndown mass flow rate. In this process, heat is transferred from the working fluid to the HTS medium at HHX system **500**, from the CTS medium to the working fluid at CHX system **600**, and from a high-pressure working fluid stream to a low-pressure working fluid stream at RHX system **400**.

[0164] Under some PHES system modes, such as a long term Cold Dry Standby **1010** (see FIG. 10), the HTS medium and the CTS medium in the main heat exchanger system **300A** is drained to thermal reservoirs (e.g., CTS system **691** and/or **692**, and/or HTS system **591** and/or **592**). In such a scenario, heat traces may be used to ensure that the HTS medium does not freeze.

[0165] Main heat exchanger system **300A** includes CHX system **600**. A function of CHX system **600** is to transfer heat between a CTS medium and a working fluid. As illustrated in FIGS. 6A and 6B, embodiments of CHX system **600** can include differing amounts of cold-side heat exchangers ("CHX") depending on design requirements. CHX system **600** is illustrated as including cold-side heat exchangers **600-1**, **600-2**, through **600-n**, which reflect in these example embodiments **390**, **391** at least three CHX and can include more than three CHX, although other PHES system embodiments may have less than three CHX. In some embodiments, as illustrated in FIGS. 6A and 6B, each of CHX **600-1** through **600-n** is a cross-flow heat exchanger. Specifically, a CTS medium flows through each of CHX **600-1** through **600-n** between fluid interconnect **1** and fluid interconnect **13**. Additionally, a working fluid flows through each of CHX **600-1** through **600-n** between fluid interconnect **2** and fluid interconnect **14**. In another embodiment, one or more CHX may not be cross-flow, and may have another internal fluid routing arrangement; however, CTS flow between interconnects **1**, **13** and working fluid flow between interconnects **2**, **14** is maintained.

[0166] As illustrated in FIGS. 6A and 6B, each of CHX **600-1** through **600-n** is connected in parallel to the CTS medium and working fluid flows, respectively, with respect

to each other CHX. In another embodiment, one or more CHX may be connected in series with one or more CHX. In another embodiment, one more groups of CHX may be connected in parallel, and one or more groups of CHX may be connected in series. In another embodiment, individual CHX and/or groups of CHX may be combined in various combinations of series and parallel configurations.

[0167] Main heat exchanger system **300A** includes HHX system **500**. A function of HHX system **500** is to transfer heat between an HTS medium and a working fluid. Embodiments of HHX system **500** can include differing amounts of hot-side heat exchangers ("HHX") depending on design requirements. HHX system **500** is illustrated as including hot-side heat exchangers **500-1**, **500-2**, through **500-n**, which reflect in these example embodiments **390**, **391** at least three HHX and can include more than three HHX, although other PHES system embodiments may have less than three HHX. In some embodiments, as illustrated in FIGS. 6A and 6B, each of HHX **500-1** through **500-n** is a cross-flow heat exchanger. Specifically, an HTS medium flows through each of HHX **500-1** through **500-n** between fluid interconnect **6** and fluid interconnect **8**. Additionally, a working fluid flows through each of HHX **500-1** through **500-n** between fluid interconnect **7** and fluid interconnect **9**. In another embodiment, one or more HHX may not be cross-flow, and may have another internal fluid routing arrangement; however, HTS flow between interconnects **6**, **8** and working fluid flow between interconnects **7**, **9** is maintained.

[0168] As illustrated in FIGS. 6A and 6B, each of HHX **500-1** through **500-n** is connected in parallel to the HTS medium and working fluid flows, respectively, with respect to each other HHX. In another embodiments, one or more HHX may be connected in series with one or more HHX. In another embodiments, one more groups of HHX may be connected in parallel, and one or more groups of HHX may be connected in series. In another embodiment, individual HHX and/or groups of HHX may be combined in various combinations of series and parallel configurations.

[0169] Main heat exchanger system **300A** includes RHX system **400**. A function of RHX system **400** is to transfer heat between a high-pressure working fluid stream and a low-pressure working fluid stream. Embodiments of RHX system **400** can include differing amounts of recuperator heat exchangers ("RHX") depending on design requirements. In FIGS. 6A and 6B, RHX system **400** is illustrated as including recuperator heat exchangers **400-1**, **400-2**, through **400-n**, which reflect at least three RHX and can include more than three RHX in these example embodiments, **390**, **391** although other PHES system embodiments may have less than three RHX. In some embodiments, as illustrated in FIGS. 6A and 6B, each of RHX **400-1** through **400-n** is a cross-flow heat exchanger. Specifically, working flows through each of RHX **400-1** through **400-n** between fluid interconnect **5** and fluid interconnect **11**. Additionally, the working fluid in a different part of the working fluid loop flows through each of RHX **400-1** through **400-n** between fluid interconnect **10** and fluid interconnect **12**. In another embodiment, one or more RHX may not be cross-flow, and may have another internal fluid routing arrangement; however, working fluid flow between interconnects **5**, **11** and working fluid flow between interconnects **10**, **12** is maintained.

[0170] As illustrated in FIGS. 6A and 6B, each of RHX 400-1 through 400-*n* is connected in parallel to the working fluid flows with respect to each other RHX. In another embodiments, one or more RHX may be connected in series with one or more RHX. In another embodiments, one more groups of RHX may be connected in parallel, and one or more groups of RHX may be connected in series. In another embodiment, individual RHX and/or groups of RHX may be combined in various combinations of series and parallel configurations.

[0171] Main heat exchanger system 300A includes AHX system 700. A function of AHX system 700 is to transfer heat from a working fluid to the ambient environment, or other external heat sink, during generation mode. In one embodiment, the AHX system 700 will only be operational during PHES system generation (e.g., generation 1004 in FIG. 10). For example, during PHES system charge (e.g., charge 1002 in FIG. 10), the AHX system 700 will be bypassed, as further discussed herein.

[0172] Embodiments of AHX system 700 can include differing configurations and amounts of ambient heat exchangers ("AHX") (also referred to as ambient coolers) depending on design requirements. In embodiment 390 in FIG. 6A, AHX system 700 is illustrated as including ambient heat exchangers 700-1, 700-2, through 700-*n*, which reflect at least three AHX in this example embodiment and can include more than three AHX, although other PHES system embodiments may have less than three AHX. In a preferred embodiment, AHX system 700 includes only one AHX, e.g., AHX 700-1. In embodiment 390, as illustrated in FIG. 6A, each of AHX 700-1 through 700-*n* is an ambient cooler that exhausts heat to the environment from the working fluid flowing through the AHX between fluid interconnects 4 and 3. In the embodiment of FIG. 6A, fluid interconnects 28, 29 are not utilized. In the embodiment of FIG. 6A, individual AHX may include one or more variable-speed fans that can be controlled to adjust ambient air flow across the AHX in order to reach a desired working fluid outlet temperature of the AHX system 700. As illustrated in FIG. 6A, each of AHX 700-1 through 700-*n* is connected in parallel to the working fluid flow with respect to each other AHX. In another embodiments, one or more AHX may be connected in series with one or more AHX. In another embodiments, one more groups of AHX may be connected in parallel, and one or more groups of AHX may be connected in series. In another embodiment, individual AHX and/or groups of AHX may be combined in various combinations of series and parallel configurations.

[0173] In embodiment 391 in FIG. 6B, AHX system 700 is illustrated as including ambient heat exchangers 701-1, 701-2, through 701-*n*, which reflect at least three AHX in this example embodiment and can include more than three AHX, although other PHES system embodiments may have less than three AHX. In a preferred embodiment, AHX system 700 includes only one AHX, e.g., AHX 701-1. In embodiment 391, as illustrated in FIG. 6B, each of AHX 701-1 through 701-*n* is a cross-flow heat exchanger. Specifically, a heat sink fluid flows through each of AHX 701-1 through 701-*n* between fluid interconnect 28 and fluid interconnect 29. Additionally, a working fluid flows through each of AHX 701-1 through 701-*n* between fluid interconnect 4 and fluid interconnect 3. In the embodiment of FIG. 6B, the heat sink fluid may be ambient air that is pulled from and/or is exhausted to the environment, or the heat sink fluid

may be a fluid that is pulled from a heat sink fluid reservoir (not shown) and/or sent to heat sink fluid reservoir (not shown) or other heat sink (not shown), such as a thermal waste heat capture/transfer system. In embodiment 391 of FIG. 6B, heat sink fluid mass flow rate through the AHXs may be adjusted in order to reach a desired working fluid outlet temperature of the AHX system 700. As illustrated in FIG. 6B, each of AHX 701-1 through 701-*n* is connected in parallel to the working fluid flow with respect to each other AHX. In another embodiments, one or more AHX may be connected in series with one or more AHX. In another embodiments, one more groups of AHX may be connected in parallel, and one or more groups of AHX may be connected in series. In another embodiment, individual AHX and/or groups of AHX may be combined in various combinations of series and parallel configurations.

[0174] Main heat exchanger system 300A, as illustrated in embodiment 390 and 391 in FIGS. 6A and 6B, may include heat traces 460 and 560 as part of the RHX system 400 and HHX system 500, respectively. A function of heat trace 460 is to maintain fluid manifolds and/or other metal mass at desired setpoint temperatures during various modes and/or states, for example, in order to reduce thermal gradients on sensitive components. A function of heat trace 560 is to maintain fluid manifolds and/or other metal mass at desired setpoint temperatures during various modes and/or states, for example, in order to avoid freezing (i.e., phase change) of HTX medium in the HHX system 500 and/or to reduce thermal gradients on sensitive components. Each of the heat traces 460 and 560 can function to reduce thermal ramp rates, which benefits heat exchanger longevity, and allows for faster PHES system (e.g., PHES systems 1000, 1003, 1005) startup times. Heat traces 460 and 560 are illustrated as near fluid interconnects 12 and 9, respectively. However, heat traces 460 and 560 can be located at other locations within RHX system 400 and HHX system 500 in order to accomplish their functions. Additionally or alternatively, heat traces 460 and 560 can include heat traces at multiple locations within RHX system 400 and HHX system 500 in order to accomplish their functions.

E. Working Fluid Loop Subsystem

[0175] FIG. 3 is a schematic fluid path diagram of a working fluid loop 300 which may be implemented in a PHES system, such as PHES system 1000, according to an example embodiment. FIG. 3 provides additional detail concerning working fluid loop 300 than is shown in the top-level schematic of FIG. 2. In general terms, the working fluid loop 300 includes, for example, high-pressure fluid paths and low-pressure fluid paths separated by the turbomachinery, turbomachinery bypass and recirculation loops, heat exchangers (e.g., excess heat radiators), valves, pressure relief devices, working fluid supply components (e.g., working fluid compressor), an inventory control system including working fluid tank systems (e.g., high pressure tank systems and low pressure tank systems), and sensors for pressure, temperature, flow rate, dewpoint, speed, and/or fluid concentration. Other embodiments of a working fluid loop operable in PHES systems disclosed herein are possible as well.

[0176] FIG. 3N and FIG. 3O illustrate circulatory flow paths of working fluid in working fluid loop 300 for charge mode 1002 and generation mode 1004, respectively. Bold fluid paths illustrate the circulatory flow paths and arrows on

bold fluid paths indicate circulatory flow direction. Working fluid may be resident in other fluid paths, but is not actively circulating because such other fluid paths do not form a circulatory circuit with an inlet and outlet (i.e., they are a dead end). Valve positions are indicated with a filled valve icon representing a closed valve, an unfilled valve icon representing an open valve, and a cross-hatched valve representing a valve that may change position state without affecting the illustrated circulatory flow path. For example, in FIG. 3N, valve **231** is closed, valve **131** is open, and valve **242** may change position state without affecting the flow path.

[0177] The embodiment of working fluid loop **300** illustrated in FIG. 3 can serve numerous roles within PHES system **1000**. The working fluid loop **300** can route working fluid between the turbomachinery and the heat exchangers. The working fluid loop **300** can provide working fluid to the main heat exchanger system **300A** for transferring heat between HTS medium and CTS medium during, for example, charge or generation cycles. The working fluid loop **300** can protect the turbomachinery during emergency trip events, and help with compressor surge prevention and overpressure prevention. The working fluid loop **300** can maintain its pressures (e.g., pressures in low-pressure and high-pressure fluid paths) below specified set points for each mode of PHES system operation. The working fluid loop **300** can help with smooth PHES system **1000** startup and shutdown, including, for example, working fluid bypass flow during generation cycle startup to prevent bidirectional loads/demands on a VFD. The working fluid loop **300** can quickly bring working fluid pressures down to allow mode switching operation within short time intervals. The working fluid loop **300** can maintain working fluid loop pressures at or above a minimum working fluid loop base pressure, such as whenever CHX system **600** or HHX system **500** are filled with their respective CTS or HTS media, for example, to prevent leakage of CTS or HTS media into the working fluid loop **300**. The working fluid loop **300** can adjust low-side pressure in the working fluid loop between a minimum pressure and working pressures (i.e. pressures during charge and generation), as a means of controlling PHES system power. The working fluid loop **300** can regulate circulate working fluid mass, for example to control PHES system pressures, PHES system power, and/or compensate for working fluid losses from the working fluid loop over time.

[0178] The following paragraphs describe components of a working fluid loop, such as working fluid loop **300**, or working fluid loops **300C** or **300D** as appropriate.

[0179] Pressure relief device **101** is a pressure relief device on a low-pressure low-temperature (“LPLT”) portion of the working fluid loop **300**. It protects from overpressure the LPLT portion of the working fluid loop in the vicinity, for example, where high-pressure working fluid could be introduced through the turbomachinery, recirculation valves, or bypass valves.

[0180] Pressure relief device **102** is a pressure relief device on a low-pressure medium-temperature (“LPMT”) portion of the working fluid loop **300**. It protects from overpressure the LPMT portion of the working fluid loop **300** in the vicinity, for example, where high-pressure working fluid could be introduced through the turbomachinery, recirculation valves, and/or bypass valves.

[0181] Valve **119** regulates a high-flow recirculation fluid path around a compressor system (e.g., compressor system

130, compressor system **830**, reversible turbomachine system **850**) that can be opened, for example, to reduce and/or prevent surge in the compressor system. For example, valve **119** may be opened following a trip event during charge mode operation or when valve **131** is closed. In an embodiment where valve **132** is sufficiently large, valve **119** can be omitted.

[0182] Valve **131** is a compressor system (e.g., compressor system **130**, compressor system **830**, reversible turbomachine system **850**) shutoff valve that, when closed, isolates the compressor system from the high-pressure side of the working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**) for example, during generation mode or following a trip event. Valve **131** preferably fails closed. A benefit of valve **131** is that it can be closed to isolate the compressor system from the large, high-pressure working fluid volume that is present in fluid paths on the side of valve **131** opposite the compressor system. That large volume could cause the compressor system to surge if the compressor system were to spin down following a power loss or unexpected trip scenario in the PHES system (e.g., PHES system **1000**, **1003**, **1005**).

[0183] Valve **132** regulates a recirculation fluid path around a compressor system (e.g., compressor system **130**, compressor system **830**, reversible turbomachine system **850**) that can be opened, for example, to recirculate working fluid driven by the compressor system during, for example, cooldown (e.g., during slow rolling) or after a mode switch. Valve **132** may exhibit slow response time and preferably fails open. A benefit of failing open is that a valve failure does not prevent compressor system cooldown, which is beneficial to prevent damage to the compressor system.

[0184] Heat exchanger **132H** is a radiator in the recirculation fluid path regulated by valve **132** and removes heat (e.g., to ambient) from the working fluid recirculating through a compressor system (e.g., compressor system **130**, compressor system **830**, reversible turbomachine system **850**), for example, following the end of charge mode operation.

[0185] Valve **133** is a working fluid dump valve located downstream of a compressor system (e.g., compressor system **130**, compressor system **830**, reversible turbomachine system **850**) and isolation valve **131**. Valve **133** may be, for example, used to reduce the working fluid pressure in the vicinity of the outlet of the compressor system during certain events, for example trip events during charge mode **1002**. Opening valve **133** dumps working fluid to ambient, or a working fluid reservoir (not shown), and decreases working fluid pressure in the vicinity of the outlet of the compressor system, which beneficially reduces the risk of compressor system surge.

[0186] Valve **141** is a charge turbine system **140** shutoff valve that, when closed, isolates charge turbine system **140** from the high-pressure side of the working fluid loop **300**, for example, during generation mode or following a trip event. Valve **141** preferably fails closed. A benefit of valve **141** is that it can be closed, in conjunction with closing valve **131**, to prevent working fluid mass moving from the high-pressure side of the main working fluid loop **300** to the low-pressure side of the working fluid loop **300**, which could result in the working fluid loop **300** equilibrating in pressure to a settle-out pressure greater than the pressure rating of components in the low-pressure side of the loop.

[0187] Valve 142 regulates a recirculation fluid path around a turbine system (e.g., turbine system 140, reversible turbomachine system 852) that can be opened, for example, to recirculate working fluid through the turbine system during, for example, turning (e.g., slow rolling) or after a mode switch. Valve 142 may exhibit slow response time and preferably fails open. A benefit of valve 142 is that it can be opened to prevent the inlet pressure of the turbine system from dropping substantially below the outlet pressure of the turbine system upon closing valve 141 or 841, which is beneficial because it prevents the turbine system from operating outside typical design specifications for pressure differentials.

[0188] Fan 142F can be operated, when valve 142 is open, to provide recirculation flow of working fluid through the turbine system (e.g., turbine system 140, reversible turbomachine system 852) via the recirculation loop controlled by valve 142. This is beneficial, for example, when the spinning turbine system does not create appreciable working fluid flow through the turbine system and consequently experiences windage. Fan 142 can be turned on to create working fluid flow through the turbine system via the recirculation loop to alleviate the windage.

[0189] Valve 222 regulates a bypass fluid path that can be opened, for example during generation mode, to provide a working fluid bypass path around the high-pressure side of RHX system 400 and HHX system 500, thereby allowing some amount of working fluid flow through the bypass fluid path instead of through RHX system 400 and HHX system 500. Opening valve 222, preferably in conjunction with, e.g., closing valves 231, 241, or valves 831C1, 831G1, 841C1, 841G1, or valves 831, 841, removes energy (in the form of hot compressed working fluid) that is supplied to a turbine system (e.g., turbine system 240, turbine system 840, reversible turbomachine system 852), thereby starving the turbine system. Beneficially, valve 222 can be opened, for example, when a PHES system (e.g., PHES system 1000, 1003, 1005) in generation mode experiences a loss of load event (e.g., from the electric grid) or a trip event. Closing valves 231 and 241, or valves 831C1, 831G1, 841C1, 841G1, or valves 831, 841, and opening of 222 collectively can prevent overspeed of the generation mode powertrain (e.g., GPT system 200, or shared powertrain system 800, or reversible powertrain system 801) as a result of turbine system overspeed.

[0190] Valve 229 regulates a bypass fluid path that can be opened to provide a high-flow working fluid bypass path around the high-pressure side of RHX system 400, HHX system 500, and a turbine system (e.g., turbine system 240, turbine system 840, reversible turbomachine system 852), thereby allowing some amount of working fluid flow through the bypass fluid path instead of through RHX system 400, HHX system 500, and the turbine system. Beneficially, valve 229 can be opened to reduce load during startup of generation mode and to prevent the generation mode turbine system (e.g., turbine system 240, turbine system 840, reversible turbomachine system 852) from generating substantial power during startup of generation mode. Opening valve 229 reduces a net load required of a generation or motor/generator system (e.g., generator system 210 acting as a motor, motor/generator system 810 acting as a motor) during generation mode startup. Opening valve 229 reduces a compressor system (e.g., compressor system 230, compressor system 830, reversible turboma-

chine system 850) power need by reducing outlet pressure at the compressor system. Opening valve 229 also starves the turbine system (e.g., turbine system 240, turbine system 840, reversible turbomachine system 852) of much of its fluid flow so that the turbine system does not produce substantially more power than the compressor system (e.g., compressor system 230, compressor system 830, reversible turbomachine system 850). By keeping a low, but net positive, electrical power demand from the generation or motor/generator system (e.g., generator system 210 acting as a motor, motor/generator system 810 acting as a motor) means that a VFD (e.g., VFD 214) supplying power to the generation system can maintain speed control during startup/spin-up. Opening valve 229 also provides a high-flow fluid path to prevent surge in the compressor system (e.g., compressor system 230, compressor system 830, reversible turbomachine system 850), for example, following a trip event out of generation mode operation and when valve 231, or valves 841C1 and 841G1, or valve 841, are closed.

[0191] Valve 231 is a generation compressor system 230 shutoff valve that, when closed, isolates generation compressor system 230 from the high-pressure side of the working fluid loop during charge mode operation or following a trip event. Valve 231 preferably fails closed. A benefit of valve 231 is that it can be closed to isolate the compressor system 230 from the large high-pressure working fluid volume that is present in fluid paths on the side of valve 231 opposite the compressor system 230. That large volume could cause the compressor system 230 (e.g. compressor 230-1) to surge if the compressor system 230 (e.g. compressor 230-1) were to spin down following a power loss or unexpected trip scenario in the PHES system 1000.

[0192] Valve 232 regulates a recirculation fluid path around a generation compressor system (e.g., compressor system 240, reversible turbomachine system 852 acting as a compressor) that can be opened, for example, to recirculate working fluid driven by the generation compressor system during, for example, turning or after a mode switch. Valve 232 may exhibit slow response time and preferably fails open. A benefit of valve 232 failing open is that it allows for turbomachinery temperature equilibration upon failure; for example, failure during a post-shutdown spinning mode allows cooldown of hot portions of the generation compressor system and warmup of the inlet side of the generation compressor system. In a shared powertrain working fluid loop, such as working fluid loop 300C in FIG. 28B, valve 132 may be used similarly or the same as valve 232. In such a configuration, valve 132 may regulate a recirculation fluid path around compressor system 830 that can be opened, for example, to recirculate working fluid driven by compressor system 830 during, for example, turning or after a mode switch. In such a configuration, valve 132 may exhibit slow response time and preferably fails open. A benefit of valve 132 in such a configuration failing open is that it allows for turbomachinery temperature equilibration upon failure; for example, failure during a during a post-shutdown spinning mode allows cooldown of hot portions of the compressor system 830 and warmup of the inlet side of the compressor system 830.

[0193] Valve 241 is generation turbine system 240 shutoff valve that, when closed, isolates generation turbine system 240 from the high-pressure side of the working fluid loop 300 during, for example, charge mode operation or following a trip event. In practical effect, closing valve 241 can

starve turbine system **240** and prevent GPT system **200** overspeed. Valve **241** preferably fails closed. A benefit of valve **241** is that can be closed to isolate a source of high-pressure working fluid that could continue to drive the turbine system **240** during, for example, a loss-of-grid-load event, which otherwise might cause an overspeed event for the GPT system **200**.

[0194] Valve **242** regulates a recirculation fluid path around a generation mode turbine system (e.g., turbine system **240**, reversible turbomachine system **850** acting as a turbine) that can be opened, for example, to recirculate working fluid through the turbine system during, for example, cooldown (e.g. during slow rolling) or after a mode switch. Valve **242** may exhibit slow response time and preferably fails open. A benefit of valve **242** failing open is that if valve **242** fails, by failing open it allows for cooldown spinning of the powertrain system (e.g., GPT system **200**, reversible powertrain system **801**) after shutdown of the powertrain system. Cooldown spinning can prevent bowing of rotating components in the turbomachinery. Another benefit of valve **242** failing open is that, when failed open, the powertrain system (e.g., GPT system **200**, reversible powertrain system **801**) can continue to function during generation (e.g., mode **1004**) or slow turning (e.g., mode **1006**), albeit with decreased efficiency during generation due to open valve **242** creating a bleed path for the working fluid.

[0195] Heat exchanger **242H** is a radiator in the recirculation fluid path regulated by valve **242** or valve **842** and removes heat (e.g., to ambient) from the working fluid recirculating through a turbine system (e.g., turbine system **240**, turbine system **840**, reversible turbomachine system **852**).

[0196] Fan **242F** can be operated, when valve **142** is open, to provide recirculation flow of working fluid through a turbine system (e.g., turbine system **240**, reversible turbomachine system **852**) via the recirculation loop controlled by valve **242**. This is beneficial, for example, when the spinning turbine system does not create appreciable working fluid flow through the turbine system and consequently experiences windage. Fan **242** can be turned on to create working fluid flow through the turbine system via the recirculation loop to alleviate the windage and/or for cooling down of turbine system during, for example, slow rolling.

[0197] Valve **323** regulates a bypass fluid path that can be opened, for example during charge mode, to provide a working fluid bypass path around AHX system **700**, thereby allowing some amount of working fluid flow through the bypass fluid path instead of through AHX system **700**. Beneficially, opening valve **323**, preferably in conjunction with closing valve **324** (and valve **325** if present), diverts working fluid around AHX system **700**, thereby reducing working fluid loop **300** pressure drop when heat dump from the working fluid is not desired, such as during charge mode operation. Valve **323** may exhibit slow actuation time and preferably fails open. Beneficially, valve **323** preferably fails open so that working fluid loop **300** can maintain flow if working fluid valve **324** (and valve **325** if present) is closed or were to fail closed. If valve **323** and valve **324** (or valve **325** if present) are both closed, working fluid circulation in the working fluid loop **300** would stop and the loss of working fluid flow could damage turbomachinery attempting to circulate the working fluid. Additionally, if valve **323** fails open, it allows the PHES system (e.g., PHES system

1000, **1003**, **1005**) to continue operating, albeit with a loss of efficiency in some modes. In an alternative embodiment of a working fluid loop, valve **323** may be combined with valve **324**, for example at the junction of the fluid path exiting interconnect **5** and the fluid path entering interconnect **4** in generation mode, as a two-position, three-way valve to accomplish the same effect as the two valves **323**, **324**.

[0198] Valve **324** is an isolation valve that, when closed, isolates AHX system **700** from circulation of working fluid through AHX system **700**, for example during charge mode. If valve **325** is present, both valves **324** and **325** may be closed to completely isolate AHX system **700** from working fluid, for example during charge mode and/or service. Valve **324** may exhibit slow actuation time and preferably fails to current position or alternately fails open. Beneficially, if valve **324** fails to current position, the PHES system (e.g., PHES system **1000**, **1003**, **1005**) can continue its current operation. Alternatively, valve **324** can be specified to fail open for the reasons described above with respect to valve **323**.

[0199] Valve **325** is an isolation valve that, when closed, isolates AHX system **700** from circulation of working fluid through AHX system **700**, for example during charge mode. Valve **325** may exhibit slow actuation time and preferably fails to current position. Beneficially, if valve **325** fails to current position, the PHES system (e.g., PHES system **1000**, **1003**, **1005**) can continue its current operation. In an alternative embodiment, valve **325** may be omitted from working fluid loop **300**. FIGS. **3K**, **3L** and their corresponding disclosure illustrate that embodiment. In this alternate embodiment with valve **325** omitted, closing valve **324** and opening valve **323** will cause working fluid to not circulate through AHX system **700**, and instead bypass AHX system **700** through valve **323**. However, omitting valve **325** means that AHX system **700** cannot be fully isolated from the working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**), as it will see resident working fluid.

[0200] Filter **301** is a working fluid filter (or pre-filter) for working fluid compressor **303** that provides filtration of working fluid entering the working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**) from an outside source, such as ambient air when air is the working fluid or for a working fluid that is stored in an outside working fluid make-up reservoir (not shown). Filter **301** may act as a pre-filter if working fluid compressor **303** also contains filters.

[0201] Valve **302** is a working fluid compressor **303** feed valve that, when opened, provides the ability for the working fluid compressor **303** to pull working fluid from ambient or an outside working fluid make-up reservoir (not shown). When closed, valve **302** provides the ability for the working fluid compressor **303** to pull working fluid from the working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**) (e.g., from evacuation lines via the fluid paths through valve **304** or valve **305**).

[0202] Working fluid compressor **303** is a make-up working fluid compressor. When activated, working fluid compressor **303** can, depending on valve states, provide working fluid for inventory control system ("ICS") **300B** storage tank systems **310** and/or **320**. Additionally or alternatively, when activated, working fluid compressor **303** can, depending on valve states, replenish a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**) with working fluid lost through leakage or venting. Additionally or alternatively, when acti-

vated, working fluid compressor **303** can, depending on valve states, evacuate the working fluid loop to reduce pressure below what ICS **300B** valve arrangements can accomplish when lowering the working fluid loop pressure below the settle-out pressure for startup. This is beneficial because the working fluid loop may be preferably partially evacuated (depending, e.g., on pressure limitations of the CPT system **100** vs. The GPT system **200**) in order to drop working fluid loop pressure when one powertrain (e.g., CPT system **100** or GPT system **200**) has spun down and the other power train is spinning up. For example, if PHES system **1000** is coming out of charge mode **1002** and CPT system **100** has just spun down, it is desirable to lower the working fluid loop **300** pressure so that GPT system **200** can start to spin up. “Settle-out” pressure can be interpreted as the resulting pressure in the working fluid loop if working fluid mass were allowed to move from the high-pressure side of the working fluid loop to the low-pressure side of the working fluid loop to the point where the pressure on both sides equilibrated. Additionally or alternatively, when activated, working fluid compressor **303** can, depending on valve states, counteract hysteresis in the functioning of ICS **300B** by pumping working fluid mass from the low-pressure side of the working fluid loop to high-pressure tank system **320**.

[0203] Valve **304** is a feed valve for the working fluid compressor **303** on a low-pressure-side evacuation fluid path of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**). Valve **304**, when open, connects the low-pressure side of the working fluid loop to working fluid compressor **303** for pulling working fluid from the working fluid loop into ICS **300B** high-pressure tank system **320**.

[0204] Valve **305** is a feed valve for the working fluid compressor **303** on a high-pressure-side evacuation fluid path of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**). Valve **305**, when open, connects the high-pressure side of the working fluid loop to working fluid compressor **303** for pulling working fluid from the working fluid loop into ICS **300B** high-pressure tank system **320**.

[0205] Valve **308** is an evacuation valve on the low-pressure side of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**). Valve **308**, when open, allows working fluid in the working fluid loop to be evacuated to the environment or an outside working fluid make-up reservoir (not shown). Valve **308** is primarily for servicing of the working fluid loop, but can also be used for inventory control purposes (e.g., reducing working fluid mass in the working fluid loop) related to power generation mode **1004**, charge mode **1002**, or other operations.

[0206] Pressure relief device **309** is an ICS **300B** low-pressure-side pressure relief device that protects low-pressure fluid paths in a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**) from over pressurization, for example, near where high-pressure working fluid is introduced by ICS **300B** (e.g., via valve **322**) into the low-pressure fluid paths.

[0207] Low-pressure tank system **310** is an ICS **300B** tank system that includes one or more tanks that store working fluid at low pressure (e.g., less than the pressure in high-pressure tank system **320**, and/or less than the pressure in the high-pressure side of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**)). Working fluid may be moved into low-pressure tank system **310** from, for example, working fluid loop **300**. Working fluid may be released from

low-pressure tank system **310** into, for example, working fluid loop **300**. Preferably, tank system **310** includes built-in pressure relief devices.

[0208] Valve **311** is an ICS **300B** HP-LP valve that, for example, when open, allows for release of high-pressure working fluid from the high-pressure side of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**) into the low-pressure tank system **310**. Valve **311** may be a controlled proportional valve that is used, for example, for controlling PHES system **1000**, **1003**, **1005** power ramping rates.

[0209] Valve **312** is an ICS **300B** LP-LP valve that, for example, when open, allows for movement of low-pressure working fluid between low-pressure tank system **310** and the low-pressure side of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**).

[0210] Valve **314** is an evacuation valve on the high-pressure side of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**). Valve **314**, when open, allows working fluid in the working fluid loop to be evacuated to the environment or an outside working fluid make-up reservoir (not shown). Valve **314** is primarily for servicing of working fluid loop, but can also be used for inventory control purposes (e.g., reducing working fluid mass in the working fluid loop) related to power generation mode **1004**, charge mode **1002**, or other operations.

[0211] Valve **318** is a dump valve on the high-pressure side of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**). Valve **318**, when open, allows working fluid in the high-pressure side of the working fluid loop to be dumped to the ICS **300B** low-pressure tank system **310**, lowering pressure in the working fluid loop. Beneficially, this preserves filtered working fluid as opposed to evacuating working fluid through valves **308** or **314**. Though similarly arranged in ICS **300B**, valve **318** may differ from valve **311**. Valve **318** may be a fast switched (i.e., “bang-bang”) valve and/or may be larger than valve **311**. This is beneficial for moving high-pressure working fluid from the working fluid loop into the low-pressure tank system **310** at a much faster rate than valve **311** can accomplish, which may be preferred for certain mode transitions or trip events.

[0212] Pressure relief device **319** is an ICS **300B** high-pressure-side pressure relief device that protects high-pressure fluid paths in a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**) from over pressurization.

[0213] High-pressure tank system **320** is an ICS **300B** tank system that includes one or more tanks that store working fluid at high pressure (e.g., higher than the pressure in low-pressure tank system **310**, and/or higher than the pressure in the low-pressure side of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**)). Working fluid may be moved into high-pressure tank system **320** from, for example, the high-pressure side of the working fluid loop via ICS **300B** valves (e.g., valve **321**) and/or working fluid compressor **303**. Working fluid may be released from high-pressure tank system **320** into, for example, the low-pressure side of the working fluid loop via ICS **300B** valves (e.g., valve **322**). Preferably, the high-pressure tank system **320** includes built-in pressure relief devices.

[0214] Valve **321** is an ICS **300B** HP-HP valve that, for example, when open, allows for movement of high-pressure working fluid between the high-pressure side of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**) **300** and high-pressure tank system **320**.

[0215] Valve 322 is an ICS 300B LP-HP valve that, for example, when open, allows for release of high-pressure working fluid from high-pressure tank system 320 into the low-pressure side of a working fluid loop (e.g., working fluid loops 300, 300C, 300D).

[0216] Sensors 119S, 130S, 131S, 132S, 140S, 141S, 142S, 229S, 230S, 231S, 232S, 240S, 241S, 242S, 324S, 325S, 361S, 362S, 363S, 364S, 365S, 366S, and 367S are monitoring and reporting devices that can provide one or more of pressure, temperature, flow rate, dewpoint, and/or fluid concentration data to one or more control systems controlling and/or monitoring conditions of a PHES system (e.g., PHES system 1000, 1003, 1005).

[0217] Sensor 303S is a monitoring and reporting devices that can provide one or more of compressor speed, pressure, temperature, and/or flow rate data to one or more control systems controlling and/or monitoring conditions of a PHES system (e.g., PHES system 1000, 1003, 1005).

[0218] Sensors 310S and 320S are monitoring and reporting devices that can provide one or more of pressure, temperature, dewpoint, and/or fluid concentration data to one or more control systems controlling and/or monitoring conditions of a PHES system (e.g., PHES system 1000, 1003, 1005).

[0219] Valve 401 regulates a bypass fluid path that can be opened, for example during generation mode, to provide a working fluid bypass path around the low-pressure side of RHX system 400 and AHX system 700, thereby allowing some amount of working fluid flow through the bypass fluid path instead of through RHX system 400 and AHX system 700. Beneficially, valve 401 may be used in conjunction with valve 222, 323, 324 (and 325, if present) to mitigate a negative effect of opening valve 222. During, for example, generation mode 1004, opening valve 222 (with valves 231, 241 closed, or valves 831C1, 831G1, 841C1, 841G1 closed, or valves 831, 841 closed), will cause the outlet temperature of a turbine system (e.g., turbine system 240, turbine system 840, reversible turbomachine system 852) to drop quickly. That results in circulation of colder working fluid downstream of the turbine system that could shock (and potentially damage) the downstream RHX system 400 and AHX system 700 if the colder working fluid were allowed to pass into those heat exchangers. Therefore, as an example, when valve 222 is opened, valve 401 may also be opened and preferably valves 323, 324 (and 325, if present) may be closed, so that the colder working fluid flow from the turbine system outlet bypasses around RHX system 400 and AHX system 700 and flows instead to the inlet of the CHX system 600, which is expecting colder working fluid.

HP/LP Working Fluid Paths

[0220] In a PHES system (e.g., PHES system 1000, 1003, 1005) working fluid loop (e.g., working fluid loops 300, 300C, 300D), high-pressure fluid paths are downstream of a compressor system (e.g., compressor systems 130, 230, compressor system 830, reversible turbomachine system 850 acting as a compressor, reversible turbomachine system 852 acting as a compressor) and upstream of a turbine system (e.g., turbine systems 140, 240, turbine system 840, reversible turbomachine system 850 acting as a turbine, reversible turbomachine system 852 acting as a turbine) (i.e., between outlets of charge or generation compressor systems and inlets of charge or generation turbine systems, respectively). Low-pressure fluid paths are downstream of

the turbine system (e.g., turbine systems 140, 240, turbine system 840, reversible turbomachine system 850 acting as a turbine, reversible turbomachine system 852 acting as a turbine) and upstream of the compressor system (e.g., compressor systems 130, 230, compressor system 830, reversible turbomachine system 850 acting as a compressor, reversible turbomachine system 852 acting as a compressor) (i.e., between outlets of charge or generation turbine systems and inlets of charge or generation compressor systems 130, 230, respectively).

[0221] For example, a high-pressure fluid path is between the CPT system 100 compressor system 130 outlet and the CPT turbine system 140 inlet. In FIGS. 3 and 3N, that high-pressure fluid path encompasses fluid interconnects 17, 7, 9, 10, 12, and 18. With reference to the circulatory flow paths illustrated in bold in FIG. 3N, the portion of this high-pressure fluid path downstream of compressor system 130, encompassing fluid interconnects 17, 7 and ending at HHX system 500 can additionally be considered a high-pressure high-temperature (e.g., HP-HT) fluid path. Similarly, the portion of this high-pressure fluid path downstream of HHX system 500, encompassing fluid interconnects 9, 10, 12, 18, and ending at the inlet to turbine system 140 can additionally be considered a high-pressure medium-temperature (e.g., HP-MT) fluid path.

[0222] Another high-pressure fluid path is between the GPT system 200 compressor system 230 outlet and the GPT turbine system 240 inlet. In FIGS. 3 and 3O, that high-pressure fluid path encompasses fluid interconnects 22, 12, 10, 9, 7, and 23. With reference to the circulatory flow paths illustrated in bold in FIG. 3O, the portion of this high-pressure fluid path downstream of compressor system 230, encompassing fluid interconnects 22, 12, and ending at RHX system 400 can additionally be considered a high-pressure medium-temperature (e.g., HP-MT) fluid path. Similarly, the portion of this high-pressure fluid path downstream of RHX system 400, encompassing fluid interconnects 10, 9, 7, 23, and ending at the inlet to turbine system 240 can additionally be considered a high-pressure high-temperature (e.g., HP-HT) fluid path.

[0223] As another example, a high-pressure fluid path is between the shared powertrain system 800 compressor system 830 outlet and the shared powertrain system 800 turbine system 840 inlet. In FIGS. 28A and 28B, that high-pressure fluid path encompasses fluid interconnects 28, 7, 9, 10, 12, and 29. With reference to the circulatory flow paths illustrated in bold in FIG. 28A, the portion of this high-pressure fluid path downstream of compressor system 830, encompassing fluid interconnects 28, 7, and ending at HHX system 500 can additionally be considered a high-pressure high-temperature (e.g., HP-HT) fluid path. Similarly, the portion of this high-pressure fluid path downstream of HHX system 500, encompassing fluid interconnects 9, 10, 12, 29, and ending at the inlet to turbine system 840 can additionally be considered a high-pressure medium-temperature (e.g., HP-MT) fluid path. With reference to the circulatory flow paths illustrated in bold in FIG. 28B, the portion of this high-pressure fluid path downstream of compressor system 830, encompassing fluid interconnects 28, 12, 10, 9, and ending at HHX system 500 can additionally be considered a high-pressure medium-temperature (e.g., HP-MT) fluid path. Similarly, the portion of this high-pressure fluid path downstream of HHX system 500, encompassing fluid intercon-

nects **7, 29**, and ending at the inlet to turbine system **840** can additionally be considered a high-pressure high-temperature (e.g., HP-HT) fluid path.

[0224] As another example, a high-pressure fluid path is between the reversible powertrain system **801** reversible turbomachine system **850** outlet, when reversible turbomachine system **850** is acting as a compressor, and the reversible powertrain system **801** reversible turbomachine system **852** inlet, when reversible turbomachine system **852** is acting as a turbine. In FIG. 30A, that high-pressure fluid path encompasses fluid interconnects **34, 7, 9, 10, 12, and 35**. With reference to the circulatory flow paths illustrated in bold in FIG. 30A, the portion of this high-pressure fluid path downstream of reversible turbomachine system **850**, encompassing fluid interconnects **34, 7**, and ending at HHX system **500** can additionally be considered a high-pressure high-temperature (e.g., HP-HT) fluid path. Similarly, the portion of this high-pressure fluid path downstream of HHX system **500**, encompassing fluid interconnects **9, 10, 12, 35**, and ending at the inlet to reversible turbomachine system **852** can additionally be considered a high-pressure medium-temperature (e.g., HP-MT) fluid path.

[0225] As another example, the same high-pressure fluid path is between the reversible powertrain system **801** reversible turbomachine system **852** outlet, when reversible turbomachine system **852** is acting as a compressor, and the reversible powertrain system **801** reversible turbomachine system **850** inlet, when reversible turbomachine system **850** is acting as a turbine. In FIG. 30B, that high-pressure fluid path encompasses the same fluid interconnects **34, 7, 9, 10, 12, and 35**. With reference to the circulatory flow paths illustrated in bold in FIG. 30B, the portion of this high-pressure fluid path downstream of reversible turbomachine system **852**, encompassing fluid interconnects **35, 12, 10, 9** and ending at HHX system **500** can additionally be considered a high-pressure medium-temperature (e.g., HP-MT) fluid path. Similarly, the portion of this high-pressure fluid path downstream of HHX system **500**, encompassing fluid interconnects **7, 35**, and ending at the inlet to reversible turbomachine system **850** can additionally be considered a high-pressure high-temperature (e.g., HP-HT) fluid path.

[0226] As another example, a low-pressure fluid path is between the CPT system **100** turbine system **140** outlet and the CPT compressor system **130** inlet. In FIGS. 3 and 3N, that low-pressure fluid path encompasses fluid interconnects **19, 14, 2, 5, 11, and 20**. With reference to the circulatory flow paths illustrated in bold in FIG. 3N, the portion of this low-pressure fluid path downstream of turbine system **140**, encompassing fluid interconnects **19, 14**, and ending at CHX system **600** can additionally be considered a low-pressure low-temperature (e.g., LP-LT) fluid path. Similarly, the portion of this low-pressure fluid path downstream of CHX system **600**, encompassing fluid interconnects **2, 5, 11, 20**, and ending at the inlet to compressor system **130** can additionally be considered a low-pressure medium-temperature (e.g., LP-MT) fluid path.

[0227] Another low-pressure fluid path is between the GPT system **200** turbine system **240** outlet and the compressor system **230** inlet. In FIGS. 3 and 3O, that low-pressure fluid path encompasses fluid interconnects **25, 11, 5, 4 and 3** (depending on AHX system **700** bypass state), **2, 14, and 26**. With reference to the circulatory flow paths illustrated in bold in FIG. 3O, the portion of this low-pressure fluid path downstream of turbine system **240**,

encompassing fluid interconnects **25, 11, 5, 4 and 3** (depending on AHX system **700** bypass state), **2**, and ending at CHX system **600** can additionally be considered a low-pressure medium-temperature (e.g., LP-MT) fluid path. Similarly, the portion of this low-pressure fluid path downstream of CHX system **600**, encompassing fluid interconnects **14, 26**, and ending at the inlet to compressor system **230** can additionally be considered a low-pressure low-temperature (e.g., LP-LT) fluid path.

[0228] As another example, a low-pressure fluid path is between the shared powertrain system **800** turbine system **840** outlet and the shared powertrain system **800** compressor system **830** inlet. In FIG. 28A, that low-pressure fluid path encompasses fluid interconnects **30, 14, 2, 5, 11, and 31**. In FIG. 28B, that low pressure fluid path encompasses fluid interconnects **30, 11, 5, 4, 3, 2, 14, and 31**. With reference to the circulatory flow paths illustrated in bold in FIG. 28A, the portion of this low-pressure fluid path downstream of turbine system **840**, encompassing fluid interconnects **30, 14**, and ending at CHX system **600** can additionally be considered a low-pressure low-temperature (e.g., LP-LT) fluid path. Similarly, the portion of this low-pressure fluid path downstream of CHX system **600**, encompassing fluid interconnects **2, 5, 11, 31**, and ending at the inlet to compressor system **830** can additionally be considered a low-pressure medium-temperature (e.g., LP-MT) fluid path. With reference to the circulatory flow paths illustrated in bold in FIG. 28B, the portion of this low-pressure fluid path downstream of turbine system **840**, encompassing fluid interconnects **30, 11, 5, 4, 3, 2**, and ending at CHX system **600** can additionally be considered a low-pressure medium-temperature (e.g., LP-MT) fluid path. Similarly, the portion of this low-pressure fluid path downstream of CHX system **600**, encompassing fluid interconnects **14, 31**, and ending at the inlet to compressor system **830** can be considered a low-pressure low-temperature (e.g., LP-LT) fluid path.

[0229] As another example, a low-pressure fluid path is between the reversible powertrain system **801** reversible turbomachine system **852** outlet, when reversible turbomachine system **852** is acting as a turbine, and the reversible powertrain system **801** reversible turbomachine system **850** inlet, when reversible turbomachine system **850** is acting as a compressor. In FIG. 30A, that low-pressure fluid path encompasses fluid interconnects **36, 14, 2, 5, 11, and 37**. With reference to the circulatory flow paths illustrated in bold in FIG. 30A, the portion of this low-pressure fluid path downstream of reversible turbomachine system **852**, encompassing fluid interconnects **36, 14**, and ending at CHX system **600** can additionally be considered a low-pressure low-temperature (e.g., LP-LT) fluid path. Similarly, the portion of this low-pressure fluid path downstream of CHX system **600**, encompassing fluid interconnects **2, 5, 11, 37**, and ending at the inlet to reversible turbomachine system **850** can additionally be considered a low-pressure medium-temperature (e.g., LP-MT) fluid path.

[0230] As another example, a low-pressure fluid path is between the reversible powertrain system **801** reversible turbomachine system **850** outlet, when reversible turbomachine system **850** is acting as a turbine, and the reversible powertrain system **801** reversible turbomachine system **852** inlet, when reversible turbomachine system **852** is acting as a compressor. In FIG. 30B, that low-pressure fluid path encompasses the same fluid interconnects **37, 11, 5, 4, 3, 2, 14, and 36**. With reference to the circulatory flow paths

illustrated in bold in FIG. 30B, the portion of this low-pressure fluid path downstream of reversible turbomachine system **850**, encompassing fluid interconnects **37, 11, 5, 4, 3, 2**, and ending at CHX system **600** can additionally be considered a low-pressure medium-temperature (e.g., LP-MT) fluid path. Similarly, the portion of this low-pressure fluid path downstream of CHX system **600**, encompassing fluid interconnects **14, 36**, and ending at the inlet to reversible turbomachine system **852** can additionally be considered a low-pressure low-temperature (e.g., LP-LT) fluid path.

Powertrain Isolation in Dual Powertrain PHES Systems

[0231] In PHES systems with dual powertrains (e.g., PHES system **1000**), valve **131** and valve **141** may be closed to isolate the CPT system **100** turbomachinery during generation mode **1004**. Valve **231** and valve **241** may be closed to isolate the GPT system **200** turbomachinery during charge mode **1002**. As noted above, these isolation valves **131, 141, 231, 241** are preferably fail-closed valves and preferably they can close quickly to help protect the turbomachinery during a trip event.

AHX System Isolation

[0232] The AHX system **700** can exhaust excess heat in the working fluid to the environment. In some embodiments, excess heat may be rejected from the PHES system (e.g., PHES system **1000, 1003, 1005**) via the working fluid loop (e.g., working fluid loops **300, 300C, 300D**) only during generation (e.g., mode **1004**). Excess heat from inefficiency is generated during both charge (e.g. mode **1002**) and generation (e.g., mode **1004**) due to inefficiencies of the turbomachinery. In an embodiment where excess heat is not rejected during a charge mode (e.g., mode **1002**), the excess heat accumulates and results in, for example, a higher CTS medium **690** temperature. In an embodiment where excess heat is rejected during a generation mode (e.g., mode **1004**), excess heat from charge mode inefficiency and generation mode inefficiency can be removed from the working fluid loop through the AHX system **700**.

[0233] Consequently, in a preferred embodiment, it is desirable to provide a mode-switchable working fluid heat dissipation system that can be activated during generation mode **1004** and bypassed during charge mode **1002**, or vice versa in another embodiment. In a working fluid loop (e.g., working fluid loops **300, 300C, 300D**), as depicted for example in FIGS. 3, 3N, 3O, 28, 28A, 28B, 30, 30A, 30B, an arrangement of valves allow AHX system **700** to be activated or bypassed depending on the mode (e.g., modes **1002, 1004**, or other modes, transitions, or state as further described with respect to, for example, FIGS. 10 and/or 11). A set of three valves, **323, 324, 325** direct working fluid flow through the AHX system **700** during generation mode, as illustrated in FIGS. 3O, 28B, 30B, and direct working fluid to bypass the AHX system **700** during charge mode, as illustrated in FIG. 3N, 28A, 30A. To direct working fluid flow through the AHX system **700**, valve **323** may be closed and valves **324** and **325** open. Conversely, to bypass AHX system **700**, valve **323** may be opened and valves **324** and/or **325** may be closed. FIGS. 3I and 3J and their corresponding disclosure further illustrate the bypass and active states of AHX system **700**. Alternatively, in another embodiment, valve **325** may be omitted and valves **323** and **324** are used

to provide a mode-switchable heat dissipation system, as further illustrated and described herein and with respect to FIGS. 3K and 3L.

Inventory Control System

[0234] Inventory control refers to control of the mass, and corresponding pressures, of working fluid in the high-pressure and low-pressure sides of a working fluid loop (e.g., working fluid loops **300, 300C, 300D**), which can be controlled to affect, for example, power generation and charge characteristics of a PHES system (e.g., PHES system **1000, 1003, 1005**). Control of working fluid inventory inside the working fluid loop can be accomplished with components illustrated in FIGS. 3, 28, 30, and additionally illustrated as ICS **300B** in FIG. 3M, which can be implemented in any of the PHES system embodiments herein. One or more controllers, such as illustrated in FIG. 24A, may participate in and/or direct the control. Using inventory control, power of the PHES system is preferably modulated by adjusting working fluid pressure in the low-pressure side of the working fluid loop.

[0235] In one example of inventory control, a high-pressure tank system and a low-pressure tank system and associated valves are used to control the amount of working fluid circulating in a working fluid loop (e.g., working fluid loops **300, 300C, 300D**). High-pressure tank system **320**, which may include one or more fluid tanks for holding working fluid, can be connected to a high-pressure working fluid path via valve **321** and to a low-pressure working fluid path via valve **322**. Low-pressure tank system **310**, which may include one or more fluid tanks, can be connected to a high-pressure working fluid path via valve **311** and to a low-pressure working fluid path via valve **312**. The four valves, **311, 312, 321, and 322**, may be used to control the direction of working fluid flow between the tank systems **310, 320** and low-pressure or high-pressure fluid paths in the working fluid loop, effectively allowing the addition or removal of working fluid circulating through the working fluid loop.

[0236] ICS **300B** further includes a make-up working fluid compressor **303** that can add working fluid to the working fluid loop (e.g., working fluid loops **300, 300C, 300D**). The working fluid loop operates as a closed loop; however, working fluid may be lost over time or intentionally lost due to operational decisions or hardware protection-related operations, such as venting of working fluid in overpressure conditions. Working fluid can be added to the working fluid loop by adding outside working fluid through a working fluid filter **301**. To get the outside working fluid into the high-pressure tank system **320**, the working fluid compressor **303** is used to pressurize outside working fluid to a pressure greater than the high-pressure tank system **320** (or greater than at least one tank in the high-pressure tank system **320**). In an embodiment where the working fluid is air, ambient air may be brought in through the filter **301** and pressurized with the compressor **303**. In other embodiments, an outside working fluid make-up reservoir (not shown) may supply working fluid to the filter **301** or the compressor **303**.

[0237] In another example of inventory control, after a normal shutdown or a trip event in a PHES system (e.g., PHES system **1000, 1003, 1005**), pressure in a working fluid loop (e.g., working fluid loops **300, 300C, 300D**) is preferably brought to a lower pressure before a powertrain system (e.g., CPT system **100**, GPT system, **200**, shared powertrain

800, reversible powertrain **801**) is started. This is beneficial because if high pressure in high-pressure fluid paths of the working fluid loop is not lowered prior to some mode transitions, the resulting settle-out pressure throughout the working fluid loop would require that low-pressure fluid paths in the working fluid loop be designed to work with higher pressures than typical operating pressures in the low-pressure fluid paths during charge or generation modes. Thus, if working fluid can be removed from the working fluid loop during spin-down (e.g., transition to hot turning mode **1006** and/or slow rolling state), lower-pressure piping and components can be used in the low-pressure fluid paths of the working fluid loop, thus allowing reduced capital investment in the PHES system design. Therefore, it is desirable to bring the circulating working fluid mass down so that the settle-out pressure in the working fluid loop is no more than the typical low-side pressure in the working fluid loop.

[0238] In one example, working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**) pressure reduction can be accomplished by using the working fluid compressor **303** to take working fluid from a high-pressure fluid path via valve **305**, or to take working fluid from a low-pressure fluid path via valve **304**, preferably one at a time, and push the working fluid into the high-pressure tank system **320**. Additionally or alternatively, valves **311** or **318** can be used to slowly or quickly bleed down pressure from a high-pressure fluid path into the lower pressure tank system **310**.

[0239] In another example, ICS **300B** includes at least one evacuation valve **308** controllable to vent working fluid from the low-pressure side of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**), as well as pressure relief devices throughout the working fluid loop to provide protection from overpressure.

[0240] In another example, ICS **300B** includes at least one evacuation valve **314** controllable to vent working fluid from the high-pressure side of a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**), as well as pressure relief devices throughout the working fluid loop to provide protection from overpressure. Powertrain Bypass/Recirculation Loops

[0241] For each turbomachinery powertrain (e.g., CPT system **100**, GPT system **200**, shared powertrain system **800**, reversible powertrain system **801**), there are working fluid recirculation and bypass loops. A recirculation loop may be characterized as a switchable closed-loop working fluid path that allows recirculation of working fluid from the outlet of a component back to the inlet of the component. For example, a recirculation loop can be used around a compressor system during hot turning. In this example, working fluid is routed from the compressor system outlet back to the compressor inlet instead of through the main heat exchangers, allowing the compressor system to gradually cool down after the compressor system transitions from high flow rate operation (e.g. charge mode **1002** or generation mode **1004**) to low flow rate operation (e.g., hot turning mode **1006**).

[0242] A bypass loop may be characterized as a switchable closed-loop working fluid path that routes working fluid around one or more components in the main working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**). For example, during transition from a generation mode **1004** to a trip mode **1012**, a bypass loop may be activated during that high flow rate period. The bypass loop could route high flow rate working fluid from a generation compressor system

outlet away from the heat exchangers and to a generation turbine system inlet. A bypass loop can be beneficial during trip events (e.g., mode **1012**) when surging of the turbomachinery is a risk, and also during turbomachinery startup when it is desirable to reduce startup power.

[0243] Valve **119**, which is normally closed, can open a preferably high flow rate bypass loop around a compressor system (e.g., compressor system **130**, compressor system **830**, reversible turbomachine system **850** acting as a compressor). This is beneficial, for example, to prevent surge in the compressor system during a trip event from charge mode.

[0244] Valve **132**, which is normally closed, can open a recirculation loop around a compressor system (e.g., compressor system **130**, compressor system **830**, reversible turbomachine system **850** acting as a compressor). The valve **132** recirculation loop can be activated to allow circulation and also cooling of the working fluid through the heat exchanger **132**. The valve **132** recirculation loop may have lower flow rate capability than the valve **119** recirculation loop. The valve **132** recirculation loop can be beneficial, for example, during a hot turning mode.

[0245] For the CPT system **100**, valve **142**, which is normally closed, can open a recirculation loop around the charge turbine system **140** to allow recirculation during, for example, hot turning mode for the CPT system **100**. As previously noted, fan **142F** may assist with working fluid flow in this recirculation loop. For the reversible powertrain system **801**, valve **142**, which is normally closed, can open a recirculation loop around the reversible turbomachine **852** acting as a turbine to allow recirculation during, for example, a hot turning mode. Fan **142F** may assist with working fluid flow in this recirculation loop. For the shared powertrain system **800**, valve **842**, which is normally closed and functions similarly to valve **142**, can open a recirculation loop around the turbine system **840** to allow recirculation during, for example, a hot turning mode. Similarly, fan **842F** may assist with working fluid flow in this recirculation loop.

[0246] Valve **229**, which is normally closed, can open a preferably high flow rate bypass fluid path from the outlet of a generation compressor system (e.g., compressor system **230**, compressor system **830** in generation mode, reversible turbomachine system **852** acting as a compressor) to the outlet fluid path of a generation turbine system (e.g., turbine system **240**, turbine system **840**, reversible turbomachine system **850** acting as a turbine) to reduce start-up power at the powertrain system (e.g., GPT system **200**, shared powertrain **800**, reversible powertrain **801**). Routing working fluid through the valve **229** bypass loop reduces the magnitude of power for each of the generation compressor system and the generation turbine system, and thus reduces the net power magnitude of the powertrain system. In effect, the valve **229** bypass loop creates a limited starving effect in the powertrain system. The effect on the generation turbine system is greater than the effect on the generation compressor system. Consequently, opening the valve **229** bypass loop can keep generation turbine system power production less than generation compressor system power draw. Because that ensures a net electrical power input need, a generator system or motor/generator system (e.g., generator system **210** acting as a motor, motor/generator system **810** acting as a motor) must still act as a motor during the duration of spin-up. Beneficially, this maintains VFD control

of the spin-up process. As another benefit, opening the valve 229 bypass loop can provide surge protection during a trip event.

[0247] Valve 232, which is normally closed, can open a recirculation loop around a generation compressor system (e.g., compressor system 240, reversible turbomachine system 852 acting as a compressor) to provide working fluid circulation through the generation compressor system during, for example, hot turning mode. In a shared powertrain working fluid loop, such as working fluid loop 300C in FIG. 28B, valve 132 may be used similarly or the same as valve 232, as further described herein.

[0248] Valve 242, which is normally closed, can open a recirculation loop around a generation mode turbine system (e.g., turbine system 240, reversible turbomachine system 850 acting as a turbine). This recirculation loop can be activated to allow circulation and also cooling of the working fluid recirculating through the heat exchanger 242H, thereby cooling the generation turbine system 240. This is beneficial during, for example, hot turning mode.

[0249] In a shared powertrain PHES system, (e.g., PHES system 1003), valve 842 and heat exchanger 842H can act similarly to, or the same as, valve 242 and heat exchanger 242H, respectively, when the PHES system is in a generation mode. Valve 842 regulates a recirculation fluid path around a portion of the generation mode turbine system (e.g., turbine system 840, see FIG. 34B) that can be opened, for example, to recirculate working fluid through the turbine system during, for example, cooldown (e.g. during slow rolling) or after a mode switch. Valve 842 may exhibit slow response time and preferably fails open. A benefit of valve 842 failing open is that if valve 842 fails, by failing open it allows for cooldown spinning of the powertrain system (e.g., shared powertrain system 800) after shutdown of the powertrain system. Cooldown spinning can prevent bowing of rotating components in the turbomachinery. Another benefit of valve 842 failing open is that, when failed open, the powertrain system can continue to function during generation (e.g., mode 1004) or slow turning (e.g., mode 1006), albeit with decreased efficiency during generation due to open valve 842 creating a bleed path for the working fluid.

[0250] Valve 222, which is normally closed, can be opened to provide to provide a working fluid bypass path around the high-pressure side of RHX system 400 and HHX system 500 for a generation powertrain system (e.g., GPT system 200, shared powertrain system 800 in generation mode, reversible powertrain system 801 in generation mode). This is further described above with respect to valve 222 and valve 401.

[0251] Other recirculation and bypass valves may be implemented in a PHES system (e.g., PHES system 1000, 1003, 1005) to provide functionality in surge prevention, overspeed prevention, overpressure prevention, startup load reduction, and low thermal ramping of components.

F. Hot-Side Thermal Storage Subsystem

[0252] FIG. 4 is a schematic fluid path diagram of a hot-side thermal storage system which may be implemented in a PHES system, such as PHES systems 1000, 1003, 1005 according to an example embodiment. Other embodiments of an HTS system operable in PHES systems disclosed herein are possible as well. FIG. 4 provides additional detail concerning an HTS system 501 embodiment than is shown in the top-level schematics of FIGS. 2, 27, 29. In general

terms, HTS system 501 includes tanks for HTS medium, HTS medium fluid paths, pumps, valves, and heaters. The HTS system 501 is capable of transporting HTS medium 590 back and forth between the two (or more) storage tanks to allow charging of the warm HTS medium 590 (i.e., adding thermal energy) or discharging of the HTS medium 590 (i.e., extracting thermal energy). The heaters are available to ensure that the HTS medium 590 remains in liquid phase for anticipated operational conditions in PHES systems 1000, 1003, 1005.

[0253] An HTS system, such as the embodiment of HTS system 501 illustrated in FIG. 4, can serve numerous roles within a PHES system (e.g., PHES system 1000, 1003, 1005). An HTS system may ensure that HTS medium 590 remains in liquid phase during all modes of operation of the PHES system. An HTS system may deliver HTS medium 590 flow to the HHX system 500 to store heat in the HTS medium 590 during charge mode operation of the PHES system (e.g. mode 1002). An HTS system may deliver HTS medium 590 flow to the HHX system 500 to provide heat from the HTS medium 590 to the working fluid during generation mode operation of the PHES system (e.g., mode 1004). An HTS system may drain HTS medium 590 from the PHES system into at least one storage tank. An HTS system may vent entrapped gas in HTS medium 590 fluid paths. An HTS system may protect fluid paths and components from over pressurization. An HTS system may isolate itself from the other PHES system subsystems when the HHX system 500 is disconnected for service, or for thermal rebalancing of the HTS system and/or PHES system. An HTS system may maintain pressure of the HTS medium 590 in the HHX system 500 to be less than that of the working fluid pressure in the working fluid loop 300 at HHX system 500, for example, to prevent leakage of HTS medium into the working fluid loop (e.g., working fluid loops 300, 300C, 300D).

[0254] In the embodiment of an HTS system shown in FIG. 4, the HTS system 501 includes two tanks: a warm HTS tank 510 for storing warm HTS medium 590 (e.g., at approximately 270° C.) and a hot HTS tank 520 for storing hot HTS medium 590 (e.g., at approximately 560° C.). In other embodiments, more than one tank may be used to increase the storage capacity of the warm HTS storage 591 and/or the hot HTS storage 592. Each HTS tank 510, 520 has a pump, an immersion heater, and sensors.

[0255] In HTS system 501, warm HTS pump 530 circulates HTS medium 590 from warm HTS tank 510, through fluid interconnect 8, through HHX system 500, through fluid interconnect 6, and to the hot HTS tank 520 during PHES charging mode (e.g., mode 1002), where the HTS medium 590 is absorbing heat from the working fluid side of the HHX system 500. Hot HTS pump 540 circulates HTS medium 590 from hot HTS tank 520, through fluid interconnect 6, through HHX system 500, through fluid interconnect 8, and to the warm HTS tank 510 during PHES system generation mode (e.g., mode 1004), where the HTS medium 590 is providing heat to the working fluid side of the HHX system 500.

[0256] In HTS system 501, valves in HTS system 501 can be actuated to bypass the HHX system 500 as necessary in order to isolate HTS tanks 510, 520 from the rest of PHES system (e.g., PHES system 1000, 1003, 1005) and/or to facilitate thermal balancing of the HTS loop and/or PHES system. The ability to facilitate balancing can be beneficial,

for example, to maintain thermal balance between PHES system charge and generation cycles. It is desirable that the mass of HTS medium **590** transferred from warm HTS tank **510** to hot HTS tank **520** during charge (e.g. charge mode **1002**) is later transferred back from hot HTS tank **520** to warm HTS tank **510** during generation (e.g., generation mode **1004**), and vice versa. However, disturbances to the HTS medium flow rate during charge and generation cycles, resulting from, for example, uneven heat loss across the PHES system, may result in unequal masses of HTS medium **590** transferred between the cycles. If that occurs, direct transfer of HTS medium **590** from warm HTS tank **510** to hot HTS tank **520**, or vice versa, may be used to re-balance HTS medium **590** masses at the beginning or end of a charge or generation cycle.

[0257] In HTS system **501**, valves can be actuated to drain HTS medium **590** in fluid paths, including HHX system **500**, into one or more tanks as necessary.

[0258] In HTS system **501**, heat traces can be used throughout the fluid paths to avoid formation of solid HTS medium **590** during filling of the HTS system **501** and/or during hot turning mode (e.g., mode **1006**) or hot standby mode (e.g., mode **1008**) where there may be no significant flow of HTS medium **590** through fluid paths.

[0259] The following paragraphs describe components of the HTS system **501**:

[0260] Warm HTS tank **510** is a tank for storing warm HTS medium **590**. In other embodiments, there may be additional warm HTS tanks.

[0261] Sensors **510S**, **520S** are monitoring and reporting devices that can provide temperature and/or fluid level data for HTS medium **590** in tanks **510**, **520**, respectively, to one or more control systems controlling and/or monitoring conditions in the PHES system (e.g., PHES system **1000**, **1003**, **1005**).

[0262] Valve **511** is a bypass valve that provides a flow path for HTS medium **590** to go directly into the warm tank **510**, bypassing the pump **530** when valve **557** is closed.

[0263] Heater **512** provides heat to HTS medium **590** in warm HTS tank **510**, for example, to ensure it stays in liquid form.

[0264] Hot HTS tank **520** is a tank for storing hot HTS medium **590**. In other embodiments, there may be additional hot HTS tanks.

[0265] Valve **521** is a bypass valve that provides a flow path for HTS medium **590** to go directly into the hot tank **520**, bypassing the pump **540** when valve **558** is closed.

[0266] Heater **522** provides heat HTS medium **590** in hot tank **520**, for example, to ensure it stays in liquid form.

[0267] Breather device **529** allows ambient air in and out of the tank head space as the HTS medium **590** expands and contracts with temperature.

[0268] Warm HTS pump **530** delivers HTS medium **590** from warm HTS tank **510** to hot HTS tank **520** via HHX system **500** during charge mode operation. Depending on valve state, pump **530** can alternatively or additionally deliver HTS medium **590** to hot HTS tank **520** via bypass valve **551**, bypassing HHX system **500**, for balancing purposes. In other embodiments, there may be additional warm HTS pumps.

[0269] Hot HTS pump **540** delivers HTS medium **590** from hot HTS tank **520** to warm HTS tank **510** via HHX system **500** during generation mode operation. Depending on valve state, pump **540** can alternatively or additionally

deliver HTS medium **590** to warm HTS tank **510** via valve **551**, bypassing HHX system **500**, for balancing purposes. In other embodiments, there may be additional hot HTS pumps.

[0270] Valve **551** is an HHX system **500** bypass valve that provides a fluid flow path allowing HTS medium **590** to travel between HTS tanks **510**, **520** while bypassing HHX system **500**.

[0271] Sensors **551S**, **552S** are monitoring and reporting devices that can provide temperature, flow, and/or pressure data to one or more control systems controlling and/or monitoring conditions in the PHES system (e.g., PHES system **1000**, **1003**, **1005**).

[0272] Valve **552** is a drain valve that provides a fluid flow path for draining of HTS medium **590** into or out of warm tank **510**.

[0273] Valve **553** is a drain valve that provides a fluid flow path for draining of HTS medium **590** into or out of hot tank **520**.

[0274] Valve **554** is a check valve that works as a gas release valve to allow accumulated gas in the HTS system **501** to migrate to a tank cover gas space in either or both tanks **510**, **520**.

[0275] Valve **555** is an HHX system **500** isolation valve that restricts HTS medium **590** flow between the HHX system **500** and HTS system **501** through interconnect **8**.

[0276] Valve **556** is an HHX system **500** isolation valve that restricts HTS medium **590** flow between the HHX system **500** and HTS system **501** through interconnect **6**.

[0277] Valves **552**, **553**, **555**, and **556** can all be closed to isolate HHX system **500** from HTS medium **590** in the HTS system **501**.

[0278] Valve **557** is a warm CTS pump **530** outlet valve that can be opened to allow CTS medium **590** flow from warm CTS pump **530** or closed to prevent flow into the outlet of hot CTS pump **530**.

[0279] Valve **558** is a hot CTS pump **540** outlet valve that can be opened to allow CTS medium **590** flow from hot CTS pump **540** or closed to prevent flow into the outlet of hot CTS pump **540**.

[0280] Heat trace **560** can be activated to maintain fluid paths and/or other metal mass at temperatures sufficient to keep the HTS medium **590** in liquid phase, and/or at desired setpoint temperatures during various modes and/or states of a PHES system (e.g., PHES system **1000**, **1003**, **1005**) in order to reduce thermal gradients on sensitive components, and/or to reduce transition time between the PHES system modes and states. Beneficially, heat trace **560** can reduce thermal ramp rates, which benefits component longevity, and allows for faster startup times. Heat trace **560** is illustrated as near fluid interconnect **8** and on the warm tank **510** side of HTS system **501**. However, heat trace **560** can be located at other locations within HTS system **501** in order to accomplish its functions. Additionally or alternatively, heat trace **560** can include heat traces at multiple locations within HTS system **501** in order to accomplish its functions.

Operation of HTS System

[0281] During operation of a PHES system (e.g., PHES system **1000**, **1003**, **1005**) in a generation mode (e.g. mode **1004**), the HTS system **501** is configured such that hot HTS medium **590** is delivered from hot HTS tank **520** to warm HTS tank **510** via HHX system **500** at a fixed and/or controllable rate using pump **540**. During generation, heat

from the hot HTS medium **590** is transferred to the working fluid via the HHX system **500**. The rated generation flow of HTS medium **590** at a given PHES system power may be a function of the generation flow of CTS medium **690** to maintain inventory balance.

[0282] During operation of a PHES system (e.g., PHES system **1000**, **1003**, **1005**) in a charge mode (e.g., mode **1002**), the HTS system **501** is configured such that warm HTS medium **590** can be delivered from warm HTS tank **510** to hot HTS tank **520** via HHX system **500** at a fixed or controllable rate using the pump **530**. During charge, the warm HTS medium **590** absorbs heat from the hot working fluid via the HHX system **500**. The rated charge flow of HTS medium **590** at a given PHES system power may be a function of the charge flow of CTS medium **690** to maintain inventory balance.

[0283] Under some PHES system (e.g., PHES system **1000**, **1003**, **1005**) modes, such as long-term Cold Dry Standby, the HTS medium **590** in the hot-side loop (e.g., HTS system **501**, HHX system **500**, and intermediate fluid paths) needs to be drained to the HTS tanks **510** and/or **520**. In this scenario, preferably the heater **512** in the warm tank **510** is used to ensure HTS medium **590** remain in liquid form. Preferably, for example, the hot HTS pump **540** can be used to transfer hot HTS medium **590** from the hot HTS tank **520** to the warm HTS tank **510** via the HHX system **500** bypass line (e.g., via valve **551**) and valve **511**. Alternatively, warm HTS pump **530** can be used to transfer warm HTS medium **590** from the warm HTS tank **510** to the hot HTS tank **520** via the HHX system **500** bypass line (e.g., via valve **551**) and valve **521**. HTS **590** medium remaining in hot HTS tank **520** may also be kept in a liquid state with heater **522**.

[0284] Under certain operating modes, HHX system **500** can be bypassed by closing valves **552**, **553**, **555**, and **556**, opening valve **551**, and using pump **530** or **540** to cause flow of HTS medium **590** between HTS tanks **510** and **520**. For example, HHX system **500** can be bypassed to balance the thermal energy content either between the HTS tanks **510**, **520** individually and/or to balance total thermal energy between HTS system **501** and CTS system **601**.

G. Cold-Side Thermal Storage Subsystem

[0285] FIG. **5** is a schematic fluid path diagram of a cold-side thermal storage system which may be implemented in a PHES system, such as PHES systems **1000**, **1003**, **1005** according to an example embodiment. Other embodiments of a CTS system operable in PHES systems disclosed herein are possible as well. FIG. **5** provides additional detail concerning a CTS system **601** embodiment than is shown in the top-level schematic of FIGS. **2**, **27**, **29**. In general terms, CTS system **601** includes tanks for CTS medium, CTS medium fluid paths, pumps, valves, and inert gas supply. The CTS system **601** is capable of transporting CTS medium **690** back and forth between the two (or more) storage tanks to allow charging of the CTS medium **690** (i.e., removing thermal energy) or discharging of the CTS medium **690** (i.e., adding thermal energy). During PHES system charge mode operation, the CTS medium **690** deposits heat to working fluid inside the CHX system **600**. During PHES system generation mode operation, the CTS medium **690** absorbs heat from the working fluid inside the CHX system **600**.

[0286] A CTS system, such as CTS system **601** illustrated in FIG. **5**, can serve numerous roles within a PHES system,

such as PHES systems **1000**, **1003**, **1005**. A CTS system may deliver CTS medium **690** flow to the CHX system **600** to provide heat during charge mode operation of a PHES system **1000** (e.g., mode **1002**). A CTS system may deliver CTS medium **690** flow to the CHX system **600** to absorb heat during generation mode operation of the PHES system (e.g., mode **1004**). A CTS system may drain CTS medium **690** into at least one storage tank. A CTS system may vent entrapped gas in CTS medium **690** fluid paths. A CTS system may protect fluid paths and components from over pressurization. A CTS system **601** may isolate itself from other PHES system subsystems when the CHX system **600** is disconnected for service, or for thermal rebalancing. A CTS system may isolate the CTS medium **690** from ambient via an inert gas blanket. A CTS system may maintain pressure of the CTS medium **690** in the CHX system **600** to be less than that of the working fluid pressure in the a working fluid loop (e.g., working fluid loops **300**, **300C**, **300D**) at CHX system **600**, for example, to prevent leakage of CTS medium into the working fluid loop. A CTS system **601** may monitor CTS medium **690** health during operation.

[0287] In the embodiment of a CTS system shown in FIG. **5**, the CTS system **601** includes two tanks: a warm CTS tank **610** for storing warm CTS medium **690** (e.g., at approximately 30° C.) and a cold CTS tank **620** for storing cold CTS medium **690** (e.g., at approximately -60° C.). In other embodiments, more than one CTS tank may be used to increase the storage capacity of the warm CTS storage **691** and/or the cold CTS storage **692**. In CTS system **601**, each CTS storage **691**, **692** has a pump system **639**, **649**, respectively.

[0288] In CTS system **601**, warm pump **630** circulates CTS medium **690** from warm CTS tank **610**, through fluid interconnect **1**, through CHX system **600**, through fluid interconnect **13**, and to the cold CTS tank **620** during a PHES charging mode (e.g., mode **1002**), where the CTS medium **690** is providing heat to the working fluid side of the CHX system **600**. The cold pump **640** circulates CTS medium **690** from cold CTS tank **620**, through fluid interconnect **13**, through CHX system **600**, through fluid interconnect **1**, and to the warm CTS tank **610** during a PHES system generation mode (e.g., mode **1004**), where the CTS medium **690** is absorbing heat from the working fluid side of the CHX system **600**.

[0289] Valves in CTS system **601** can be actuated to bypass the CHX system **600** as necessary in order to isolate CTS storage **691**, **692** from the rest of a PHES system (e.g., PHES system **1000**, **1003**, **1005**) and/or to facilitate balancing of the CTS loop. The ability to facilitate balancing can be beneficial, for example, to maintain thermal balance between PHES system charge and generation cycles. It is desirable that the mass of CTS medium **690** transferred from warm CTS tank **610** to cold CTS tank **620** during charge (e.g., charge mode **1002**) is later transferred back from cold CTS tank **620** to warm CTS tank **610** during generation (e.g., generation mode **1004**). However, disturbances to the CTS flow rate during charge and generation cycles, resulting from, for example uneven heat loss across the PHES system, may result in unequal masses of CTS medium **690** transferred between the cycles. If that occurs, direct transfer of CTS medium **690** from warm CTS tank **610** to cold CTS tank **620**, or vice versa, may be used to re-balance CTS medium **690** masses at the beginning or end of a charge or generation cycle.

[0290] In CTS system 601, valves can be actuated to drain CTS medium 690 in fluid paths, including CHX system 600, into one or more tanks as necessary.

[0291] In an embodiment of CTS system 601, one, or both of, CTS pumps 630, 640 are capable of bidirectional flow. Beneficially, reverse pumping can be used to provide active pressure reduction in the CTS loop, which can be employed to keep CTS medium 690 pressure in CHX system 600 below working fluid pressure in CHX system 600. This working fluid positive pressure condition (with respect to CTS medium 690) beneficially prevents any CTS medium from leaking into working fluid loop (e.g., working fluid loops 300, 300C, 300D), for example, through cracked heat exchanger cores.

[0292] The following paragraphs describe components of the CTS system 601:

[0293] Valve 602 is a CHX system 600 isolation valve that restricts CTS medium 690 flow between the CHX system 600 and CTS system 601 through interconnect 13.

[0294] Valve 603 is a CHX system 600 isolation valve that restricts CTS medium 690 flow between the CHX system 600 and CTS system 601 through interconnect 1.

[0295] Valves 602, 603 can both be closed to isolate the CHX system 600 from CTS medium 690 in the CTS system 601.

[0296] Valve 605 is a CHX system 600 bypass valve that provides a fluid flow path allowing CTS medium 690 to travel between CTS tanks 610, 620 while bypassing CHX system 600.

[0297] Warm CTS tank 610 is a tank for storing warm CTS medium 690.

[0298] Sensors 610S, 620S are monitoring and reporting devices that can provide temperature and/or fluid level data for HTS medium 690 in tanks 610, 620, respectively, to one or more control systems controlling and/or monitoring conditions in a PHES system (e.g., PHES system 1000, 1003, 1005).

[0299] Valve 611 is an isolation valve that isolates warm CTS tank 610 from the CTS loop.

[0300] Pressure relief device 619 protects CTS tanks 610, 620 from over pressurization via a gas fluid path between the headspace of CTS tanks 610, 620.

[0301] Cold CTS tank 620 is a tank for storing cold CTS medium 690.

[0302] Valve 621 is an isolation valve that isolates cold CTS tank 620 from the CTS loop.

[0303] Inert gas reservoir 622 is a storage reservoir for an inert gas (e.g., nitrogen) useable as a cover gas to blanket CTS medium 690 in tanks 610, 620.

[0304] Valve 623 is an inert gas fluid path valve that can control a flow of inert gas from inert gas reservoir 622 to the headspace of CTS tanks 620, 621 which are connected via a gas fluid path. Valve 623 can be used to regulate the pressure of an inert gas blanket within the CTS tanks 610, 620.

[0305] Valve 624 is an inert gas purge valve that can control a flow of pressurized inert gas into the cold-side loop CTS medium 690 fluid paths to purge those fluid paths of CTS medium 690.

[0306] Warm CTS pump 630 delivers CTS medium 690 from warm CTS tank 610 to cold CTS tank 620 via CHX system 600 during charge mode operation (e.g., mode 1002) of a PHES system (e.g., PHES system 1000, 1003, 1005). Depending on valve states, pump 630 can alternatively or

additionally deliver CTS medium 690 to cold CTS tank 620 via valve 605, bypassing CHX system 600, for balancing purposes. In other embodiments, there may be additional warm CTS pumps.

[0307] Valve 631 is a warm pump 630 isolation valve that, when closed, can isolate pump 630, for example during a PHES system (e.g., mode 1002) generation mode when CTS medium 690 is flowing from cold CTS tank 620 to warm CTS tank 610. In an embodiment where pump 630 is bidirectional and operating in reverse, valve 631 may be open during generation mode to allow active pressure reduction in the CTS loop.

[0308] Valve 632 is a warm CTS pump 630 bypass valve that provides a flow path around pump 630 during, for example, generation mode operation (e.g., mode 1004) of a PHES system (e.g., PHES system 1000, 1003, 1005) or balancing of CTS medium 690 in CTS system 601.

[0309] Valve 633 is a warm pump 630 isolation valve that, when closed along with warm pump outlet valve 631, allows for servicing of warm pump 630 when the pump is not in use, for example during a PHES system (e.g., PHES system 1000, 1003, 1005) generation mode (e.g., mode 1004) when CTS medium 690 is flowing to warm tank 610 through pump 630 bypass valve 632.

[0310] Warm CTS pump system 639 and cold CTS pump system 649 illustrate respective CTS medium 690 pumping systems for warm CTS storage 691 and cold CTS storage 692, respectively.

[0311] Cold pump 640 delivers CTS medium 690 from cold CTS tank 620 to warm CTS tank 610 via CHX system 600 during generation mode (e.g., mode 1004) operation of a PHES system (e.g., mode 1004). Depending on valve state, pump 640 can alternatively or additionally deliver CTS medium 690 to warm CTS tank 620 via valve 605, bypassing CHX system 600, for balancing purposes. In other embodiments, there may be additional cold CTS pumps.

[0312] Valve 641 is a cold pump 640 isolation valve that, when closed, can isolate pump 640, for example during PHES system (e.g., mode 1004) charge mode when CTS medium 690 is flowing from warm CTS tank 610 to cold CTS tank 620. In an embodiment where pump 640 is bidirectional and operating in reverse, valve 641 may be open during generation mode to allow active pressure reduction in the CTS loop.

[0313] Valve 642 is a cold CTS pump 640 bypass valve that provides a flow path around pump 640 during, for example, charge mode (e.g., mode 1002) operation of the PHES system (e.g., PHES system 1000, 1003, 1005) or balancing of CTS medium 690 in CTS system 601.

[0314] Valve 643 is a cold pump 640 isolation valve that, when closed along with cold pump outlet valve 641, allows for servicing of cold pump 640 when the pump is not in use, for example during a PHES system (e.g., PHES system 1000, 1003, 1005) charge mode when CTS medium 690 may be flowing to cold tank 620 through pump 640 bypass valve 642.

[0315] Sensors 661S, 662S, 663S, 664S, 665S, 666S, 667S, 668S are monitoring and reporting devices that can provide temperature, flow, and/or pressure data to one or more control systems controlling and/or monitoring conditions in a PHES system (e.g., PHES system 1000, 1003, 1005).

[0316] Valve 682 is a check-style vent valve that allows entrapped CTS medium 690 gas in CTS loop fluid paths

(e.g., CTS system 601 and CHX system 600) to be vented to a cover gas region of the CTS tanks 610, 620, but prevents gas or fluid from the CTS tanks from flowing back towards CHX system 600.

Operation of CTS System

[0317] During a PHES system (e.g., PHES system 1000, 1003, 1005) charge mode (e.g., mode 1002), warm pump 630 delivers warm CTS medium 690 at a fixed or controllable rate from warm CTS tank 610 to cold CTS tank 620 via CHX system 600. During charge, heat from the warm CTS medium 690 is transferred to the working fluid via the CHX system 600. The rated charge flow of CTS medium 690 at a given PHES system power may be a function of the charge flow of HTS medium 590 to maintain inventory balance. The cold CTS pump 640 can be used to reduce pressure at the CHX system 600 by pulling CTS medium 690 from there.

[0318] During PHES system (e.g., PHES system 1000, 1003, 1005) generation mode (e.g., mode 1004), the cold pump 640 delivers cold CTS medium 690 at a fixed or controllable rate from the cold CTS tank 620 to the warm CTS tank 610 through CHX system 600. The rated generation flow of CTS medium 690 at a given PHES system power may be a function of the generation flow of HTS medium 590 to maintain inventory balance. The warm coolant pump 630 can be used to reduce pressure at the CHX system 600 by pulling CTS medium 690 from there.

[0319] Under some PHES system (e.g., PHES system 1000, 1003, 1005) modes, such as long-term Cold Dry Standby, the CTS medium 690 in the cold-side loop (e.g., CTS system 601, CHX system 600, and intermediate fluid paths) needs to be drained to the CTS tanks 610 and/or 620. For example, cold pump 640 can be used to transfer cold CTS medium 690 in the cold tank 620 to the warm tank 610 via a fluid path through bypass valve 605.

[0320] Under certain operating modes, CHX system 600 can be bypassed by closing valves 602, 603 and opening valve 605, and using pumps 630 and/or 640 to cause flow of CTS medium 690 between CTS tanks 610 and 620. For example, CHX system 600 can be bypassed to balance the thermal energy content either between CTS tanks 610, 620 individually and/or to balance total thermal energy between CTS system 601 and HTS system 501.

III. Illustrative PHES System—Shared Powertrain

[0321] FIG. 27 is a top-level schematic diagram of a PHES system 1003 with a shared powertrain, according to an example embodiment, in which PHES system and subsystem embodiments herein may be implemented. As a top-level schematic, the example embodiment PHES system 1003 in FIG. 27 illustrates major subsystems and select components, but not all components. Additional components are further illustrated with respect to additional figures detailing various subsystems. Additionally or alternatively, in other embodiments, additional components and/or subsystems may be included, and/or components and/or subsystems may not be included. FIG. 27 further illustrates select components and subsystems that work together in the PHES system 1003. FIG. 27 schematically shows how the select components and subsystems connect, how they are grouped into major subsystems, and select interconnects between them.

[0322] PHES system 1003 utilizes components, fluids, controls, functions, operations, capabilities, systems, subsystems, configurations, arrangements, modes, states, benefits, and advantages described with respect to PHES system 1000, except that PHES system 1003 includes a shared powertrain (“SPT”) system 800 in lieu of the dual powertrains, CPT system 100 and GPT system 200, and a working fluid loop 300C in lieu of working fluid loop 300.

[0323] In FIG. 27, illustrated exemplary components in SPT system 800 include motor/generator system 810, gearbox system 820, compressor system 830, and turbine system 840. Motor/generator system 810 may include one or more motors, generators, and/or motor/generators. Gearbox system 820 may include one or more gearboxes connecting one or more components of the motor/generator system 810 to one or more components of the compressor system 830 and/or turbine system 840. Compressor system 830 may include one or more compressors. Turbine system 840 may include one or more turbines.

[0324] Depending on operational mode, state, and embodiment configuration, SPT system 800 may connect to other components and subsystems of PHES system 1003 through various interconnects, including electrical interconnect 32 and fluid interconnects 28, 28A, 29, 29A, 30, 30A, 31, 31A. Fluid interconnect pairs 28 and 28A, 29 and 29A, 30 and 30A, 31 and 31A, may share common connections between the pairs or may be separate as illustrated. SPT system 800 may include more or fewer interconnects than shown in FIG. 27. The SPT system 800 can accept electrical power in at electrical interconnect 32 and convert the electrical energy to working fluid flows through one or more of its fluid interconnects. Additionally, SPT system 800 can output electrical power through electrical interconnect 32 as a result of energy generated by SPT system 800.

[0325] Power/signal path 902 connects electrical interconnect 32 and electrical interconnect 33 and may carry power/signals between power interface 2004 and motor/generator system 810 and/or other components in power transmission system 802. Power interface 2004 may perform the same or similar functions as power interface 2002, and may include the same or similar components as power interface 2002, including a variable frequency drive to vary the speed of the motor/generator system 810 components, breakers to make or break connections directly to an electrical grid or other power source or load through interconnect 27, breakers to make or break connections between the variable frequency drive and the motor/generator system 810 components and/or the electrical grid, power transformers, and power conditioning equipment.

[0326] Working fluid loop 300C may include the same components and subsystems, perform the same or similar functions, and operate substantially the same or similar to working fluid loop 300. As illustrated, for example in FIGS. 27, 28, and as describe previously, working fluid loop 300C includes a high-pressure high-temperature (HP-HT) fluid path 909, a high-pressure medium-temperature (HP-MT) fluid path 910, a low-pressure medium-temperature (LP-MT) fluid path 912, and a low-pressure low-temperature (LP-LT) fluid path 911.

[0327] In the PHES system 1003, working fluid loop 300C may act as a closed-cycle fluid path through which the working fluid circulates and in which desired system pressures of the working fluid can be maintained. The working fluid loop 300C provides an interface for the working fluid

between the SPT system **800** turbomachinery (e.g., compressor system **830** and turbine system **840** and the heat exchangers in the main heat exchanger system **300A**. In a preferred embodiment, the working fluid is air. Example embodiments, and portions thereof, of working fluid loop **300C**, are illustrated in FIGS. **27**, **28**, **28A**, and **28B**.

[0328] The main heat exchanger system **300A**, the HTS system **501**, and the CTS system **601**, may include components, and function, as described with respect to PHES system **1000** and elsewhere herein.

[0329] Components in PHES system **1003** and site integration system **2000**, including but not limited to valves, fans, sensors, pumps, heaters, heat traces, breakers, VFDs, working fluid compressors, etc., may each be connected to a power source and may be independently controllable, either or both proportionally and/or switchably, via one or more controllers and/or control systems. Additionally, each such component may include, or be communicatively connected via, a signal connection with another such component, through, for example, a wired, optical, or wireless connections. For example, a sensor may transmit data regarding temperature of the working fluid at a location in the working fluid loop; and, a control system may receive that data and responsively send a signal to a valve to close a fluid path. Data transmission and component control via signaling is known in the art and not illustrated herein, except wherein a particular arrangement is new and/or particularly relevant to the disclosed PHES systems, as with, for example, FIG. **9**.

A. Shared Powertrain System

[0330] Unlike PHES system **1000** which includes CPT system **100** as a charge mode powertrain and GPT system **200** as generation mode powertrain, PHES system **1003** includes shared powertrain system **800** for both charge mode and generation mode operation. Compressor system **830** operates in both charge mode and generation mode, and turbine system **840** operates in both charge mode and generation mode.

[0331] In charge mode configuration, SPT system **800** may function as CPT system **100** in PHES system **1000**, including compressor system **830** functioning as charge compressor system **130**, turbine system **840** functioning as charge turbine system **140**, and power transmission system **802** functioning as the corresponding motor system **110** and gearbox system **120**. In generation mode configuration, SPT system **800** may function as GPT system **200** in PHES system **1000**, including compressor system **830** functioning as generation compressor system **230**, turbine system **830** functioning as generation turbine system **240**, and power transmission system **802** functioning as the corresponding generator system **210** and gearbox system **220**.

[0332] As illustrated in FIGS. **28**, **28A**, and **28B**, working fluid loop **300C** includes a valve arrangement that allows the working fluid loop **300C** to switch between charge mode operation and generation mode operation.

[0333] FIG. **28A** illustrates working fluid loop **300C** valve states when PHES system **1003** is in charge mode (e.g., mode **1002**). For charge mode operation of PHES system **1003**, valve **831C1** is open and valve **831G1** is closed, allowing working fluid to exit the compressor system **830** outlet and travel through fluid path **909** to HHX system **500**. From HHX system **500**, working fluid circulates to RHX system **400** and then into fluid path **910**. Valve **841C1** is

open and valve **841G1** is closed, allowing the working fluid to enter an inlet of turbine system **840**. Valve **841C2** is open and valve **841G2** is closed, allowing working fluid to exit an outlet of turbine system **840** and travel through fluid path **911** to CHX system **600**. From CHX system **600**, working fluid bypasses AHX **700** (depending on the state of valves **323**, **324** and/or **325**) and circulates through RHX system **400** and through fluid path **912**. Valve **831C2** is open and valve **831G2** is closed, allowing working fluid to then enter an inlet of compressor system **830**, completing the closed loop cycle.

[0334] FIG. **28B** illustrates working fluid loop **300C** valve states when PHES system **1003** is in generation mode (e.g., mode **1004**). For generation mode operation of PHES system **1003**, valve **831C1** is closed and valve **831G1** is open, allowing working fluid to exit the compressor system **830** outlet and travel through fluid path **910** to RHX system **400**. From RHX system **400**, working fluid circulates through HHX system **500** and then into fluid path **909**. Valve **841C1** is closed and valve **841G1** is open, allowing the working fluid to enter an inlet of turbine system **840**. Valve **841C2** is closed and valve **841G2** is open, allowing working fluid to exit an outlet of turbine system **840** and travel through fluid path **912** to RHX system **400**. From RHX system **400**, working fluid circulates through AHX **700** (depending on the state of valves **323**, **324** and/or **325**), through CHX system **600**, and through fluid path **911**. Valve **831C2** is closed and valve **831G2** is open, allowing working fluid to then enter an inlet of compressor system **830**, completing the closed loop cycle.

[0335] ICS **300B** may be connected to fluid paths in working fluid loop **300C** as illustrated and may function as described elsewhere herein.

[0336] Bypass and recirculation loops for SPT system **800**, such as the loops controlled by valves **119**, **132**, **222**, **229**, **401**, and **842** may function as described elsewhere herein, for example with respect to PHES system **1000**.

[0337] Sensors **830S**, **831S**, **840S**, **841S**, **842S** are monitoring and reporting devices that can provide one or more of pressure, temperature, flow rate, dewpoint, and/or fluid concentration data to one or more control systems controlling and/or monitoring conditions of the PHES system **1003**.

IV. Illustrative PHES System—Reversible Powertrain

[0338] FIG. **29** is a top-level schematic diagram of a PHES system **1005** with a reversible powertrain, according to an example embodiment, in which PHES system and subsystem embodiments herein may be implemented. As a top-level schematic, the example embodiment PHES system **1005** in FIG. **29** illustrates major subsystems and select components, but not all components. Additional components are further illustrated with respect to additional figures detailing various subsystems. Additionally or alternatively, in other embodiments, additional components and/or subsystems may be included, and/or components and/or subsystems may not be included. FIG. **29** further illustrates select components and subsystems that work together in the PHES system **1005**. FIG. **29** schematically shows how the select components and subsystems connect, how they are grouped into major subsystems, and select interconnects between them.

[0339] PHES system **1005** utilizes components, fluids, controls, functions, operations, capabilities, systems, subsystems, configurations, arrangements, modes, states, ben-

efits, and advantages described with respect to PHES system **1000** and **1003**, except that PHES system **1005** includes a reversible powertrain (“RPT”) system **801** in lieu of the dual powertrains, CPT system **100** and GPT system **200** or the shared powertrain system **800**, and a working fluid loop **300D** in lieu of working fluid loops **300** or **300C**.

[0340] In FIG. 29, illustrated exemplary components in RPT system **801** include motor/generator system **810**, gearbox system **820**, reversible turbomachine system **850**, and reversible turbomachine system **852**. Motor/generator system **810** may include one or more motors, generators, and/or motor/generators. Gearbox system **820** may include one or more gearboxes connecting one or more components of the motor/generator system **810** to one or more components of the reversible turbomachine system **850** and/or reversible turbomachine system **852**. Reversible turbomachine system **850** may include one or more reversible turbomachines. Reversible turbomachine system **852** may include one or more reversible turbomachines.

[0341] Depending on operational mode, state, and embodiment configuration, RPT system **801** may connect to other components and subsystems of PHES system **1005** through various interconnects, including electrical interconnect **38** and fluid interconnects **34**, **34A**, **35**, **35A**, **36**, **36A**, **37**, **37A**. Fluid interconnect pairs **34** and **34A**, **35** and **35A**, **36** and **36A**, **37** and **37A**, may share common connections between the pairs or may be separate as illustrated. RPT system **801** may include more or fewer interconnects than shown in FIG. 29. RPT system **801** can accept electrical power in at electrical interconnect **38** and convert the electrical energy to working fluid flows through one or more of its fluid interconnects. Additionally, RPT system **801** can output electrical power through electrical interconnect **38** as a result of energy generated by RPT system **801**.

[0342] Power/signal path **902** connects electrical interconnect **38** and electrical interconnect **39** and may carry power/signals between power interface **2006** and motor/generator system **810** and/or other components in power transmission system **802**. Power interface **2006** may perform the same or similar functions as power interface **2002** and/or **2004**, and may include the same or similar components as power interface **2002** and/or **2004**, including a variable frequency drive to vary the speed of the motor/generator system **810** components, breakers to make or break connections directly to an electrical grid or other power source or load through interconnect **27**, breakers to make or break connections between the variable frequency drive and the motor/generator system **810** components and/or the electrical grid, power transformers, and power conditioning equipment.

[0343] Working fluid loop **300D** may include the same components and subsystems, perform the same or similar functions, and operate substantially the same or similar to working fluid loop **300** and/or **300C**. As illustrated, for example in FIG. 29, and as describe previously, working fluid loop **300D** includes a high-pressure high-temperature (HP-HT) fluid path **914**, a high-pressure medium-temperature (HP-MT) fluid path **915**, a low-pressure medium-temperature (LP-MT) fluid path **917**, and a low-pressure low-temperature (LP-LT) fluid path **916**.

[0344] In the PHES system **1005**, working fluid loop **300D** may act as a closed-cycle fluid path through which the working fluid circulates and in which desired system pressures of the working fluid can be maintained. The working fluid loop **300D** provides an interface for the working fluid

between the RPT system **801** turbomachinery (e.g., reversible turbomachine system **850** and reversible turbomachine system **852** and the heat exchangers in the main heat exchanger system **300A**. In a preferred embodiment, the working fluid is air. Example embodiments, and portions thereof, of working fluid loop **300D**, are illustrated in FIGS. 29, 30, 30A, and 30B.

[0345] The main heat exchanger system **300A**, the HTS system **501**, and the CTS system **601**, may include components, and function, as described with respect to PHES systems **1000**, **1003** and elsewhere herein.

[0346] Components in PHES system **1005** and site integration system **2000**, including but not limited to valves, fans, sensors, pumps, heaters, heat traces, breakers, VFDs, working fluid compressors, etc., may each be connected to a power source and may be independently controllable, either or both proportionally and/or switchably, via one or more controllers and/or control systems. Additionally, each such component may include, or be communicatively connected via, a signal connection with another such component, through, for example, a wired, optical, or wireless connections. For example, a sensor may transmit data regarding temperature of the working fluid at a location in the working fluid loop; and, a control system may receive that data and responsively send a signal to a valve to close a fluid path. Data transmission and component control via signaling is known in the art and not illustrated herein, except wherein a particular arrangement is new and/or particularly relevant to the disclosed PHES systems, as with, for example, FIG. 9.

A. Reversible Powertrain System

[0347] Unlike PHES system **1000** which includes CPT system **100** as a charge mode powertrain and GPT system **200** as generation mode powertrain, and PHES system **1003** which includes shared powertrain system **800** for both charge mode and generation mode operation with dedicated compressor turbomachinery and dedicated turbine machinery, PHES system **1005** includes reversible powertrain system **801** for both charge mode and generation mode operation with reversible turbomachines that can alternately act as compressors or turbines depending on the fluid flow direction, which may depend on the mode and/or state of the PHES system **1005**.

[0348] PHES system **1005** includes reversible powertrain system **801** for both charge mode and generation mode operation. Reversible turbomachine system **850** includes one or more turbomachines that can operate alternately as a compressor or a turbine and reversible turbomachine system **850** operates in both charge mode and generation mode. Reversible turbomachine system **852** likewise includes one or more turbomachines that can operate alternately as a compressor or a turbine and reversible turbomachine system **852** operates in both charge mode and generation mode.

[0349] Depending on the mode, reversible turbomachine system **852** may operate in the alternate configuration as compared to reversible turbomachine system **850**. For example, when the PHES system **1005** is in a charge mode, reversible turbomachine system **850** operates as a compressor system and reversible turbomachine system **852** operates as a turbine system. When the PHES system **1005** is in a generation mode, reversible turbomachine system **850** operates as a turbine system and reversible turbomachine system **852** operates as a compressor system.

[0350] In charge mode configuration, RPT system 801 may function as CPT system 100 in PHES system 1000, including reversible turbomachine system 850 functioning as charge compressor system 130, reversible turbomachine system 852 functioning as charge turbine system 140, and power transmission system 802 functioning as the corresponding motor system 110 and gearbox system 120. In generation mode configuration, RPT system 801 may function as GPT system 200 in PHES system 1000, including reversible turbomachine system 852 functioning as generation compressor system 230, reversible turbomachine system 850 functioning as generation turbine system 240, and power transmission system 802 functioning as the corresponding generator system 210 and gearbox system 220.

[0351] As illustrated in FIGS. 30, 30A, and 30B, working fluid loop 300D includes a valve arrangement that allows for isolation of high-pressure volume, flow bypass for startup, flow bypass for trip, and other operability maneuvers as described elsewhere herein. Unlike PHES system 1000 and 1003, this valve arrangement in the working fluid loop 300D is not needed to switch between charge mode operation and generation mode operation. Instead, mode switch from charge mode operation to generation mode operation and vice versa is achieved via flow direction reversal, which is done by reversing the rotational direction of RPT system 801.

[0352] FIG. 30A illustrates working fluid loop 300D valve states and RPT system 801 configuration when PHES system 1005 is in charge mode (e.g., mode 1002). For charge mode operation of PHES system 1005, reversible turbomachine system 850 is operating as a compressor system and reversible turbomachine system 852 is operating as a turbine system. Valve 831 is open, allowing working fluid to exit the reversible turbomachine system 850 outlet and travel through fluid path 914 to HHX system 500. From HHX system 500, working fluid circulates to RHX system 400 and then into fluid path 915. Valve 841 is open, allowing the working fluid to enter an inlet of reversible turbomachine system 852. After expansion in reversible turbomachine system 852, working fluid exits an outlet of reversible turbomachine system 852 and travels through fluid path 916 to CHX system 600. From CHX system 600, working fluid bypasses AHX 700 (depending on the state of valves 323, 324 and/or 325) and circulates through RHX system 400 and through fluid path 917. Working fluid then enters an inlet of reversible turbomachine system 850, where it is compressed, completing the closed loop cycle.

[0353] FIG. 30B illustrates working fluid loop 300D valve states and RPT system 801 configuration when PHES system 1005 is in generation mode (e.g., mode 1004). For generation mode operation of PHES system 1005, reversible turbomachine system 852 is operating as a compressor system and reversible turbomachine system 850 is operating as a turbine system. Valve 841 is open, allowing working fluid to exit the reversible turbomachine system 852 outlet and travel through fluid path 915 to RHX system 400. From RHX system 400, working fluid circulates through HHX system 500 and then into fluid path 914. Valve 831 is open, allowing the working fluid to enter an inlet of reversible turbomachine system 852. After expansion in reversible turbomachine system 850, working fluid exits an outlet of reversible turbomachine system 850 and travels through fluid path 917 to RHX system 400. From RHX system 400, working fluid circulates through AHX 700 (depending on

the state of valves 323, 324 and/or 325), through CHX system 600, and through fluid path 916. Working fluid then enters an inlet of reversible turbomachine system 852, where it is compressed, completing the closed loop cycle.

[0354] ICS 300B may be connected to fluid paths in working fluid loop 300D as illustrated and may function as described elsewhere herein.

[0355] Bypass and recirculation loops for RPT system 800, such as the loops controlled by valves 119, 132, 142, 222, 229, 232, 242, and 401 may function as described elsewhere herein, for example with respect to PHES system 1000.

[0356] Sensors 850S, 851S, 852S, 853S are monitoring and reporting devices that can provide one or more of pressure, temperature, flow rate, dewpoint, and/or fluid concentration data to one or more control systems controlling and/or monitoring conditions of the PHES system 1005.

V. Illustrative PHES System—Non-Recuperated

[0357] FIGS. 31A and 31B are schematic fluid path diagram of circulatory flow paths of a non-recuperated main heat exchanger system during charge mode and generation mode, respectively.

[0358] The PHES systems (e.g., PHES system 1000, 1003, 1005) disclosed herein may be operated without the benefit of a recuperator system (e.g., RHX system 400), thus reducing capital costs and flow path complexity and length. However, removing the recuperator system will generally result in lower efficiency of the system and/or different temperature profiles (e.g., greater approach temperatures in the remaining heat exchanger systems) across the PHES system.

[0359] Main heat exchanger system 300A1 may be substituted for main heat exchanger system 300A in a PHES system, including PHES systems 1000, 1003, 1005. Main heat exchanger system 300A1 removes the RHX system from main heat exchanger system 300A, but is otherwise identical. The resulting flow paths for charge mode operation and generation mode operation are shown in FIGS. 31A and 31B, respectively.

VI. Power Transmission Systems

[0360] SPT system 800 and RPT system 801 are illustrated in FIGS. 27 and 29 in a particular arrangement for illustrative convenience only, with a power transmission system 802 and turbomachinery (e.g., 830 and 840, or 850 and 852) coaxially in sequence along a common driveshaft. Other arrangements, including additional components, are possible as well, which may provide advantages compared to the illustrated arrangements of FIGS. 27 and 29. Each of the power transmission system arrangements illustrated in FIGS. 32A-32F may be substituted for the arrangements in SPT system 800 and RPT system 801 illustrated in FIGS. 27 and 29. Each of the power transmission system arrangements illustrated in FIGS. 33A-33C may be substituted for the arrangements in SPT system 800 illustrated in FIG. 27. For convenience of illustration, each of FIGS. 32A-32F and 33A-33C illustrate a single turbomachine of each type (i.e., 830-1, 840-1, 850-1, or 852-1) on a given respective driveshaft; however, multiple additional turbomachines of a given type (i.e., 830-2, 840-2, 850-2, or 852-2) may be on a respective driveshaft in alternate embodiments, consistent with the disclosure herein that compressor system 830,

turbine system **840**, reversible turbomachine system **850**, and reversible turbomachine system **852** may include one or more turbomachines of the same type. Multiple turbomachines of a given type on a respective driveshaft may be fluidly connected to the working fluid flow in series or parallel to, respectively, increase fluid capacity or increase compression/expansion as in a multi-stage turbomachinery arrangement, or arranged in a combination of series and parallel to accomplish both.

[0361] FIG. 32A is a schematic diagram of a power transmission system, according to an example embodiment. In FIG. 32A, power transmission system **802** includes a motor/generator **810-1** and a fixed or variable speed gearbox **820-1** arranged to coaxially drive a common driveshaft **251** which turns (or is turned by) the turbomachinery (e.g., compressor **830-1** and turbine **840-1**, or reversible turbomachine **850-1** and reversible turbomachine **852-1**). The gearbox **820-1** may allow a speed reduction or increase between the rotating speed of the motor/generator **810-1** and the turbomachinery. Each of the turbomachines, being driven by a common driveshaft, will rotate at a fixed rate relative to the other. As with CPT system **100** and/or GPT system **200**, a turning motor **821-1** and a clutch **821-2** may be present in the power transmission system **802**, for the same functionality and purpose as described with respect to those powertrain systems **100**, **200**.

[0362] FIG. 32B is a schematic diagram of a power transmission system, according to an example embodiment. In FIG. 32B, power transmission system **802** includes a motor/generator **810-1** and a gearbox **820-1** arranged between the turbomachines and driving a common or separate driveshaft(s) **251** which turn(s) (or is/are turned by) the turbomachinery (e.g., compressor **830-1** and turbine **840-1**, or reversible turbomachine **850-1** and reversible turbomachine **852-1**). The gearbox **820-1** may allow a speed reduction or increase between the rotating speed of the motor/generator **810-1** and the turbomachinery. Each of the turbomachines may rotate at a fixed rate relative to the other. Gearboxes **820-1A** and **820-1B** may each have one gear ratio used in charge mode and a different gear ratio used in generation mode. As with CPT system **100** and/or GPT system **200**, a turning motor **821-1** and a clutch **821-2** may be present in the power transmission system **802**, for the same functionality and purpose as described with respect to those powertrain systems **100**, **200**. Beneficially, this arrangement may allow a more compact packaging and/or shorter driveshaft(s) **251**, reducing whip in the rotating components (e.g., reducing low-frequency torsional vibration modes). Also, this arrangement may allow each turbomachine to rotate at different rates relative to another, allowing for independent performance optimization.

[0363] FIG. 32C is a schematic diagram of a power transmission system, according to an example embodiment. In FIG. 32C, power transmission system **802** includes a motor/generator **810-1** and two fixed or variable ratio gearboxes **820-1A**, **820-1B** arranged between the turbomachines and driving separate driveshafts **251** which turn (or are turned by) the turbomachinery (e.g., compressor **830-1** and turbine **840-1**, or reversible turbomachine **850-1** and reversible turbomachine **852-1**). The gearboxes **820-1A**, **820-1B** may each independently provide a speed reduction or increase between the rotating speed of the motor/generator **810-1** and the turbomachinery connected to the respective driveshaft **251**. Gearboxes **820-1A** may have a different gear

ratio than gearbox **820-1B**, allowing each of the turbomachines to rotate at different rates relative to the other. As with CPT system **100** and/or GPT system **200**, turning motors **821-1** and clutches **821-2** may be present in the power transmission system **802**, for the same functionality and purpose as described with respect to those powertrain systems **100**, **200**. Beneficially, this arrangement allows variability in turbomachine speeds relative to each other, which provides design flexibility in the turbomachines, the power generation and charge characteristics of the PHES system, and the pressure and temperature profiles across each of the turbomachines. For example, the arrangement of FIG. 32C allows an independent or unique speed for each turbomachine based on PHES system operating mode. More specifically, the arrangement of FIG. 32C allows each turbomachine to be operated at different speeds (e.g., minimum two) for common operating modes, e.g., charge and generation. This enables the same physical turbomachine to perform the same functions but at different power ratings tailored for each mode. For example, the charge mode operation may run the compressor turbomachine at a higher speed and the turbine turbomachine at a lower speed, and similarly, during the generation mode operation, the same compressor turbomachine may run at a lower speed and the same turbine turbomachine may run at a higher speed. The speed may be optimized to achieve the best performance of each turbomachine by managing (or varying) either pressure ratio or flow rate for each operating mode and both pressure ratio and flow rate may be changed to achieve optimum performance.

[0364] FIG. 32D is a schematic diagram of a power transmission system, according to an example embodiment. In FIG. 32D, power transmission system **802** includes a motor/generator **810-1** and a fixed or variable ratio gearbox **820-1** arranged between the turbomachines and driving separate driveshafts **251** which turn (or are turned by) the turbomachinery (e.g., compressor **830-1** and turbine **840-1**, or reversible turbomachine **850-1** and reversible turbomachine **852-1**). Motor/generator **810** may be a two-speed motor/generator capable of operating, for example in grid-synchronous mode, with at least two different speed rates depending on operating mode (e.g., by changing between two-pole and four-pole operation). Motor/generator **810-1** may directly drive one driveshaft **251** and the gearbox **820-1** may drive the other driveshaft **251**. The gearbox **820-1** may provide a speed reduction or increase between the rotating speed of the motor/generator **810-1** and the turbomachinery connected to the gearbox-drive driveshaft **251**, allowing each of the turbomachines to rotate at different rates relative to the other. In an SPT system **800**, the arrangement of FIG. 32C can provide compressor **830-1** speed adjustment by the motor/generator **810-1** and turbine speed **840-1** adjustment by the gearbox **820-1**. In an RPT system **801**, the arrangement of FIG. 32C can provide reversible turbomachine **850-1** speed adjustment by the motor/generator **810-1** and reversible turbomachine **852-1** speed adjustment by the gearbox **820-1**. As with CPT system **100** and/or GPT system **200**, turning motor **821-1** and clutch **821-2** may be present in the power transmission system **802**, for the same functionality and purpose as described with respect to those powertrain systems **100**, **200**. Beneficially, this arrangement allows variability in turbomachine speeds relative to each other, which provides design flexibility in the turbomachines, the power generation and charge characteristics of the PHES system, and the pressure and temperature profiles

across each of the turbomachines. This arrangement provides the same benefits as FIG. 32C and simplifies the overall powertrain by eliminating one gearbox, but additionally requires a two-speed motor/generator **810-1**.

[0365] FIG. 32E is a schematic diagram of a power transmission system, according to an example embodiment. The arrangement of FIG. 32E is a variant of the arrangement in FIG. 32D. In FIG. 32E, power transmission system **802** includes a motor/generator **810-1** and a fixed or variable ratio gearbox **820-1** arranged between the turbomachines and driving separate driveshafts **251** which turn (or are turned by) the turbomachinery (e.g., compressor **830-1** and turbine **840-1**, or reversible turbomachine **850-1** and reversible turbomachine **852-1**). Motor/generator **810-1** may be a two speed motor/generator capable of operating, for example in grid-synchronous mode, with at least two different speed rates depending on operating mode (e.g. by changing between two-pole and four-pole operation). Motor/generator **810-1** may directly drive one driveshaft **251** and the gearbox **820-1** may drive the other driveshaft **251**. The gearbox **820-1** may provide a speed reduction or increase between the rotating speed of the motor/generator **810-1** and the turbomachinery connected to the gearbox-drive driveshaft **251**, allowing each of the turbomachines to rotate at different rates relative to the other. In an SPT system **800**, the arrangement of FIG. 32C can provide compressor **830-1** speed adjustment by the gearbox **820-1** and turbine speed **840-1** adjustment by the motor/generator **810-1**. In an RPT system **801**, the arrangement of FIG. 32C can provide reversible turbomachine **850-1** speed adjustment by the gearbox **820-1** and reversible turbomachine **852-1** speed adjustment by the motor/generator **810-1**. As with CPT system **100** and/or GPT system **200**, turning motor **821-1** and clutch **821-2** may be present in the power transmission system **802**, for the same functionality and purpose as described with respect to those powertrain systems **100**, **200**. Beneficially, this arrangement allows variability in turbomachine speeds relative to each other, which provides design flexibility in the turbomachines, the power generation and charge characteristics of the PHES system, and the pressure and temperature profiles across each of the turbomachines. As with FIG. 32D, this arrangement provides the same benefits as FIG. 32C and simplifies the overall powertrain by eliminating one gearbox, but additionally requires a two-speed motor/generator **810-1**.

[0366] FIG. 32F is a schematic diagram of a power transmission system, according to an example embodiment. In FIG. 32F, power transmission system **802** includes a motor/generator **810-1** (which may be only a motor in alternate embodiments) and a fixed or variable speed gearbox **820-1A** which turn (or are turned by) the turbomachinery (e.g., compressor **830-1** or reversible turbomachine **850-1**) via a driveshaft **251**. Power transmission system **802** further includes a motor/generator **810-2** (which may be only a generator in alternate embodiments) and a fixed or variable speed gearbox **820-1B** which turn (or are turned by) the turbomachinery (e.g., turbine **840-1** or reversible turbomachine **852-1**) via a separate driveshaft **251**. Each of motor/generator **810-1** and **810-2** may be a two speed motor/generator capable of operating, for example in grid-synchronous mode, with at least two different speed rates depending on operating mode (e.g. by changing between two-pole and four-pole operation). The gearboxes **820-1A**, **820-1B** may each independently provide a speed reduction

or increase between the rotating speed of the motor/generators **810-1**, **810-2** and the turbomachinery connected to their respective driveshaft **251**. Gearboxes **820-1A** may have a different gear ratio than gearbox **820-1B**, allowing each of the turbomachines to rotate at different rates relative to the other. As with CPT system **100** and/or GPT system **200**, turning motors **821-1** and clutches **821-2** may be present in the power transmission system **802**, for the same functionality and purpose as described with respect to those powertrain systems **100**, **200**. Beneficially, this arrangement allows variability in turbomachine speeds relative to each other, which provides design flexibility in the turbomachines, the power generation and charge characteristics of the PHES system, and the pressure and temperature profiles across each of the turbomachines. Further, this arrangement provides design flexibility in the motor/generator specifications. This arrangement allows each turbomachine to operate at an optimum speed either via a variable-speed or two-speed gearbox or via a two-speed motor/generator.

[0367] FIGS. 33A-33C each provide arrangements that allow variable speed operation through the use of controllable clutches. In each of FIGS. 33A-33C, the additional motor **811-1** or generator **812-1** can be of smaller size (e.g., smaller power) compared to motor/generator **810-1**.

[0368] FIG. 33A is a schematic diagram of a power transmission system, according to an example embodiment. In FIG. 33A, the arrangement includes a motor/generator **810-1** and a fixed or variable ratio gearbox **820-1** which turn (or are turned by) turbine **840-1** via a driveshaft **251**. The arrangement further includes a motor **811-1** and a controllable clutch **837**, which when the clutch **837** is engaged, turns the compressor **830-1** via a separate driveshaft **251**. Compressor **830-1** and turbine **840-1** may be rotatably connected via a controllable clutch **836**. The gearbox **820-1** may provide a speed reduction or increase between the rotating speed of the motor/generator **810-1** and the turbine **840-1**. The speed of the turbomachines **830-1**, **840-1** can be varied with respect to each other and/or based on the operational mode of the PHES system (e.g., charge or generation mode). Rotational speed can be managed via the fixed or variable ratio gearbox **820-1** and/or motor/generator **810-1**, allowing the arrangement to operate with at least three different speeds. For example, with clutch **836** engaged and clutch **837** disengaged, motor/generator **810-1** can drive the turbomachines at a first speed through the gearbox **820-1**. If gearbox **820-1** is a variable speed gearbox, the gearbox **820-1** can be shifted to a different speed, allowing the turbomachines to operate at a second speed. Further, clutch **836** can be disengaged and clutch **837** engaged, allowing the motor **811-1** to drive compressor **830-1** at one speed while the turbine **840-1** connected to the motor/generator **810-1** is driven (or drives the motor/generator **810-1**) at a different speed. In one example, with the PHES system in charge mode, clutches **836** and **837** are engaged, and compressor **830-1** and turbine **840-1** are driven by motor/generator **810-1** at the same speed. In another example, with the PHES system in generation mode, clutch **836** is disengaged and clutch **837** is engaged, allowing motor **811-1** to drive compressor **830-1** at one speed. Additionally, gearbox **820-1** is shifted to a higher speed, allowing motor/generator **810-1** to be driven by the turbine **840-1** at a higher speed than the compressor **830-1**. As with CPT system **100** and/or GPT system **200**, turning motor **821-1** and clutch **821-2** may be present in the arrangement, for the same

functionality and purpose as described with respect to those powertrain systems **100**, **200**. Beneficially, this arrangement allows variability in turbomachine speeds relative to each other and with respect to operating mode, which provides design flexibility in the turbomachines, the power generation and charge characteristics of the PHES system, and the pressure and temperature profiles across each of the turbomachines. Further, this arrangement provides design flexibility in the motor/generator specifications. This arrangement allows each turbomachine to operate at an optimum speed.

[0369] FIG. 33B is a schematic diagram of a power transmission system, according to an example embodiment. The arrangement of FIG. 33B is a variant of the arrangement in FIG. 33A. In FIG. 33B, the arrangement includes a motor/generator **810-1** and a fixed or variable ratio gearbox **820-1** which turn compressor **830-1** via a driveshaft **251**. The arrangement further includes a generator **812-1** and a controllable clutch **838**, which when the clutch **838** is engaged, allows the turbine **840-1** to be turned via a separate driveshaft **251**. Compressor **830-1** and turbine **840-1** may be rotatably connected via a controllable clutch **836**. The gearbox **820-1** may provide a speed reduction or increase between the rotating speed of the motor/generator **810-1** and the compressor **830-1**. The speed of the turbomachines **830-1**, **840-1** can be varied with respect to each other and/or based on the operational mode of the PHES system (e.g., charge or generation mode). Rotational speed can be managed via the fixed or variable speed gearbox **820-1** and/or motor/generator **810-1**, allowing the arrangement to operate with at least three different speeds. For example, with clutch **836** engaged and clutch **838** disengaged, motor/generator **810-1** can drive the turbomachines at a first speed through the gearbox **820-1**. If gearbox **820-1** is a variable speed gearbox, the gearbox **820-1** can be shifted to a different speed, allowing the turbomachines to operate at a second speed. Further, clutch **836** can be disengaged and clutch **838** engaged, allowing the generator **812-1** to be driven by the turbine **840-1** at one speed while the compressor **830-1** connected to the motor/generator **810-1** is driven at a different speed. In one example, with the PHES system in charge mode, clutches **836** and **838** are engaged, and compressor **830-1** and turbine **840-1** are driven by motor/generator **810-1** at the same speed. In another example, with the PHES system in generation mode, clutch **836** is disengaged and clutch **838** is engaged, allowing generator **812-1** to be driven by turbine **840-1** at one speed. Additionally, gearbox **820-1** is shifted to a lower speed, allowing motor/generator **810-1** to drive the compressor **830-1** at a lower speed than the turbine **840-1**. As with CPT system **100** and/or GPT system **200**, turning motor **821-1** and clutch **821-2** may be present in the arrangement, for the same functionality and purpose as described with respect to those powertrain systems **100**, **200**. Beneficially, this arrangement allows variability in turbomachine speeds relative to each other and with respect to operating mode, which provides design flexibility in the turbomachines, the power generation and charge characteristics of the PHES system, and the pressure and temperature profiles across each of the turbomachines. Further, this arrangement provides design flexibility in the motor/generator specifications. This arrangement allows each turbomachine to operate at an optimum speed.

[0370] FIG. 33C is a schematic diagram of a power transmission system, according to an example embodiment. In FIG. 33C, the arrangement includes a motor/generator **810-1** connected via a controllable clutch **836A** to turbine **840-1**, which in turn is connected via controllable clutch **838** to generator **812-1**. The arrangement further includes the motor/generator **810-1** connected via a controllable clutch **836B** to compressor **830-1**, which in turn is connected via controllable clutch **837** to motor **811-1**. The speed of the turbomachines **830-1**, **840-1** can be varied with respect to each other and/or based on the operational mode of the PHES system (e.g., charge or generation mode). Rotational speed can be managed via engaging or disengaging the clutches. In one example, compressor **830-1** and turbine **840-1** can be operated at the same speed by engaging clutches **836A**, **836B** and disengaging clutches **837**, **838**. In charge mode, motor/generator **810-1** drives the turbomachinery and, in generation mode, motor/generator **810-1** is driven by the turbomachinery. In another example, in charge mode operation, motor/generator **810-1** can drive compressor **830-1** at one speed by having clutch **837** disengaged and clutch **836B** engaged. At the same time, generator **812-1** can be driven by turbine **840-1** at a different speed by having clutch **836A** disengaged and clutch **838** engaged. In another example, in generation mode operation, motor **811-1** can drive compressor **830-1** at one speed by having clutch **837** engaged and clutch **836B** disengaged. At the same time, motor/generator **810-1** can be driven by turbine **840-1** at a different speed by having clutch **836A** engaged and clutch **838** disengaged.

[0371] Beneficially, this arrangement allows variability in turbomachine speeds relative to each other and with respect to operating mode, which provides design flexibility in the turbomachines, the power generation and charge characteristics of the PHES system, and the pressure and temperature profiles across each of the turbomachines. Further, this arrangement provides design flexibility in the motor/generator specifications. This arrangement allows each turbomachine to operate at an optimum speed. This configuration doesn't require variable-speed or two-speed capability from the motor **811-1**, generator **812-1**, or motor/generator **810-1**. Gearboxes (not shown) may be coupled between components to provide desired rotational speed, but the gearboxes can be fixed speed while still allowing the arrangement to operate at variable speeds. Compared to other arrangements, this arrangement does require both an additional motor and an additional generator.

VII. Modular Turbomachinery Arrangements

[0372] As stated previously, SPT system **800** and RPT system **801** are illustrated in FIGS. 27 and 29 in a particular arrangement for illustrative convenience only. Other arrangements, including additional components, are possible as well, which may provide advantages compared to the illustrated arrangements of FIGS. 27 and 29. Each of the arrangements illustrated in FIGS. 34A-34C may be substituted for the SPT system **800** arrangement illustrated in FIG. 27, and each of the arrangements illustrated in FIGS. 35A-35C may be substituted for the RPT system **801** arrangement illustrated in FIG. 29. Each of the power transmission system arrangements illustrated in FIGS. 33A-33C may be substituted for the arrangements in SPT system **800** illustrated in FIG. 27.

[0373] The disclosed arrangements in FIGS. 34A-34C and FIGS. 35A-35C utilizes modular arrangements of turbomachinery for the generation and charge drivetrains. This is advantageous because PHES system generation powertrains may benefit from a relatively large turbine system combined with a relatively smaller compressor system, and PHES system charge powertrains may benefit from a relatively large compressor system combined with a smaller turbine system. The modular turbomachinery arrangements provided herein address this challenge by combining multiple units of, optionally identical, turbomachinery in unequal numbers depending on the operating mode.

[0374] The clutches described with respect to FIGS. 34A-34C and FIGS. 35A-35C are preferably synchro-self-shifting ("SSS") clutches or other types of overrunning clutches, or may alternatively be controllable clutches, or a combination of both types of clutches, or other clutch types as may provide benefits to cost, reliability, or operational flexibility.

[0375] FIG. 34A is a schematic diagram of modular turbomachinery with shared powertrains in a 2x2 configuration, according to an example embodiment. In FIG. 34A, the arrangement includes a first power transmission system 802 coupled to a compressor 830-1 and coupled to a turbine 840-1 via a clutch 845. The power transmission system 802 may be, for example, a power transmission system described with respect to FIGS. 32B-32F. The arrangement further includes a second power transmission system 802 coupled to a second compressor 830-2 via a clutch 835 and coupled to a second turbine 840-2. In an alternative embodiment, second power transmission system 802 may also be the first power transmission system 802 instead of a separate power transmission system 802 as illustrated. Compressor 830-1 is fluidly coupled to interconnects 31 and 28. Compressor 830-2 may be fluidly connected to interconnects 31 and 28, depending on the state of valves 834. With valves 834 closed, compressor 830-2 is disconnected from the working fluid loop of the PHES system. A fluid connection is also available to various bypass and recirculation loops described elsewhere herein via interconnects 28A and 31A. Turbine 840-2 is fluidly coupled to interconnects 30 and 29. Turbine 840-1 may be fluidly connected to interconnects 30 and 29, depending on the state of valves 844. With valves 844 closed, turbine 840-1 is disconnected from the working fluid loop of the PHES system. A fluid connection is also available to various bypass and recirculation loops described elsewhere herein via interconnects 29A and 30A.

[0376] In generation mode, the arrangement operates with only compressor 830-1 and both of the turbines 840-1, 840-2 active. This occurs with clutch 835 disengaged and clutch 845 engaged. Turbine 840-1 may be started either through control of flow and heat input to the turbine 840-1 or through the use of an additional starter motor (e.g. a turning motor 821-1, not shown).

[0377] In charge mode, the arrangement operates with both compressors 830-1, 830-2 and only turbine 840-2 active. This occurs with clutch 835 engaged and clutch 845 disengaged. Compressor 830-2 may be started through the use of an additional starter motor (e.g. a turning motor 821-1, not shown).

[0378] FIG. 35A is a schematic diagram of modular turbomachinery with reversible powertrains in a 2x2 configuration, according to an example embodiment. The arrangement of FIG. 35A is a variant of the arrangement in FIG. 34A, but applicable to reversible powertrains. In FIG. 35A,

the arrangement includes a first power transmission system 802 coupled to a reversible turbomachine 850-1 and coupled to a reversible turbomachine 852-1 via a clutch 845. The power transmission system 802 may be, for example, a power transmission system described with respect to FIGS. 32B-32F. The arrangement further includes a second power transmission system 802 coupled to a second reversible turbomachine 850-2 via a clutch 835 and coupled to a second reversible turbomachine 852-1. In an alternative embodiment, second power transmission system 802 may also be the first power transmission system 802 instead of a separate power transmission system 802 as illustrated. Reversible turbomachine 850-1 is fluidly coupled to interconnects 37 and 34. Reversible turbomachine 850-2 may be fluidly connected to interconnects 37 and 34, depending on the state of valves 834. With valves 834 closed, reversible turbomachine 850-2 is disconnected from the working fluid loop of the PHES system. A fluid connection is also available to various bypass and recirculation loops described elsewhere herein via interconnects 28A and 31A. Reversible turbomachine 852-2 is fluidly coupled to interconnects 36 and 35. Reversible turbomachine 852-1 may be fluidly connected to interconnects 36 and 35, depending on the state of valves 844. With valves 844 closed, reversible turbomachine 852-1 is disconnected from the working fluid loop of the PHES system. A fluid connection is also available to various bypass and recirculation loops described elsewhere herein via interconnects 35A and 36A.

[0379] In generation mode, the arrangement may operate with only reversible turbomachine 852-1 (acting as a compressor) and both of the reversible turbomachines 850-1, 850-2 (acting as turbines) active. This occurs with clutch 835 engaged and clutch 845 disengaged. Reversible turbomachine 850-1 may be started either through control of flow and heat input to the reversible turbomachine 850-1 or through the use of an additional starter motor (e.g. a turning motor 821-1, not shown).

[0380] In charge mode, the arrangement may operate with both reversible turbomachines 850-1, 850-2 (acting as compressors) and only reversible turbomachine 852-2 (acting as a turbine) active. This occurs with clutch 835 engaged and clutch 845 disengaged. Reversible turbomachine 850-2 may be started either through control of flow and heat input to the compressor 830-2 or through the use of an additional starter motor (e.g. a turning motor 821-1, not shown), particularly if an SSS clutch is used for clutch 835.

[0381] FIG. 34B is a schematic diagram of modular turbomachinery with shared powertrains in a 3x2 configuration, according to an example embodiment. In FIG. 34B, the arrangement includes the arrangement of FIG. 34A plus third power transmission system 802 coupled to a third compressor 830-3. In an alternative embodiment, third power transmission system 802 may also be the first power transmission system 802 instead of a separate power transmission system 802 as illustrated. Compressor 830-1 is fluidly coupled to interconnects 31 and 28.

[0382] This 3x2 configuration can be utilized for asymmetric charge/generation applications where a faster charge profile is desired. In this configuration, as an example, generation mode could operate in a 1x2 configuration while charge mode could operate in a 3x1 configuration.

[0383] As an example, in generation mode, the arrangement operates with only compressor 830-1 and both of the turbines 840-1, 840-2 active. This occurs with clutch 835

disengaged, clutch **845** engaged, and the third power transmission system **802**, which is coupled to compressor **830-3**, not actively supplying power to compressor **830-3**. In an alternative arrangement, an arrangement of valves **834** may be arranged around compressor **830-3**, similarly to how they are arranged around compressor **830-2**, to prevent working fluid flow through compressor **830-3** in generation mode.

[0384] In charge mode, the arrangement operates with all compressors **830-1**, **830-2**, **830-3** and only turbine **840-2** active. This occurs with clutch **835** engaged, clutch **845** disengaged, and the third power transmission system **802**, which is coupled to compressor **830-3**, actively supplying power to compressor **830-3**. In further embodiments, a 4×2 configuration or other asymmetric configurations can similarly be implemented to enable different asymmetries or increased output.

[0385] FIG. 35B is a schematic diagram of modular turbomachinery with a reversible powertrain in a 3×2 configuration, according to an example embodiment. The arrangement of FIG. 35B is a variant of the arrangement in FIG. 34B, but applicable to reversible powertrains. In FIG. 35B, the arrangement includes the arrangement of FIG. 35A plus third power transmission system **802** coupled to a third reversible turbomachine **850-3**. In an alternative embodiment, third power transmission system **802** may also be the first power transmission system **802** instead of a separate power transmission system **802** as illustrated. Third reversible turbomachine **850-3** is fluidly coupled to interconnects **37** and **34**.

[0386] This 3×2 configuration can be utilized for asymmetric charge/generation applications where a faster charge profile is desired. In this configuration, as an example, generation mode could operate in a 1×2 configuration while charge mode could operate in a 3×1 configuration.

[0387] As an example, in generation mode, the arrangement operates with only reversible turbomachine **852-2** (acting as a compressor) and reversible turbomachines **850-1**, **850-2** (acting as turbines) active. This occurs with clutch **835** engaged, clutch **845** disengaged, and the third power transmission system **802**, which is coupled to reversible turbomachine **850-3**, not actively supplying power to reversible turbomachine **850-3**. In an alternative arrangement, an arrangement of valves **834** may be arranged around reversible turbomachine **850-3**, similarly to how they are arranged around reversible turbomachine **850-3**, to prevent working fluid flow through reversible turbomachine **850-3** in generation mode.

[0388] In charge mode, the arrangement operates with all reversible turbomachines **850-1**, **850-2**, **850-3** (acting as compressors) and only reversible turbomachine **852-2** (acting as a turbine) active. This occurs with clutch **835** engaged, clutch **845** disengaged, and the third power transmission system **802**, which is coupled to reversible turbomachine **850-3**, actively supplying power to reversible turbomachine **850-3**. In an alternative embodiment, reversible turbomachine **852-1** can be removed from the arrangement if it is only intended to run in the exemplary 1×2 generation configuration and 3×1 charge configuration. However, in further embodiments, a 3×2 charge configuration could be implemented.

[0389] In addition to the embodiments explicitly illustrated in FIGS. 34A, 34B, 35A, and 35B, a 4×2 configuration or multiple other asymmetric configurations can simi-

larly be implemented by following the embodiments described herein to enable different asymmetries or increased output.

[0390] FIG. 34C is a schematic diagram of modular turbomachinery with a shared powertrain in a series configuration, according to an example embodiment. In FIG. 34C, the arrangement includes a power transmission system **802** coupled to a compressor **830-1** and coupled to a turbine **840-1**. Compressor **830-1** may further be coupled to a second compressor **830-2** via a clutch **835**. Additionally, turbine **840-1** may further be coupled to a second turbine **840-2** via a clutch **845**. The power transmission system **802** may be, for example, a power transmission system described with respect to FIGS. 32B-32F. Compressor **830-1** is fluidly coupled to interconnects **31** and **28**. Compressor **830-2** may be fluidly connected to interconnects **31** and **28**, depending on the state of valves **834**. With valves **834** closed, compressor **830-2** is disconnected from the working fluid loop of the PHES system. A fluid connection is also available to various bypass and recirculation loops described elsewhere herein via interconnects **28A** and **31A**. Turbine **840-1** is fluidly coupled to interconnects **30** and **29**. Turbine **840-2** may be fluidly connected to interconnects **30** and **29**, depending on the state of valves **844**. With valves **844** closed, turbine **840-2** is disconnected from the working fluid loop of the PHES system. A fluid connection is also available to various bypass and recirculation loops described elsewhere herein via interconnects **29A** and **30A**.

[0391] In generation mode, the arrangement operates with only compressor **830-1** and both of the turbines **840-1**, **840-2** active. This occurs with clutch **835** disengaged and clutch **845** engaged. Turbine **840-1** may be started either through control of flow and heat input to the turbine **840-1** or through the use of an additional starter motor (e.g. a turning motor **821-1**, not shown).

[0392] In charge mode, the arrangement operates with both compressors **830-1**, **830-2** and only turbine **840-1** active. This occurs with clutch **835** engaged and clutch **845** disengaged. Compressor **830-2** may be started through use of an additional starter motor (e.g. a turning motor **821-1**, not shown).

[0393] In this arrangement, initial spin-up may involve all turbomachinery for each mode, with all turbomachinery coming to a standstill before mode switch. Alternatively, initial spin-up could take place with just compressor **830-1** and turbine **840-1** driven by the power transmission system **802**, with compressor **830-2** later engaged via clutch **835** for charge mode operation or turbine **840-2** later engaged via clutch **845** for generation mode operation. For the latter alternative spin up scenario, the clutches ideally are controlled-engagement viscous-style or some other controllable and variable torque clutch that would allow, along with controlled opening/closing of the compressor or turbines respective high-pressure-side isolation valve, for a controlled spin-up or spin-down of the engaging/dis-engaging turbomachine.

[0394] FIG. 35C is a schematic diagram of modular turbomachinery with a reversible powertrain in a series configuration, according to an example embodiment. The arrangement of FIG. 35C is a variant of the arrangement in FIG. 34C, but applicable to reversible powertrains. In FIG. 35C, the arrangement includes a power transmission system **802** coupled to a reversible turbomachine **850-1** and coupled to a reversible turbomachine **852-1**. Reversible turboma-

chine **850-1** may further be coupled to a second reversible turbomachine **850-2** via a clutch **835**. Additionally, reversible turbomachine **852-1** may further be coupled to a second reversible turbomachine **852-2** via a clutch **845**. The power transmission system **802** may be, for example, a power transmission system described with respect to FIGS. **32B-32F**. Reversible turbomachine **850-1** is fluidly coupled to interconnects **37** and **34**. Reversible turbomachine **850-2** may be fluidly connected to interconnects **37** and **34**, depending on the state of valves **834**. With valves **834** closed, reversible turbomachine **850-2** is disconnected from the working fluid loop of the PHES system. A fluid connection is also available to various bypass and recirculation loops described elsewhere herein via interconnects **37A** and **34A**. Reversible turbomachine **852-1** is fluidly coupled to interconnects **36** and **35**. Reversible turbomachine **852-2** may be fluidly connected to interconnects **36** and **35**, depending on the state of valves **844**. With valves **844** closed, reversible turbomachine **852-2** is disconnected from the working fluid loop of the PHES system. A fluid connection is also available to various bypass and recirculation loops described elsewhere herein via interconnects **36A** and **35A**.

[0395] In generation mode, the arrangement may operate with only reversible turbomachine **852-1** (acting as a compressor) and both of the reversible turbomachines **850-1**, **850-2** (acting as turbines) active. This occurs with clutch **835** engaged and clutch **845** disengaged. Reversible turbomachine **850-2** may be started through the use of an additional starter motor (e.g. a turning motor **821-1**, not shown).

[0396] In charge mode, the arrangement may operate with both reversible turbomachine **850-1**, **850-2** (acting as compressors) and only reversible turbomachine **852-1** (acting as a turbine) active. This occurs with clutch **835** engaged and clutch **845** disengaged. Reversible turbomachine **850-2** may be started either through control of flow and heat input to the reversible turbomachine **850-2** or through the use of an additional starter motor (e.g. a turning motor **821-1**, not shown), particularly if an SSS clutch is used for clutch **835**.

[0397] In an alternative embodiment, reversible turbomachine **852-2** can be removed from the arrangement if it is only intended to run in the exemplary 1×2 generation configuration and 2×1 charge configuration.

[0398] In another alternative embodiment, the configuration of FIG. **35C** can be used to dramatically and rapidly increase power levels by converting from a single compressor and single turbine flow configuration to a dual (or multiple) compressor and dual (or multiple) turbine flow configuration.

VIII. Operating Modes and States in a PHES System

[0399] Disclosed herein are various modes of operation and states of a PHES system, each of which may be implemented in the exemplary PHES system **1000**.

A. Primary Modes of Operation

[0400] The PHES systems herein, including PHES system **1000**, can transition through a number of modes of operation. Each of the primary modes of operation can be described with respect to a particular state of components and subsystems in the PHES system. Additionally, each of the primary modes of operation has an associated active

parasitic load and a readiness time. Example primary modes of operation of the disclosed PHES systems are shown in FIG. **10**.

[0401] FIG. **10** illustrates primary modes of operation of a PHES system, including PHES system **1000**, according to an example embodiment. The primary modes of operation include charge **1002**, generation **1004**, hot turning **1006**, hot standby **1008**, cold dry standby **1010**, and tripped **1012**. FIG. **10** further illustrates the preferred transitions between modes, as indicated by directional arrows between modes. For example, in one embodiment, a PHES system, such as PHES system **1000**, can transition from charge **1002** to hot turning **1006** to hot standby **1008** to cold dry standby **1010**. In another example, a PHES system, such as PHES system **1000**, can transition from charge **1002** to hot turning **1006** to generation **1004**.

[0402] Cold Dry Standby Mode **1010**. In this primary mode of operation, the thermal storage reservoirs are effectively offline and the associated thermal storage media are at their lowest practical thermal energy state for a given embodiment. In embodiments with liquid thermal storage, the thermal storage media may be drained to their respective tanks and not circulated through the rest of the PHES system. In embodiments with a hot-side liquid thermal storage media (e.g., molten salt), the hot-side liquid thermal storage media may be kept at a minimum temperature to prevent freezing, which may include active heating to maintain this minimum practical thermal energy state. In embodiments with a coolant as a cold-side liquid thermal storage media, the coolant may be kept at or near environmental ambient temperature. In some embodiments, the remainder of the PHES system infrastructure may also be kept at or near environmental ambient temperature. In some embodiments, pressure in the working fluid loop may be kept at or near ambient environmental pressure or at a minimum working fluid pressure $P_{standby}$. In one embodiment, $P_{standby}$ is a pressure in the working fluid loop (e.g., working fluid loop **300**) below working pressure (e.g., during charge or generation modes **1002**, **1004**) but still sufficient to ensure positive pressure with respect to any opposite side pressure in HTS medium or CTS medium heat exchanger systems (e.g., HHX system **501** or CHX system **601**). Maintaining $P_{standby}$ beneficially prevents any HTS medium or CTS medium from leaking into the working fluid loop (e.g., through cracked heat exchanger cores).

[0403] In Cold Dry Standby mode **1010**, a PHES system achieves its lowest active parasitic load. In some embodiments, there is no significant parasitic load. In some embodiments, heating a hot-side liquid thermal storage media to prevent freezing is an active parasitic load. In some embodiments, maintaining a working fluid pressure at $P_{standby}$ greater than ambient environmental pressure is an active parasitic load.

[0404] Within embodiments of the disclosed PHES systems, including PHES system **1000**, the readiness time to transition between cold dry standby mode **1010** and either charge mode **1002** or generation mode **1004** (via hot standby mode **1008**) is a relatively long time compared to other mode transitions to charge mode **1002** or generation mode **1004**.

[0405] Hot Standby Mode **1008**. In this primary mode of operation, heat exchangers are primed with thermal storage media. In some embodiments, hot-side and/or cold-side heat exchangers are filled partially or completely with HTS and/or CTS media, respectively. In the case of liquid thermal

storage media, the thermal storage media may or may not be continuously flowing through the heat exchangers, preferably at a very low flow rate. One or more hot-side heat exchangers (e.g., HHX system **500**) are warmed above ambient environmental temperature. In some embodiments, heat traces or other heaters (e.g., heaters **512**, **522**) are used to heat the HTS medium, which in turn warms the hot-side heat exchanger(s). The warmed hot-side heat exchangers may be at or near their steady-state temperature for charge or generation modes, or may be at an intermediate temperature between their steady-state temperature and ambient environmental temperature. CPT system (e.g., CPT system **100**) and GPT system (e.g., GPT system **200**) are at zero RPM or substantially zero RPM (e.g., no turning, temporarily spinning down to eventual zero RPM from a prior state, insubstantial turning as a result of convective currents only, and/or no torque input from motors). In some embodiments, minimum pressure in the working fluid loop is kept at $P_{standby}$, though pressure in the working fluid loop (e.g. working fluid loop **300**) may be higher initially upon entering hot standby mode **1008**, depending on the prior mode the PHES system is transitioning from.

[0406] In hot standby mode, embodiments of the disclosed PHES systems can experience active parasitic load from heaters working on the thermal storage media. In some embodiments, heat traces are active to keep the thermal storage media at or near steady-state temperatures. In some embodiments, maintaining a working fluid pressure at $P_{standby}$ is an active parasitic load.

[0407] Within embodiments of the disclosed PHES systems, including PHES system **1000**, and beneficially, the readiness time to transition between hot standby mode **1008** and either charge mode **1002** or generation mode **1004** is relatively short. For example, the readiness time may be less than 10% of the readiness time for transition from cold dry standby mode **1010** to either charge mode **1002** or generation mode **1004**.

[0408] Hot Turning Mode **1006**. In this primary mode of operation, either or both the CPT system and/or GPT system is slow rolling (i.e., CPT and/or GPT turbomachinery is spinning at a minimum speed). In a preferred embodiment, the slow-rolling turbomachinery use recirculation and/or bypass fluid loops, such as the examples disclosed herein, to circulate working fluid through the slow-rolling turbomachinery.

[0409] Within embodiments of the disclosed PHES systems, including PHES system **1000**, and beneficially, the readiness time to transition between hot turning mode **1006** and either charge mode **1002** or generation mode **1004** is shorter than the readiness time to transition between hot standby mode **1008** and either charge mode **1002** or generation mode **1004**.

[0410] Charge Mode **1002**. In this primary mode of operation, the CPT system turbomachinery is connected to the electrical grid and preferably operating at grid speed, i.e., the CPT system is operating at an RPM that synchronizes the motor system with the operating frequency of the connected electrical grid. In some embodiments, the GPT system is at zero RPM or substantially zero RPM (e.g., no turning, temporarily spinning down to eventual zero RPM from prior state, insubstantial turning as a result of convective currents only, and/or no torque input from motors). In some embodiments, the GPT system is at turning speed. In charge mode, thermal storage media are substantially at steady-state tem-

peratures and one or more control systems control may modulate power consumption of the disclosed PHES systems by, for example, controlling the pressure of the working fluid. In another embodiment, one or more control systems may control CTS medium and/or HTS medium flow rates and/or pressures through the main heat exchanger system to modulate power consumption of the disclosed PHES systems. In another embodiment, one or more control systems control both the pressure of the working fluid and/or CTS medium and/or HTS medium flow rates and/or pressures to modulate power consumption of the disclosed PHES systems.

[0411] In charge mode, active parasitic loads include support systems for the heat exchanger systems and any associated fluid loops, support systems for CPT system, and in some embodiments, support systems for the GPT system if the generation powertrain is turning.

[0412] Beneficially, embodiments of the disclosed PHES systems can ramp the charge mode **1002** power consumption very quickly between full power and a significantly reduced power consumption level (and vice versa). Additionally, within embodiments of the disclosed PHES systems, including PHES system **1000**, and beneficially, the readiness time to transition between charge mode **1002** and generation mode **1004** (or vice versa) via hot turning mode **1006** is shorter than the readiness time to transition between hot standby mode **1008** and either charge mode **1002** or generation mode **1004**.

[0413] Generation Mode **1004**. In this primary mode of operation, the GPT system is connected to the electrical grid and preferably operating at grid speed, i.e., the GPT system is operating at an RPM that synchronizes the generator system with the operating frequency of the connected electrical grid. In some embodiments, the charge powertrain is at zero RPM or substantially zero RPM (e.g., no turning, temporarily spinning down to eventual zero RPM from prior state, insubstantial turning as a result of convective currents only, and/or no torque input from motors). In some embodiments, the CPT system is at turning speed. In generation mode, thermal storage media are substantially at steady-state temperatures. In generation mode, thermal storage media are substantially at steady-state temperatures and one or more control systems control may modulate power generation of the disclosed PHES systems by, for example, controlling the pressure of the working fluid. In another embodiment, one or more control systems may control CTS medium and/or HTS medium flow rates and/or pressures through the main heat exchanger system to modulate power generation of the disclosed PHES systems. In another embodiment, one or more control systems control both the pressure of the working fluid and/or CTS medium and/or HTS medium flow rates and/or pressures to modulate power generation of the disclosed PHES systems.

[0414] In generation mode, active parasitic loads include support systems for the heat exchanger systems and any associated fluid loops, support systems for GPT system, and in some embodiments, support systems for the CPT system if the charge powertrain is turning.

[0415] Beneficially, embodiments of the disclosed PHES systems can ramp the generation mode **1004** power generation very quickly between low power and full power (and vice versa).

[0416] Tripped Mode **1012**. This primary mode of operation is a state of recovery from a trip event. This mode may

include spin-down of one or more of the powertrains (e.g., CPT system **100**, GPT system **200**) from its prior controlled (e.g., hot turning and/or steady-state) speed to a slower or substantially zero RPM speed. In some embodiments, this mode may further include venting working fluid to manage working fluid pressures and/or maintain working fluid pressures within design and/or safe working limits.

[0417] In a tripped mode, active parasitic loads will be consistent with whatever mode preceded the Tripped mode, except where an active parasitic load also trips to a failsafe condition with a lower (or higher) load of the active parasitic loads. PHES system readiness exiting from tripped mode **1012** to another mode will vary depending on the initiating trip event.

B. PHES System Operating States and Transitional States

Operating States

[0418] FIG. **11** is a state diagram illustrating operating states of a PHES system, including PHES system **1000**, according to an example embodiment. FIG. **11** mirrors the primary modes of operation shown in FIG. **10**, including the preferred transitions between modes, as indicated by directional arrows between modes. FIG. **11** further adds additional detail regarding state conditions. Operating states are shown as headings in the blocks in FIG. **11**. Some of these states represent different versions of three common modes of operation (i.e., hot turning **1006**, charge **1002**, and generation **1004**) and account for alternate configurations in which the non-primary powertrain may be operating in (e.g., slow rolling or not slow rolling). The PHES system operating states illustrated in FIG. **11** are “holding states” in which the PHES systems spend significant time.

[0419] CHARGE (GPT BASE) **1014** is a charge mode **1002** operating state where the GPT system (e.g., GPT system **200**) is at a base level with low or no activity. Valves associated with GPT system operation are configured at a base level (e.g., for no rotation of the GPT system). The CPT system (e.g., CPT system **100**) is in charge mode with CPT turbomachinery rotating at steady state (i.e., operating) speed. Valves associated with the CPT system are configured for steady state rotation of CPT turbomachinery, including connection to high-pressure working fluid paths. The hot-side loop is configured for HTS medium to flow from a warm HTS system (e.g., warm HTS system **591**) to a hot HTS system (e.g., hot HTS system **592**) via an HHX system (e.g., HHX system **500**). The cold-side loop is configured for CTS medium to flow from a warm CTS system (e.g., warm CTS system **691**) to a cold CTS system (e.g., cold CTS system **692**) via a CHX system (e.g., CHX system **600**). Ambient cooling of working fluid (e.g., AHX system **700**) is bypassed.

[0420] GENERATION (CPT BASE) **1016** is a generation mode **1004** operating state where the CPT system (e.g., CPT system **100**) is at a base level with low activity. Valves associated with CPT system operation are configured at a base level (e.g., for no rotation of the CPT system). The GPT system (e.g., GPT system **200**) is in generation mode with GPT turbomachinery rotating at steady state (i.e., operating) speed. Valves associated with the GPT system are configured for steady-state rotation of GPT turbomachinery, including connection to high-pressure working fluid paths. The hot-side loop is configured for HTS medium to flow from the hot HTS system (e.g., hot HTS system **592**) to the

warm HTS system (e.g., warm HTS system **591**). The cold-side loop is configured for CTS medium to flow from the cold CTS system (e.g., cold CTS system **692**) to the warm CTS system (e.g., warm CTS system **691**). Ambient cooling of working fluid (e.g., AHX system **700**) is active with working fluid circulating through the AHX system **700**.

[0421] CHARGE (GPT SLOW ROLLING) **1026** is a charge mode **1002** operating state where the GPT system (e.g., GPT system **200**) is slow rolling (i.e., GPT turbomachinery is spinning at a minimum speed). Valves associated with GPT system operation are configured for recirculation of working fluid through the GPT system. The CPT system (e.g., CPT system **100**) is in charge mode with CPT turbomachinery rotating at operating speed. Valves associated with the CPT system are configured for steady-state rotation of CPT turbomachinery, including connection to high-pressure working fluid paths. The hot-side loop is configured for HTS medium to flow from the warm HTS system (e.g., warm HTS system **591**) to the hot HTS system (e.g., hot HTS system **592**). The cold-side loop is configured for CTS medium to flow from the warm CTS system (e.g., warm CTS system **691**) to the cold CTS system (e.g., cold CTS system **692**). Ambient cooling of working fluid (e.g., AHX system **700**) is bypassed.

[0422] GENERATION (CPT SLOW ROLLING) **1028** is a generation mode **1004** operating state where the CPT system (e.g., CPT system **100**) is slow rolling (i.e., CPT turbomachinery is spinning at a minimum speed). Valves associated with CPT system operation are configured for recirculation of working fluid through the CPT system. The GPT system (e.g., GPT system **200**) is in generation mode with GPT turbomachinery rotating at operating speed. Valves associated with the GPT system are configured for steady-state rotation of GPT turbomachinery, including connection to high-pressure working fluid paths. The hot-side loop is configured for HTS medium to flow from the hot HTS system (e.g., hot HTS system **592**) to the warm HTS system (e.g., warm HTS system **591**). The cold-side loop is configured for CTS medium to flow from the cold CTS system (e.g., cold CTS system **692**) to the warm CTS system (e.g., warm CTS system **691**). Ambient cooling of working fluid (e.g., AHX system **700**) is active with working fluid circulating through the AHX system **700**.

[0423] HOT TURNING (CPT SLOW ROLLING) **1018** is a hot turning mode **1008** operating state where CPT system (e.g., CPT system **100**) is slow rolling (i.e., CPT turbomachinery is spinning at a minimum speed). Valves associated with CPT system operation are configured for recirculation of working fluid through the CPT system. GPT system (e.g., GPT system **200**) is at a base level with low activity. Valves associated with GPT system operation are configured at a base level (e.g., for no rotation of the GPT system). Hot-side and cold-side loops are in standby, where the HTS and CTS media are resident in the associated heat exchangers and thermal media loop fluid paths (e.g., HHX system **500** and CHX system **600**, respectively). Heat traces on the hot-side loop are turned on as necessary to keep HTS medium in liquid phase. The ambient heat exchanger system (e.g., AHX system **700**) is set to active state. AHX valves are set to allow working fluid circulation through the AHX system, but no working fluid may actually be circulating through the AHX system due to recirculation and/or base state of the

working fluid at the powertrain. With no working fluid circulation through the AHX system, AHX system fans are turned off.

[0424] HOT TURNING (GPT SLOW ROLLING) **1022** is a hot turning mode **1008** operating state where GPT system (e.g., GPT system **200**) is slow rolling (i.e., GPT turbomachinery is spinning at a minimum speed). Valves associated with GPT system operation are configured for recirculation of working fluid through the GPT system. CPT system (e.g., CPT system **100**) is at a base level with low activity. Valves associated with CPT system operation are configured at a base level (e.g., for no rotation of the CPT system). Hot-side and cold-side loops are in standby, where the HTS and CTS media are resident in the associated heat exchangers and thermal media loop fluid paths (e.g., HHX system **500** and CHX system **600**, respectively). Heat traces on the hot-side loop are turned on as necessary to keep HTS medium in liquid phase. The ambient heat exchanger system (e.g. AHX system **700**) is set to active state. AHX valves are set to allow working fluid circulation through the AHX system, but no working fluid may actually be circulating through the AHX system due to recirculation and/or base state of the working fluid at the powertrain. With no working fluid circulation through the AHX system, AHX system fans are turned off.

[0425] HOT TURNING (CPT+GPT SLOW ROLLING) **1020** is a hot turning mode **1008** operating state where GPT system (e.g., GPT system **200**) is slow rolling (i.e., GPT turbomachinery is spinning at a minimum speed) and CPT system (e.g., CPT system **100**) is slow rolling (i.e., CPT turbomachinery is spinning at a minimum speed). Valves associated with GPT system operation are configured for recirculation of working fluid through the GPT system. Valves associated with CPT system operation are configured for recirculation of working fluid through the CPT system. Hot-side and cold-side loops are in standby, where the HTS and CTS media are resident in the associated heat exchangers and thermal media loop fluid paths (e.g., HHX system **500** and CHX system **600**, respectively). Heat traces on the hot-side loop are turned on as necessary to keep HTS medium in liquid phase. The ambient heat exchanger system (e.g. AHX system **700**) is set to active state. AHX valves are set to allow working fluid circulation through the AHX system, but no working fluid may actually be circulating through the AHX system due to recirculation and/or base state of the working fluid at the powertrain. With no working fluid circulation through the AHX system, AHX system fans are turned off.

[0426] HOT STANDBY **1024** is a hot standby mode **1008** operating state. GPT system (e.g., GPT system **200**) is at a base level with low activity. Valves associated with GPT system operation are configured at a base level (e.g., for no rotation of the GPT system). CPT system (e.g., CPT system **100**) is at a base level with low activity. Valves associated with CPT system operation are configured at a base level (e.g., for no rotation of the CPT system). Hot-side and cold-side loops are in standby, where the HTS and CTS media are resident in the associated heat exchangers and thermal media loop fluid paths (e.g., HHX system **500** and CHX system **600**, respectively). Heat traces on the hot-side loop are turned on as necessary to keep HTS medium in liquid phase. The ambient heat exchanger system (e.g. AHX system **700**) is set to active state. AHX valves are set to allow working fluid circulation through the AHX system,

but no working fluid may actually be circulating through the AHX system due to base state of the working fluid at the powertrain. With no working fluid circulation through the AHX system, AHX system fans are turned off.

[0427] COLD DRY STANDBY **1030** is a cold dry standby mode **1010** operating state. GPT system (e.g., GPT system **200**) is off with no significant activity. Valves associated with GPT system operation are configured at a base level (e.g., for no rotation of the GPT system). CPT system (e.g., CPT system **100**) is off with no significant activity. Valves associated with CPT system operation are configured at a base level (e.g., for no rotation of the CPT system). HTS and CTS media in hot-side and cold-side loops, respectively, are drained to HTS and CTS tanks, respectively (e.g., tank(s) **510** and/or **520**; tank(s) **610** and/or **620**). In one embodiment, HTS medium **590** in HHX **500** and associated fluid paths is drained to hot HTS tank **520**, and HTS medium **590** in warm HTS tank **510** remains in warm HTS tank **510**. In another embodiment, CTS medium **690** in CHX **600** and associated fluid paths is drained to warm CTS tank **610**, and CTS medium **690** in cold CTS tank **620** remains in cold CTS tank **620**. Additionally or alternatively, HTS medium **590** and CTS medium **690** may be pumped between their respective tanks in the same manner as a thermal media rebalancing operation. Hot-side and cold-side heat exchangers and associated thermal media loop fluid paths (e.g., HHX system **500** and CHX system **600**, respectively) are empty of thermal storage media and HTS and CTS media are not actively circulating. One or more HTS system **501** heaters (e.g., heaters **512**, **522**) are active to maintain HTS medium resident in tanks (e.g., HTS tanks **510**, **520**) in liquid state.

Transitional States

[0428] In addition to the operating states (i.e., long-term holding states) shown in FIG. 11, there are numerous additional transitional states. These transitional states would be within the paths shown by the arrows in FIG. 11. Between operating states, there may be transitional states where one or more subsystems need to switch to their own respective states. The subsystems may change their state (e.g., valve actuation, pump speed change) in specific preferred sequences. These transitions and the intermediary transitional states that make up the transitions are described in more detail below.

C. States of Generation Powertrain and Associated Valves

[0429] FIG. 12 and FIG. 13 are state diagrams illustrating select operating and transitional states of a PHES system, including PHES system **1000**, each according to an example embodiment. These are example state transitions and other embodiments are possible as well. FIG. 12 and FIG. 13 are used primarily to illustrate generation powertrain state transitions. Other examples are provided herein reflecting other state transitions for other subsystems in a PHES system, for example, FIGS. 19, 20, 21, 22, and 23 and their associated descriptions.

[0430] FIG. 12 illustrates transition from the HOT STANDBY state **1024** to GENERATION (CPT BASE) state **1016**, with intermediate transitional states **1034**, **1036**, **1038**. During the transition from the HOT STANDBY state **1024** to GENERATION (CPT BASE) state **1016**, the generation powertrain moves from the base state, at **1024** and **1034**, to spin up to variable frequency drive state, at **1036**, to power

generation, at **1038** and **1016**. The GPT valve system moves from its base state, at **1024**, to bypassed state, at **1034** and **1036** and **1038**, and then eventually to the connected state, at **1016**. Beneficially, this overall transition process enables the generation powertrain to move through the spin up state with minimal load.

[0431] FIG. 13 illustrates transition from the GENERATION (CPT BASE) state **1016** to the HOT TURNING (GPT SLOW ROLLING) state **1022**, with intermediate transitional states **1042** and **1044**. During the transition from the GENERATION (CPT BASE) state **1016** to the HOT TURNING (GPT SLOW ROLLING) state **1022** (e.g., due to operator initiated shutdown of the generation mode **1004**), the generation powertrain moves through the generation state, at **1016** and **1042**, to the base state, at **1044**, and then to the turning state, at **1022**. The GPT valve systems move from a connected state, at **1016**, to a bypass state, at **1042** and **1044**, beneficially to allow the turbomachinery speed to drop, and eventually to a recirculation state, at **1022**, beneficially to allow the rotor to cool down.

[0432] FIG. 14 further describes the generation powertrain (e.g., GPT system **200**) states (i.e., GPT states) illustrated in FIGS. 12 and 13. FIG. 14 is a state diagram illustrating generation powertrain states of a PHES system, including PHES system **1000**, according to an example embodiment.

[0433] The states in FIG. 14 occur sequentially, for the most part, and correspond to startup and grid synchronization of the generation powertrain. The preferred sequential relationship of these states, with expected allowable transitions, is indicated by directional arrows between states.

[0434] At GPT Base state **1048**, the generation powertrain is not driven. It is typically not spinning (i.e., at zero RPM), but it may still be spinning as it comes into this state from another state in which it was spinning. Both generation circuit breakers (e.g., **211**, **212**) are open. The generation powertrain is ready to be spun.

[0435] At GPT Spin Up state **1050**, the generation powertrain is connected to, and driven by, the VFD, spinning up to rated speed. For grid connections, once at grid speed, the generator (e.g., generation system **230**) may not yet be synchronized to the external electrical grid.

[0436] GPT Generation state **1052**, is a typical operating state for the generation mode **1004**. At this state, the generation powertrain is spinning at rated speed (i.e., steady state) and the circuit breaker to the grid is closed. The generation powertrain is connected to the grid.

[0437] GPT Slow Roll state **1054**, is a typical state for the generation powertrain when the PHES system is in charge mode **1002**, unless the GPT system has cooled to the point that it can be in the base state. At this state, the generation powertrain is spinning at a low speed (i.e., slow rolling). A generation turning motor (e.g., **221-1**) is on to maintain the slow rotational speed of the generation powertrain.

[0438] The generation powertrain states illustrated in FIGS. 12, 13, and 14 can be further described with respect to the electrical status of the power interface **2002**. Table I lists power interface **2002** component status for GPT states illustrated in FIGS. 12, 13, and 14.

TABLE I

	Status			
	GPT Base 1048	GPT Spin Up 1050	GPT Generation 1052	GPT Slow Roll 1054
VFD 214	Off	On	Off	Off
VFD-to-GEN Breaker 211	Open	Closed	Open	Open
GEN grid-connect Breaker 212	Open	Open	Closed	Open
GEN Turning Motor 221-1	Off	Off	Off	On

[0439] Transitions between generation powertrain states are described in the following paragraphs, with steps recited in preferred sequence. Component references refer to example embodiment GPT system **200**, but the steps may be applied to other configurations to accomplish the same state transitions.

[0440] GPT Base **1048** to GPT Spin Up **1050**. For this state transition, the working fluid loop valving configuration and pressure must be at the right state before this transition can take place, as described below with respect to GPTV states. Power is first applied to a motor to spin the generation powertrain. In GPT system **200**, VFD-to-generator breaker **211** is closed and VFD **214** is turned on, resulting in the generation powertrain spinning. Generator **210-1** is acting as a motor and accepting current from VFD **214**. Compressor **230-1** and turbine **240-1** are spinning. The motor speed is then increased via VFD **214**, bringing the generation powertrain up to a grid-synchronous speed.

[0441] GPT Spin Up **1050** to GPT Generation **1052**. This transition is a grid-synchronization transition. Motor (e.g., generator **210-1** acting as a motor) speed is adjusted through current control (e.g., at VFD **214**) to ensure grid-synchronous speed and to prevent speed overshoot. Motor phase is adjusted (e.g., at VFD **214**) until the motor phase is grid synchronous. Power supply from grid to motor is shutoff (e.g., grid-connect breaker **212** is closed), and the motor then acts as a generator to supply power to the grid (e.g., VFD-to-generator breaker **211** is opened). The VFD will then start powering down to zero.

[0442] GPT Generation **1052** to GPT Base **1048**. This transition can happen, for example, during both normal shutdown of the generation powertrain and during a trip event. Power supply from grid to motor is opened (e.g., grid-connect breaker **212** is opened). Once the generation powertrain has transitioned into GPT Base **1048** (after opening of the breaker), the generation powertrain will still be spinning, and will start ramping down to zero speed unless the powertrain is further transitioned to the GPT Slow Rolling **1054** state prior to spinning down to zero.

[0443] GPT Spin Up **1050** to GPT Base **1048**. This transition could happen, for example, due to a trip signal. The VFD (e.g., VFD **214**) is turned off and no longer connected to the generator (e.g., VFD-to-generator breaker **211** is opened). Once the generation powertrain has transitioned into GPT Base **1048** (after opening of the breaker), the generation powertrain will still be spinning, and will start ramping down to zero speed unless the generation powertrain is further transitioned to the GPT Slow Rolling **1054** state prior to spinning down to zero.

[0444] GPT Base **1048** to GPT Slow Rolling **1054**. This transition takes place by turning on the turning motor (e.g., turning motor **221-1**), which turns the drive train (e.g., generation turbomachinery **230-1**, **240-1**) at a very low, “slow rolling speed” (e.g., 0.1% to 1%, 1% to 5%, or 5% to 10% of steady state generation RPM). In normal operation, as the drive train ramps down in speed, the turning motor will be turned on during ramp down to ensure the speed of the turbomachinery drivetrain does not slow down below the slow rolling speed, or if the speed slows below the slow rolling speed, then it is brought back to the slow rolling speed. This can be accomplished through an overrunning clutch (e.g., overrunning clutch **221-2**) connected between the turning motor and the drivetrain that disengages when the driver side (e.g. drivetrain) of the clutch is operating at speeds higher than the slow rolling speed, and engages when the driver side of the clutch is operating at speeds lower than or equal to the slow rolling speed. This results in the turning motor engaging with the turbine when the turbine reaches the speed of the turning motor. The motor will then maintain the slow rolling speed.

[0445] GPT Slow Rolling **1054** to GPT Base **1048**. The turning motor (e.g., turning motor **221-1**) is turned off. The generation powertrain will subsequently coast down to substantially zero rpm.

[0446] GPT Slow Rolling **1054** to GPT Spin Up **1050**. To start the generation startup process with the generation powertrain spinning, the powertrain can transition directly from GPT Slow Rolling **1054** to GPT Spin Up **1050** by sequentially connecting the VFD to the generator (acting as a motor) (e.g., closing VFD-to-generator breaker **211**) and turning off the turning motor (e.g., turning motor **221-1**).

[0447] The generation powertrain transitional states illustrated in FIGS. **12** and **13** can also be further described with respect to the valve states associated with generation powertrain, including, for example, bypass and recirculation loops.

[0448] FIG. **16** is a state diagram illustrating generation powertrain (e.g., GPT system **200**) valve states (i.e., GPTV states), of a PHES system, including PHES system **1000**, from a generation powertrain perspective (e.g., GPT system **200** and associated GPT system **200** bypass/recirculation valves), according to an example embodiment.

[0449] The states in FIG. **16** occur sequentially, for the most part. The preferred sequential relationship of these states, with expected allowable transitions, is indicated by directional arrows between states.

[0450] At GPTV Base state **1064**, the valves are configured to have both recirculation valves and the bypass valves open. This is considered a fail-safe state.

[0451] At GPTV Recirculation state **1070**, the generation working fluid valves are configured such that they can provide working fluid circulation and any desired heat removal for the generation powertrain (e.g., GPT system **200**) as it spins at a low rate (e.g., slow rolling speed). The generation powertrain is also isolated from the high-pressure side of the working fluid loop (e.g., working fluid loop **300**).

[0452] At GPTV Bypassed state **1066**, the bypass valve is open in addition to the isolation (shutoff) valves. This allows working fluid to bypass the generation turbine partially, which allows the control of the turbine power generation prior to reaching full speed and closing the breaker. Beneficially, this allows the use of a uni-directional VFD (e.g., VFD **214**).

[0453] At GPTV HP Connected state **1068**, the generation working fluid valves are configured such that working fluid can be circulated between the high-pressure side and the low-pressure side via the generation powertrain. All the working fluid bypass loops are closed to prevent loss. Valve **229** is closed but may be in a state where it is ready to be opened quickly to help with anti-surge as necessary in case of a trip event.

[0454] Table II lists valve status for state transitions illustrated in FIGS. **12** and **13** and GPTV states illustrated in FIG. **16**.

TABLE II

	Status			
	GPTV Base 1064	GPTV Recirculation 1070	GPTV Bypassed 1066	GPTV HP Connected 1068
Compressor Shutoff Valve 231 (fails closed)	Closed	Closed	Open	Open
Turbine Shutoff Valve 241 (fails closed)	Closed	Closed	Open	Open
Compressor Bypass Valve 229 (fails open)	Open	Closed	Open	Closed
Compressor Recirc Valve 232 (fails closed)	Open	Open	Closed	Closed
Turbine Recirc Valve 242 (fails open)	Open	Open	Closed	Closed
Bypass Path Valve 222 (fails open)	Closed	Closed	Closed	Closed
Bypass Path Valve 401	Closed	Closed	Closed	Closed

[0455] Further illustrating the GPTV states, FIGS. **3A**, **3B**, **3C**, and **3D** each illustrate a portion of FIG. **3** encompassing GPT system **200** and associated bypass/recirculation valves, each according to an example embodiment. FIG. **3A** illustrates GPTV base state **1064**. FIG. **3B** illustrates GPTV Bypass state **1066**. FIG. **3C** illustrates GPTV Recirculation state **1070**. FIG. **3D** illustrates GPTV HP Connected state **1068**. Valve positions are indicated in FIGS. **3A**, **3B**, **3C**, and **3D** with a filled valve icon representing a closed valve and an unfilled valve icon representing an open valve. For example, in FIG. **3A**, valve **231** is closed and valve **232** is open.

[0456] Transitions between generation powertrain valve (GPTV) states are described in the following paragraphs, with steps recited in preferred sequence. Component references refer to example embodiments GPT system **200** and working fluid loop **300**, but the steps may be applied to other configurations to accomplish the same GPTV state transitions.

[0457] GPTV Base **1064** to GPTV Recirculation **1070**. Turbine bypass fluid path is closed (e.g., valve **229** is closed).

[0458] GPTV Base **1064** to GPTV Bypassed **1066**. Compressor recirculation fluid path and turbine recirculation fluid path are closed (e.g., valve **232** and valve **242** are closed). Turbine bypass fluid path (e.g., valve **229**) remains open to allow working fluid to go through the bypass loop.

Compressor outlet (shutoff) valve **231** is opened. Turbine inlet (shutoff) valve **241** is opened.

[0459] GPTV Bypassed **1066** to GPTV HP Connected **1068**. Turbine bypass fluid path is closed (e.g., valve **229** is closed).

[0460] GPTV Bypassed **1066** to GPTV Base **1064**. Generation powertrain recirculation fluid paths are opened (e.g., recirculation valves **232**, **242** are opened). Turbine inlet fluid paths are closed (e.g., valve **241** is closed). Compressor outlet fluid path is closed (e.g., valve **231** is closed).

[0461] GPTV HP Connected **1068** to GPTV Base **1064**. This transition can happen, for example, due to a trip event. Turbine inlet fluid paths are quickly closed (e.g., valve **241** is quickly closed). Turbine bypass fluid path is quickly opened (e.g., valve **229** is quickly opened) to help with anti-surge. Compressor outlet fluid path is closed (e.g., valve **231** is closed). Generation powertrain recirculation fluid paths are opened (e.g., recirculation valves **232**, **242** are opened).

[0462] GPTV HP Connected **1068** to GPTV Bypassed **1066**. This transition generally happens during normal shut down. Turbine bypass fluid path is opened (e.g., valve **229** is opened) to help with anti-surge.

[0463] GPTV Recirculation **1070** to GPTV Base **1064**. Turbine bypass fluid path is opened (e.g., valve **229** is opened).

D. States of Charge Powertrain and Associated Valves

[0464] FIG. 15 is a state diagram illustrating charge powertrain (e.g., CPT system **100**) states (i.e., CPT states) of a PHES system, including PHES system **1000**, according to an example embodiment.

[0465] The states in FIG. 15 occur sequentially, for the most part. The preferred sequential relationship of these states, with expected allowable transitions, is indicated by directional arrows between states.

[0466] At CPT Base state **1056**, the charge powertrain is not driven. It is typically not spinning (i.e., at zero RPM), but it may still be spinning as it comes into this state from another state in which it was spinning. Both charge circuit breakers (e.g., **111**, **112**) are open. The charge powertrain is ready to be spun.

[0467] At CPT Spin Up state **1058**, the charge powertrain is connected to, and driven by, the VFD, spinning up to rated speed. For grid connections, once at grid speed, the motor (e.g., charge motor system **110**) is not yet synchronized to the external electrical grid.

[0468] CPT Charge state **1060**, is a typical operating state for the charge mode **1002**. At this state, the charge powertrain is spinning at rated speed (i.e., steady state) and the circuit breaker to the grid is closed. The charge powertrain is connected to the grid.

[0469] CPT Slow Rolling state **1062**, is a typical state for the charge powertrain when the PHES system is in generation mode **1004**, unless the CPT system has cooled to the point that it can be in the base state. At this state, the charge powertrain is spinning at a very low, “slow rolling speed” (e.g., 0.1% to 1%, 1% to 5%, or 5% to 10% of steady state charge RPM). A charge turning motor (e.g., **121-1**) is on to maintain the slow rolling speed of the charge powertrain.

[0470] The charge powertrain states illustrated in FIG. 15 can be further described with reference to the electrical status of the power interface **2002**, illustrated in FIG. 9, which can control electrical power in the CPT system **100**.

Table III lists power interface **2002** component status, and charge turning motor, for CPT states illustrated in FIG. 15.

TABLE III

	Status			
	CPT Base	CPT Spin Up	CPT Charge	CPT Slow Roll
VFD 214	Off	On	Off	Off
VFD-to-CHG-Motor Breaker 111	Open	Closed	Open	Open
CHG Motor Grid-connect Breaker 112	Open	Open	Closed	Open
CHG Turning Motor 121-1	Off	Off	Off	On

[0471] Transitions between charge powertrain states are described in the following paragraphs, with steps recited in preferred sequence. Component references refer to example embodiment CPT system **100** and power interface **2002**, but the steps may be applied to other configurations to accomplish the same state transitions.

[0472] CPT Base **1056** to CPT Spin Up **1058**. For this state transition, the working fluid loop valving configuration and pressure must be at the right state before this transition can take place, as described below with respect to CPTV states. Power is first applied to a motor (e.g., motor **110-1**) to spin the charge powertrain. For CPT system **100**, VFD-to-motor breaker **111** is closed and VFD **214** is turned on, resulting in the charge powertrain spinning. Compressor system **1301** and turbine system **140** are spinning. The motor speed is then increased via VFD **214**, bringing the generation powertrain up to a grid-synchronous speed.

[0473] CPT Spin Up **1058** to CPT Charge **1060**. This transition is a grid-synchronization transition. Motor (e.g., motor **110-1**) speed is adjusted through current control (e.g., at VFD **214**) to ensure grid-synchronous speed and to prevent speed overshoot. Motor phase is adjusted (e.g., at VFD **214**) until the motor phase is grid synchronous. Power supply from grid to motor is activated (e.g., grid-connect breaker **112** is closed), and VFD power to motor is stopped (e.g., VFD-to-motor breaker **111** is opened). The VFD will then start powering down to zero.

[0474] CPT Charge **1060** to CPT Base **1056**. This transition happens, for example, during both normal shutdown of the charge powertrain and during a trip event. Power supply from grid to motor is halted (e.g., grid-connect breaker **112** is opened). Once the charge powertrain has transitioned into CPT Base **1056** (upon the opening of the breaker), the charge powertrain will still be spinning, and will start ramping down to zero speed unless the powertrain is further transitioned to the CPT Slow Rolling **1062** state prior to spinning down to zero.

[0475] CPT Spin Up **1058** to CPT Base **1056**. This transition could happen, for example, due to a trip signal. The VFD (e.g., VFD **214**) is turned off and no longer connected to the motor (e.g., VFD-to-motor breaker **111** is opened). Once the charge powertrain has transitioned into CPT Base **1056** (upon the opening of the breaker), the charge powertrain will still be spinning, and will start ramping down to zero speed unless the charge powertrain is further transitioned to the CPT Slow Rolling **1062** state prior to spinning down to zero.

[0476] CPT Base **1056** to CPT Slow Rolling **1062**. This transition takes place by turning on the turning motor (e.g., turning motor **121-1**), which turns the drivetrain (e.g., charge turbomachinery **130-1**, **140-1**) at a low speed (e.g., slow rolling speed). In normal operation, as the drivetrain ramps down in speed, the turning motor will be turned on during ramp down to ensure the speed of the drivetrain does not slow down below the minimum speed, or if the speed slows below the minimum speed, then it is brought back to the minimum speed. This can be accomplished through an overrunning clutch (e.g., overrunning clutch **121-2**) connected between the turning motor and the drivetrain that disengages when the driver side (e.g., drivetrain) of the clutch is operating at speeds higher than a minimum speed (e.g., slow rolling speed), and engages when the driver side of the clutch is operating at speeds lower than or equal to a minimum speed (e.g., slow rolling speed). This results in the turning motor engaging with the turbine when the turbine reaches the speed of the turning motor. The motor will then maintain the low (e.g., slow rolling) speed.

[0477] CPT Slow Rolling **1062** to CPT Base **1056**. The turning motor (e.g., turning motor **121-1**) is turned off. The charge powertrain will subsequently coast down to zero rpm.

[0478] CPT Slow Rolling **1062** to CPT Spin Up **1058**. To start the charge startup process with the charge powertrain spinning, the powertrain can transition directly from CPT Slow Rolling **1062** to CPT Spin Up **1058** by sequentially connecting the VFD to the motor (e.g., closing VFD-to-motor breaker **111**) and turning off the turning motor (e.g., turning motor **121-1**).

[0479] Charge powertrain transitional states can also be further described with respect to the valve states associated with charge powertrain bypass and recirculation loops.

[0480] FIG. 17 is a state diagram illustrating charge powertrain (e.g., CPT system **100**) valve states (i.e., CPTV states), of a PHES system, including PHES system **1000**, from a charge powertrain perspective (e.g., CPT system **100** and associated CPT system **100** bypass/recirculation valves), according to an example embodiment.

[0481] The states in FIG. 17 occur sequentially, for the most part. The preferred sequential relationship of these states, with expected allowable transitions, is indicated by directional arrows between states.

[0482] At CPTV Base state **1072**, the valves are configured to have both recirculation valves and the bypass valves open. This is considered a fail-safe state.

[0483] At CPTV Recirculation state **1078**, the generation working fluid valves are configured such that they can provide working fluid circulation and any desired heat removal for the charge powertrain (e.g., CPT system **100**) as it spins at a slow rate (e.g., slow rolling speed). The charge powertrain is also isolated from the high-pressure side of the working fluid loop.

[0484] At CPTV Bypassed state **1074**, the bypass valve is open in addition to the isolation valves. This allows working fluid to circulate via a bypass loop to reduce load on the charge compressor (e.g., compressor system **130**).

[0485] At CPTV HP Connected state **1076**, the charge working fluid valves are configured such that working fluid can be circulated between the high-pressure side and the low-pressure side via the charge powertrain. All the working fluid bypass loops are closed to prevent loss. Valve **119** is closed but in a state where it is ready to be opened quickly to help with anti-surge as necessary in case of a trip event.

[0486] Table IV lists valve status for CPTV states illustrated in FIG. 17.

TABLE IV

Valve	Status			
	CPTV Base 1072	CPTV Recirculation 1078	CPTV Bypassed 1074	CPTV HP Connected 1076
Compressor Shutoff Valve 131 (fails closed)	Closed	Closed	Open	Open
Turbine Shutoff Valve 141 (fails closed)	Closed	Closed	Open	Open
Compressor Bypass Valve 119 (fails closed)	Open	Closed	Open	Closed
Compressor Recirc Valve 132 (fails closed)	Open	Open	Closed	Closed
Turbine Recirc Valve 142 (fails open)	Open	Open	Closed	Closed

[0487] Further illustrating the CPTV states, FIGS. 3E, 3F, 3G, and 3H each illustrate a portion of FIG. 3 encompassing CPT system **100** and associated bypass/recirculation valves, each according to an example embodiment. FIG. 3E illustrates CPTV base state **1072**. FIG. 3F illustrates CPTV Bypass state **1074**. FIG. 3G illustrates CPTV Recirculation state **1078**. FIG. 3H illustrates CPTV HP Connected state **1076**. Valve positions are indicated in FIGS. 3E, 3F, 3G, and 3H with a filled valve icon representing a closed valve and an unfilled valve icon representing an open valve. For example, in FIG. 3E, valve **131** is closed and valve **132** is open.

[0488] Transitions between charge powertrain valve (CPTV) states are described in the following paragraphs, with steps recited in preferred sequence. Component references refer to example embodiments CPT system **100** and working fluid loop **300**, but the steps may be applied to other configurations to accomplish the same CPTV state transitions.

[0489] CPTV Base **1072** to CPTV Recirculation **1078**. Compressor high-flow recirculation fluid path is closed (e.g., valve **119** is closed).

[0490] CPTV Base **1072** to CPTV Bypassed **1074**. Compressor recirculation fluid path and turbine recirculation fluid path are closed (e.g., valve **132** and valve **142** are closed). Compressor high-flow recirculation fluid path (e.g., valve **119**) remains open to allow working fluid to go through the recirculation loop. Compressor outlet valve **131** is opened. Turbine inlet valve **141** is opened.

[0491] CPTV Bypassed **1074** to CPTV HP Connected **1076**. Compressor high-flow recirculation fluid path is closed (e.g., valve **119** is closed).

[0492] CPTV Bypassed **1074** to CPTV Base **1072**. Charge powertrain recirculation fluid paths are opened (e.g., recirculation valves **132**, **142** are opened). Turbine inlet fluid path is closed (e.g., valve **141** is closed). Compressor outlet fluid path is closed (e.g., valve **131** is closed).

[0493] CPTV HP Connected **1076** to CPTV Base **1072**. This transition may happen, for example, due to a trip event. Turbine inlet fluid path is quickly closed (e.g., valve **141** is quickly closed). Compressor high-flow recirculation fluid

path is quickly opened (e.g., valve **119** is quickly opened) to help with anti-surge. Compressor outlet fluid path is closed (e.g., valve **131** is closed). Charge powertrain recirculation fluid paths are opened (e.g., recirculation valves **132**, **142** are opened).

[0494] CPTV HP Connected **1076** to CPTV Bypassed **1074**. This transition can happen, for example, during normal shut down or during a grid trip event. Compressor high-flow recirculation fluid path is opened (e.g., valve **119** is opened) to help manage the pressure ratio across the compressor and avoid compressor surge.

[0495] CPTV Recirculation **1078** to CPTV Base **1072**. Compressor high-flow recirculation fluid path is opened (e.g., valve **119** is opened).

E. States of Ambient Heat Exchanger and Associated Valves

[0496] FIG. **18** is a state diagram illustrating ambient cooler (also referred to as ambient heat exchanger) states (e.g., AHX system **700**) of a PHES system, including PHES system **1000**, according to an example embodiment. The two states in FIG. **18** can transition back-and-forth, as indicated by directional arrows between the states.

[0497] Example ambient cooler states include, Ambient Cooler Bypassed **1080**, Ambient Cooler Active **1082**, and Ambient Cooler Off **1084**. During Ambient Cooler Off **1084**, working fluid loop valves regulating working fluid flow paths into or out of the ambient cooler (e.g., AHX system **700**) are all closed, preventing movement of working fluid into or out of the ambient cooler. Ambient cooler fans, if present, are off. During Ambient Cooler Bypassed **1080**, working fluid loop valves are configured such that the ambient cooler is bypassed by working fluid circulating in the working fluid loop (e.g. working fluid loop **300**). Ambient cooler fans, if present, are off. During Ambient Cooler Active **1082**, working fluid loop valves are configured such that working fluid in the working fluid loop can enter the ambient cooler. If the working fluid is actually circulating through the ambient cooler, the ambient cooler removes heat from working fluid in the working fluid loop and exhausts it the environment; this state may, for example, be used during generation mode **1004** and the bypass state **1080** may, for example, be used during charge mode **1002**. Ambient cooler fans, if present, may be used to vary the rate of heat extraction from the working fluid. Ambient cooler fans may be turned on, and may have their speed adjusted, when working fluid is actively circulating through the ambient cooler, and the fans may be turned off if the working fluid is not actively circulating through the ambient cooler, regardless of valve configuration.

[0498] Alternatively, in other embodiments of PHES systems and/or working fluid loop, an ambient cooler (e.g., AHX system **700**) can be configured to be continuously connected to the working fluid loop (i.e., no bypass state is available). In these alternative embodiments, the fans or other equipment (e.g., heat sink fluid flow rate) are used to vary the heat removal capability of the ambient cooler. For example, during generation mode **1004**, ambient cooler fans are turned on to actively remove heat from the working fluid, and during generation mode **1002**, when ambient cooler fans are turned off, the ambient cooler does not passively remove a significant amount of heat from the working fluid.

[0499] Table V lists cooler and valve status for ambient cooler (e.g., AHX system **700**) states illustrated in FIG. **18**.

TABLE V

	Status		
	Ambient Cooler Bypassed 1080	Ambient Cooler Active 1082	Ambient Cooler Off 1084
Bypass Valve 323	Open	Closed	Closed
Cold-side Isolation Valve 324	Closed	Open	Closed
Recuperator-side Isolation Valve 325	Closed	Open	Closed
AHX Fans	Fan Off	Fan On	Fan Off

[0500] Further illustrating ambient cooler states **1080** and **1082**, FIGS. **3I** and **3J** each illustrate a portion of FIGS. **3**, **28**, and **30** encompassing AHX system **700** and associated bypass valves, according to an example embodiment. FIG. **3I** illustrates ambient cooler bypass state **1080**. FIG. **3J** illustrates ambient cooler active state **1082**. Valve positions are indicated in FIGS. **3I** and **3J** with a filled valve icon representing a closed valve and an unfilled valve icon representing an open valve. For example, in FIG. **3I**, valve **324** is closed and valve **323** is open.

[0501] In an alternative valve arrangement for the ambient cooler states **1080** and **1082**, FIGS. **3K** and **3L** each illustrate a portion of FIGS. **3**, **28**, and **30** but with valve **325** removed. FIG. **3K** illustrates ambient cooler bypass state **1080**. FIG. **3L** illustrates ambient cooler active state **1082**. Valve positions are indicated in FIGS. **3K** and **3L** with a filled valve icon representing a closed valve and an unfilled valve icon representing an open valve. For example, in FIG. **3K**, valve **324** is closed and valve **323** is open. The valve states in Table V are applicable to both FIGS. **3I**, **3J** and FIGS. **3K**, **3L**, with the exception that valve **325** states are not applicable to FIGS. **3K**, **3L**.

[0502] Transitions between ambient cooler states are described in the following paragraphs, with steps recited in preferred sequence. Component references refer to example embodiments of AHX system **700** and working fluid loop **300**, but the steps may be applied to other configurations to accomplish the same ambient cooler state transitions.

[0503] Ambient Cooler Bypassed **1080** to Ambient Cooler Active **1082**. This transition may occur, for example, for mode switch from charge mode **1002** to generation mode **1004** or from start up (e.g., cold dry standby mode **1010**) to hot standby **1024**. Isolation valves **324** and **325** (if present) are opened. Bypass valve **323** is closed. If working fluid is circulating through the ambient cooler (e.g. AHX system **700**), fans (e.g., fans in AHX system **700**) are turned on and fan speed may be controlled for desired heat removal.

[0504] Ambient Cooler Active **1082** to Ambient Cooler Bypassed **1080**. This transition may occur, for example, for mode switch from generation mode **1004** to charge mode **1002**. Isolation valves **324** and **325** (if present) are closed. Bypass valve **323** is opened. Fans (e.g., fans in AHX system **700**) are turned off.

[0505] Ambient Cooler Active **1082** to Ambient Cooler Off **1084**. This transition may occur, for example, for mode switch from hot standby **1008** and/or **1024** to cold dry standby **1010** and/or **1030**. Isolation valves **324** and **325** (if present) are closed. Bypass valve **323** is closed. Fans (e.g., fans in AHX system **700**) are turned off.

F. States and Control of PHES System and Inventory Control System

[0506] FIG. 24 is a simplified block diagram illustrating components of a PHES system 1200. The PHES system 1200 may take the form of, or be similar in form, to any PHES system herein, including PHES system 1000, 1003, 1005, 3000. The PHES systems disclosed herein (e.g., 1000, 1003, 1005, 3000) may be implemented in and/or include any or all of the components illustrated in PHES system 1200, and/or additional components.

[0507] The PHES system 1200 may include one or more sensors 1204, power generation and power storage components 1206, a communication system 1208, a controller system 1216, one or more processors 1210, and a data storage 1212 on which program instructions 1214 may be stored. The components may communicate, direct, and/or be directed, over one or more communication connections 1202 (e.g., a bus, network, PCB, etc.).

[0508] The power generation and/or storage components 1206 may include powertrains, mechanical and/or electrical power transmission systems, power busses, turbomachinery, motors, generators, motor/generators, working fluid loops, heat exchanger loops, thermal media loops, thermal storage reservoirs, and electrical systems as described elsewhere herein.

[0509] The sensors 1204 may include a range of sensors, including monitoring and reporting devices that can provide operating conditions of the PHES system, including one or more of pressure, temperature, flow rate, dewpoint, turbomachinery speed, fan speed, pump speed, valve state, mass flow rate, switch state, voltage, amperage, power, frequency, fluid level, and/or fluid concentration data, to one or more control systems and/or controllers controlling and/or monitoring conditions of a PHES system.

[0510] The control system 1216 can function to regulate and/or control the operation of the PHES system 1200 in accordance with instructions from another entity, control system, and/or based on information output from the sensors 1204. The control system 1216 may therefore be configured to operate various valves, switches/breakers, VFDs, pumps, speed controls, and other components of the PHES system 1200 that adjust the operation of the PHES system 1200. The control system 1216 may be implemented by components in whole or in part in the PHES system 1200 and/or by remotely located components in communication with the PHES system 1200, such as components located at stations that communicate via the communication system 1208. The control system 1216 may be implemented by mechanical systems and/or with hardware, firmware, and/or software. As one example, the control system 1216 may take the form of program instructions 1214 stored on a non-transitory computer readable medium (e.g., the data storage 1212) and a processor (or processors) 1210 that executes the instructions. The control system 1216 may include the PHES Supervisory Controller 1124 and the ICS Controller 1125, as well as other controllers.

[0511] The PHES system 1200 may include a communication system 1208. The communications system 1208 may include one or more wireless interfaces and/or one or more wireline interfaces, which allow the PHES system 1200 to communicate via one or more networks. Such wireless interfaces may provide for communication under one or more wireless communication protocols. Such wireline interfaces may include an Ethernet interface, a Universal

Serial Bus (USB) interface, or similar interface to communicate via a wire, a twisted pair of wires, a coaxial cable, an optical link, a fiber-optic link, or other physical connection to a wireline network. The PHES system 1200 may communicate within the PHES system 1200, with other stations or plants, and/or other entities (e.g., a command center) via the communication system 1208. The communication system 1208 may allow for both short-range communication and long-range communication. The PHES system 1200 may communicate via the communication system 1208 in accordance with various wireless and/or wired communication protocols and/or interfaces.

[0512] The PHES system 1200 may include one or more processors 1210, data storage 1212, and program instructions 1214. The processor(s) 1210 may include general-purpose processors and/or special purpose processors (e.g., digital signal processors, application specific integrated circuits, etc.). The processor(s) 1210 can be configured to execute computer-readable program instructions 1214 that are stored in the data storage 1212. Execution of the program instructions can cause the PHES system 1200 to provide at least some of the functions described herein.

[0513] As illustrated in FIG. 24A, one or more control systems may be used to control ICS system 390. The working fluid inventory control system (ICS) is part of the working fluid loop subsystem (e.g., working fluid loop 300). The inventory control system may include a compressor, a filtering system to condition the working fluid, one or more working fluid tanks, fluid paths, and valves to manage the various requirements from this system. Example components of an ICS 390 embodiment, as implemented in working fluid loop 300, are shown in FIG. 3M. FIG. 3M illustrates a portion of FIGS. 3, 28, and 30 encompassing an inventory control system, according to an example embodiment.

[0514] A PHES supervisory controller 1124 may determine and/or direct PHES system 1000 modes and/or states, which may include ICS system 390 modes and/or states. Alternatively or additionally, an ICS controller 1125 may receive directives from PHES supervisory controller 1124, responsively enact changes in ICS 390, and report conditions to PHES supervisory controller 1124. For example, a power demand signal can be sent from PHES supervisory controller 1124 to ICS controller 1125. The ICS controller 1125 may then determine valve sequences and operations based, for example, on current PHES system conditions and the power demand signal. Alternatively or additionally, PHES supervisory controller 1124 may enact changes in ICS 390. For example, PHES supervisory controller 1124 may determine a new power demand level in the PHES system 1000 and responsively direct valve sequences and operations based, for example, on current PHES system conditions and power requirements, to reach that power demand level.

[0515] During normal operation, in order to increase power in the PHES system 1000, a controller (e.g., controller 1125 and/or controller 1124) can increase the working fluid pressure. To accomplish this, the controller can cause the following:

[0516] Open valve 312 to throttle working fluid from low-pressure tank system 310 into the low-pressure side of the working fluid loop 300. This increases the inlet pressure into the CPT system 100 or GPT system 200, which will, in turn, increase the power of the PHES system 1000.

- [0517] Determine current PHES system 1000 power level and compare to the power demand level. This step may be repeated until: (i) the current power level matches the demand level, or (ii) there is no more driving head (the pressure in low-pressure tank system 310 is only marginally above the working fluid loop 300 low-side pressure). The latter stop condition can be determined, for example, by comparing low-pressure tank system 310 pressure and working fluid loop 300 low-side pressure, or by determining that current power levels have ceased increasing. If either of these stop conditions are met, close valve 312.
- [0518] Determine if further power increase is still required (i.e., the second stop condition above occurred prior to reaching demand level). If further power increase is required, open valve 322 to add working fluid from the high-pressure tank system 320 into the low-pressure side of the working fluid loop 300. This can be continued until the PHES system 1000 reaches the demand power level. The ICS tank systems 310, 320 are preferably sized such that the PHES system 1000 can get to full power in either charge mode 1002 or generation mode 1004.
- [0519] To decrease the power in the PHES system 1000, a controller (e.g., controller 1125 and/or controller 1124) can decrease the working fluid pressure. To accomplish this, the controller can cause the following:
- [0520] Open valve 321 to throttle working fluid from the high-pressure side of the working fluid loop 300 into high-pressure tank system 320. This decreases the inlet pressure into the CPT system 100 or GPT system 200, which will, in turn, decrease the power of the PHES system 1000.
- [0521] Determine current PHES system 1000 power level and compare to the power demand level. This step may be repeated until: (i) the current power level matches the demand level, or (ii) there is no more driving head (high-pressure side of the working fluid loop 300 is only marginally above the pressure in high-pressure tank system 320). The latter stop condition can be determined, for example, by comparing high-pressure tank system 320 pressure and working fluid loop 300 high-side pressure, or by determining that current power levels have ceased decreasing. If either of these stop conditions are met, close valve 321.
- [0522] Determine if further power decrease is still required (i.e., the second stop condition above occurred prior to reaching demand level). If further power decrease is required, open valve 311 to add working fluid from the high-pressure side of the working fluid loop 300 into the low-pressure tank system 310. This can be continued until the PHES system 1000 reaches the demand power level. The ICS tank systems 310, 320 are preferably sized such that the system can get to minimum power in either charge mode 1002 or generation mode 1004.
- [0523] Other functions ICS controller 1125 can perform include bringing the working fluid loop 300 pressures to a desired pressure (e.g., base, ambient, $P_{standby}$, specific pressure range(s) that are below either or both the current pressures in the working fluid high-side fluid paths and low-side fluid paths) following a normal shutdown or a trip event so that the PHES system can be restarted.
- [0524] Following a trip event, a controller (e.g., controller 1125 and/or controller 1124) can cause the following:
- [0525] Open valve 318 to bleed working fluid from high-pressure working fluid paths into low-pressure tank system 310. By using large valve 318 (instead of or in addition to valve 311), this can reduce the pressure in the high-pressure working fluid paths at a rate fast enough to help maintain a settle-out pressure below a threshold limit.
- [0526] Close valve 318 once pressure in low-pressure tank system 310 is substantially equal to that of the high-pressure working fluid paths.
- [0527] Open valve 305 and then turn on compressor 303 to draw working fluid from high-pressure working fluid paths into high-pressure tank system 320 until the high-pressure working fluid paths are within a desired high-pressure range.
- [0528] Turn off compressor 303 and then close valve 305.
- [0529] Open valve 304 and then turn on compressor 303 to draw working fluid from low-pressure working fluid paths into the high-pressure tank system 320 until the low-pressure working fluid paths are within a desired low-pressure range.
- [0530] If the PHES system 1000 is shut down normally, large valve 318 may not need to be opened because the pressure in the high-pressure working fluid paths has been slowly reduced during the process to substantially a base level. Accordingly, a controller (e.g., controller 1125 and/or controller 1124) can cause the following:
- [0531] Open valve 305 and then turn on compressor 303 to draw working fluid from high-pressure working fluid paths into high-pressure tank system 320 until the pressure in high-pressure working fluid paths are at a base pressure.
- [0532] Turn off compressor 303 and then close valve 305.
- [0533] Open valve 304 and then turn on compressor 303 to draw working fluid from low-pressure working fluid paths into the high-pressure tank system 320 until the low-pressure working fluid paths are at a base pressure. This should take only a short time because the low-pressure working fluid paths should already be very close to base pressure.
- [0534] If the working fluid loop 300 leaks working fluid, to controller (e.g., controller 1125 and/or controller 1124) can cause additional working fluid to be added to the working fluid loop 300 as follows. Steps are described as if from a state where all referenced valves are initially closed:
- [0535] Open valve 302.
- [0536] Turn on compressor 303 to add working fluid from ambient air when air is the working fluid or from an external working fluid make-up reservoir (not shown) into high-pressure tank system 320 until high-pressure tank system 320 reaches a desired pressure.
- [0537] Turn off compressor 303.
- [0538] Close valve 302.
- [0539] Open valve 322 to add working fluid from high-pressure tank system 320 to low-pressure working fluid paths.
- [0540] Close valve 322.
- [0541] Repeat above steps until the working fluid loop pressure is at a desired level.

G. States of Hot-Side Loop

[0542] FIG. 25 is a state diagram illustrating hot-side loop (also referred to as HTS loop) states of a PHES system, including PHES system 1000, according to an example embodiment. The hot-side loop is the flow path of circulating HTS medium 590, for example, through HTS system 501 in FIG. 4 and, in some states, HHX system 500 in FIGS. 2, 3, 6A, and 6B.

[0543] The states in FIG. 25 occur sequentially, for the most part. The preferred sequential relationships of these states are indicated by directional arrows between states.

[0544] At Drained state 1146, HTS medium 590 in fluid paths, including heat exchangers, has been drained or is being drained into the HTS tanks (e.g., 510 and/or 520). Heat trace 560 is off. When coming out of drained state 1146, e.g., to standby state 1138, heat trace 560 may be turned on prior to reintroduction of HTS medium 590 into fluid paths.

[0545] At Standby state 1138, the hot-side loop is filled or filling with HTS medium 590 and is ready for HTS medium 590 to flow. If the loop is not already filled, then a small flow

pump 540 is on to deliver this flow. Heat trace 560 may be turned off because HTS medium 590 is already hot. Bypass valve 551 is closed so that HTS medium 590 flows through HHX system 500.

[0548] At Bypassed state 1144, HTS medium 590 is flowing in the hot-side loop preferably from hot HTS system 592 to warm HTS system 591 (e.g., from hot HTS tank 520 to warm HTS tank 510 in HTS system 501), but not through the hot-side heat exchanger(s) (e.g., HHX system 500). Hot-side heat exchanger(s) are bypassed by opening bypass valve 551 and closing isolation valves 555, 556. Alternatively, in another embodiment, HTS medium 590 could flow in the hot-side loop from warm HTS system 591 to hot HTS system 592 (e.g., from warm HTS tank 510 to hot HTS tank 520 in HTS system 501), but not through the hot-side heat exchanger(s) (e.g., HHX system 500).

[0549] Table VI lists equipment status for hot-side loop states illustrated in FIG. 25. Component references refer to example embodiments illustrated in, for example, FIGS. 2, 3, 4, 6A, and 6B, and including HTS system 501 and HHX system 500, but the status may be applied to other configurations to accomplish the same hot-side loop state states.

TABLE VI

	Status				
	Drained 1146	Standby 1138	Flow-to-Hot 1140	Flow-to-Warm 1142	Bypassed 1144
HX Bypass Valve 551	Closed	Closed	Closed	Closed	Open
Heat Trace 560	Off	On	Off	Off	Off
Warm Pump 530	Off	Off	On	Off	*2
Warm Heater 512	*1	On	On	On	On
Warm Inflow Valve 511	Closed	Closed	Closed	Open	*3
Warm Pump Outlet Valve 557	Closed	Open	Open	Closed	*2
HX Warm Isolation Valve 555	Closed	Open	Open	Open	Closed
Warm Drain Valve 552	Open	Closed	Closed	Closed	Closed
Hot Pump 540	Off	Off	Off	On	*3
Hot Heater 522	*1	On	On	On	On
Hot Inflow Valve 521	Closed	Open	Open	Closed	*2
Hot Pump Outlet Valve 558	Closed	Closed	Closed	Open	*3
HX Hot Isolation Valve 556	Closed	Open	Open	Open	Closed
Hot Drain Valve 553	Open	Closed	Closed	Closed	Closed

*1 ON if HTS medium present; OFF if HTS medium not present

*2 ON or OPEN if bypass flow to hot; OFF or CLOSED if bypass flow to warm

*3 ON or OPEN if bypass flow to warm; OFF or CLOSED if bypass flow to hot

rate would be temporarily established in the appropriate direction in order to fill the fluid paths with HTS medium 590.

[0546] At Flow-to-Hot state 1140, the hot-side loop is configured to allow HTS medium 590 flow from warm HTS system 591 to hot HTS system 592 (e.g., from warm HTS tank 510 to hot HTS tank 520 in HTS system 501) via the hot-side heat exchanger(s) (e.g., HHX system 500). Warm pump 530 is on to deliver this flow. Heat trace 560 may be turned off because HTS medium 590 is already hot. Bypass valve 551 is closed so that HTS medium 590 flows through HHX system 500.

[0547] At Flow-to-Warm state 1142, the hot-side loop is configured to allow HTS medium 590 flow from hot HTS system 592 to warm HTS system 591 (e.g., from hot HTS tank 520 to warm HTS tank 510 in HTS system 501) via the hot-side heat exchanger(s) (e.g., HHX system 500). Hot

H. States of Cold-Side Loop

[0550] FIG. 26 is a state diagram illustrating cold-side loop (also referred to as CTS loop) states of a PHES system, including PHES system 1000, according to an example embodiment. The cold-side loop is the flow path of circulating CTS medium 690, for example, through CTS system 601 in FIG. 5 and, in some states, CHX system 600 in FIGS. 2, 3, 6A, and 6B.

[0551] The states in FIG. 26 occur sequentially, for the most part. The preferred sequential relationship of these states are indicated by directional arrows between states.

[0552] At Drained state 1156, CTS medium 690 in fluid paths, including heat exchangers, has been drained or is being drained into the CTS tanks (e.g., 610 and/or 620), preferably into a warm CTS tank (e.g., warm CTS tank 610). Preferably, no CTS pump is running once all CTS medium 690 has been drained.

[0553] At Standby state **1148**, the cold-side loop is filled or filling with CTS medium **690** and is ready for CTS medium **690** to flow. Preferably, no CTS pump is running once the cold-side loop has been filled. If the loop is not already filled, then a flow rate from pumps **630** and/or **640** would be established in the appropriate direction in order to fill the fluid paths with CTS medium **690**.

[0554] At Flow-to-Cold state **1150**, the cold-side loop is configured to allow CTS medium **690** flow from warm CTS system **691** to cold CTS system **692** (e.g., from warm CTS tank **610** to cold CTS tank **620** in CTS system **601**) via the cold-side heat exchanger(s) (e.g., CHX system **600**). Warm pump **630** is on to deliver this flow. Cold pump **640**, if bi-directional, can also be on to assist with pressure control. Bypass valve **605** is closed so that CTS medium **690** flows through CHX system **600**.

[0555] At Flow-to-Warm state **1152**, the cold-side loop is configured to allow CTS medium **690** flow from cold CTS system **692** to warm CTS system **691** (e.g., from cold CTS tank **620** to warm CTS tank **610** in CTS system **601**) via the

692 to warm CTS system (e.g., from cold CTS tank **620** to warm CTS tank **610** in CTS system **601**), but not through the cold-side heat exchanger(s) (e.g., CHX system **600**). Cold-side heat exchanger(s) are bypassed by opening bypass valve **605** and closing isolation valves **602**, **603**. Alternatively, in another embodiment, CTS medium **590** could be flowing in the cold-side loop from warm CTS system to cold CTS system **692** (e.g., from warm CTS tank **610** to cold CTS tank **620** in CTS system **601**), but not through the cold-side heat exchanger(s) (e.g., CHX system **600**).

[0557] Table VII lists equipment status for cold-side loop states illustrated in FIG. **26**, in an embodiment of CTS system **601** where pumps **630**, **640** are used for bi-directional pumping. Component references refer to example embodiments illustrated in, for example, FIGS. **2**, **3**, **5**, **6A**, and **6B** and including CTS system **601** and CHX system **600**, but the status may be applied to other configurations to accomplish the same hot-side loop states.

TABLE VII

Equipment	Status				
	Drained 1156	Standby 1148	Flow-to-Cold 1150	Flow-to-Warm 1152	Bypassed 1154
Bypass Valve Valve 605	Closed	Closed	Closed	Closed	Open
Inert Gas Purge Valve 624	*1	Closed	Closed	Closed	Closed
Cold Pump 640	Off	Off	On to Cold	On to Warm	*2
Cold Isolation Valve 602	Closed	Open	Open	Open	Closed
Cold Tank Valve 621	Closed	Open	Open	Open	Open
Cold Pump Isolation Valve 641	Closed	Open	Open	Open	Open
Cold Pump Bypass Valve 642	Closed	Closed	Closed	Closed	Closed
Cold Pump Isolation Valve 643	Closed	Open	Open	Open	Open
Warm Pump 630	Off	Off	On to Cold	On to Warm	*2
Warm Isolation Valve 603	Closed	Open	Open	Open	Closed
Warm Tank Valve 611	Closed	Open	Open	Open	Open
Warm Pump Isolation Valve 631	Closed	Open	Open	Open	Open
Warm Pump Bypass Valve 632	Closed	Closed	Closed	Closed	Closed
Warm Pump Isolation Valve 633	Closed	Open	Open	Open	Open

*1 OPEN until purge complete

*2 ON-to-Warm if bypass flow to warm; ON-to-Cold if bypass flow to cold

cold-side heat exchanger(s) (e.g., CHX system **600**). Cold pump **640** is on to deliver this flow. Warm pump **630**, if bi-directional, can also be on to assist with pressure control. Bypass valve **605** is closed so that CTS medium **690** flows through CHX system **600**.

[0556] At Bypassed state **1154**, CTS medium **590** is preferably flowing in the cold-side loop from cold CTS system

[0558] Table VIII lists equipment status for cold-side loop states illustrated in FIG. **26**, in an embodiment of CTS system **601** where pumps **630**, **640** are not used for bi-directional pumping. Component references refer to example embodiments illustrated in, for example, FIGS. **2**, **3**, **5**, **6A**, and **6B** and including CTS system **601** and CHX system **600**, but the status may be applied to other configurations to accomplish the same hot-side loop states.

TABLE VIII

	Status				
	Drained 1156	Standby 1148	Flow-to-Cold 1150	Flow-to-Warm 1152	Bypassed 1154
Bypass Valve Valve 605	Closed	Closed	Closed	Closed	Open
Inert Gas Purge Valve 624	*1	Closed	Closed	Closed	Closed
Cold Pump 640	Off	Off	Off	On to Warm	*2
Cold Isolation Valve 602	Closed	Open	Open	Open	Closed
Cold Tank Valve 621	Closed	Open	Open	Open	Open
Cold Pump Isolation Valve 641	Closed	Open	Closed	Open	*5
Cold Pump Bypass Valve 642	Closed	Closed	Open	Closed	*4
Cold Pump Isolation Valve 643	Closed	Open	Closed	Open	*5
Warm Pump 630	Off	Off	On to Cold	On to Warm	*3
Warm Isolation Valve 603	Closed	Open	Open	Open	Closed
Warm Tank Valve 611	Closed	Open	Open	Open	Open
Warm Pump Isolation Valve 631	Closed	Open	Open	Closed	*4
Warm Pump Bypass Valve 632	Closed	Closed	Closed	Open	*5
Warm Pump Isolation Valve 633	Closed	Open	Open	Closed	*4

*1 OPEN until purge complete

*2 On-to-Warm if bypass flow to warm; OFF if bypass flow to cold

*3 On-to-Cold if bypass flow to cold; OFF if bypass flow to warm

*4 OPEN if bypass flow to cold; CLOSED if bypass flow to warm

*5 CLOSED if bypass flow to cold; OPEN if bypass flow to warm

IX. Use Cases

[0559] This section describes transient “use cases” that can be implemented in a PHES system, including PHES system **1000** and the subsystems described herein. Each transient use case is a process or a transitional sequence that the PHES system undergoes, and can be described by mode and/or state changes.

A. Cold Dry Standby to Hot Standby (PHES System Startup)

[0560] This use case is illustrated in FIG. 10 as the transition from Cold Dry Standby mode **1010** to Hot Standby mode **1008**, and in FIG. 11 as the transition from operating state **1030** to operating state **1024**.

B. Hot Standby to Charge (PHES System Startup)

[0561] This use case is illustrated in FIG. 10 as the transition from Hot Standby mode **1008** to Charge mode **1002**, and in FIG. 11 as the transition from operating state **1024** to operating state **1014**.

[0562] FIG. 19 further illustrates this use case. FIG. 19 is a state diagram illustrating operating and transitional states in a PHES system, including PHES system **1000**, according to an example embodiment. These are example state transitions and other embodiments are possible as well. FIG. 19 illustrates transition from the HOT STANDBY state **1024** to CHARGE (GPT BASE) state **1014**, with intermediate transitional states **1086**, **1088**, **1090** occurring sequentially in between. Each of the subsystem states is described elsewhere herein.

C. Hot Standby to Generation (PHES System Startup)

[0563] This use case is illustrated in FIG. 10 as the transition from Hot Standby mode **1008** to Generation mode **1004**, and in FIG. 11 as the transition from operating state **1024** to operating state **1016**.

[0564] FIG. 20 further illustrates this use case. FIG. 20 is a state diagram illustrating operating and transitional states in a PHES system, including PHES system **1000**, according to an example embodiment. These are example state transitions and other embodiments are possible as well. FIG. 20 illustrates transition from the HOT STANDBY state **1024** to GENERATION (CPT BASE) state **1016**, with intermediate transitional states **1094**, **1096**, **1098** occurring sequentially in between. Each of the subsystem states is described elsewhere herein.

D. Charge to Hot Turning (PHES System Shutdown)

[0565] This use case is illustrated in FIG. 10 as the transition from Charge mode **1002** to Hot Turning mode **1006**, and in FIG. 11 as the transition from operating state **1014** to operating state **1018**.

[0566] FIG. 21 further illustrates this use case. FIG. 21 is a state diagram illustrating operating and transitional states in a PHES system, including PHES system **1000**, according to an example embodiment. These are example state transitions and other embodiments are possible as well. FIG. 21 illustrates transition from the CHARGE (GPT BASE) state **1014** to HOT TURNING (CPT SLOW ROLLING) state **1018**, with intermediate transitional states **1102**, **1104** occurring sequentially in between. Each of the subsystem states is described elsewhere herein.

E. Generation to Hot Turning (PHES System Shutdown)

[0567] This use case is illustrated in FIG. 10 as the transition from Generation mode **1004** to Hot Turning mode **1006**, and in FIG. 11 as the transition from operating state **1016** to operating state **1022**.

[0568] FIG. 22 further illustrates this use case. FIG. 22 is a state diagram illustrating operating and transitional states in a PHES system, including PHES system **1000**, according to an example embodiment. These are example state transitions and other embodiments are possible as well. FIG. 22 illustrates transition from the GENERATION (CPT BASE) state **1016** to HOT TURNING (GPT SLOW ROLLING) state **1022**, with intermediate transitional states **1108**, **1110** occurring sequentially in between. Each of the subsystem states is described elsewhere herein.

F. Hot Standby to Cold Dry Standby (PHES System Shutdown)

[0569] This use case is illustrated in FIG. 10 as the transition from Hot Standby mode **1008** to Cold Dry Standby mode **1010** to, and in FIG. 11 as the transition from operating state **1024** to operating state **1030**.

G. Charge to Generation (PHES System Mode Switch)

[0570] This use case is illustrated in FIG. 10 as the transition from Charge mode **1002** to Hot Turning mode **1006** to Generation mode **1004**, and in FIG. 11 as the transition from operating state **1014** to operating state **1018** to operating state **1028**.

[0571] FIG. 23 further illustrates this use case. FIG. 23 is a state diagram illustrating operating and transitional states in a PHES system, including PHES system **1000**, according to an example embodiment. These are example state transitions and other embodiments are possible as well. FIG. 23 illustrates transition from the CHARGE (GPT BASE) state **1014** to HOT TURNING (CPT SLOW ROLLING) state **1018**, with intermediate transitional states **1102**, **1104** occurring sequentially in between. FIG. 23 further continues with illustration of the continuing transition from HOT TURNING (CPT SLOW ROLLING) state **1018** to GENERATION (CPT SLOW ROLL) state **1028**, with intermediate transitional states **1116**, **1118** occurring sequentially in between. Each of the subsystem states is described elsewhere herein.

X. PHES System Power Plant Integration

[0572] Power plants are usually most efficient at their rated power. If a power plant operates at partial power (due to low demand), the efficiency goes down. Additionally, thermal power plants, can exhibit relatively long startup and shutdown times, making it difficult to respond to grid demands. Furthermore, in coal plants, the scrubbing system, which helps to clean the flue gas, also loses its efficiency at partial power, causing environmentally undesirable emissions. Therefore, there are multiple benefits to running power plants, and particularly thermal power plants, at their rated power.

[0573] FIGS. 36 and 38 are top-level schematic diagram of a PHES system in charge mode and generation mode, respectively, integrated with a power generation plant, according to an example embodiment.

[0574] FIGS. 36 and 38 includes a PHES system **3000**, which may be any PHES embodiment described herein,

including PHES systems **1000**, **1003**, **1005**, **1200**. The PHES system **3000** is integrated with a power plant **3100** that generates power, preferably for distribution to a power grid. Power plant can send electrical power to, and/or receive electrical power from, the PHES system **3000** via power/signal paths **3003** and **3004**. Power/signal paths **3003** and **3004** may include a station **3007** that can control and/or act on power transmission along the power/signal paths. As non-limiting examples, station **3007** may act as one or more of a power substation, a switching station, a distribution substation, and/or a collector substation. Power plant **3100** and the PHES system **3000** are preferably connected to an electrical grid, which can occur at station **3007** or elsewhere, such as through power plant **3100**.

[0575] In one embodiment, the PHES system **3000** can receive electrical power from the power plant **3100** for driving the powertrains (e.g., **100**, **200**, **800**, **801**). In another embodiment, the PHES system **3000** can receive electrical power from the electrical grid for driving the powertrains (e.g., **100**, **200**, **800**, **801**). In another embodiment, the PHES system **3000** can switchably receive electrical power from one or both of the power plant **3100** and/or the electrical grid for driving the powertrains (e.g., **100**, **200**, **800**, **801**).

[0576] In an embodiment, the PHES system **3000** can receive electrical power from the power plant **3100** via power path **3006** for resistive heating of HTS medium **590**. In another embodiment, the PHES system **3000** can receive electrical power from the electrical grid via power path **3006** for resistive heating of HTS medium **590**. In another embodiment, the PHES system **3000** can switchably receive electrical power from one or both of the power plant **3100** and the electrical grid via power path **3006** for resistive heating of HTS medium **590**.

A. Resistive Heating

[0577] FIG. 37A is a schematic diagram of the hot-side thermal storage system **501** illustrated in FIGS. 4, 36, 38 integrated with a power generation plant **3100** according to an example embodiment. Power path **3006** supplies switchable power to one or more of electric resistive heaters **3016** and/or **3017**. The resistive heaters **3016**, **3017** can accept electrical power and convert it to thermal energy for heating the hot HTS medium **590**. Resistive heater **3016** is located in one or more of hot HTS tank **520**. Resistive heater **3017** is inline to the fluid path controlled by valve **521** and can accept electrical power and convert it to thermal energy for heating the hot HTS medium **590** entering one or more of hot HTS tank **520**.

[0578] The resistive heaters **3016** and/or **3017** can be used to increase the HTS medium **590** temperature in tank **520**. With resistive heaters **3016** and/or **3017**, the HTS medium **590** temperature can preferably be much hotter (e.g., 800° C.) than the PHES system **3000** can deliver using the thermodynamic charge cycle alone (e.g., 550C to 600C). In one example, the resistive heaters **3016** and/or **3017** can be turned on while the PHES system **3000** is in charge mode (e.g., as illustrated in FIG. 36), increasing the hot HTS medium **590** temperature (e.g., from 550° C. to 800° C.). In this application, a high-temperature thermal or solar salt may be used as the HTS medium **590** in order to permit the higher temperatures. This allows the PHES system **3000** to advantageously operate with a high coefficient of performance from, for example, 250° C. to 550° C., while additionally storing more thermal energy in the PHES system

3000 due to the resistive heating. Depending on HTS medium **590** flow, and the which resistive heater **3016** and/or **3017** is used, resistive heating can occur with the power plant **3100** in a generation mode and PHES system **3000** in a charge, idle, or generation mode. Advantageously, with the resistive heating, the PHES system **3000** can take additional load from the power plant (or grid), which allows the PHES system **3000** to stay at a desired load even if the PHES system **3000** thermodynamic cycle through the turbomachinery must be turned down partially or fully. As another advantage, a higher hot HTS medium **590** temperature allows the generation cycle to exhibit higher efficiency. As another advantage of the resistive heating integration, the PHES system **3000** can be charged, even if the charge mode is down for maintenance or it is otherwise undesirable to run the charge mode at a particular time.

B. PHES System Power Plant Thermal Integration—Charge Mode & Idle Mode

[0579] Returning to FIG. 36, additional embodiments are illustrated that can each be separated from, or combined with, the resistive heating embodiment. As further illustrated in FIG. 36, the PHES system **3000** can be thermally integrated with the power plant **3100** during a charge mode or, in some embodiments, in and idle mode. If power plant **3100** is a thermal power station, where heat energy is converted to electrical power, heat energy from the power plant **3100**, for example when it is in a generation mode, can be routed into the PHES system **3000**. Additionally, heat can be routed out of the PHES system **3000** and into the power plant **3100**, which may occur, for example, when the PHES system is in a charge mode or an idle mode, and the power plant **3100** is in a generation mode.

[0580] In one embodiment, with the PHES system **3000** in a charge mode and power plant **3100** in a generation mode, exhaust heat flowing in fluid path **3012** from power plant **3100** to charge powertrain system **3001** can be used to reheat working fluid in the charge cycle after a first turbine stage. This embodiment is further illustrated in FIG. 36A.

[0581] FIG. 36A is a schematic diagram of a portion of powertrain system **3001** thermally integrated with power plant **3100** via fluid path **3012**, according to an example embodiment. Powertrain **3001** can be any PHES system powertrain disclosed herein for charge mode operation, including CPT system **100**, SPT system **800** in a charge mode configuration, and RPT system **801** in a charge mode configuration. For illustrative clarity, only select portions of the powertrain system **3001** are illustrated. Illustrated are compressor inlet interconnects **20, 31, 37** and compressor outlet interconnects **17, 28, 34** for the respective compressor systems **130, 830, or 850** (acting as a compressor), and turbine inlet interconnects **18, 29, 35** and turbine outlet interconnects **19, 30, 36** for the respective turbine systems **140, 840, or 852** (acting as a turbine). The turbine system (e.g., **140, 840, 852**) may include at least two stages, illustrated as turbine pairs **140-1, 140-2, or 840-1, 840-2, or 852-1, 852-2**. Between the two stages, the working fluid path may pass through a valve system **3020** which can direct the inter-stage working fluid to a reheater **3018** or the valve system **3020** can bypass the reheater **3018**. Working fluid in the PHES system **3000** expands through the first turbine stage (e.g., **140-1**) and then enters reheater **3018**. Reheater **3018** acts as a heat exchanger, transferring heat to the working fluid from exhaust heat flowing into reheater **3018**

from fluid path **3012**, which is connected to the power plant **3100**. The exhaust may be dumped to ambient or sent elsewhere after passing through the reheater **3018**. The working fluid, after passing through the reheater **3018**, expands through the second turbine stage (e.g., **140-2**) before exiting the turbine system (e.g., **140**).

[0582] Additional embodiments of the thermal integration with reheater can include multiple reheaters and multiple turbine stages. The number of turbine stages depends on the exhaust temperature from the power plant **3100** as well as a balance between cost and improvements in the coefficient of performance of the PHES system **3000** charge cycle.

[0583] Advantageously, the thermal integration with reheater embodiments can provide a higher coefficient of performance in the PHES system **3000** charge cycle because the turbine system can generate more power. Additionally, using exhaust heat from the power plant **3100** provides a lower exhaust temperature if the exhaust is eventually dumped to the ambient environment, thus providing less environmental impact.

[0584] Returning again to FIG. 36, additional embodiments are illustrated that can each be separated from, or combined with, resistive heating embodiments and/or reheater embodiments. If power plant **3100** is a thermal power station, where heat energy is converted to electrical power, heat energy from the power plant **3100** can be routed into the PHES system **3000**.

[0585] In one embodiment, with the PHES system in charge mode, and the power plant **3100** in a generation mode, heated fluid (e.g., hot air or steam) flowing in fluid path **3008** from power plant **3100** to preheater **3010** can be used to preheat working fluid flowing to the compressor system **130, 830, or 850** (acting as a compressor system). Preheater **3010** acts as a heat exchanger, transferring heat to the working fluid from the heated fluid flowing into preheater **3010** from fluid path **3008**, which is connected to the power plant **3100**. Preferably, preheater is in thermal contact with the working fluid flowing through a low-pressure medium-temperature fluid path (e.g., **908, 912, 917**). The heated fluid may be dumped to ambient or sent elsewhere after passing through the preheater **3010**. The working fluid, after passing through the preheater **3010**, is compressed in the turbine system (e.g., **130, 830, or 850** (acting as a compressor system)) and continues through the working fluid loop (e.g., **300, 300C, or 300D**).

[0586] Advantageously, the thermal integration with preheater embodiments can improve the coefficient of performance in the PHES system **3000** because the charge compressor system must do less work. Additionally, if the temperature of the heated fluid from the power plant **3100** is sufficiently high, the charge compressor system can heat the hot HTS medium **590** to a higher temperature than the non-integrated PHES **3000** charge cycle alone. This can reduce or eliminate reliance on resistance heating to raise the hot HTS medium **590** temperature. Alternatively, the preheater embodiment can be used in conjunction with the resistive heating as complementary means of achieving high temperature hot HTS medium **590**.

[0587] In another embodiment, with the PHES system **3000** in a charge mode or an idle mode, and the power plant **3100** in a generation mode, heat in the HTS tank **520** is provided to the power plant **3100**, which may be a thermal plant. An HTS heat exchanger **3029** is provided to transfer heat from hot HTS medium **590** to the power plant **3100**, for

example to reheat steam in the power plant **3100**. This embodiment is discussed in greater detail below with respect to FIGS. **38** and **37A** with the PHES system **3000** in generation mode, and the embodiment for the PHES system **3000** in charge mode operates in the same manner.

[0588] In another embodiment, with the PHES system **3000** in a charge mode or in an idle mode, and the power plant **3100** in a generation mode, the PHES system **3000** may supply cooling to the power plant **3100** (i.e., PHES system **3000** extracts heat from the power plant **3100**). As illustrated in FIGS. **36** and **37B**, the integrated system may include a fluid loop **3033** that flows cold CTS medium **690** out of a cold CTS tank **620**, through a CTS heat exchanger **3019**, and returns warm CTS medium **690** to warm CTS tank **610**. Valve system **3031** may control the flow, including isolating CTS heat exchanger from the CTS medium **690**. Pump **640** may circulate the CTS medium **690**, or alternatively or additionally, one or more other pumps (not shown) within CTS system **691** or along fluid loop **3033** may circulate the CTS medium **690** through fluid loop **3033**.

[0589] A heated fluid (e.g., steam) may circulate from the power plant **3100** through fluid path **3013**, through CTS heat exchanger **3019** and in thermal contact with the cold CTS medium **690**. The heated fluid transfer (i.e., dumps) heat to the cold CTS medium **690** creating warm CTS medium **690**, and the warm CTS medium **690** circulates to the warm CTS tank **610**. The formerly heated fluid is cooled (e.g., condenses) and may be returned to the power plant **3100** via fluid path **3015**. Advantageously, in addition to providing cooling to the power plant **3100**, this embodiment can thermodynamically balance the thermal mass of warm CTS medium **690** in warm CTS tank **610** with warm HTS medium **590** in the warm CTS tank **510**.

C. PHES System Power Plant Thermal Integration—Generation Mode

[0590] FIG. **38** is a top-level schematic diagram of a PHES system **3000** in generation mode integrated with a power generation plant, according to an example embodiment. PHES system **3000** may be any PHES embodiment described herein, including PHES systems **1000**, **1003**, **1005**, **1200**. FIG. **38** illustrates that each can be separated from, or combined with, the resistive heating embodiment. As previously described, the PHES system **3000** can be thermally integrated with the power plant **3100**. If power plant **3100** is a thermal power station, heat energy from the PHES system **3000** in a generation mode can be routed into the power plant **3100** in a generation mode. Additionally, heat can be routed out of the PHES system **3000** and into the power plant **3100**, which may occur, for example, when the PHES system is in a generation mode and the power plant **3100** is in a generation mode.

[0591] FIG. **38A** is a schematic diagram of a portion of powertrain system **3002** thermally integrated with power plant **3100** via fluid path **3024**, according to an example embodiment. In this embodiment, heat from working fluid flowing through a generation powertrain **3002** of PHES system **3000** in a generation mode can be used to preheat intake air for the power plant **3100** in a generation mode.

[0592] Powertrain **3002** can be any PHES system powertrain disclosed herein for generation mode operation, including GPT system **200**, SPT system **800** in a generation mode configuration, and RPT system **801** in a generation mode configuration. For illustrative clarity, only select por-

tions of the powertrain system **3002** are illustrated. Illustrated are compressor inlet interconnects **26**, **31**, **36** and compressor outlet interconnects **22**, **28**, **35** for the respective compressor systems **130**, **830**, or **852** (acting as a compressor), and turbine inlet interconnects **23,29,34** and turbine outlet interconnects **25**, **30**, **37** for the respective turbine systems **140**, **840**, or **850** (acting as a turbine). The compressor system (e.g., **130**, **830**, **852**) may include at least two stages, illustrated as compressor pairs **130-1**, **130-2**, or **830-1**, **830-2**, or **852-1**, **852-2**. Between the two stages, the working fluid path may pass through a valve system **3028** which can direct the inter-stage working fluid to an intercooler **3026** or valve system **3028** can bypass the intercooler **3026**. As illustrated, working fluid in the PHES system **3000** is compressed through the first compressor stage (e.g., **130-1**) and then enters intercooler **3026**. Intercooler **3026** acts as a heat exchanger, transferring heat from the working fluid to power plant intake air (or another fluid) flowing through intercooler **3026**. The working fluid, after passing through the intercooler **3026** and having been cooled, is again compressed through the second compressor stage (e.g., **130-2**) before exiting the compressor system (e.g., **130**). The preheated intake air (or other fluid) then flows through fluid path **3024** to power plant **3100**. The preheated intake air (or other fluid) may be used in the power plant **3100** to improve efficiency of the plant by providing heat energy to, for example, preheat water used in the thermal cycle of the power plant **3100**. In an alternative embodiment, intake air or other fluid passing through the intercooler **3026** could originate in the power plant **3100** and be used for other purposes. For example, the fluid could be a cool high-pressure condensate that arrives in a fluid path (not illustrated) from the power plant **3100**, is heated in the intercooler **3026**, and is then returned to the power plant **3100** through fluid path **3024**.

[0593] Additional embodiments of the thermal integration with intercooler can include multiple intercoolers and multiple compressor stages.

[0594] Advantageously, the thermal integration with intercooler embodiments can provide higher efficiency for the PHES system generation cycle, and therefore higher round trip efficiency (i.e., charge plus generation cycle). Additionally, the power plant can experience higher generation efficiency as well. Finally, if sufficient heat is removed through the intercooler, the PHES system **3000** may be able to run with the AHX **700** system bypassed or removed completely, thus further improving efficiency and/or capital cost of the PHES system **3000**.

[0595] Returning again to FIG. **38**, additional embodiments are illustrated that can each be separated from, or combined with, resistive heating embodiments and/or intercooler embodiments.

[0596] In one embodiment, with the PHES system **3000** in a generation mode and power plant **3100** in a generation mode, ambient air (or another fluid) can be circulated through an active AHX system **700**, where it is heated, and then it is directed through fluid path **3022** into power plant **3100**. As previously described (e.g., with respect to FIG. **6B**), AHX system **700** can act as a heat exchanger, preferably during operation of PHES system **3000** in generation mode, and can transfer heat from the working fluid to the ambient air (or another fluid). The preheated air can then be used for the same purposes in the power plant **3100**, and with the same efficiency advantages, as the preheated air in the

intercooler embodiments described with respect to FIG. 38A. Additionally, by reducing or eliminating exhaust heat dump from the PHES system 3000, the environmental impact of PHES system 3000 is improved. In alternative embodiments, AHX system 700 may be run as part of a charge mode working fluid loop to remove excess heat during charge mode operation of PHES system 3000. In those embodiments, heat can also be transferred via the AHX system 700 to the power plant 3100 while the PHES system 3000 is in a charge mode.

[0597] Referring to FIGS. 38 and 37A, another embodiment is provided where heat in the HTS tank 520 is provided to the power plant 3100, which may be a thermal plant. This embodiment may be accomplished with the PHES system 3000 in generation, idle, or charge mode. An HTS heat exchanger 3029 is provided to transfer heat from hot HTS medium 590 to the power plant 3100, for example to reheat steam in the power plant 3100.

[0598] An HTS heat exchanger 3029 can be positioned between hot HTS medium 590 in hot HTS tank 520 and warm HTS medium 590 in warm HTS tank 510. An HTS medium 590 fluid loop 3023 provides a circulation path between hot HTS medium 590 in hot HTS tank 520 and warm HTS medium 590 in warm HTS tank 510. A valve system 3021 can allow or isolate hot HTS medium 590 flow through the HTS heat exchanger 3029. In the illustrated embodiment of FIG. 37A, pump 540 may be used to circulate the hot HTS medium 590 from hot HTS tank 520, through the HTS heat exchanger 3029, and to the warm HTS tank 510; however, in alternative embodiments a separate pumping system or gravity feed (not illustrated) may be used to circulate the hot HTS medium 590.

[0599] Fluid from the power plant 3100 in fluid path 3025 may be circulated through the HTS heat exchanger 3029, and in thermal contact with the hot HTS medium from fluid loop 3023, such that heat is transferred from the hot HTS medium 590 to the fluid, and the now heated fluid is returned to the power plant 3100. The heated fluid may be used in a reheater (e.g., for reheating steam) in the power plant 3100.

[0600] In another embodiment, with the PHES system 3000 in a generation mode, and the power plant 3100 in a generation mode, the PHES system 3000 may supply cooling to the power plant 3100 (i.e., PHES system 3000 extracts heat from the power plant 3100). As illustrated in FIGS. 38 and 37B, the CTS heat exchanger 3019 may extract heat from a power plant 3100 fluid flowing through fluid paths 3013, 3015. The extracted heat will be transferred to CTS medium 690. This embodiment is discussed in greater detail above with respect to FIGS. 36 and 37B with the PHES system 3000 in charge or idle mode, and the embodiment for the PHES system 3000 in generation mode operates in the same manner.

XII. Cogeneration System and Control

[0601] FIG. 39 is a schematic diagram of cogeneration system 1220, which may include cogeneration control of the PHES system 3000 integrated with the power plant 3100, according to an example embodiment.

[0602] In this configuration, the power plant 3100 may supply a portion of its electrical output to the PHES system 3000. This may be done when the power plant 3100 is required to reduce its output (e.g., based on a directive from a grid operator, via, e.g., a grid dispatch controller 3400) to maintain grid stability. The PHES system 3000 may be sized

(e.g., megawatt capacity) such that it can accept some or all of the electricity that the power plant 3100 cannot send to the grid (if the power plant 3100 was running at 100%). Alternatively, the PHES system 3000 may be sized such that it can accept the minimum output power of the power plant 3100, allowing the power plant to remain operating even when grid demand is zero, thus avoiding frequent power plant shutdown and associated startup costs. The PHES system 3000 can then later discharge energy to the grid when there is higher demand for electricity.

[0603] A cogeneration dispatch controller 3300 may receive directives from a grid operator, optionally through a grid dispatch controller 3400. The grid dispatch controller 3400 may instruct the cogeneration dispatch controller 3300 to increase or decrease power supplied to the grid and/or load consumed from the grid. Alternatively or additionally, the grid dispatch controller 3400 may issue instructions to the power plant 3100, which may pass the instructions and/or responsively provide instructions and/or data to the cogeneration dispatch controller 3300 over a signal path 3042. Alternative or additionally, the power plant 3100 may issue instructions or data to the cogeneration dispatch controller 3300 based on other data.

[0604] The cogeneration dispatch controller 3300 may communicate with, and/or direct, the PHES system 3000. The cogeneration dispatch controller may receive state and/or mode information from the PHES system 3000, including power level (charge or generation), state of charge, system availability, etc. The cogeneration dispatch controller 3300 may direct the PHES system, including to change power levels and/or operation mode (e.g., from charge to generation or vice-versa). This may be done based on data received at the cogeneration dispatch controller 3300 or responsively to instructions received at the cogeneration dispatch controller 3300.

[0605] From sensor 3004S, the cogeneration dispatch controller 3300 may receive data regarding power traveling to/from the PHES system 3000, and/or from sensor 3003S, the cogeneration dispatch controller 3300 may receive data regarding power traveling from the power plant 3100. Such data may include, for example, voltage, amperage, and/or frequency.

[0606] Advantageously, the power plant 3100 can optionally maintain 100% rated output power at all time (at least until the PHES system 3000 reaches full charge capacity), keeping the power plant's at high efficiency and overall low emission. Additionally, the charged PHES system 3000, which may have been charged using inexpensive excess electricity, can sell electricity to the grid at a high margin. Further, this cogeneration integration can effectively increase the total capacity of the integrated system (power of the power plant 3100 plus power of PHES system 3000). Also, power plant 3100 and PHES system 3000 can be operated independently, as desired.

[0607] FIG. 40 is a simplified block diagram illustrating components of a cogeneration system 1220, according to an example embodiment.

[0608] The cogeneration system 1220 may include one or more sensors 1224, a communication system 1228, a controller system 1236, one or more processors 1230, and a data storage 1232 on which program instructions 1234 may be stored. The cogeneration system 1220 may further include a PHES system 3000. The PHES system 3000 may take the form of, or be similar in form, to any PHES system herein,

including PHES system **1000**, **1003**, **1005**, **1200**. The cogeneration system **1220** includes a power plant **3100** and may optionally include a thermal load **3200**. The components of cogeneration system **1220** may communicate, direct, and/or be directed, over one or more communication connections **1222** (e.g., a bus, network, PCB, etc.). T

[0609] The sensors **1224** may include a range of sensors, including monitoring and reporting devices that can provide operating conditions in the cogeneration system **1220**, including one or more of pressure, temperature, flow rate, dewpoint, turbomachinery speed, fan speed, pump speed, valve state, mass flow rate, switch state, voltage, amperage, frequency, power, fluid level, and/or fluid concentration data, to one or more control systems and/or controllers controlling and/or monitoring conditions of a PHES system. Sensors **1224** may include monitoring and reporting devices that can provide operating conditions in and between components of the cogeneration system **1220**, including PHES system **3000**, power plant **3100**, thermal load **3200**, and operating conditions of fluid or electrical paths between and among the components of the cogeneration system. Sensors **1224** may further include monitoring and reporting devices that provide operating conditions of components outside the cogeneration system **1220**. For example, sensors **1224** may monitor and report operating frequency of the electrical grid.

[0610] The control system **1236** can function to regulate and/or control the operation of the PHES system **3000** in accordance with instructions and/or data from the PHES system **3000**, another entity, control system, and/or based on information output from the sensors **1224**. The control system includes a cogeneration dispatch controller **3300**. In some embodiments, the control system may optionally include one or both of the PHES Supervisory Controller **1124** and/or the ICS Controller **1125**. The control system **1236** may therefore be configured to direct operation of the PHES system **3000**, for example by directly controlling the PHES system **3000** and/or sending instructions and/or signals to PHES Supervisory Controller **1124**. The control system **1236** may further be configured to operate various valves, switches/breakers, fans, and/or pumps that affect interaction of the PHES system **3000** with the power plant **3100** and/or thermal load **3200**. The control system **1216** may be implemented by components in whole or in part in the cogeneration system **1220** and/or by remotely located components in communication with the cogeneration system **1220**, such as components located at stations that communicate via the communication system **1228**. The control system **1236** may be implemented by mechanical systems and/or with hardware, firmware, and/or software. As one example, the control system **1236** may take the form of program instructions **1234** stored on a non-transitory computer readable medium (e.g., the data storage **1232**) and a processor (or processors) **1230** that executes the instructions. The control system **1236** may include the cogeneration dispatch controller **3300**, as well as other controllers.

[0611] The cogeneration system **1220** may include a communication system **1228**. The communications system **1228** may include one or more wireless interfaces and/or one or more wireline interfaces, which allow the cogeneration system **1220** to communicate via one or more networks. Such wireless interfaces may provide for communication under one or more wireless communication protocols. Such wireline interfaces may include an Ethernet interface, a Universal Serial Bus (USB) interface, or similar interface to

communicate via a wire, a twisted pair of wires, a coaxial cable, an optical link, a fiber-optic link, or other physical connection to a wireline network. The cogeneration system **1220** may communicate within the cogeneration system **1220**, with other stations or plants, and/or other entities (e.g., a command center) via the communication system **1228**. The communication system **1228** may allow for both short-range communication and long-range communication. The cogeneration system **1220** may communicate via the communication system **1228** in accordance with various wireless and/or wired communication protocols and/or interfaces.

[0612] The cogeneration system **1220** may include one or more processors **1230**, data storage **1232**, and program instructions **1234**. The processor(s) **1230** may include general-purpose processors and/or special purpose processors (e.g., digital signal processors, application specific integrated circuits, etc.). The processor(s) **1230** can be configured to execute computer-readable program instructions **1234** that are stored in the data storage **1232**. Execution of the program instructions can cause the cogeneration system **1220** to provide at least some of the functions described herein.

[0613] One or more controllers may be used to control cogeneration system **1220**. A cogeneration dispatch controller **3300** may determine and/or direct cogeneration system **1220** actions, including directing the PHES system **3000** to change modes or power levels, and/or to determine and/or direct power transfer between or among PHES system **3000**, the power plant **3100**, and/or an electrical grid, and/or to determine and/or direct heat transfer between or among PHES system **3000**, the power plant **3100**, and/or a thermal load **3200**. Alternatively or additionally, the cogeneration dispatch controller **3300** may receive directives and/or data from the PHES system **3000**, the power plant **3100**, the thermal load **3200**, and/or a grid dispatch controller **3400**, and responsively enact changes in PHES system **3000** (e.g., change power level), power plant **3100** (e.g., change power level) and/or cogeneration system **1200**, and/or report conditions to PHES supervisory controller **1124** or to power plant **3100**. For example, a dispatch signal originating with the grid controller **3400** can be received by the cogeneration dispatch controller **3300**, and the controller **3300** can responsively direct the PHES supervisory controller **1124** to start/increase generation power or start/increase charge load, respectively. Additionally or alternatively, the cogeneration dispatch controller **3300** could direct the power plant **3100** to increase or decrease power generation.

[0614] Cogeneration dispatch controller **3300** may monitor pressure, temperature, and/or flowrate of steam or other fluid moving between one or more of the PHES system **3000**, power plant **3100**, and/or thermal load **3200**. Cogeneration dispatch controller **3300** may monitor electric power flowing between one or more of PHES system **3000**, power plant **3100**, and/or the electrical grid.

XIII. District Heating

[0615] A PHES system **3000** integrated with a power plant **3100** may be capable of supplying waste heat from the PHES system **3000** to a thermal load. In one embodiment, the thermal load **3200** may be a district heating system providing residential and/or commercial heating. FIG. 41 is a schematic diagram of district heating with an integrated PHES system **3000**, according to an example embodiment.

[0616] In a district heating system, a power plant **3100** that operates as a thermal plant may supply heat (e.g., steam) to a thermal load **3200**, such as one or more office buildings, educational institutions, or health care facilities. Heat may be supplied to the thermal load **3200** as a fluid (e.g., hot steam) via a fluid path **3030** and cooled fluid (e.g., cold steam or condensed steam) may be returned to the power plant **3100** for reheating.

[0617] PHES system **3000** may generate excess heat, which needs to be removed from the system. Preferably, excess heat may be dumped during generation mode, and it may be dumped via the AHX system **700** as described elsewhere herein. A fluid path **3034** may connect to cooled fluid path **3032** and direct some or all of the cooled fluid into the AHX system **700** at interconnect **29** of the PHES system **3000**. Fluid flow in fluid path **3034** may be assisted with a fan **3037** (or a pump if in liquid phase). Within the AHX system **700**, the cooled fluid is thermally contacted with the hot working fluid in the working fluid loop and consequently heated before being returned via fluid path **3036** to the supply fluid path **3030** for use at the thermal load **3200**.

[0618] Advantageously, this provides a cost return for otherwise excess heat and provides an environmental benefit by reducing or eliminating waste heat dump to the ambient environment.

1.-20. (canceled)

21. A system comprising:

a pumped heat energy storage (PHES) system comprising at least two turbomachinery systems, at least one of the at least two turbomachinery systems operable as a compressor system and at least one of the at least two turbomachinery systems operable as a turbine system, and a working fluid cycle system comprising a working fluid circulating in a working fluid cycle path through the at least one turbomachinery system operable as a compressor system, a hot-side heat exchanger (“HTX”) system, the at least one turbomachinery system operable as a turbine system, and a cold-side heat exchanger system;

hot thermal storage path arranged to pass hot-side thermal storage medium through the HTX system in thermal contact with the working fluid, wherein in a charge mode, warm hot-side thermal storage medium flows via the hot thermal storage path through the hot-side HTX system to receive heat from the working fluid to heat the warm hot-side thermal storage medium into hot hot-side thermal storage medium;

an electric heater arranged in thermal contact with the hot-side thermal storage medium to provide heat to the hot-side thermal medium, wherein the electric heater is adapted to heat the hot-side thermal storage medium to a temperature greater than the hot hot-side thermal storage medium.

22. The system of claim **21**, wherein the electric heater is electrically connected with a power generation plant and receives electricity from the power generation plant for storage as stored thermal energy.

23. The system of claim **22**, wherein the power generation plant is a thermal plant.

24. The system of claim **21**, wherein the PHES system, when in the charge mode, receives electricity from the power generation plant, apart from any intervening electrical grid.

25. The system of claim **21**, wherein the working fluid path of the PHES system, when operating in a generation mode, comprises circulating the working fluid through, in sequence, at least the at least one turbomachinery system operable as a compressor system, the hot-side heat exchanger system, the at least one turbomachinery system operable as a turbine system, the cold-side heat exchanger system, and back to the at least one turbomachinery system operable as a compressor system.

26. The system of claim **25**, wherein the PHES system further comprises a recuperator heat exchanger, wherein the working fluid path of the PHES system, when operating in a generation mode, comprises circulating the working fluid through, in sequence, at least the at least one turbomachinery system operable as a compressor system, the recuperator heat exchanger system, the hot-side heat exchanger system, the at least one turbomachinery system operable as a turbine system, the recuperator heat exchanger system, the cold-side heat exchanger system, and back to the at least one turbomachinery system operable as a compressor system.

27. The system of claim **21**, wherein the electric heater is arranged inline to a stream of hot-side thermal storage medium.

28. The system of claim **27**, wherein the electric heater is arranged to heat hot-side thermal storage medium flowing into a hot-side thermal storage tank for storing hot-side thermal medium.

29. The system of claim **21**, wherein the electric heater is arranged to heat hot-side thermal storage medium within a hot hot-side thermal storage tank. First Named Inventor Benjamin R. Bollinger

30. The system of claim **21**, wherein the electric heater generates heat through resistance.

31. The system of claim **21**, wherein the electric heater is operable to heat the hot-side thermal storage fluid to a temperature much higher than using the charge cycle alone.

32. The system of claim **31**, wherein the electric heater is operable to heat the hot-side thermal storage fluid to about 800 C.

33. A method of operating a pumped heat energy storage (PHES) system comprising at least two turbomachinery systems, at least one of the at least two turbomachinery systems operable as a compressor system and at least one of the at least two turbomachinery systems operable as a turbine system, and a working fluid cycle system comprising a working fluid for circulating in a working fluid cycle path through the at least one turbomachinery system operable as a compressor system, a hot-side heat exchanger (“HTX”) system, the at least one turbomachinery system operable as a turbine system, and a cold-side heat exchanger system;

passing warm hot-side thermal storage medium through the HTX system in thermal contact with the working fluid, in a charge mode, to receive heat from the working fluid to heat the warm hot-side thermal storage medium into hot hot-side thermal storage medium; and electrically heating the hot-side thermal storage medium to a temperature greater than the hot hot-side thermal storage medium.

34. The method of claim **33**, wherein electrically heating comprises receiving electricity from a power generation plant for storage as stored thermal energy.

35. The method of claim **34**, wherein the power generation plant is a thermal plant.

36. The method of claim **34**, wherein receiving electricity from the power generation plant, includes receiving electricity from the power generation plant, apart from any intervening electrical grid.

* * * * *