




(22) **Date de dépôt/Filing Date:** 2014/07/08
 (41) **Mise à la disp. pub./Open to Public Insp.:** 2015/01/09
 (45) **Date de délivrance/Issue Date:** 2016/12/06
 (30) **Priorité/Priority:** 2013/07/09 (EP13175690.0)

(51) **Cl.Int./Int.Cl. B63H 20/06** (2006.01),
B63H 21/30 (2006.01)
 (72) **Inventeur/Inventor:**
SAKKINEN, PETRI, FI
 (73) **Propriétaire/Owner:**
ABB OY, FI
 (74) **Agent:** MARKS & CLERK

(54) **Titre : UNITE DE PROPULSION DE NAVIRE**
 (54) **Title: SHIP'S PROPULSION UNIT**

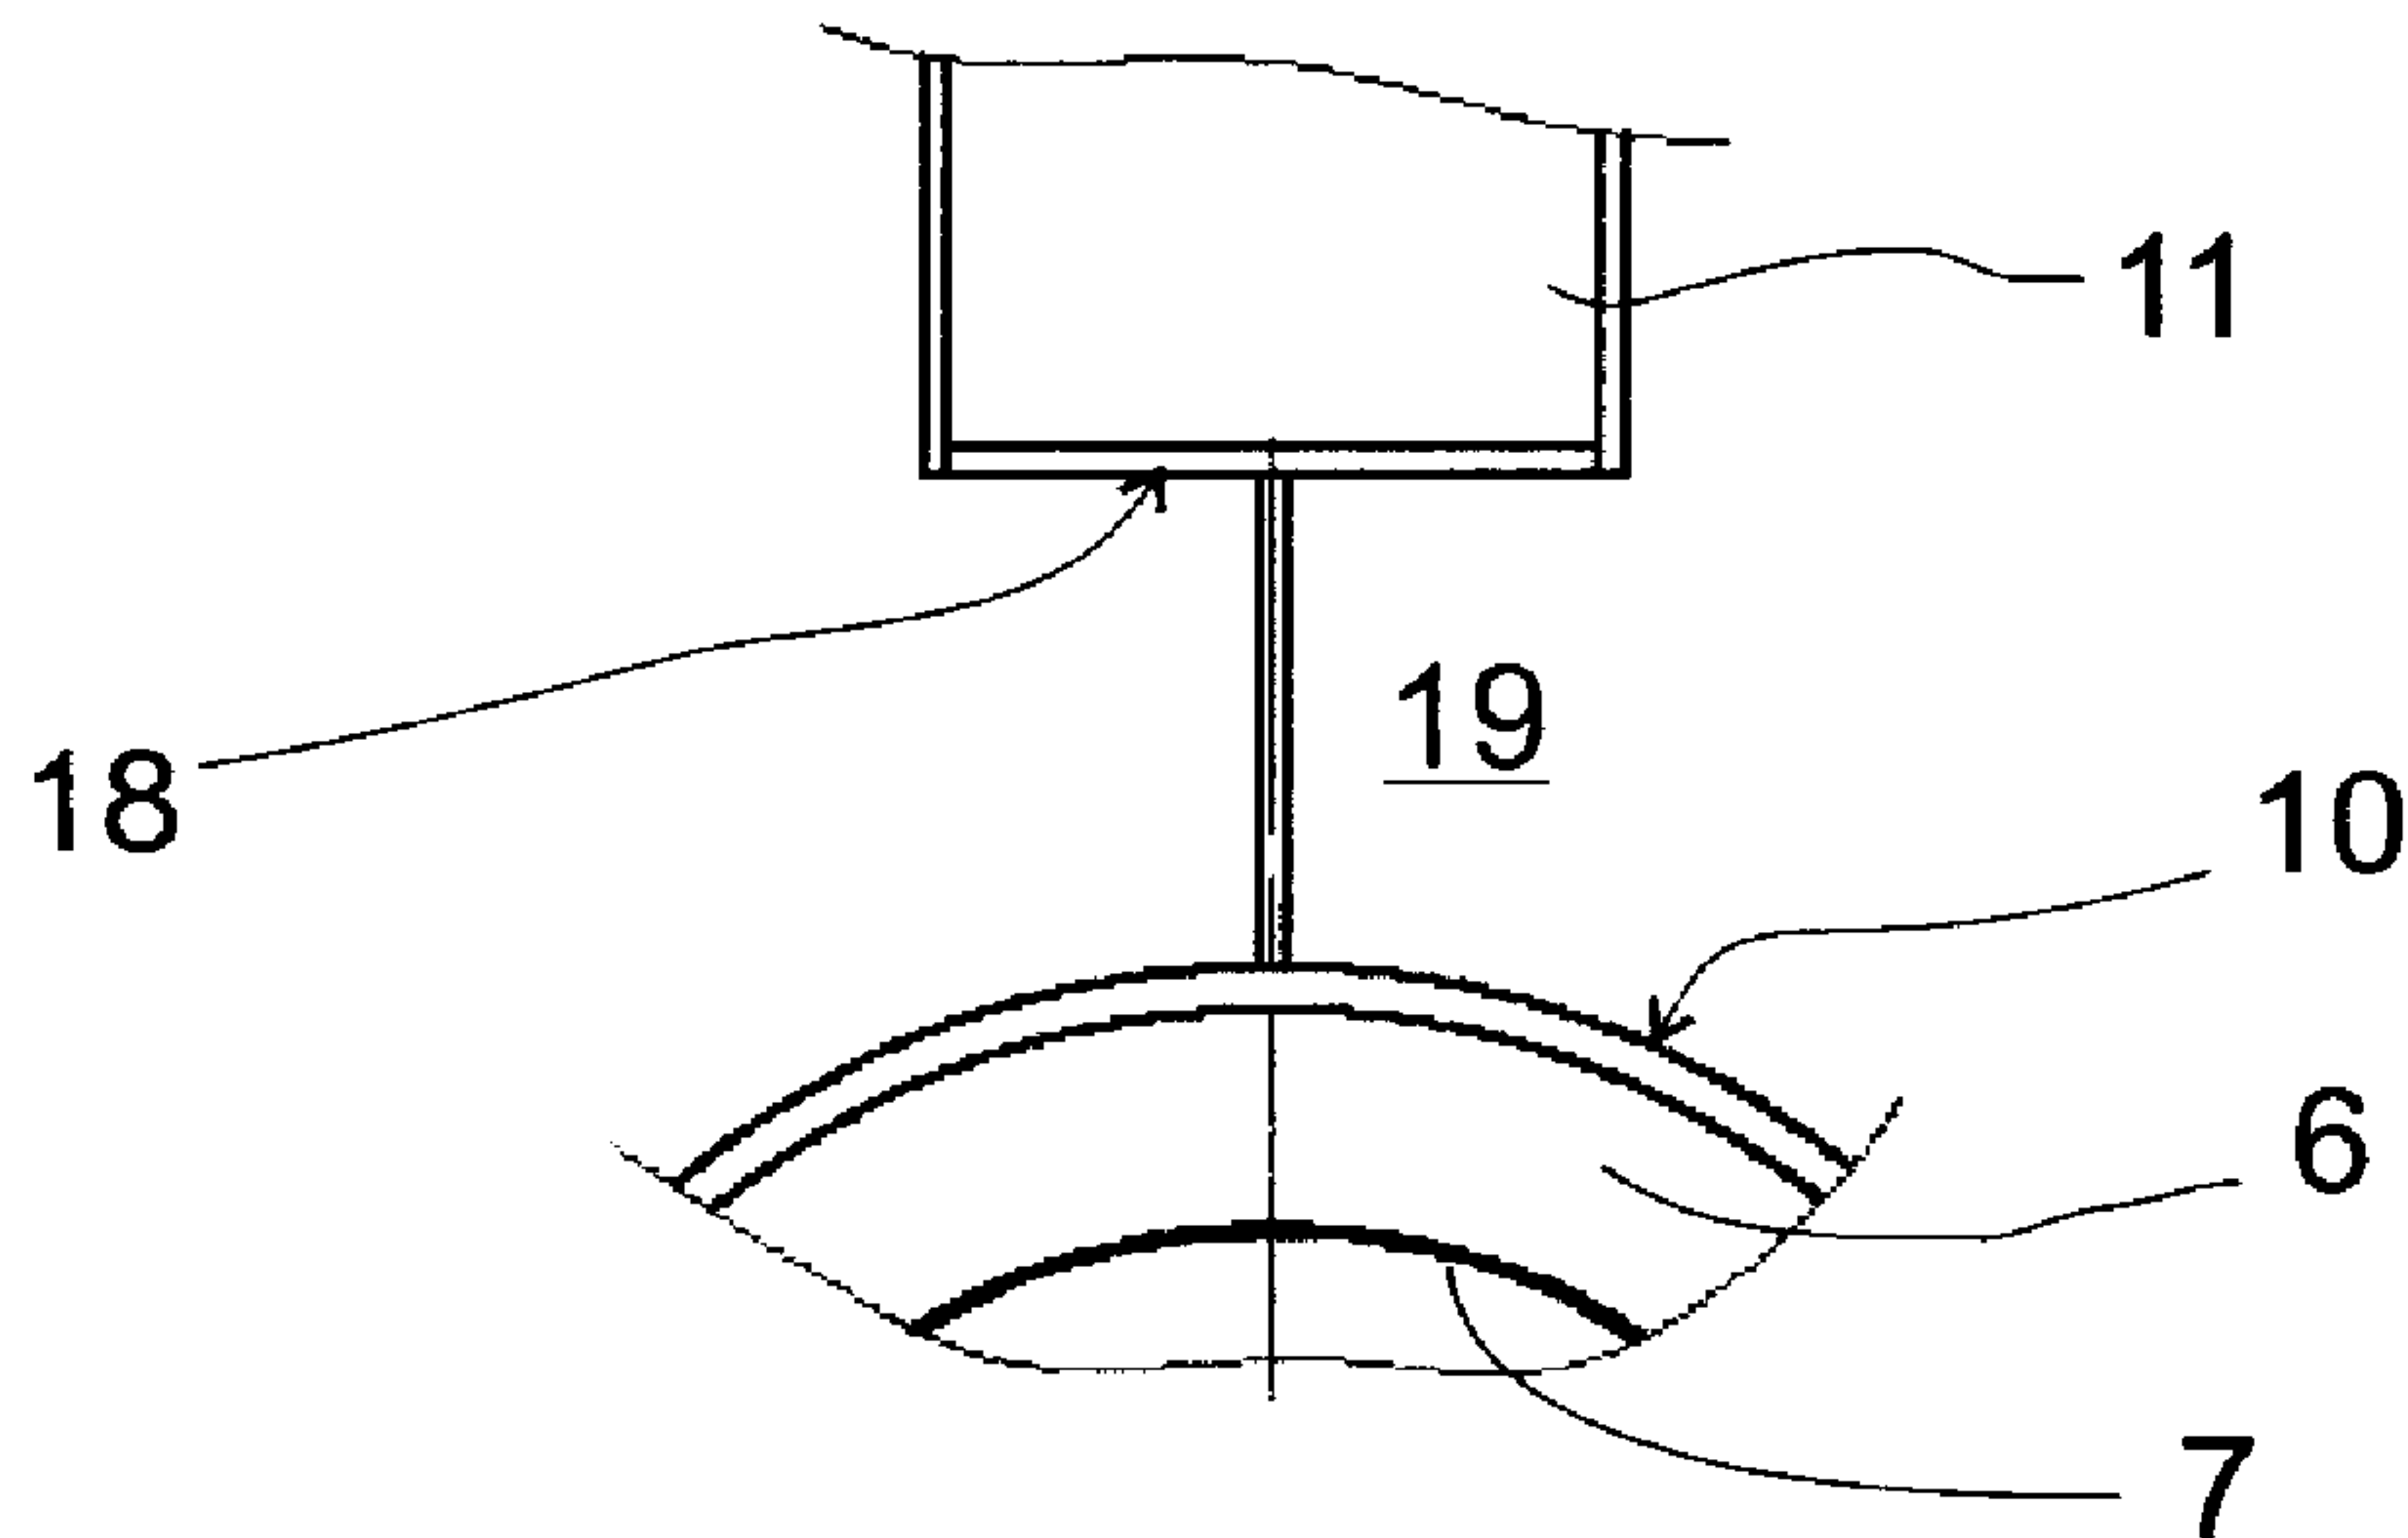

(57) **Abrégé/Abstract:**

The invention relates to a ship's propulsion unit such as a ship's azimuthing propulsion unit. The propulsion unit comprises at least one supporting metal sheet (12) arranged between an support section (11) of a shell structure (1) of the propulsion unit and an cylindrical outer surface (10) of a cylindrical section (9) of a motor housing section (8) of the shell structure (1) for providing additional support for the motor housing section (8) of the shell structure (1) at the shell structure (1) of the support section (11).



Abstract

The invention relates to a ship's propulsion unit such as a ship's azimuthing propulsion unit. The propulsion unit
5 comprises at least one supporting metal sheet (12) arranged between an support section (11) of a shell structure (1) of the propulsion unit and an cylindrical outer surface (10) of a cylindrical section (9) of a motor housing section (8) of the shell structure (1) for providing
10 additional support for the motor housing section (8) of the shell structure (1) at the shell structure (1) of the support section (11).

(Fig 4)

SHIP'S PROPULSION UNIT

Field of the invention

The invention relates to a ship's propulsion unit such as a ship's azimuthing propulsion
5 unit.

A ship's propulsion unit is presented in document WO0154973.

Objective of the invention

An object of the invention is to provide a ship's propulsion unit that provides both for
10 effective cooling of an electrical motor in a motor housing section of a shell structure of the
propulsion unit to water surrounding the shell structure of the propulsion unit and for rigid
support of the motor housing section of the shell structure at a support section of the shell
structure.

15 Short description of the invention

The ship's propulsion unit of the invention is described herein.

Preferred embodiments of the ship's propulsion unit are described herein.

According to an aspect of the present invention, there is provided a ship's propulsion unit
such as a ship's azimuthing propulsion unit, wherein the propulsion unit comprising

20 a shell structure arranged below a hull of the ship and immersible at least partly in water
so that the shell structure is at least partly surrounded by water, and

an electric motor for rotating a propeller axis, wherein the propeller axis extends to the
outside of the shell structure

a propeller mounted on the propeller axis outside the shell structure,
25 wherein the propulsion unit having a vertical longitudinal central plane,
wherein the electric motor having a stator and a rotor for rotating in the stator,

wherein the electric motor is arranged in a motor housing section of the shell structure so
that the stator of the electric motor is form-fitted into a cylindrical section of the motor housing
section of the shell structure,

30 wherein the cylindrical section having a cylindrical outer surface,

wherein the shell structure includes a support section having an lower end directly
connected to the motor housing section of the shell structure and an upper end connected to the
hull of the ship, and

1a

wherein the motor housing section of the shell structure having a first end from which the propeller axis extends to the outside of the shell structure and a second end at the opposite end of the motor housing section of the shell structure,

characterized

5 by at least one supporting metal sheet arranged between the support section of the shell structure and the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure for providing additional support for the motor housing section of the shell structure at the shell structure of the support section,

10 by said at least one supporting metal sheet having a first side surface and a second side surface,

by said at least one supporting metal sheet being fastened to the support section of the shell structure and fastened to the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure, and

15 by water surrounding the shell structure being in contact with both the first side surface and the second side surface of said at least one supporting metal sheet.

According to another aspect of the present invention, there can be provided the propulsion unit described herein, characterized

20 by the lower end of the support section of the shell structure being directly connected to the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure by means of a first connection section of the support section of the shell structure at a region of the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure that is closer to the second end of the motor housing section of the shell structure than to the first end of the motor housing section of the shell structure,

25 by the support section of the shell structure having a lower surface that is located at a distance from the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure and that faces the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure so that a space is formed between the lower surface of support section of the shell structure and the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure, and

30 by the part of the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure that is located in the space is in direct contact with water surrounding the shell structure.

According to another aspect of the present invention, there can be provided the propulsion unit described herein, characterized

1b

by the lower end of the support section of the shell structure being additionally directly connected to cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure by means of a second connection section of the support section of the shell structure at a region of the motor housing section of the shell structure that is closer to the first
5 end of the motor housing section of the shell structure than to the second end of the motor housing section of the shell structure, and

by said space being formed between the first connection section of the support section of the shell structure and the second connection section of the support section of the shell structure.

According to another aspect of the present invention, there can be provided the
10 propulsion unit described herein, characterized

by said at least one supporting metal sheet forming a closing structure arranged to partly close said space so that water surrounding the shell structure can enter the space between and so that the water can exit the space between.

According to another aspect of the present invention, there can be provided the
15 propulsion unit described herein, characterized

by at least one supporting metal sheet forming a closing structure arranged to partly close said space forming a vertical extension of the support structure, which vertical extension extends between the support structure of the shell structure and the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure.

According to another aspect of the present invention, there can be provided the
20 propulsion unit described herein, characterized

by said at least one supporting metal sheet arranged to partly close said space so that a forward opening forming an inlet and/or an outlet for water is formed and so that a rear opening forming an outlet and/or an inlet for water is formed.

According to another aspect of the present invention, there can be provided the
25 propulsion unit described herein, characterized

by supporting metal sheet forming closing structure arranged to partly close said space between being arranged symmetrically at both sides of space with respect to the vertical longitudinal central plane of the propulsion unit.

According to another aspect of the present invention, there can be provided the
30 propulsion unit described herein, characterized

by a plurality of supporting metal sheets each being arranged being fastened to the support section of the shell structure and to the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure.

1c

According to another aspect of the present invention, there can be provided the propulsion unit described herein, characterized

by some of said plurality of supporting metal sheets extending vertically at the vertical longitudinal central plane of the propulsion unit.

5 According to another aspect of the present invention, there can be provided the propulsion unit described herein, characterized

by some supporting metal sheets of said plurality of supporting metal sheets extending vertically at the vertical longitudinal central plane of the propulsion unit, and

10 by some supporting metal sheets of said plurality of supporting metal sheets extending vertically and transversely with respect to the vertical longitudinal central plane of the propulsion unit.

According to another aspect of the present invention, there can be provided the propulsion unit described herein, characterized

15 by said plurality of supporting metal sheet being arranged symmetrically with respect to the vertical longitudinal central plane of the propulsion unit.

According to another aspect of the present invention, there can be provided the propulsion unit described herein, characterized

by the electric motor being a permanent-magnet electric motor.

20 According to another aspect of the present invention, there can be provided the propulsion unit described herein, characterized

by the cylindrical section of the motor housing section of the shell structure being of a single-layer form.

According to another aspect of the present invention, there can be provided the propulsion unit described herein, characterized

25 by said at least one supporting metal sheet being of a single-layer form.

According to another aspect of the present invention, there can be provided the propulsion unit described herein, characterized

by the motor housing section includes a first detachable section at the first end of the motor housing section of the shell structure,

30 by the first detachable section of the motor housing section housing a bearing arrangement for the propeller axis, and

by the first detachable section of the motor housing section being unattached to the support section of the shell structure.

35 According to another aspect of the present invention, there can be provided the propulsion unit described herein, characterized

1d

by the motor housing section includes a second detachable section at the second end of the motor housing section of the shell structure,

by the second detachable section of the motor housing section housing a bearing arrangement for the propeller axis, and

5 by the second detachable section of the motor housing section being unattached to the support section of the shell structure.

According to another aspect of the present invention, there can be provided the propulsion unit described herein, characterized

10 by the lower end of the support section being directly connected to the motor housing section of the shell structure so that the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure partly forms the outermost surface of the propulsion unit.

The ship's propulsion unit comprises a shell structure arranged below a hull of the ship and immersible at least partly in water so that the shell structure is at least partly surrounded by
15 water. The ship's propulsion unit comprises an electric motor for rotating a propeller axis. The propeller axis extends to the outside of the shell structure. A propeller is mounted on the propeller axis outside the shell structure. The propulsion unit has a vertical longitudinal central plane. The electric motor has a stator and a rotor for rotating in the stator. The electric motor is arranged in a motor housing section of the shell structure so that the stator of the electric motor is form-fitted
20 into a cylindrical section of the motor housing section of the shell structure. The cylindrical section has a cylindrical outer surface. The shell structure includes a support section having an lower end directly connected to the motor housing section of the shell structure and an upper end connected to the hull of the ship. The motor housing section of the shell structure has a first end from which the propeller axis extends to the outside of the shell structure and a second end at the
25 opposite end of the motor housing section of the shell structure.

The invention is based on arranging at least one supporting metal sheet between the support section of the shell structure and a cylindrical outer surface of a cylindrical section of the motor housing section of the shell structure for providing additional support for the motor housing section 8 of the shell structure 1 at the shell structure 1 of the support section.

30 Because said at least one supporting metal sheet has a first side surface and a second side surface and because said at least one supporting metal sheet is fastened to the support section of the shell structure and fastened to the cylindrical outer surface of the cylindrical section of the

motor housing section of the shell structure, water surrounding the shell structure is in contact with both the first side surface and the second side surface of said at least one supporting metal sheet. This supporting leaves most of the cylindrical outer surface of a cylindrical section of the motor housing section of the shell structure exposed to water surrounding the shell structure of the propulsion unit and provides therefore for effective cooling of the electrical motor in the motor housing section of the shell structure to water surrounding the shell structure of the propulsion unit.

List of figures

10 In the following the invention will be described in more detail by referring to the figures, which

Figure 1 shows a ship's propulsion unit according to the prior art,

Figure 2 shows the ship's propulsion unit shown in figure 1 as cut along line X-X in figure 1,

15 Figure 3 shows the ship's propulsion unit shown in figure 1 as cut along line Y-Y in figure 1,

Figure 4 shows a first embodiment of the ship's propulsion unit,

Figure 5 shows the ship's propulsion unit shown in figure 4 as cut along line X-X in figure 4,

20 Figure 6 shows the ship's propulsion unit shown in figure 4 as cut along line Y-Y in figure 4,

Figure 7 shows a second embodiment of the ship's propulsion unit,

Figure 8 shows the ship's propulsion unit shown in figure 7 as cut along line X-X in figure 7,

25 Figure 9 shows the ship's propulsion unit shown in figure 7 as cut along line Y-Y in figure 7,

Figure 10 shows an alternative configuration of section Y-Y of the ship's propulsion unit shown in figure 7,

Figure 11 shows a third embodiment of the ship's propulsion unit,

30 Figure 12 shows the ship's propulsion unit shown in figure 11 as cut along line X-X in figure 11,

Figure 13 shows the ship's propulsion unit shown in figure 11 as cut along line Y-Y in figure 11,

Figure 14 shows a fourth embodiment of the ship's propulsion unit,

35

Figure 15 shows the ship's propulsion unit shown in figure 14 as cut along line Z-Z in figure 14,

Figure 16 shows the ship's propulsion unit shown in figure 14 as cut along line X-X in

figure 14,

Figure 17 shows the ship's propulsion unit shown in figure 14 as cut along line Y-Y in figure 14,

Figure 18 shows a fifth embodiment of the ship's propulsion unit,

5 Figure 19 shows the ship's propulsion unit shown in figure 18 as cut along line X-X in figure 18,

Figure 20 shows the ship's propulsion unit shown in figure 18 as cut along line Y-Y in figure 18,

Figure 21 shows a sixth embodiment of the ship's propulsion unit,

10 Figure 22 shows the sixth embodiment shown in figure 21 in a state where the first detachable section and the second detachable section have been detached,

Figure 23 shows the first detachable section of the sixth embodiment shown in figure 21, and

15 Figure 24 shows the second detachable section of the sixth embodiment shown in figure 21.

Detailed description of the invention

Figures 1 to 3 shows a ship's propulsion unit according to the prior art.

20 Figures 4 to 20 shows examples of embodiments of the ship's propulsion units (hereinafter "propulsion unit").

The ship's propulsion unit may be a ship's azimuthing propulsion unit that is attached to the hull 2 of the ship by means of a turning arrangement (not shown in the drawings) for turning the propulsion unit with respect to the hull 2 of the ship.

25 The propulsion unit comprises a shell structure 1 arranged below a hull 2 of the ship (not marked with a reference numeral) and immersible at least partly in water so that the shell structure 1 is at least partly surrounded by water

The propulsion unit comprises an electric motor 3 for rotating a propeller axis 4. The propeller axis 4 extends to the outside of the shell structure 1. A propeller 5 is mounted on the propeller axis 4 outside the shell structure 1.

30 The propulsion unit has a vertical longitudinal central plane A.

The electric motor 3 has a stator 6 and a rotor 7 for rotating in the stator 6. The electric motor 3 is arranged in a motor housing section 8 of the shell structure 1 so that the stator 6 of the electric motor 3 is form-fitted into a cylindrical section 9 of the motor housing section 8 of the shell structure 1. The cylindrical section 9 has a cylindrical outer surface 10.

35 The shell structure 1 includes a support section 11 having an lower end (not marked with a reference numeral) directly connected to the motor housing section 8 of the shell structure 1 and an upper end (not marked with a reference numeral) connected to the hull 2 of the ship.

The propulsion unit comprises at least one supporting metal sheet 12 arranged between

the support section 11 of the shell structure 1 and the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1 for providing additional support for the motor housing section 8 of the shell structure 1 at the shell structure 1 of the support section 11.

5 Said at least one supporting metal sheet 12 has a first side surface 13 and a second side surface 14. Said at least one supporting metal sheet 12 is fastened to the support section 11 of the shell structure 1 and fastened to the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1. Water surrounding the shell structure 1 is in contact with both the first side surface 12 and the second side surface 14 of said at least one
10 supporting metal sheet 12.

Said at least one supporting metal sheet 12 has preferably, but not necessarily, a thickness between about 10 and about 40 mm, preferably between about 15 and about 25 mm, more preferably about 20 mm.

In the embodiments of the propulsion unit shown in figures 4 to 20 the motor housing section 8 of the shell structure 1 has a first end 15 from which the propeller axis 4 extends to the outside of the shell structure 1 and a second end 16 at the opposite end of the motor housing section 8 of the shell structure 1. In the embodiments of the propulsion unit shown in figures 4 to 20 the lower end of the support section 11 of the shell structure 1 is directly connected to the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1 by means of a first connection section 17 of the support section 11 of the shell structure 1 at a region of the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1 that is closer to the second end 16 of the motor housing section 8 of the shell structure 1 than to the first end 15 of the motor housing section 8 of the shell structure 1. In the embodiments of the propulsion unit shown in figures 4 to 20 the support section 11 of the shell structure 1 having a lower surface 18 that is located at a distance from the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1 and that faces the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1 so that a space 19 is formed between the lower surface 18 of support section 11 of the shell structure 1 and the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1. In the embodiments of the propulsion unit shown in figures 4 to 20, the part of the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1 that is located in the space 19 is in direct contact with water surrounding the shell structure 1.
15
20
25
30

The lower end of the support section 11 of the shell structure 1 may additionally to by means of a first connection section 17 be directly connected to cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1 by means of a second connection section 20 of the support section 11 of the shell structure 1 at a region of the motor housing section 8 of the shell structure 1 that is closer to the first end 15 of the motor housing
35

section 8 of the shell structure 1 than to the second end 16 of the motor housing section 8 of the shell structure 1. In such embodiments said space 19 is formed between the first connection section 17 of the support section 11 of the shell structure 1 and the second connection section 20 of the support section 11 of the shell structure 1. Such embodiments of the propulsion unit are shown in figures 4 to 13.

In the propulsion unit comprises a space 19 between the lower surface 18 of support section 11 of the shell structure 1 and the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1, the propulsion unit may, as shown in the alternative configuration of the second embodiment shown in figure 10, in the third embodiment shown in figures 11 to 13, and in the fourth embodiment shown in figures 14 to 17, comprise at least one supporting metal sheet 12 forming a closing structure 21 arranged to partly close said space 19 so that water surrounding the shell structure 1 can enter the space 19 between and so that water can exit the space 19 between. Said at least one supporting metal sheet 12 forming a closing structure 21 arranged to partly close said space 19 may form a vertical extension of the support structure, which vertical extension extends between the support structure of the shell structure 1 and the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1. Said at least one supporting metal sheet 12 may be arranged to partly close said space 19 so that a forward opening 22 forming an inlet and/or an outlet for water is formed and so that a rear opening 23 forming an outlet and/or an inlet for water is formed. Supporting metal sheet 12 forming closing structure 21s arranged to partly close said space 19 between may be arranged symmetrically at both sides of the space 19 with respect to the vertical longitudinal central plane A of the propulsion unit.

The propulsion unit may, as in the alternative configuration of the second embodiment shown in figure 10 and in the third embodiment shown in figures 11 to 13, the propulsion unit comprise at least one supporting metal sheet 12 forming a closing structure 21 arranged to partly close a space 19 between the first connection section 17 and the second connection section 20 so that water surrounding the shell structure 1 can enter the space 19 between the first connection section 17 and the second connection section 20 and so that water can exit the space 19 between the first connection section 17 and the second connection section 20. In such embodiments said at least one supporting metal sheet 12 forming a closing structure 21 arranged to partly close said space 19 between the first connection section 17 and the second connection section 20 may form a vertical extension of the support structure, which vertical extension extends between the support structure of the shell structure 1 and the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1. Said at least one supporting metal sheet 12 arranged to partly close said space 19 between the first connection section 17 and the second connection section 20 may be arranged so that a forward opening 22 forming an inlet and/or an outlet for water is formed between the first connection section 17 and said at least one supporting metal sheet 12, and so that a rear opening 23 forming an outlet and/or an inlet for

water is formed between the second connection section 20 and said at least one additional support. Supporting metal sheet 12 forming closing structures 21 arranged to partly close said space 19 between the first connection section 17 and the second connection section 20 are preferably, but not necessarily, arranged symmetrically at both sides of the space 19 with respect to the vertical longitudinal central plane A of the propulsion unit.

The supporting metal sheet 12 of the support section 11 of the shell structure 1 may, as in the fifth embodiment shown in figures 18 to 20, comprise at least one opening 24 for allowing water surrounding the shells structure to flow through supporting metal sheet 12 of the support section 11 of the shell structure 1.

The propulsion unit comprises preferably, but not necessarily, a plurality of supporting metal sheets 12 each being arranged being fastened to the support section 11 of the shell structure 1 and fastened to the cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1. Some of said plurality of supporting metal sheets 12 may extend vertically at the vertical longitudinal central plane A of the propulsion unit. Some supporting metal sheets 12 of said plurality of supporting metal sheets 12 may extend vertically at the vertical longitudinal central plane A of the propulsion unit, and some supporting metal sheets 12 of said plurality of supporting metal sheets 12 may extend vertically and transversely with respect to the vertical longitudinal central plane A of the propulsion unit. Said plurality of supporting metal sheets 12 may be arranged symmetrically with respect to the vertical longitudinal central plane A of the propulsion unit.

In the propulsion unit the electric motor 3 may be a permanent-magnet electric motor.

In the propulsion unit the cylindrical section 9 of the motor housing section 8 of the shell structure 1 is preferably, but not necessarily, of a single-layer form.

In the propulsion unit said at least one supporting metal sheet 12 is preferably, but not necessarily, of a single-layer form. In the propulsion unit all supporting metal sheets 12 are preferably, but not necessarily, of a single-layer form.

In the propulsion unit the motor housing section 8 includes preferably, but not necessarily, as shown in figures 21 to 24, a first detachable section 25 at the first end 15 of the motor housing section 8 of the shell structure 1. Such first detachable section 25 of the motor housing section 8 houses a bearing arrangement 27 for the propeller axis 4. Such first detachable section 25 of the motor housing section 8 is unattached to the support section 11 of the shell structure 1. A purpose of such first detachable section 25 is to facilitate service or replacing of the bearing arrangement 27 without having to detach the whole propulsion unit arrangement from the hull 2 of the ship or without having to detach the motor housing section 8 from the support section 11. Because of said at least one supporting metal sheet 12 between the support section 11 of the shell structure 1 and the cylindrical outer surface 10 of the motor housing section 8 of the shell structure 1, the motor housing section 8 stays attached in a secure manner at the support section 11 when such first detachable section 25 is detached.

In the propulsion unit the motor housing section 8 includes preferably, but not necessarily, as shown in figures 21 to 24, a second detachable section 26 at the second end 16 of the motor housing section 8 of the shell structure 1. Such second detachable section 26 of the motor housing section 8 houses a bearing arrangement 27 for the propeller axis 4. Such second
5 detachable section 26 of the motor housing section 8 is unattached to the support section 11 of the shell structure 1. A purpose of such second detachable section 26 is to facilitate service or replacing of the bearing arrangement 27 without having to detach the whole propulsion unit arrangement from the hull 2 of the ship or without having to detach the motor housing section 8 from the support section 11. Because of said at least one supporting metal sheet 12 between the
10 support section 11 of the shell structure 1 and the cylindrical outer surface 10 of the motor housing section 8 of the shell structure 1, the motor housing section 8 stays attached in a secure manner at the support section 11 when such second detachable section 26 is detached.

In the propulsion unit the lower end of the support section 11 is preferably, but not necessarily, directly connected to the motor housing section 8 of the shell structure 1 so that the
15 cylindrical outer surface 10 of the cylindrical section 9 of the motor housing section 8 of the shell structure 1 partly forms the outermost surface of the propulsion unit.

It is apparent to a person skilled in the art that as technology advanced, the basic idea of the invention can be implemented in various ways. The invention and its embodiments are therefore not restricted to the above examples, but they may vary within the scope of the claims.

List of reference numerals

1. Shell structure
2. Hull
3. Electric motor
- 5 4. Propeller axis
5. Propeller
6. Stator
7. Rotor
8. Motor housing section
- 10 9. Cylindrical section
10. Cylindrical outer surface
11. Support section
12. Supporting metal sheet
13. First side surface
- 15 14. Second side surface
15. First end
16. Second end
17. First connection section
18. Lower surface
- 20 19. Space
20. Second connection section
21. Closing structure
22. Forward opening
23. Rear opening
- 25 24. Opening
25. First detachable section
26. Second detachable section
27. Bearing arrangement

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A ship's propulsion unit, the propulsion unit comprising:
 - a shell structure arranged below a hull of the ship and immersible at least partly in water so that the shell structure is at least partly surrounded by water;
 - an electric motor for rotating a propeller axis, wherein the propeller axis extends to the outside of the shell structure; and
 - a propeller mounted on the propeller axis outside the shell structure, wherein the propulsion unit has a vertical longitudinal central plane, wherein the electric motor has a stator and a rotor for rotating in the stator, wherein the electric motor is arranged in a motor housing section of the shell structure so that the stator of the electric motor is form-fitted into a cylindrical section of the motor housing section of the shell structure, wherein the cylindrical section has a cylindrical outer surface, wherein the shell structure includes a support section having an lower end directly connected to the motor housing section of the shell structure and an upper end connected to the hull of the ship, and wherein the motor housing section of the shell structure has a first end from which the propeller axis extends to the outside of the shell structure and a second end at the opposite end of the motor housing section of the shell structure, wherein the propulsion unit further comprises at least one supporting metal sheet arranged between the support section of the shell structure and the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure for providing additional support for the motor housing section of the shell structure at the shell structure of the support section, wherein said at least one supporting metal sheet has a first side surface and a second side surface, wherein said at least one supporting metal sheet is fastened to the support section of the shell structure and fastened to the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure, and wherein water surrounding the shell structure is in contact with both the first side surface and the second side surface of said at least one supporting metal sheet.

2. The propulsion unit according to claim 1, wherein the ship's propulsion unit is a ship's azimuthing propulsion unit.

3. The propulsion unit according to claim 1, wherein the lower end of the support section of the shell structure is directly connected to the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure by means of a first connection section of the support section of the shell structure at a region of the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure that is closer to the second end of the motor housing section of the shell structure than to the first end of the motor housing section of the shell structure,

wherein the support section of the shell structure has a lower surface that is located at a distance from the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure and that faces the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure so that a space is formed between the lower surface of the support section of the shell structure and the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure, and

wherein the part of the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure that is located in the space is in direct contact with water surrounding the shell structure.

4. The propulsion unit according to claim 3, wherein the lower end of the support section of the shell structure is additionally directly connected to cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure by means of a second connection section of the support section of the shell structure at a region of the motor housing section of the shell structure that is closer to the first end of the motor housing section of the shell structure than to the second end of the motor housing section of the shell structure, and

wherein said space is formed between the first connection section of the support section of the shell structure and the second connection section of the support section of the shell structure.

5. The propulsion unit according to claim 3 or 4, wherein said at least one supporting metal sheet forms a closing structure arranged to partly close said space so that water surrounding the shell structure can enter the space between and so that the water can exit the space between.

6. The propulsion unit according to claim 5, wherein said closing structure forms a vertical extension of the support structure, said vertical extension extending between the support section of the shell structure and the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure.

7. The propulsion unit according to claim 5 or 6, wherein said at least one supporting metal sheet is arranged to partly close said space so that a forward opening forming at least one of an inlet and an outlet for water is formed and so that a rear opening forming at least one of another outlet and another inlet for water is formed.

8. The propulsion unit according to any one of claims 5 to 7, wherein said closing structure is arranged symmetrically at both sides of said space with respect to the vertical longitudinal central plane of the propulsion unit.

9. The propulsion unit according to any one of claims 1 to 8, wherein the at least one supporting metal sheet comprises a plurality of supporting metal sheets, each being arranged and fastened to the support section of the shell structure and to the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure.

10. The propulsion unit according to claim 9, wherein some of said plurality of supporting metal sheets extend vertically at the vertical longitudinal central plane of the propulsion unit.

11. The propulsion unit according to claim 9 or 10, wherein
some supporting metal sheets of said plurality of supporting metal sheets extend vertically at the vertical longitudinal central plane of the propulsion unit, and
some supporting metal sheets of said plurality of supporting metal sheets extend vertically and transversely with respect to the vertical longitudinal central plane of the propulsion unit.

12. The propulsion unit according to any one of claims 9 to 11, wherein said plurality of supporting metal sheet are arranged symmetrically with respect to the vertical longitudinal central plane of the propulsion unit.

13. The propulsion unit according to any one of claims 1 to 12, wherein the electric motor is a permanent-magnet electric motor.

14. The propulsion unit according to any one of claims 1 to 13, wherein the cylindrical section of the motor housing section of the shell structure is of a single-layer form.
15. The propulsion unit according to any one of claims 1 to 14, wherein said at least one supporting metal sheet is of a single-layer form.
16. The propulsion unit according to any one of claims 1 to 15, wherein
the motor housing section includes a first detachable section at the first end of the motor housing section of the shell structure,
the first detachable section of the motor housing section houses a second bearing arrangement for the propeller axis, and
the first detachable section of the motor housing section is unattached to the support section of the shell structure.
17. The propulsion unit according to claim 16, wherein
the motor housing section includes a second detachable section at the second end of the motor housing section of the shell structure,
the second detachable section of the motor housing section houses a second bearing arrangement for the propeller axis, and
the second detachable section of the motor housing section is unattached to the support section of the shell structure.
18. The propulsion unit according to any one of claims 1 to 17, wherein the lower end of the support section is directly connected to the motor housing section of the shell structure so that the cylindrical outer surface of the cylindrical section of the motor housing section of the shell structure partly forms an outermost surface of the propulsion unit.

2 / 8

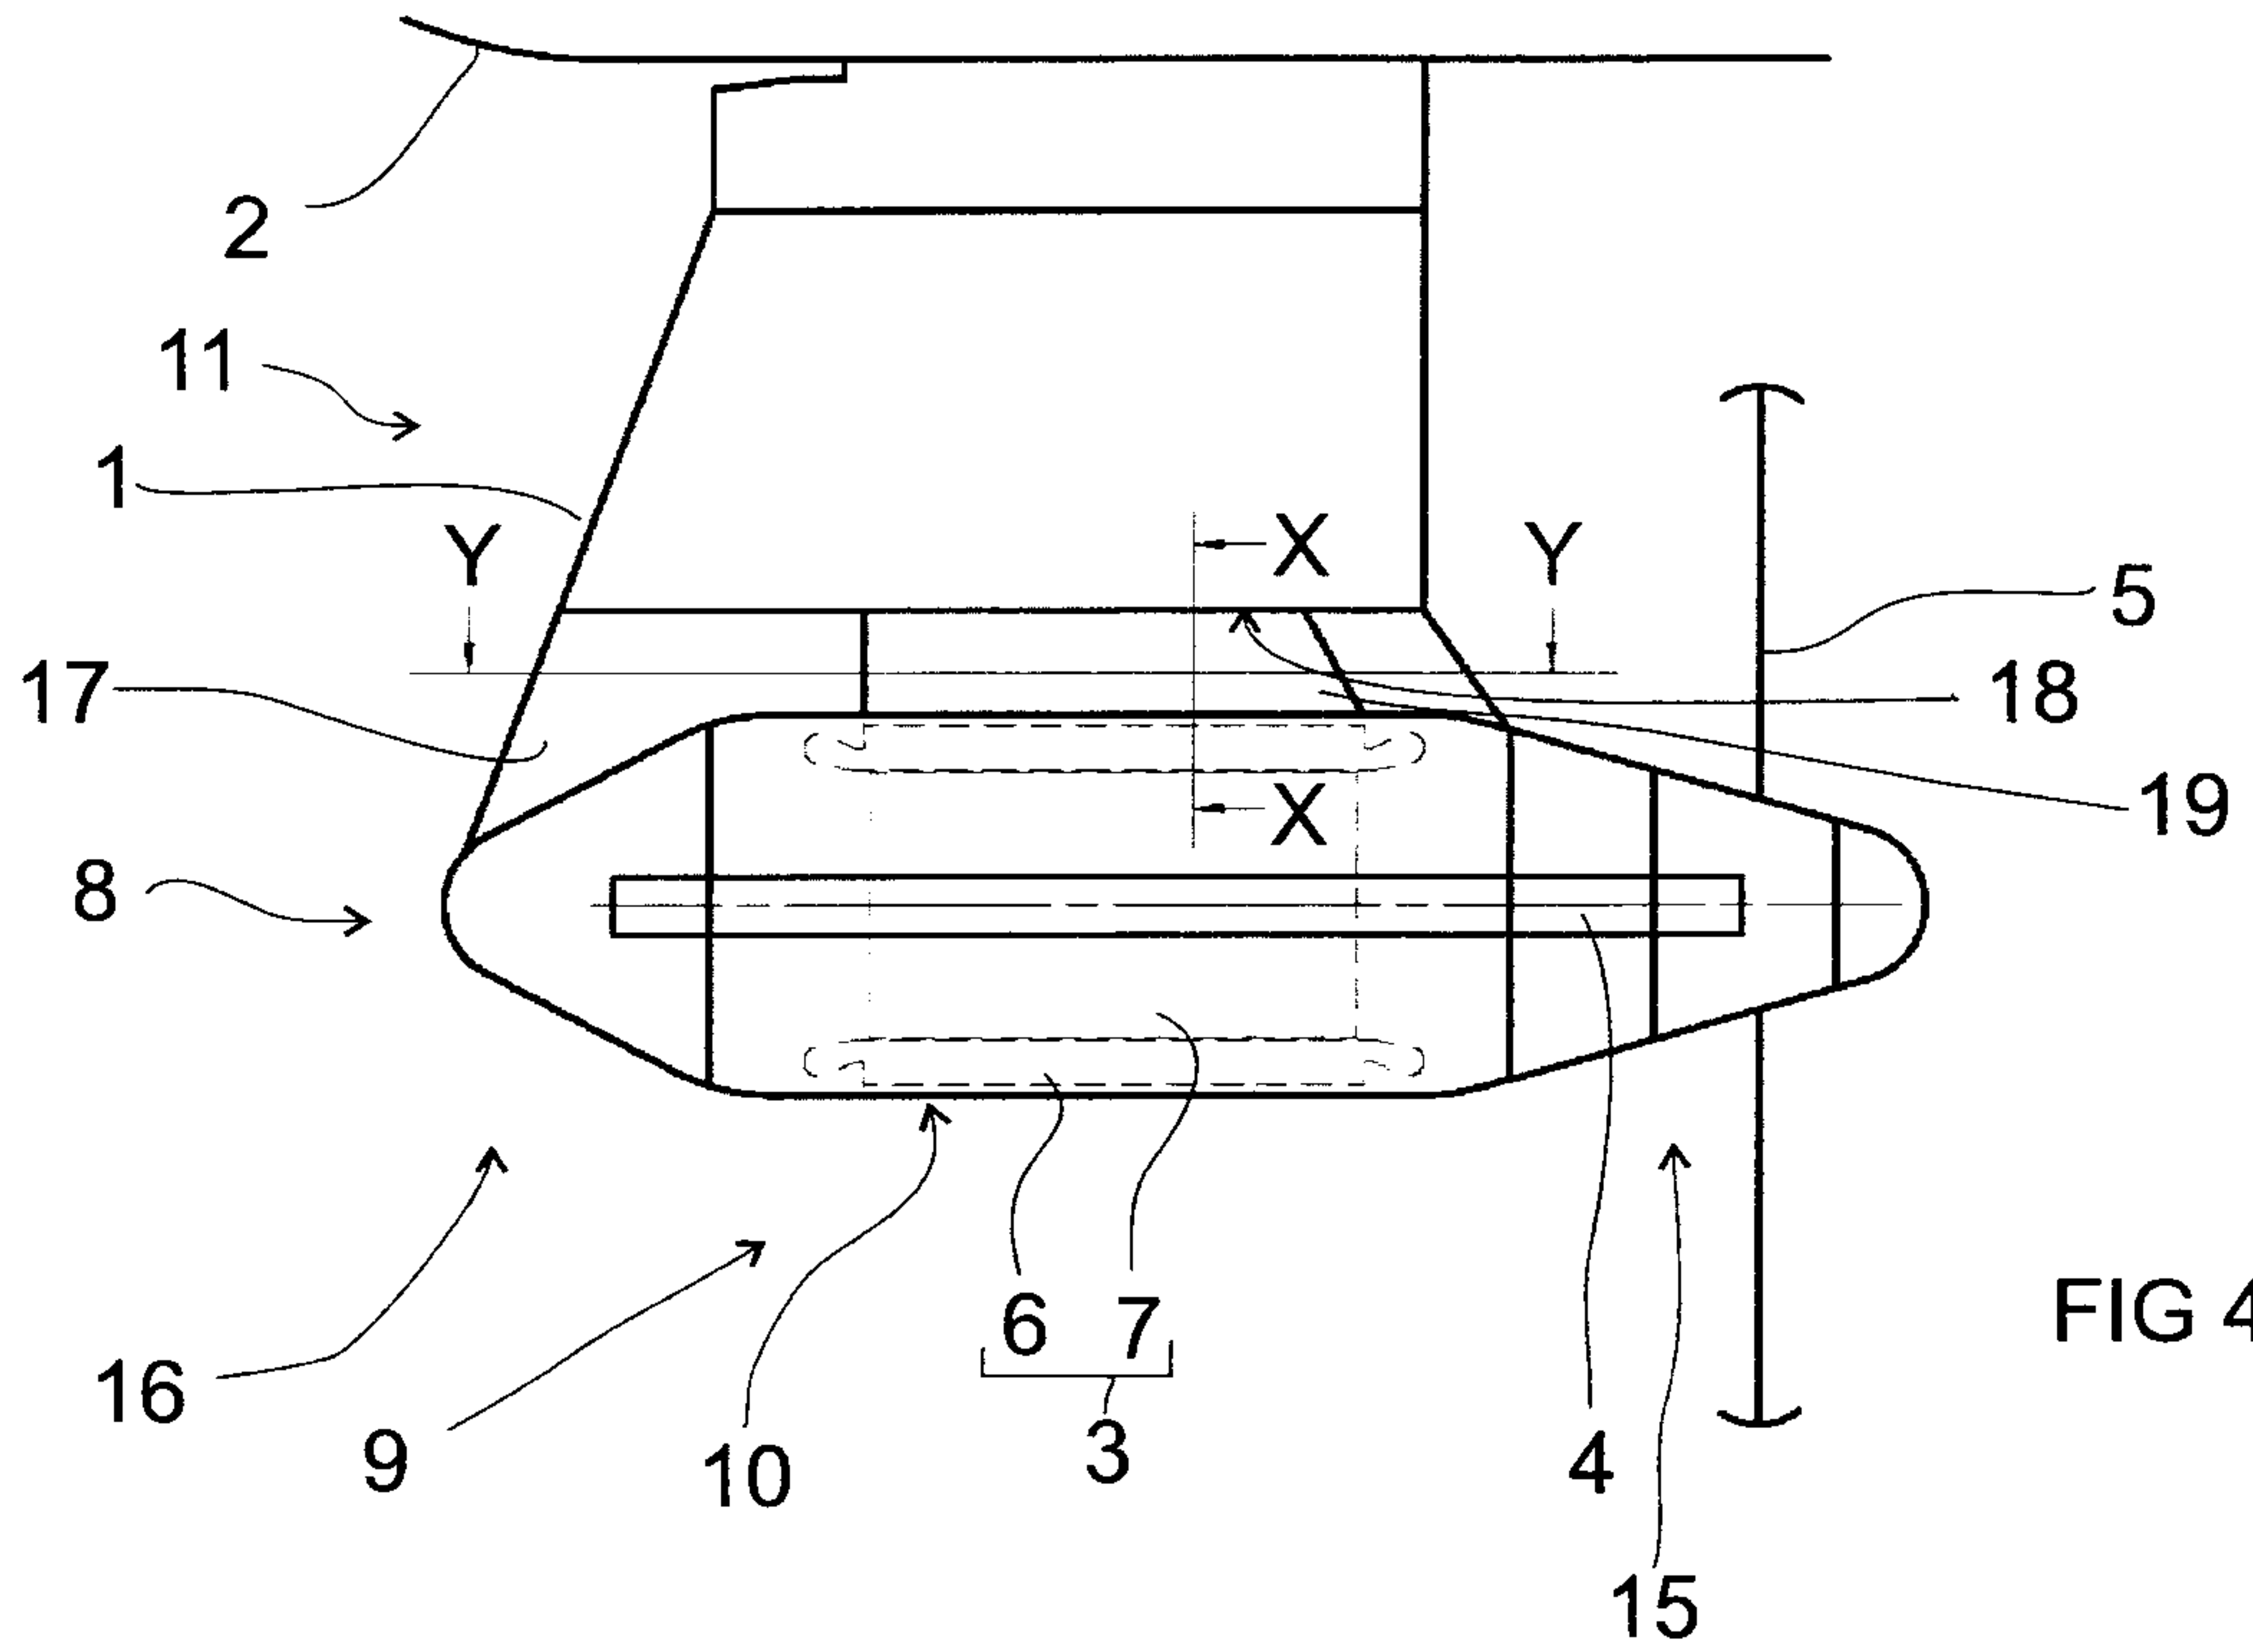


FIG 4

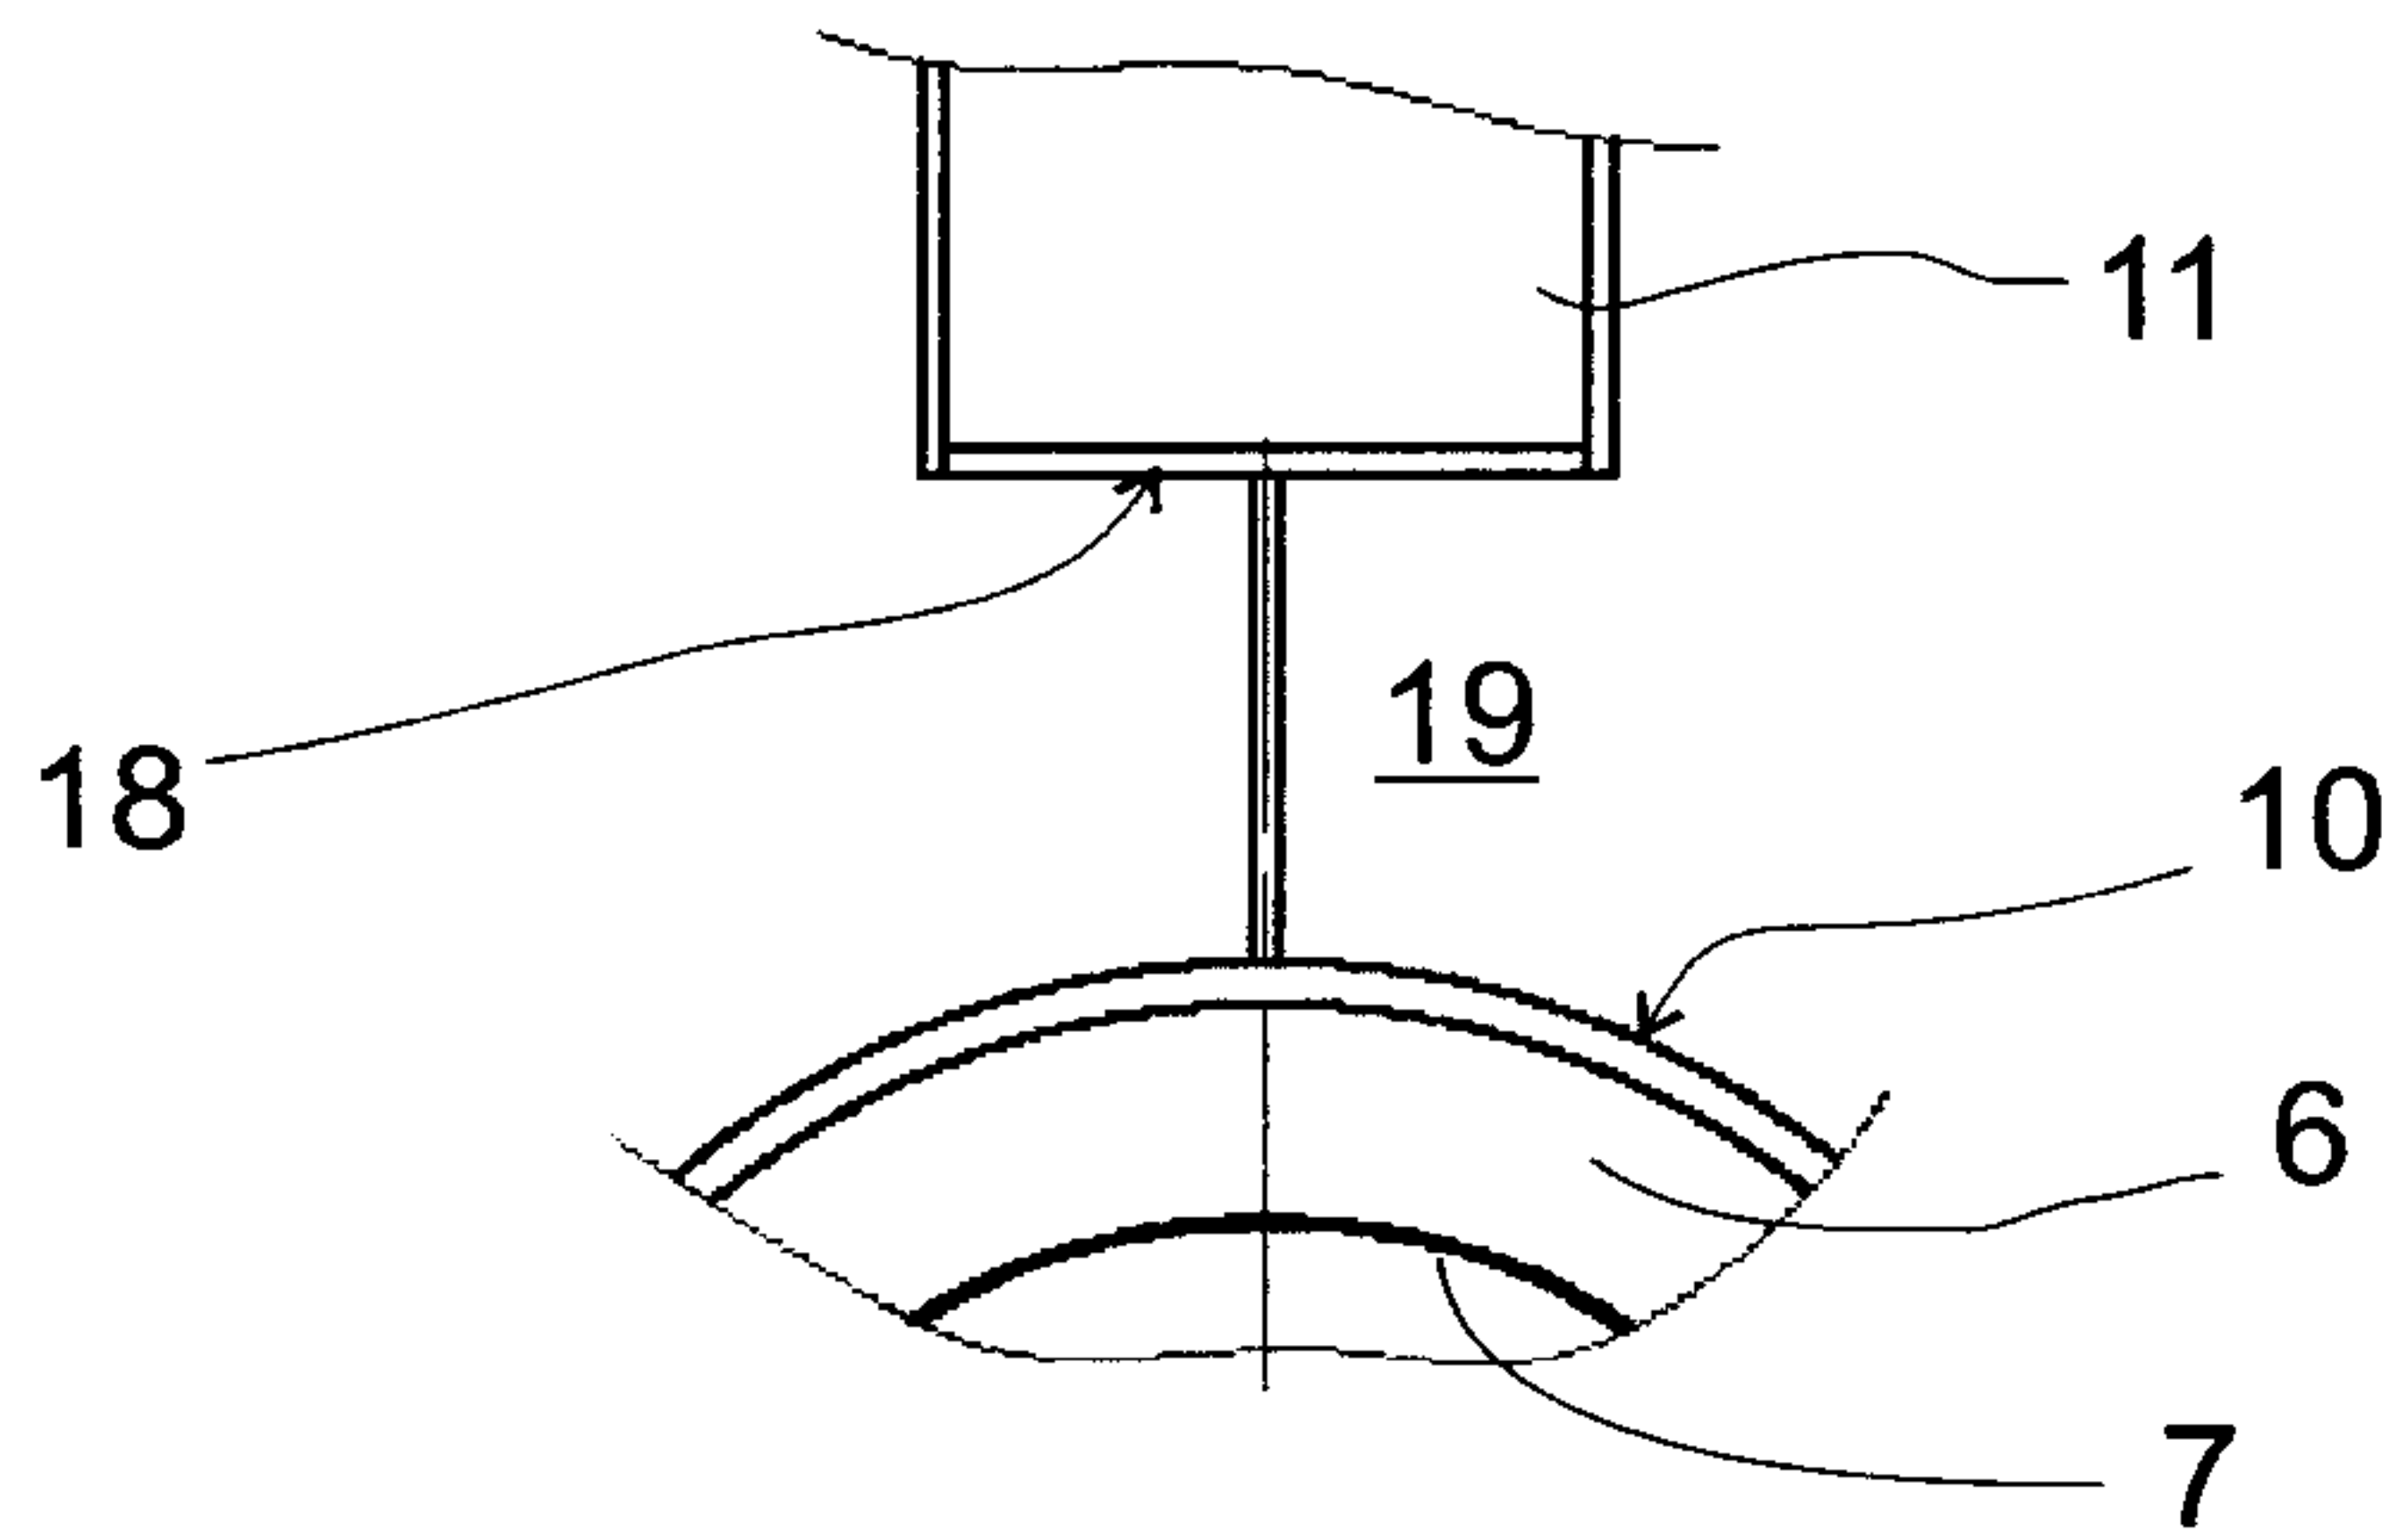


FIG 5

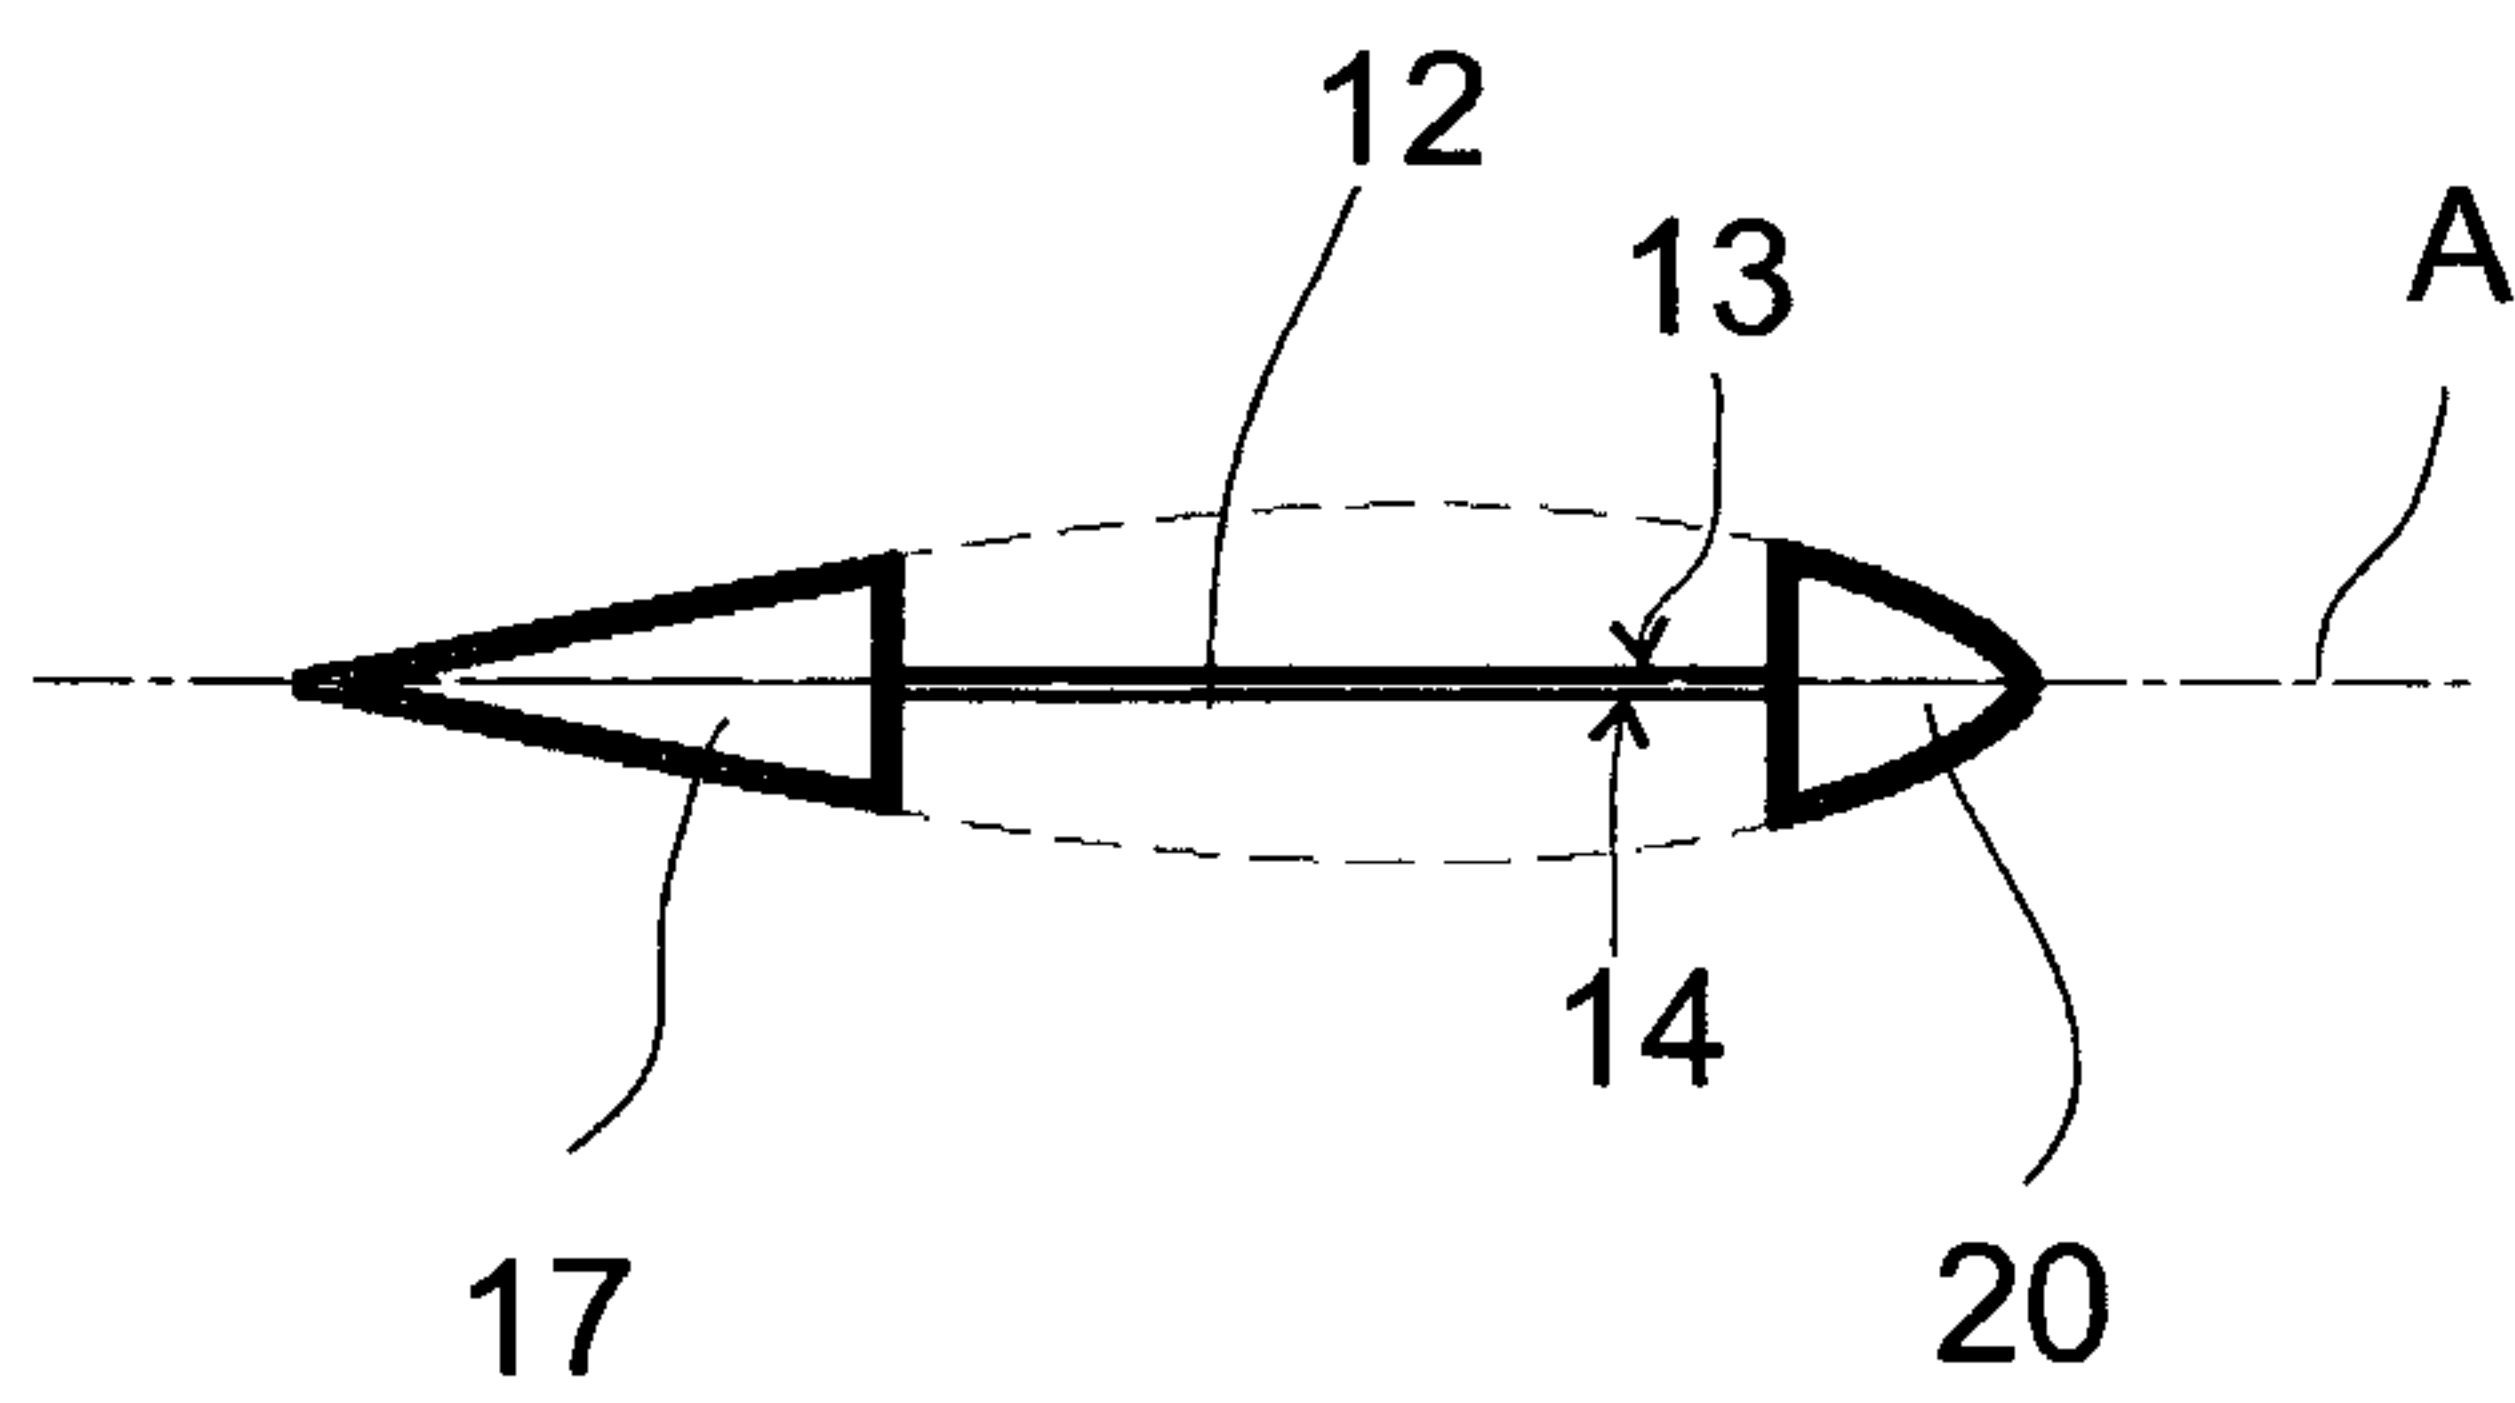


FIG 6

3 / 8

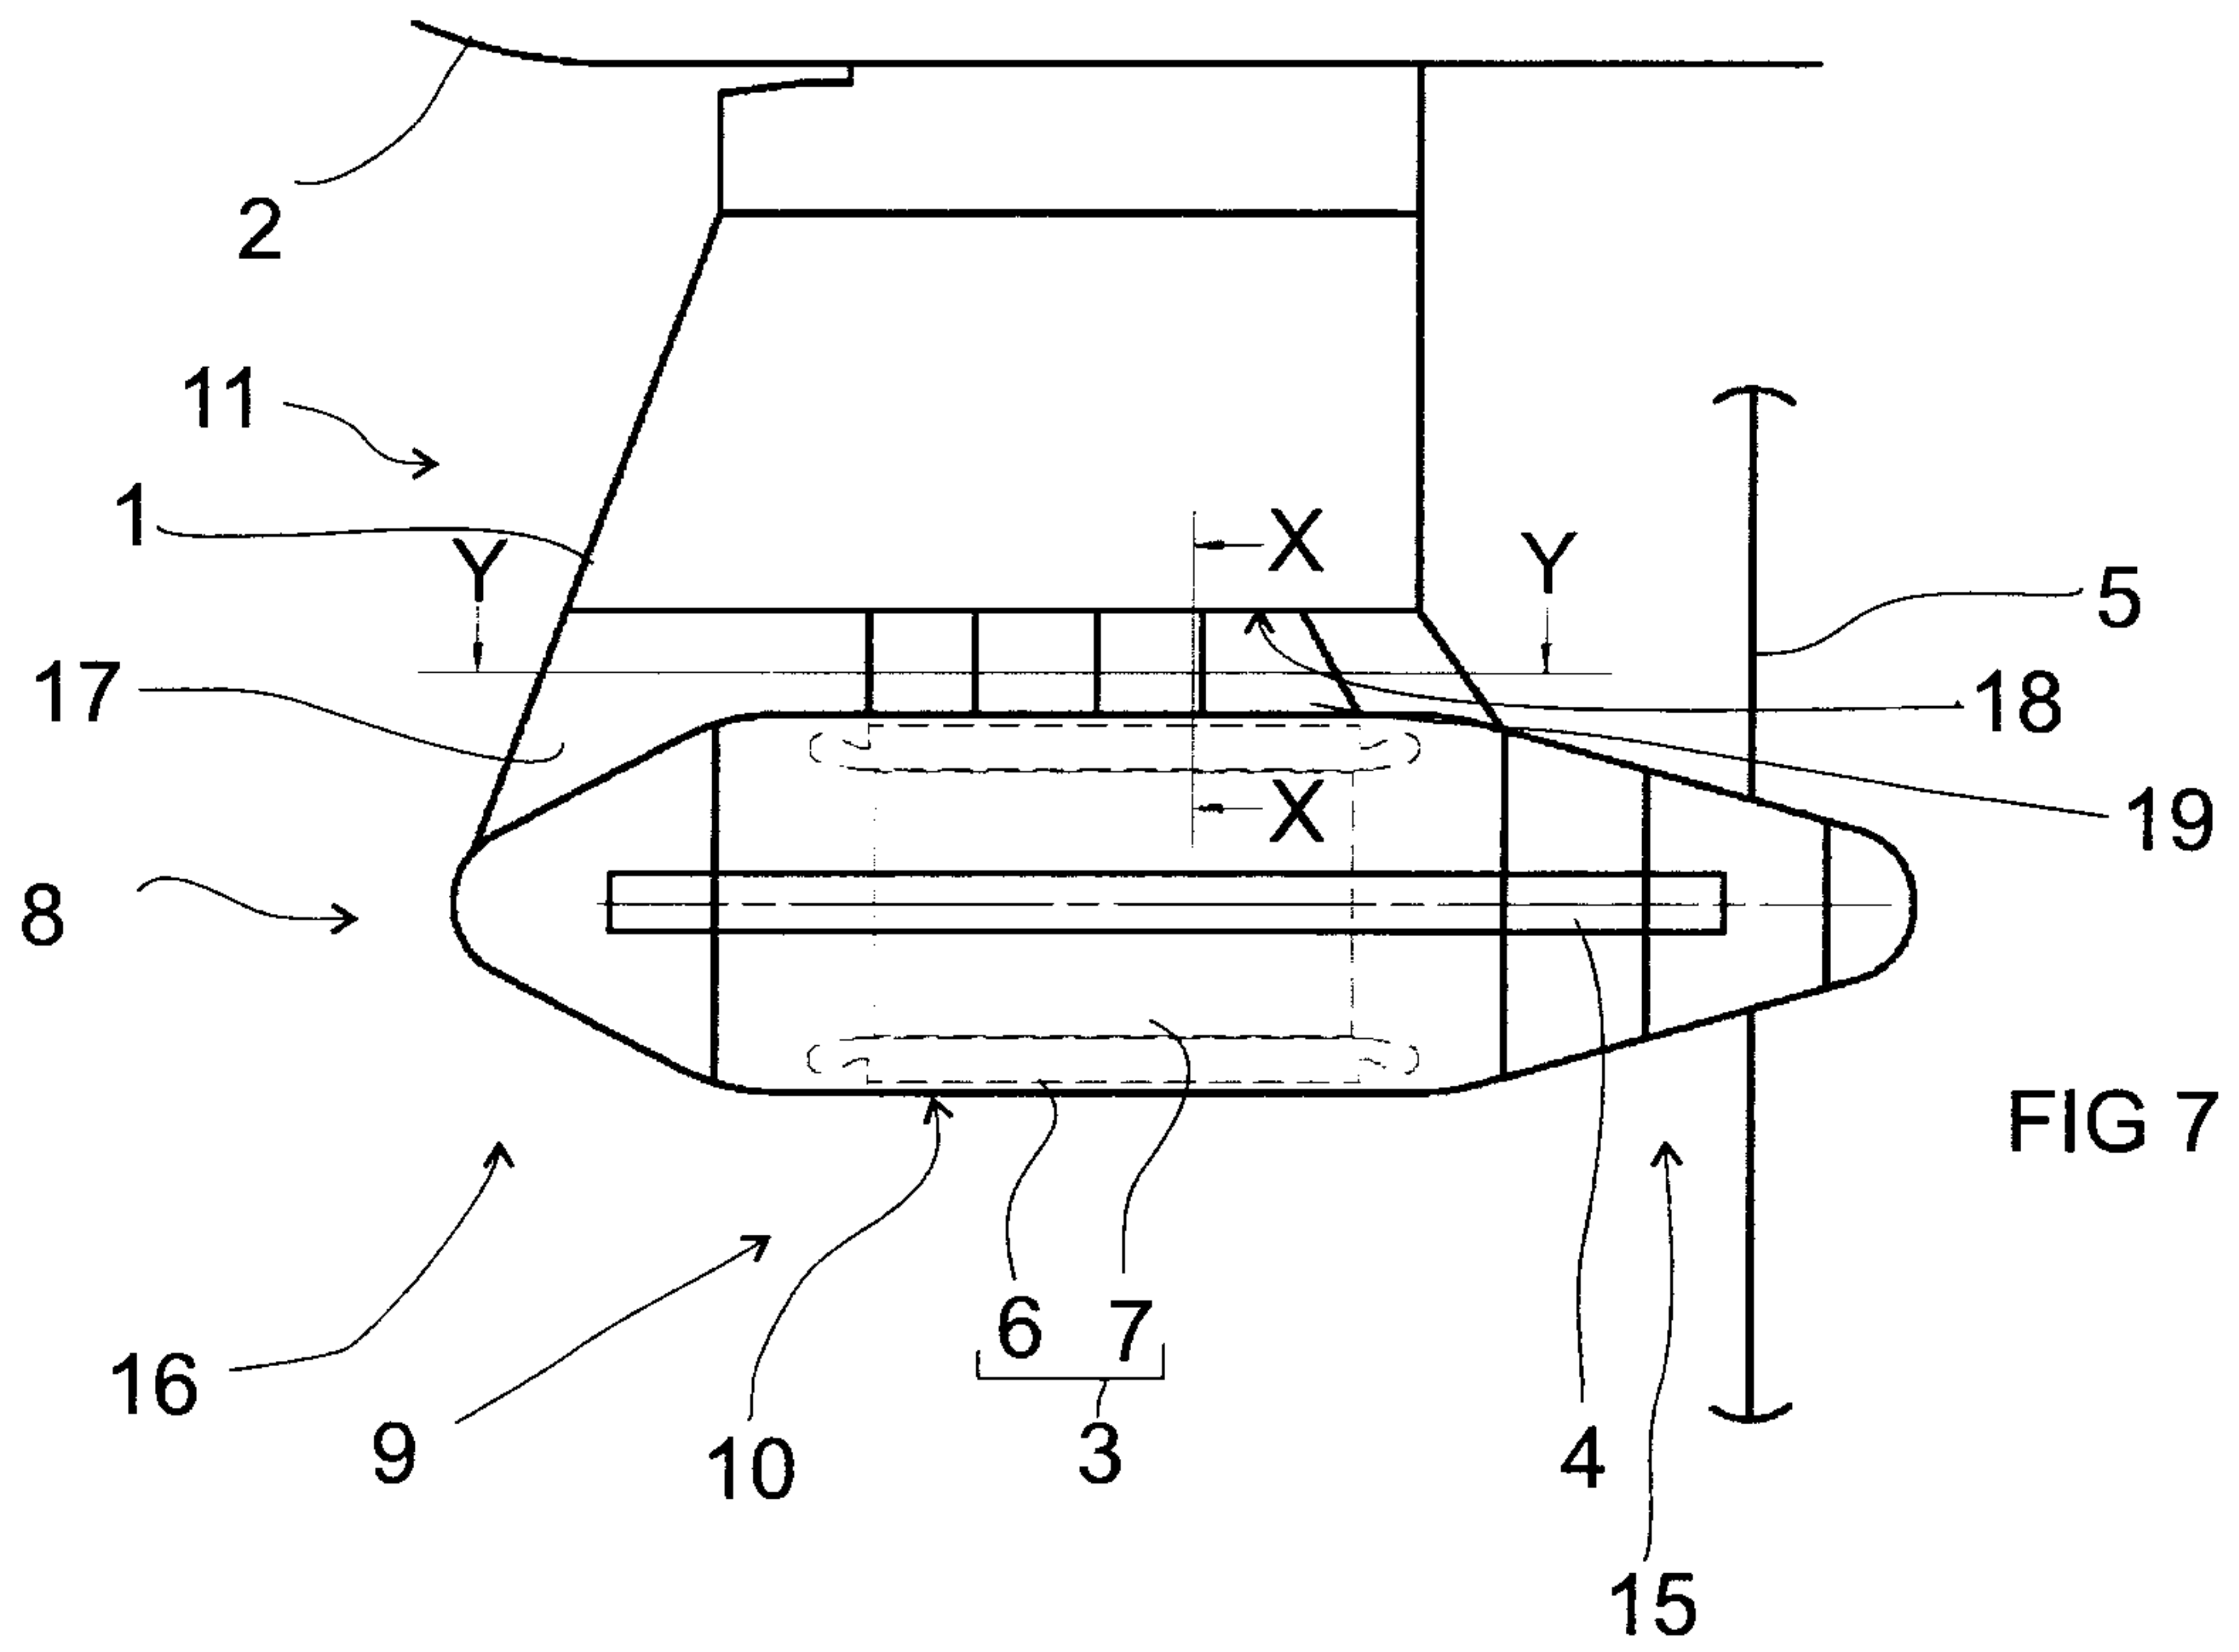


FIG 7

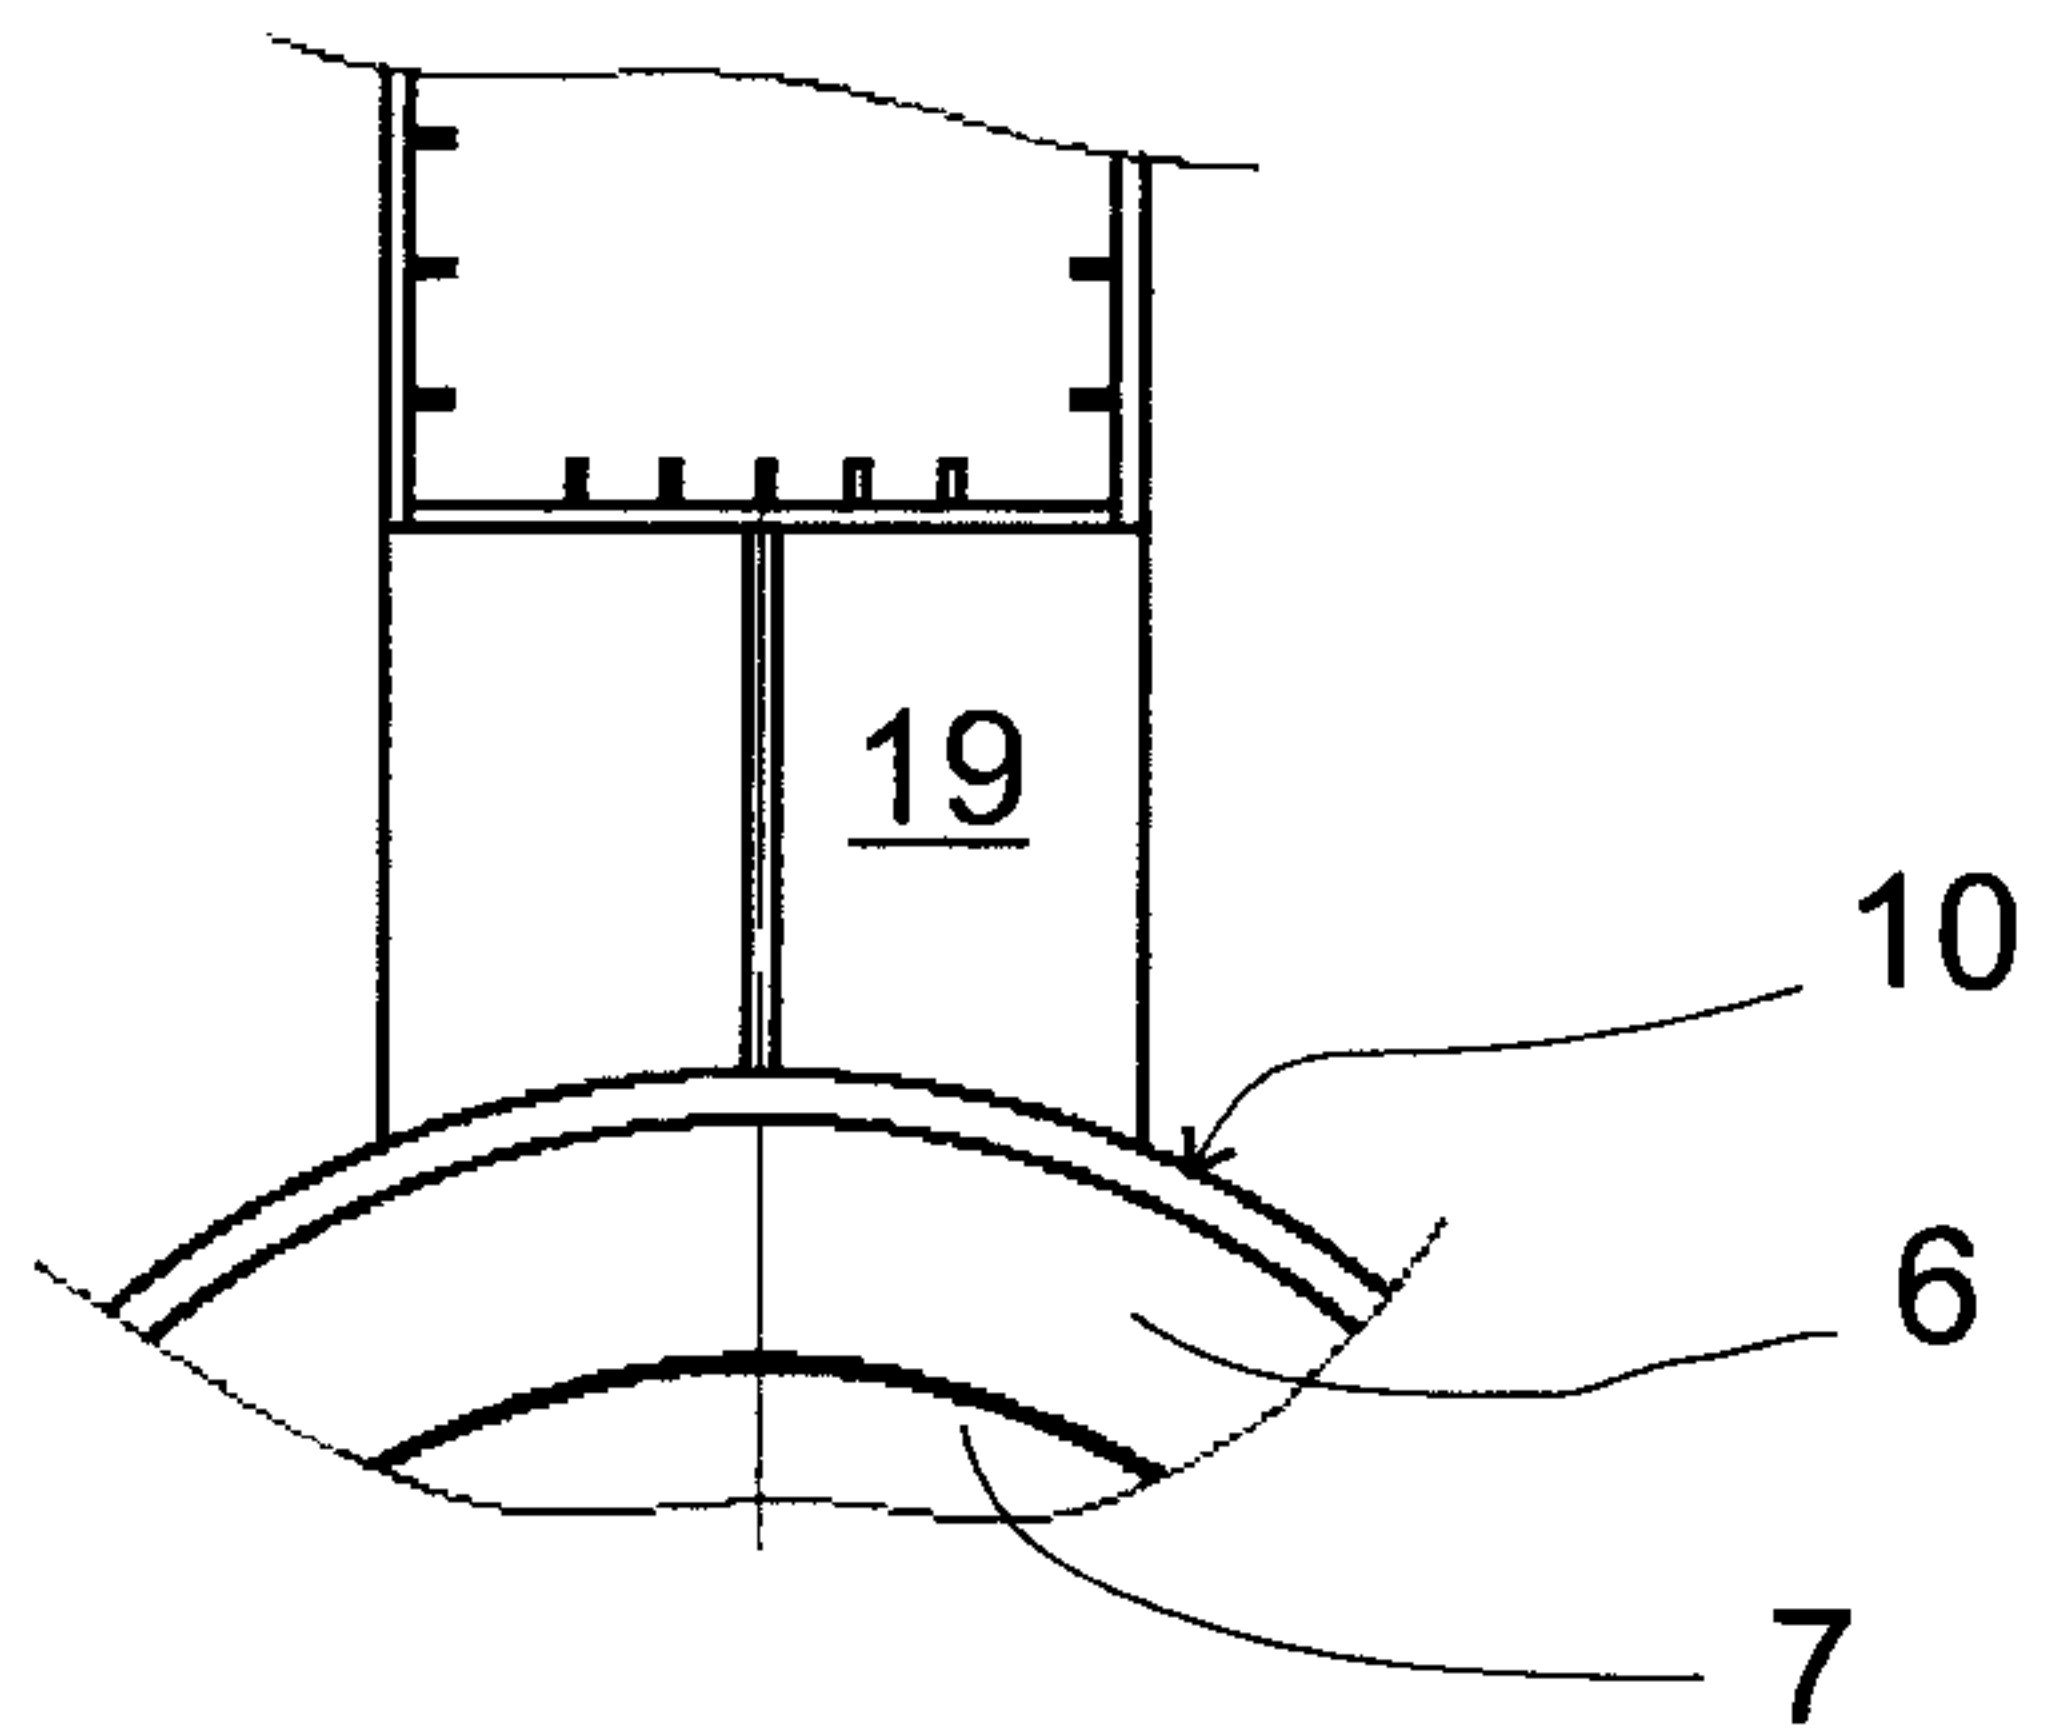


FIG 8

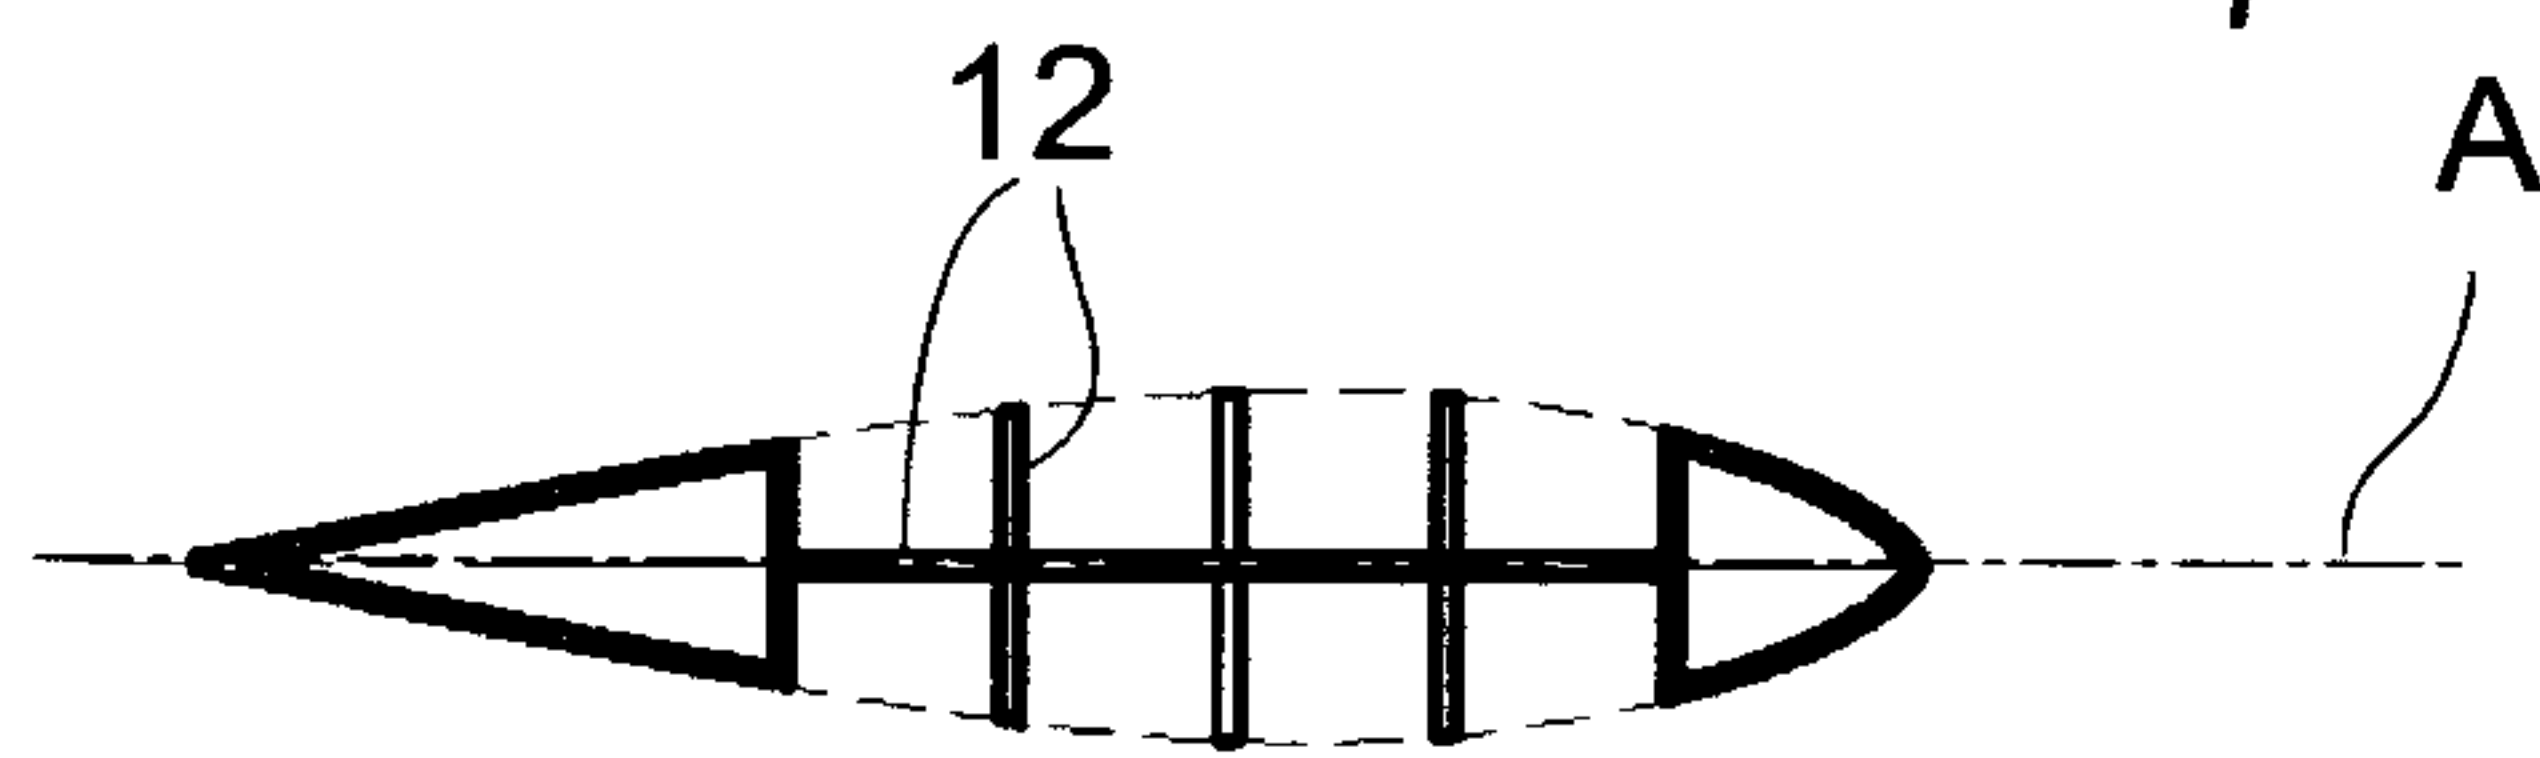


FIG 9

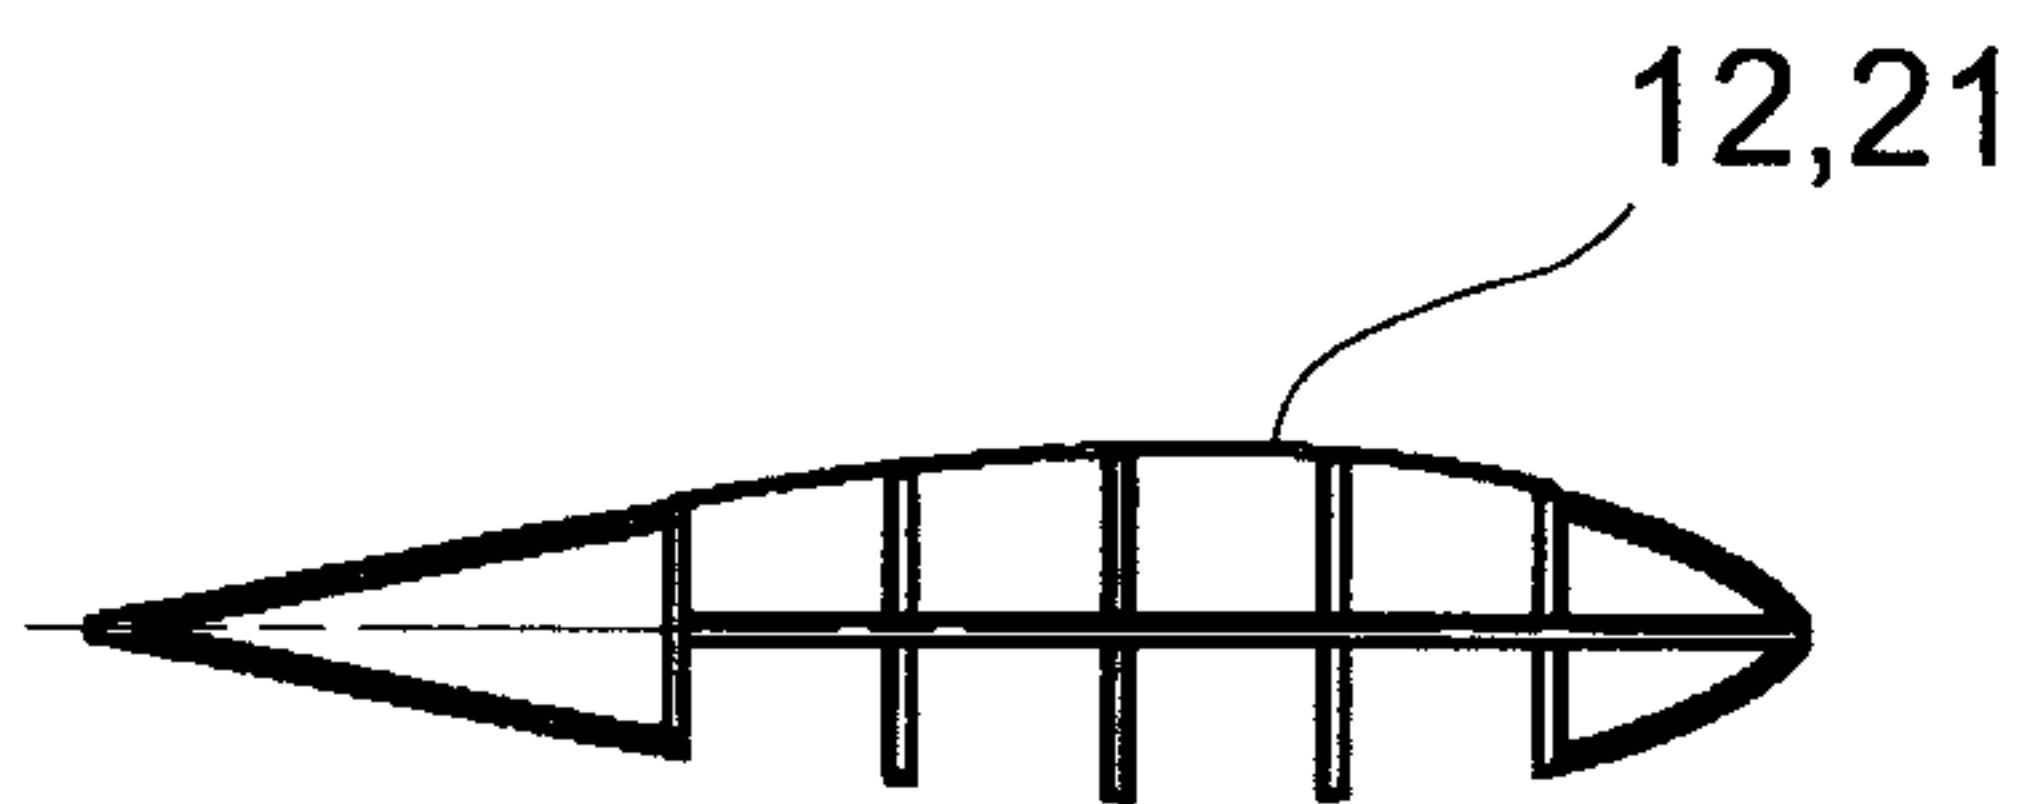


FIG 10

5 / 8

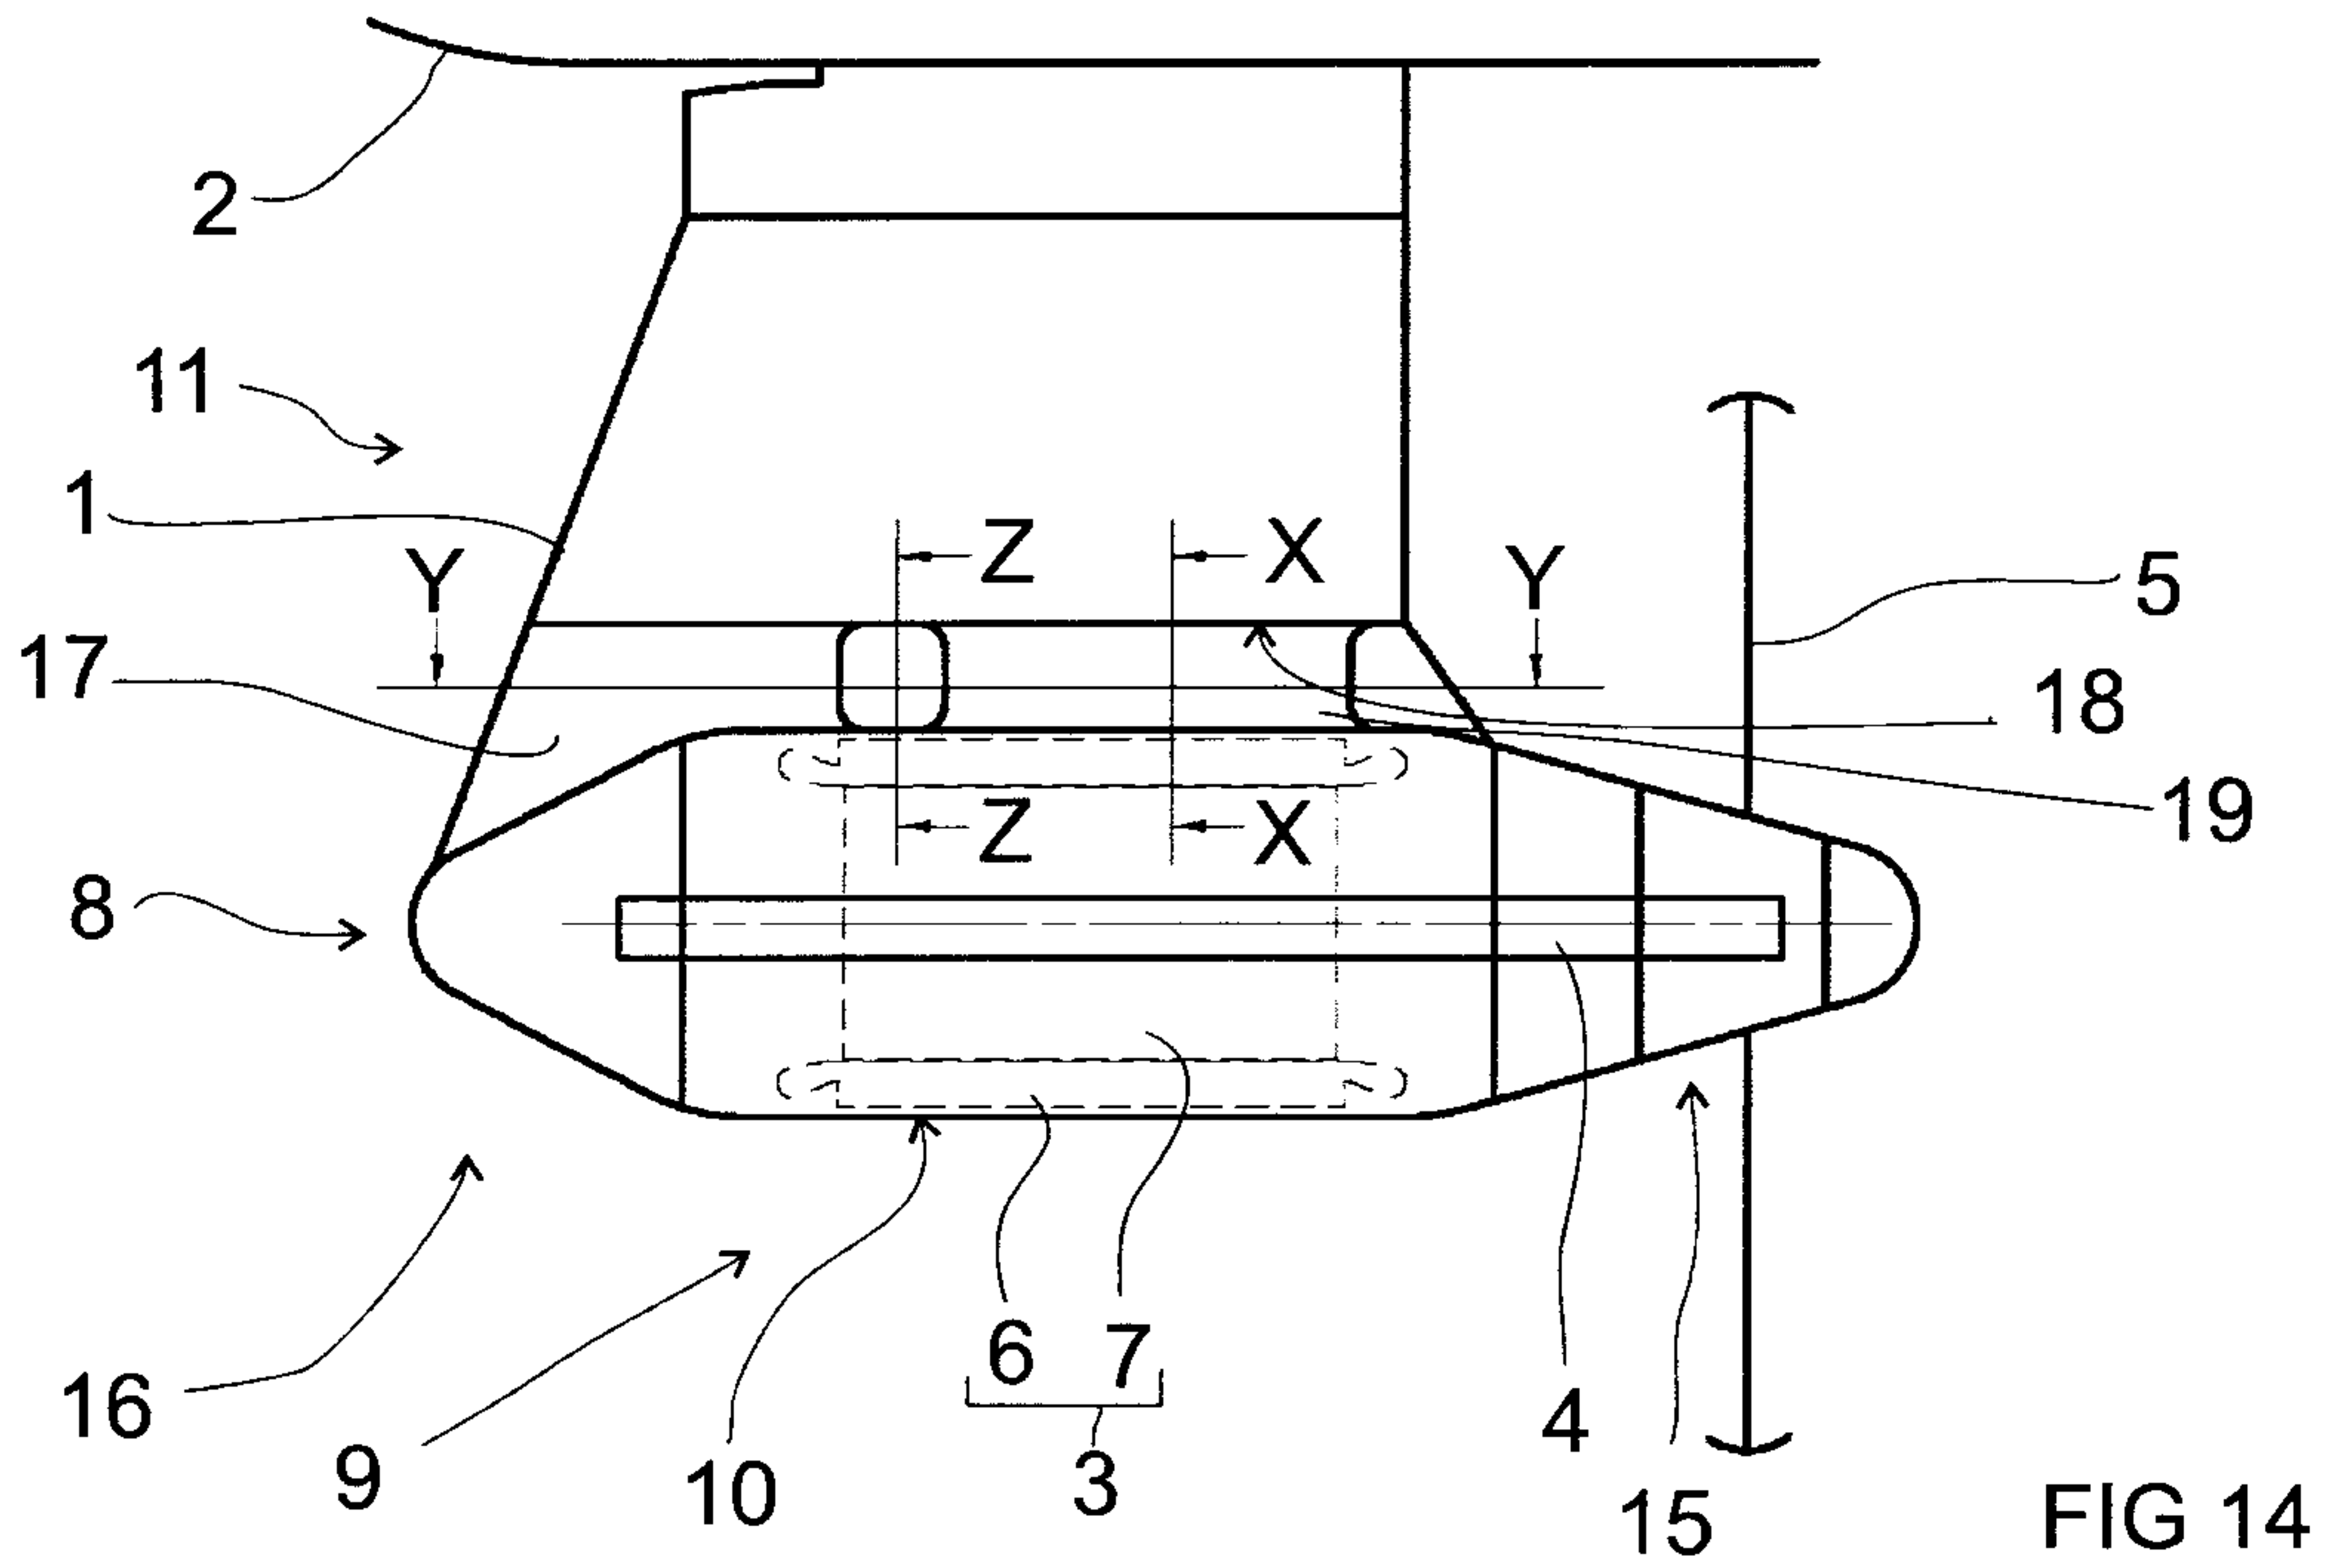


FIG 14

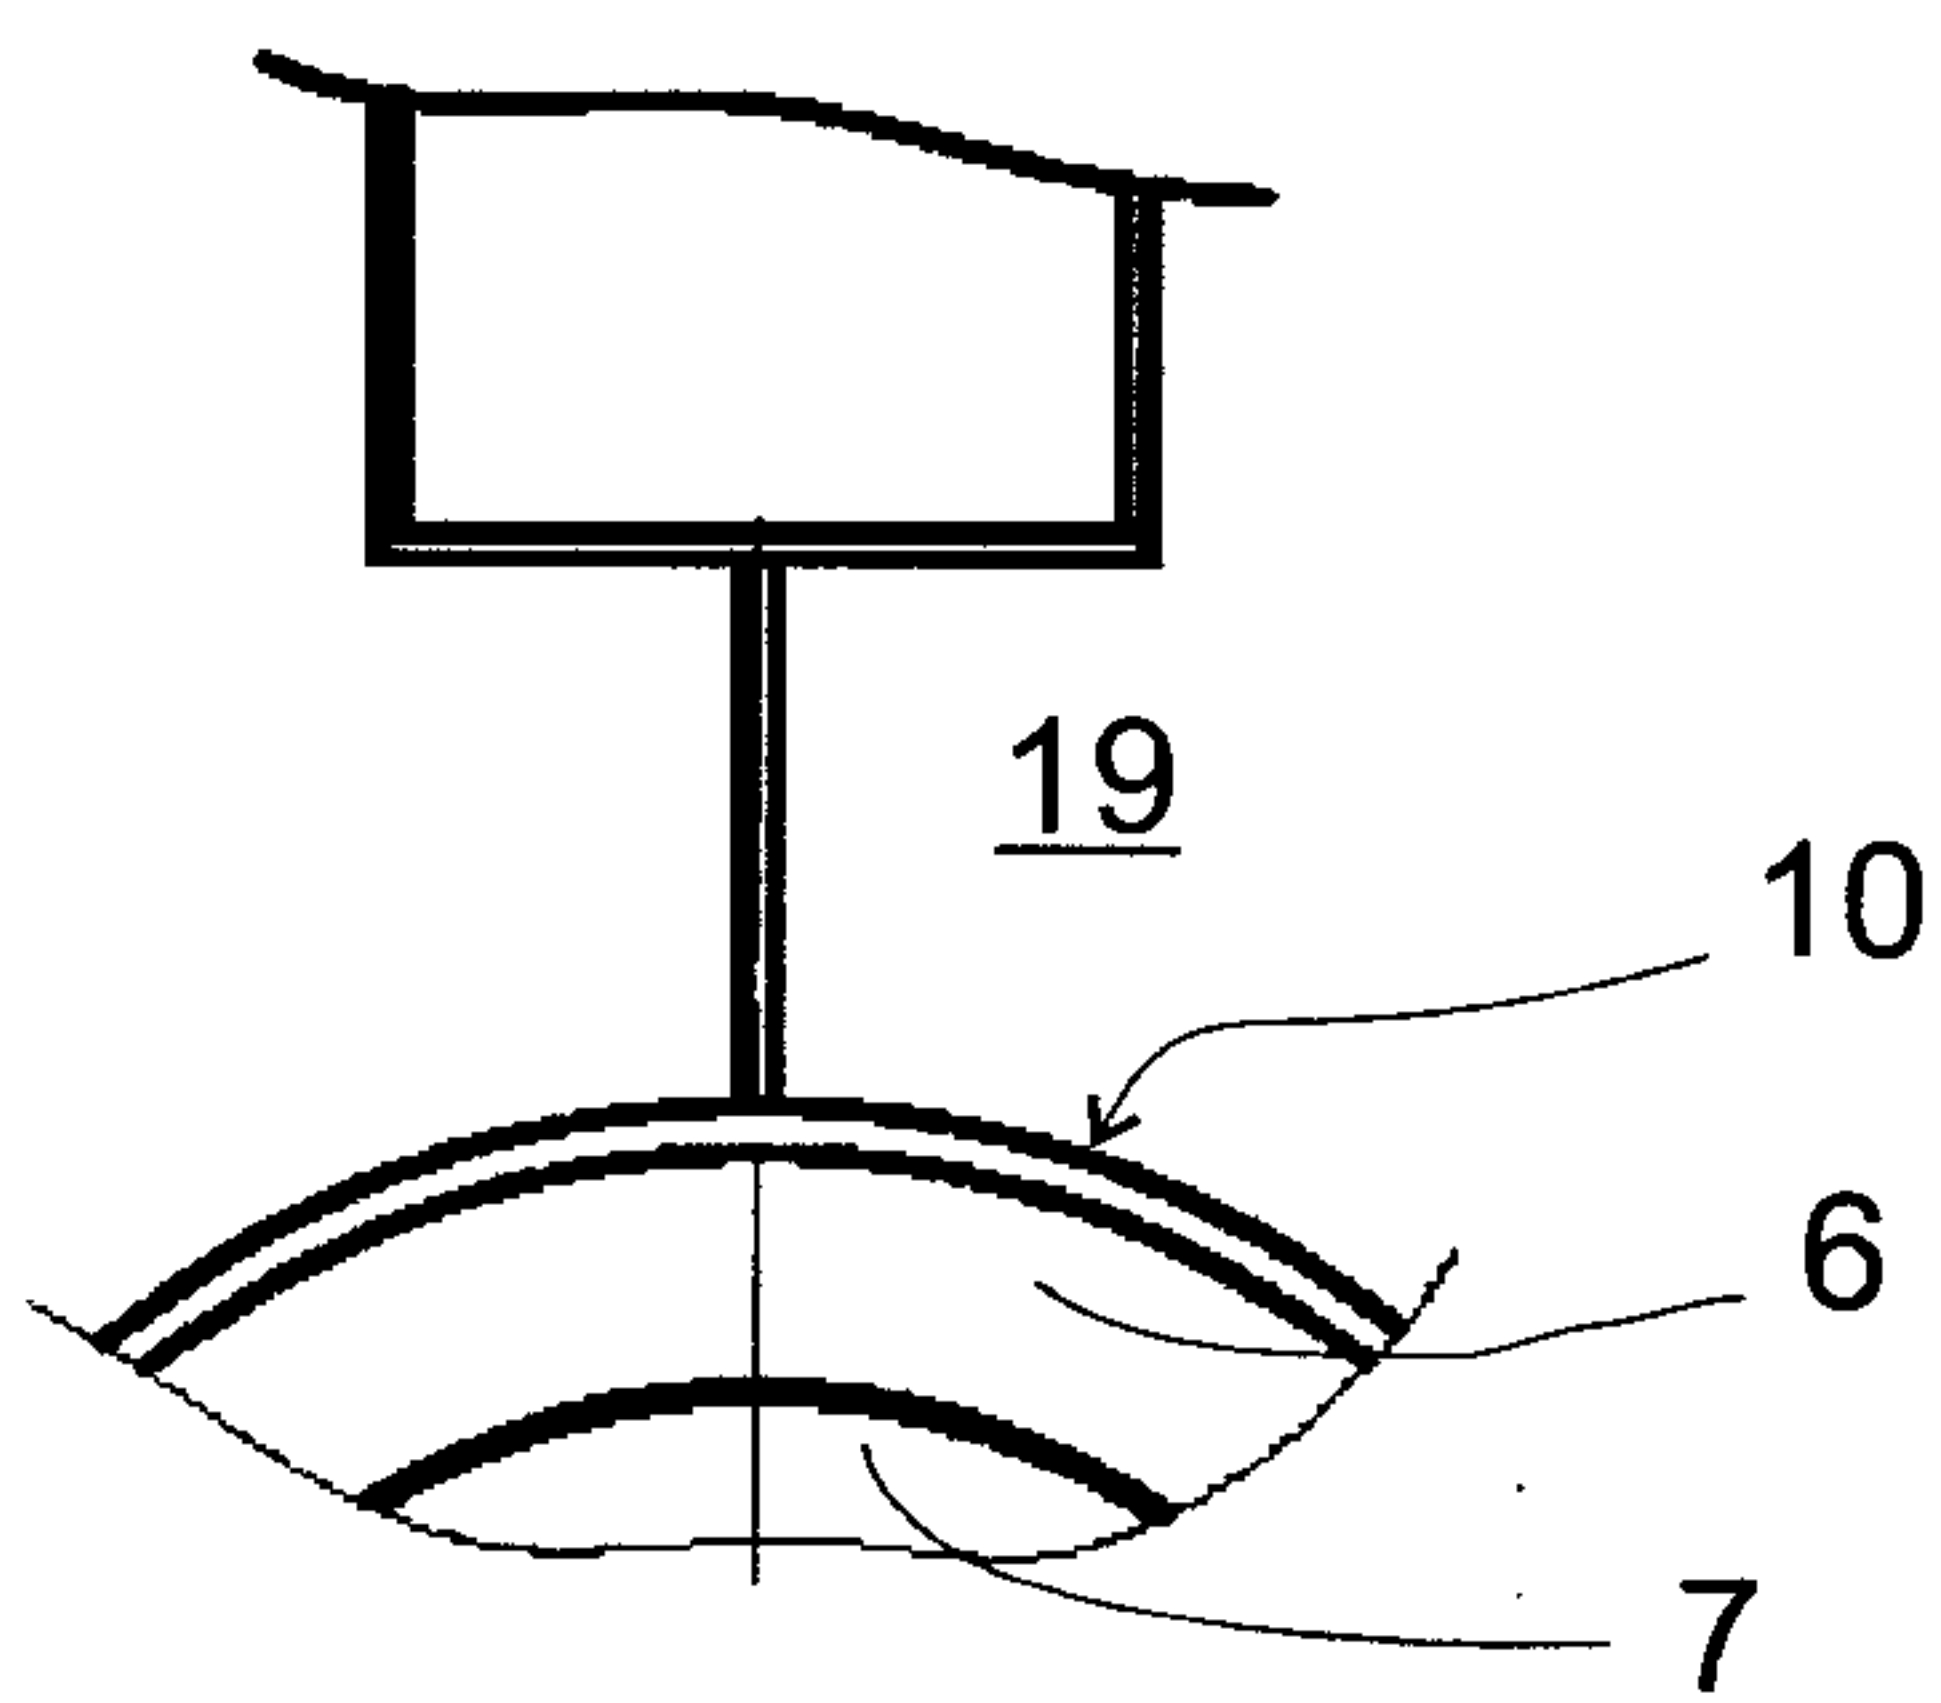


FIG 15

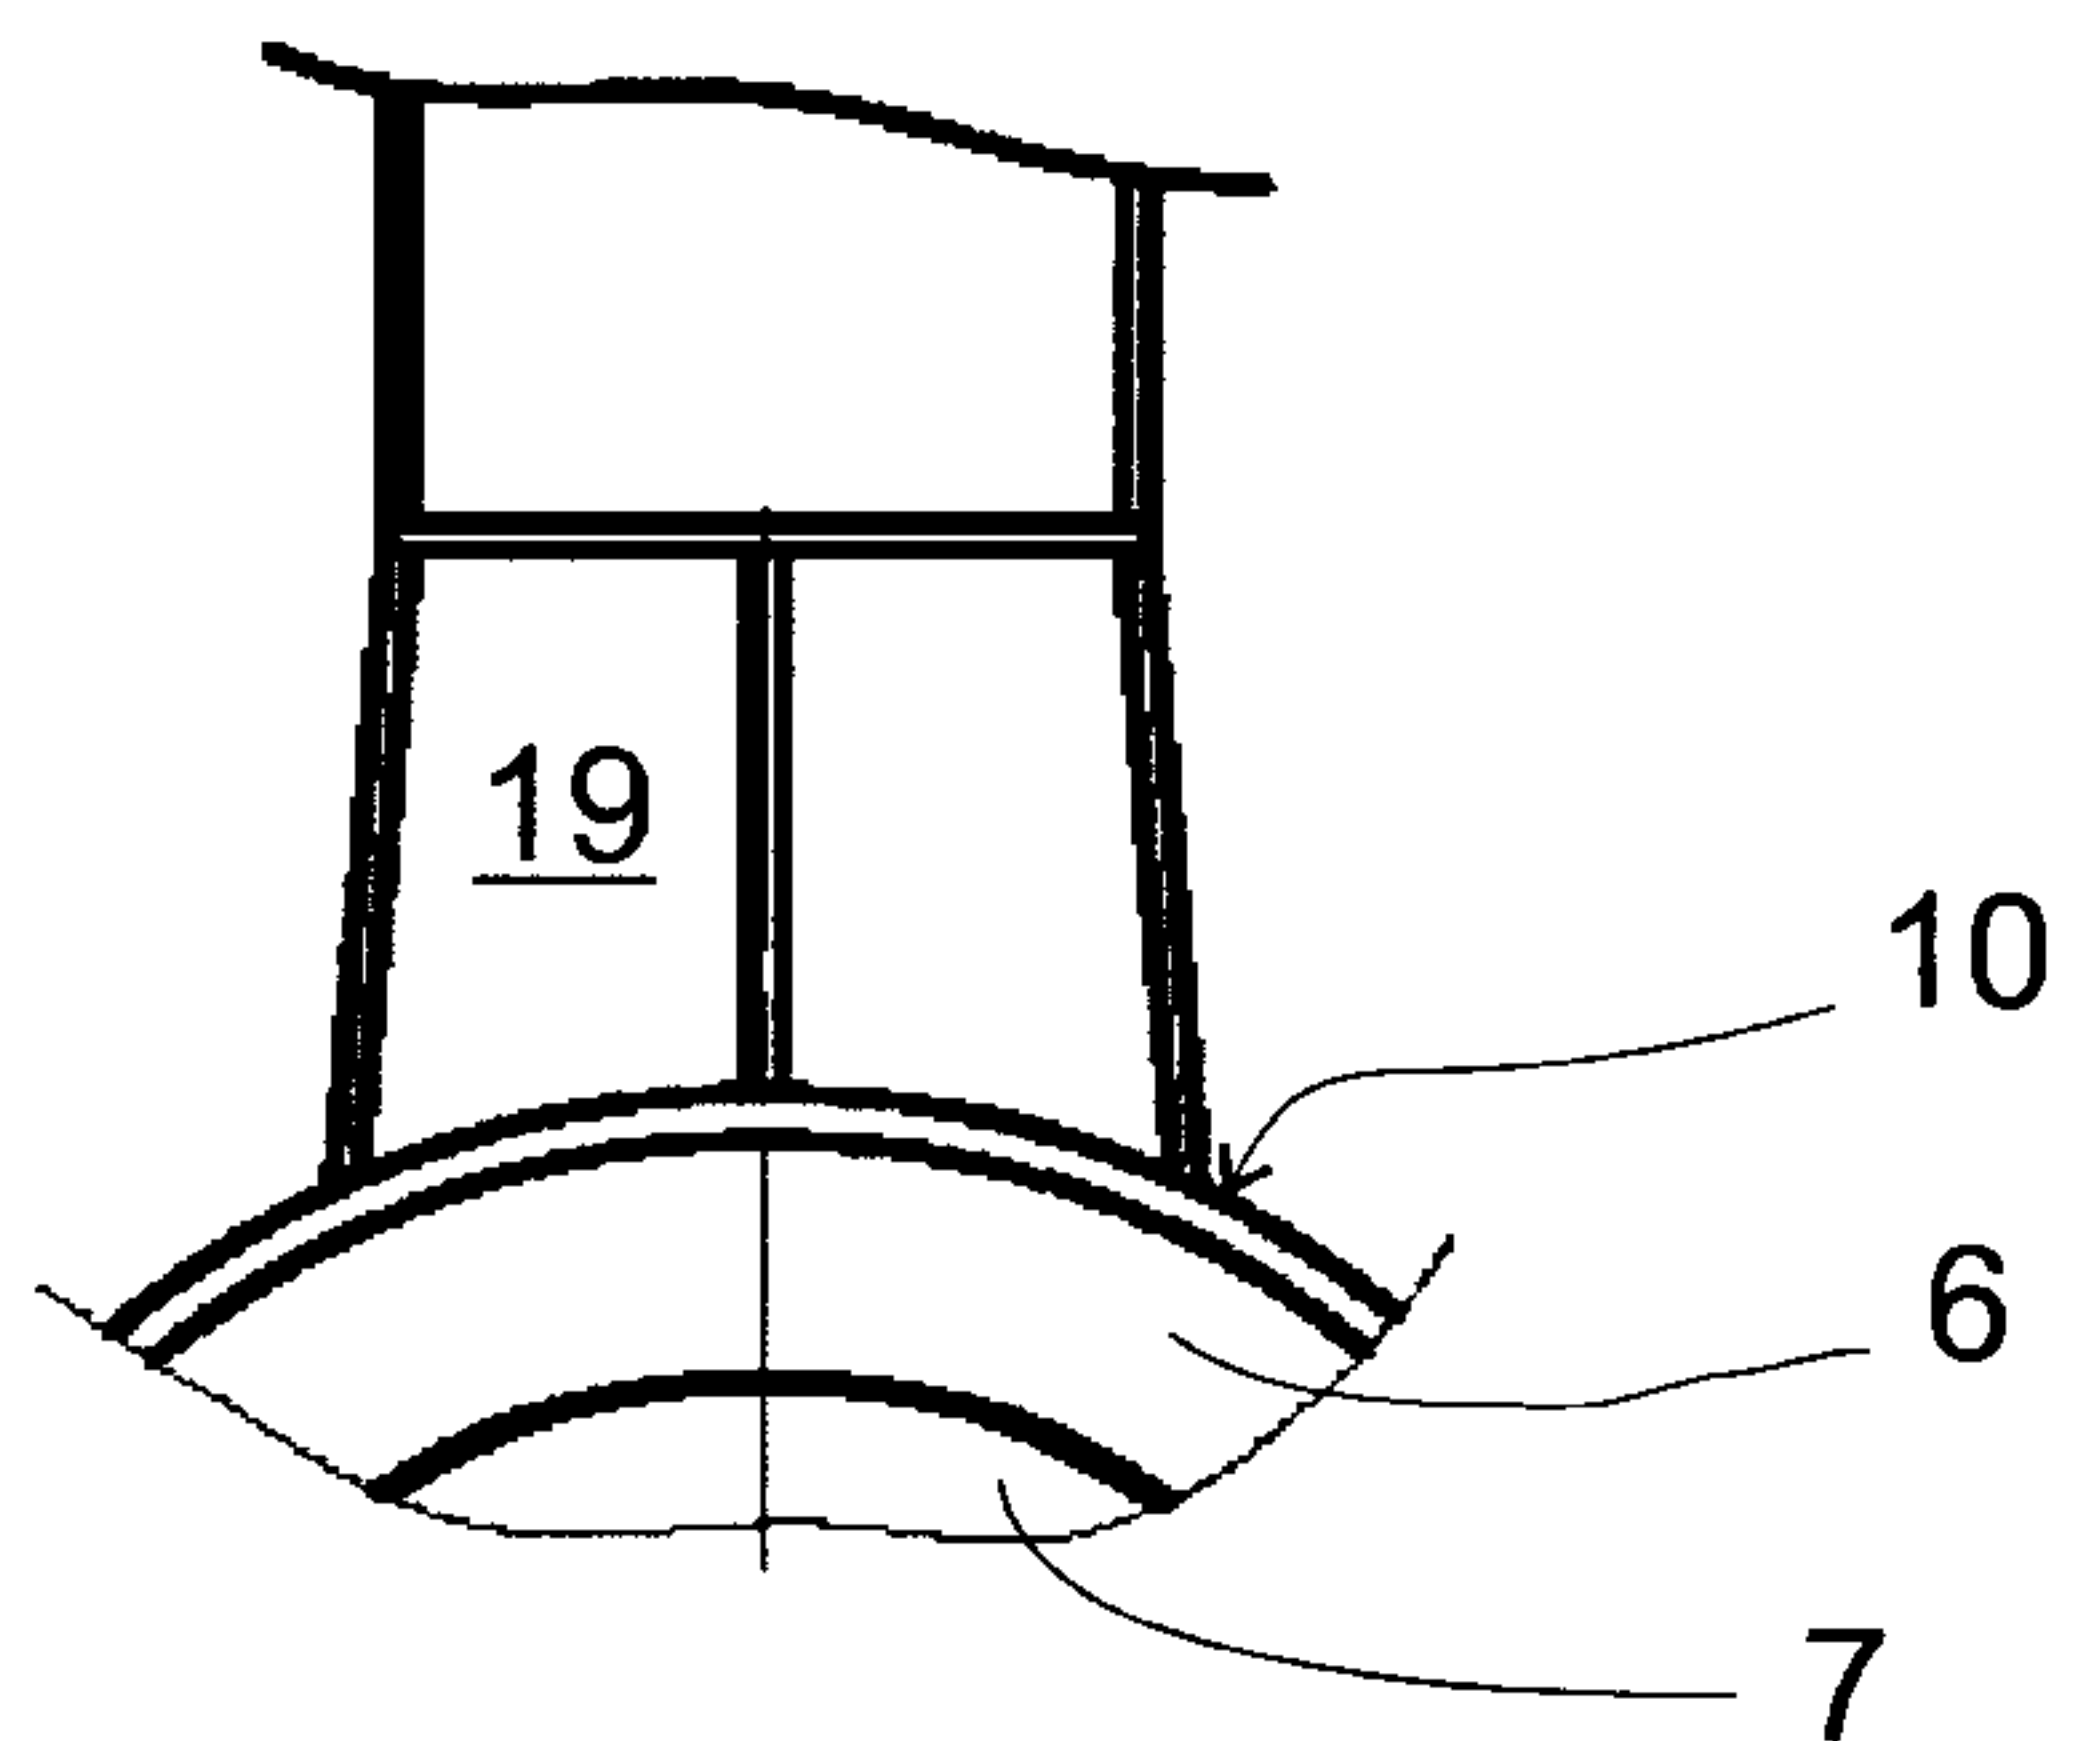


FIG 16




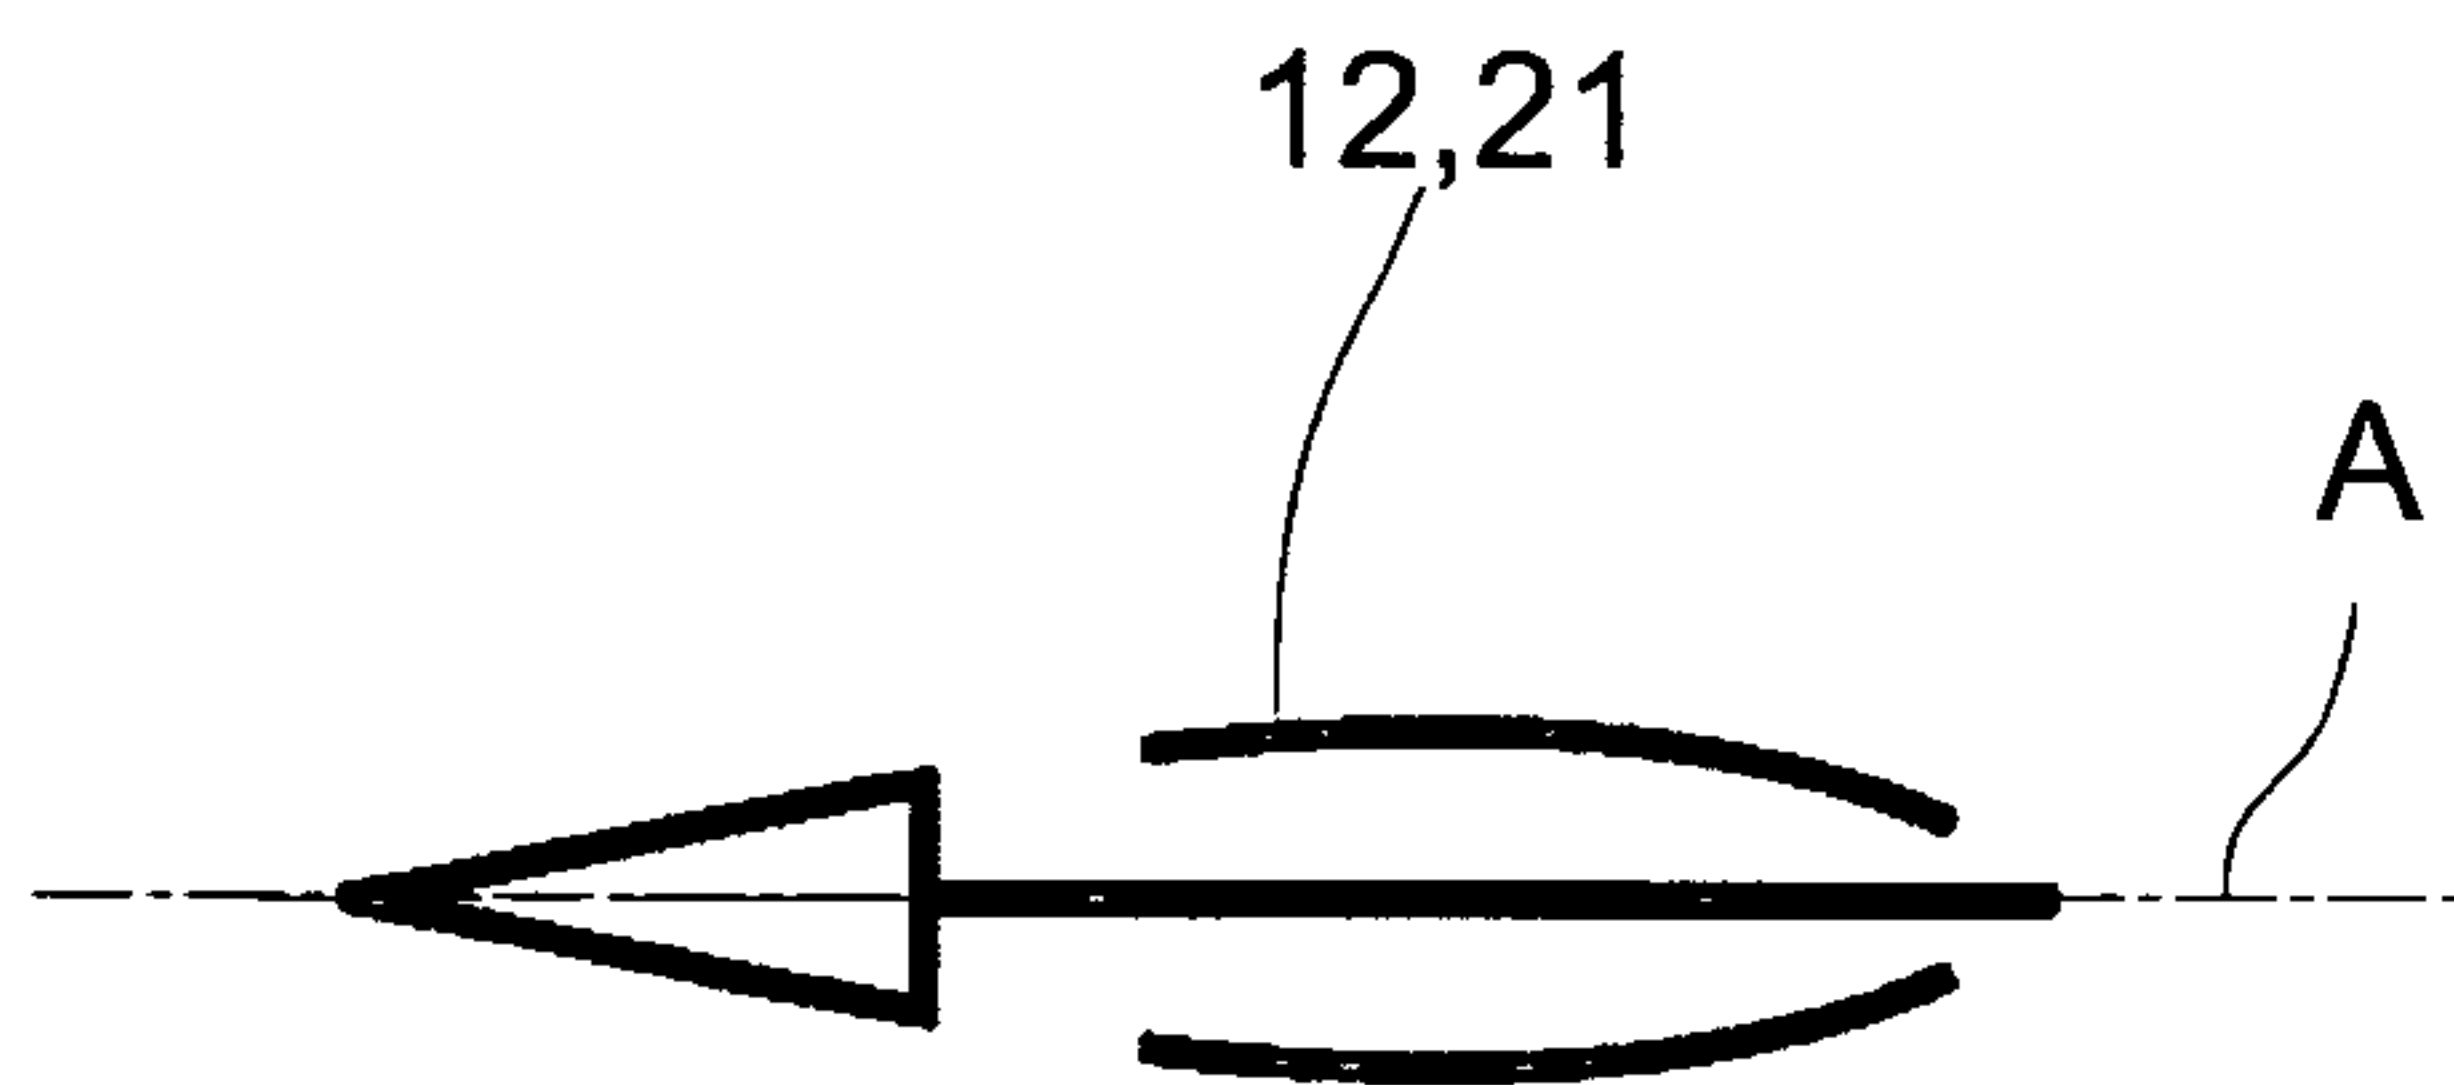


FIG 17

6 / 8

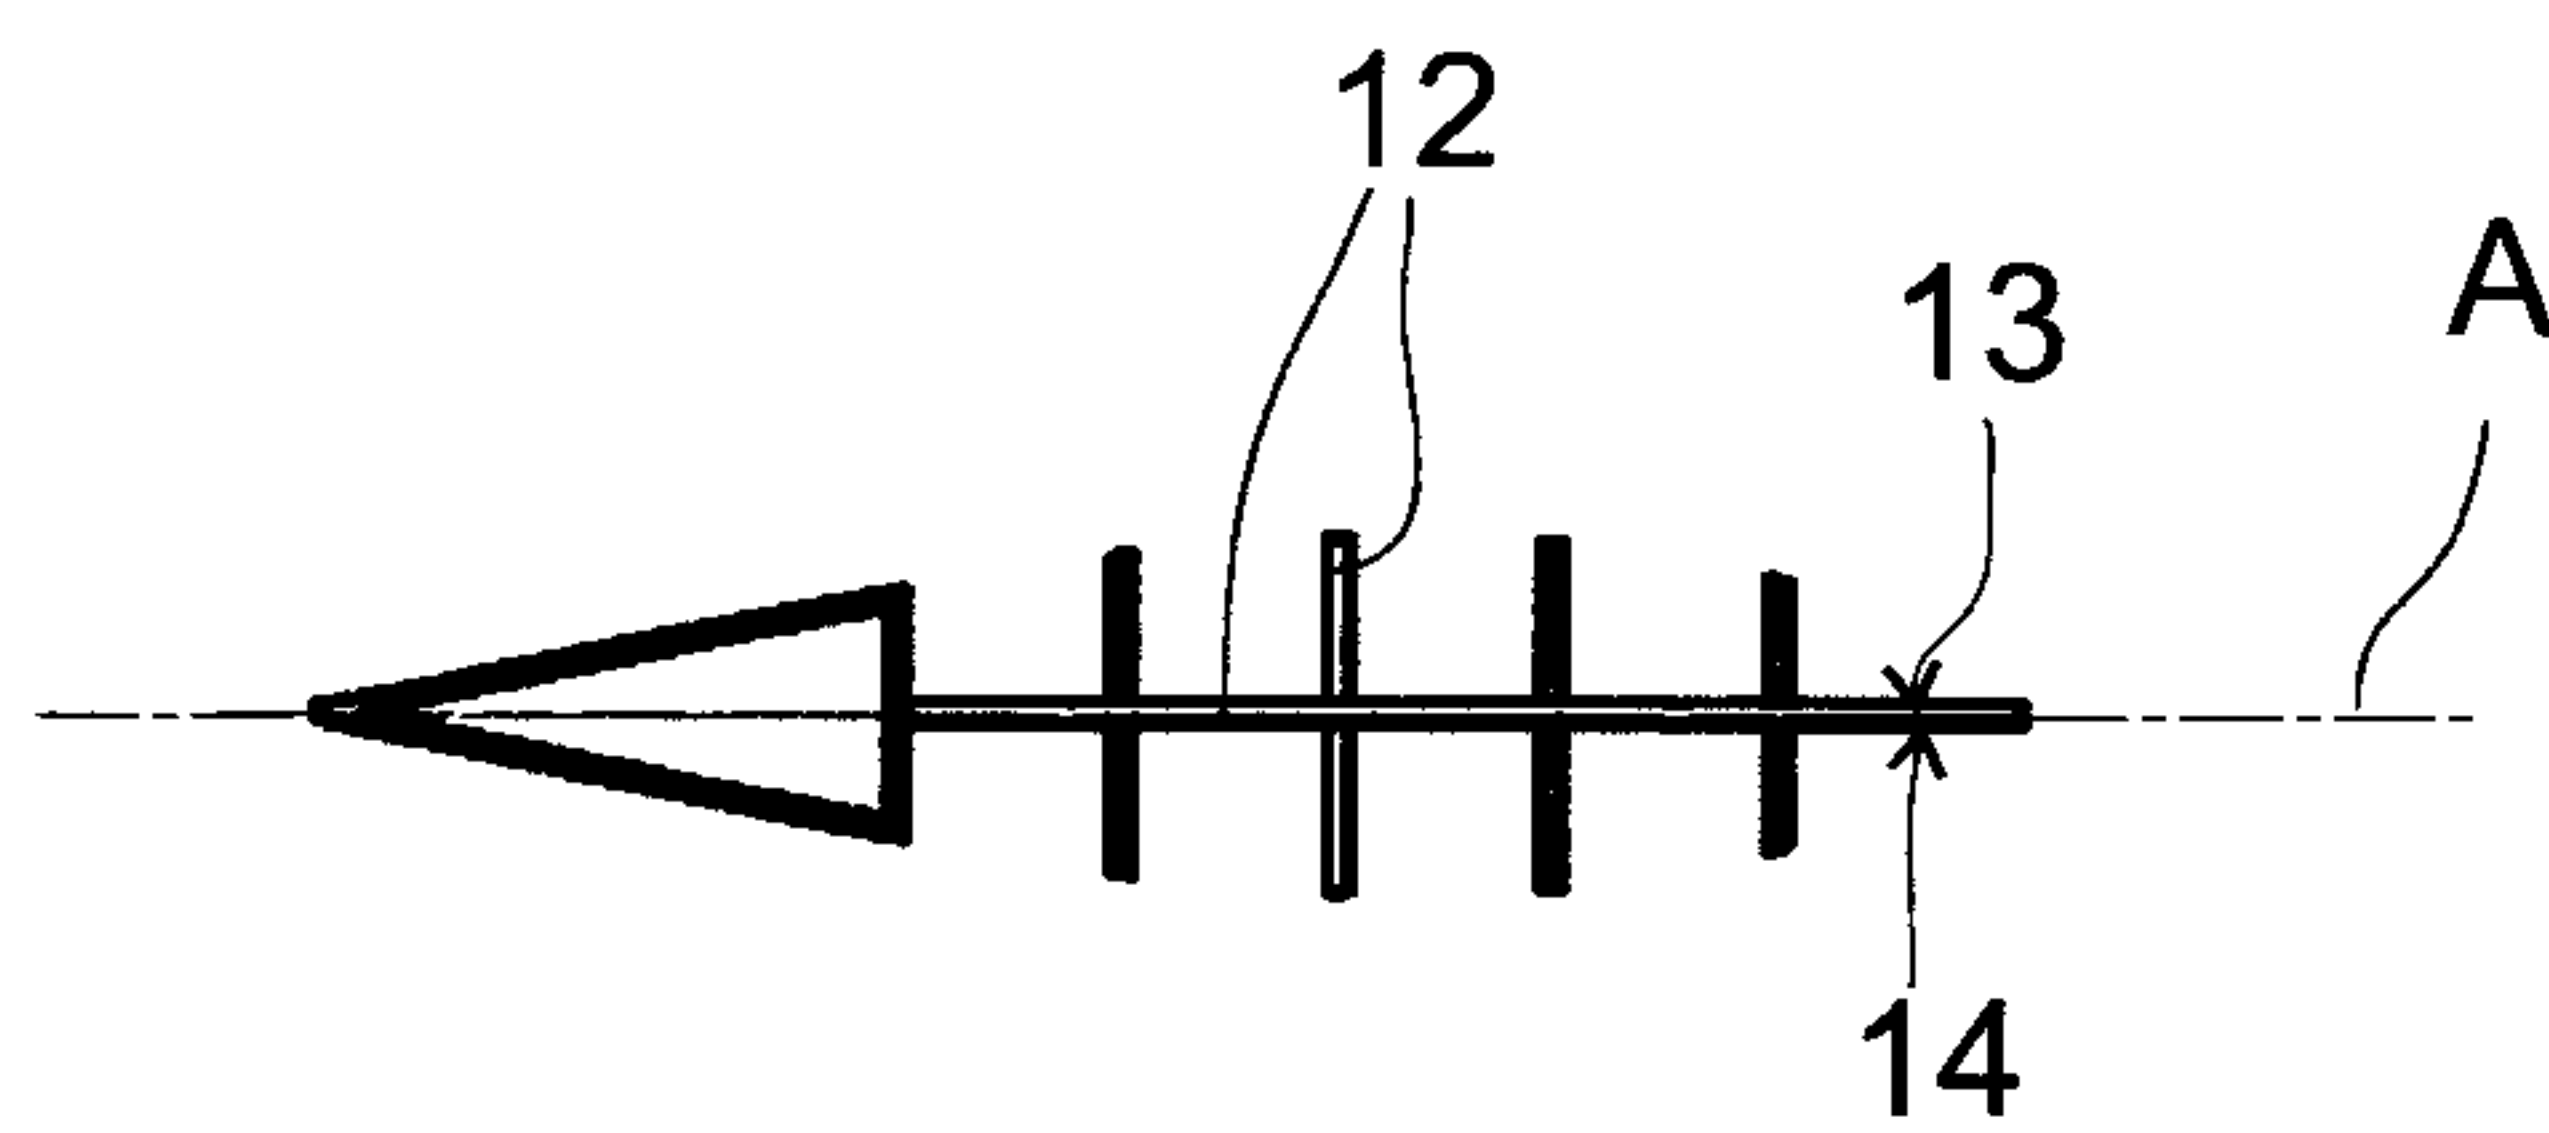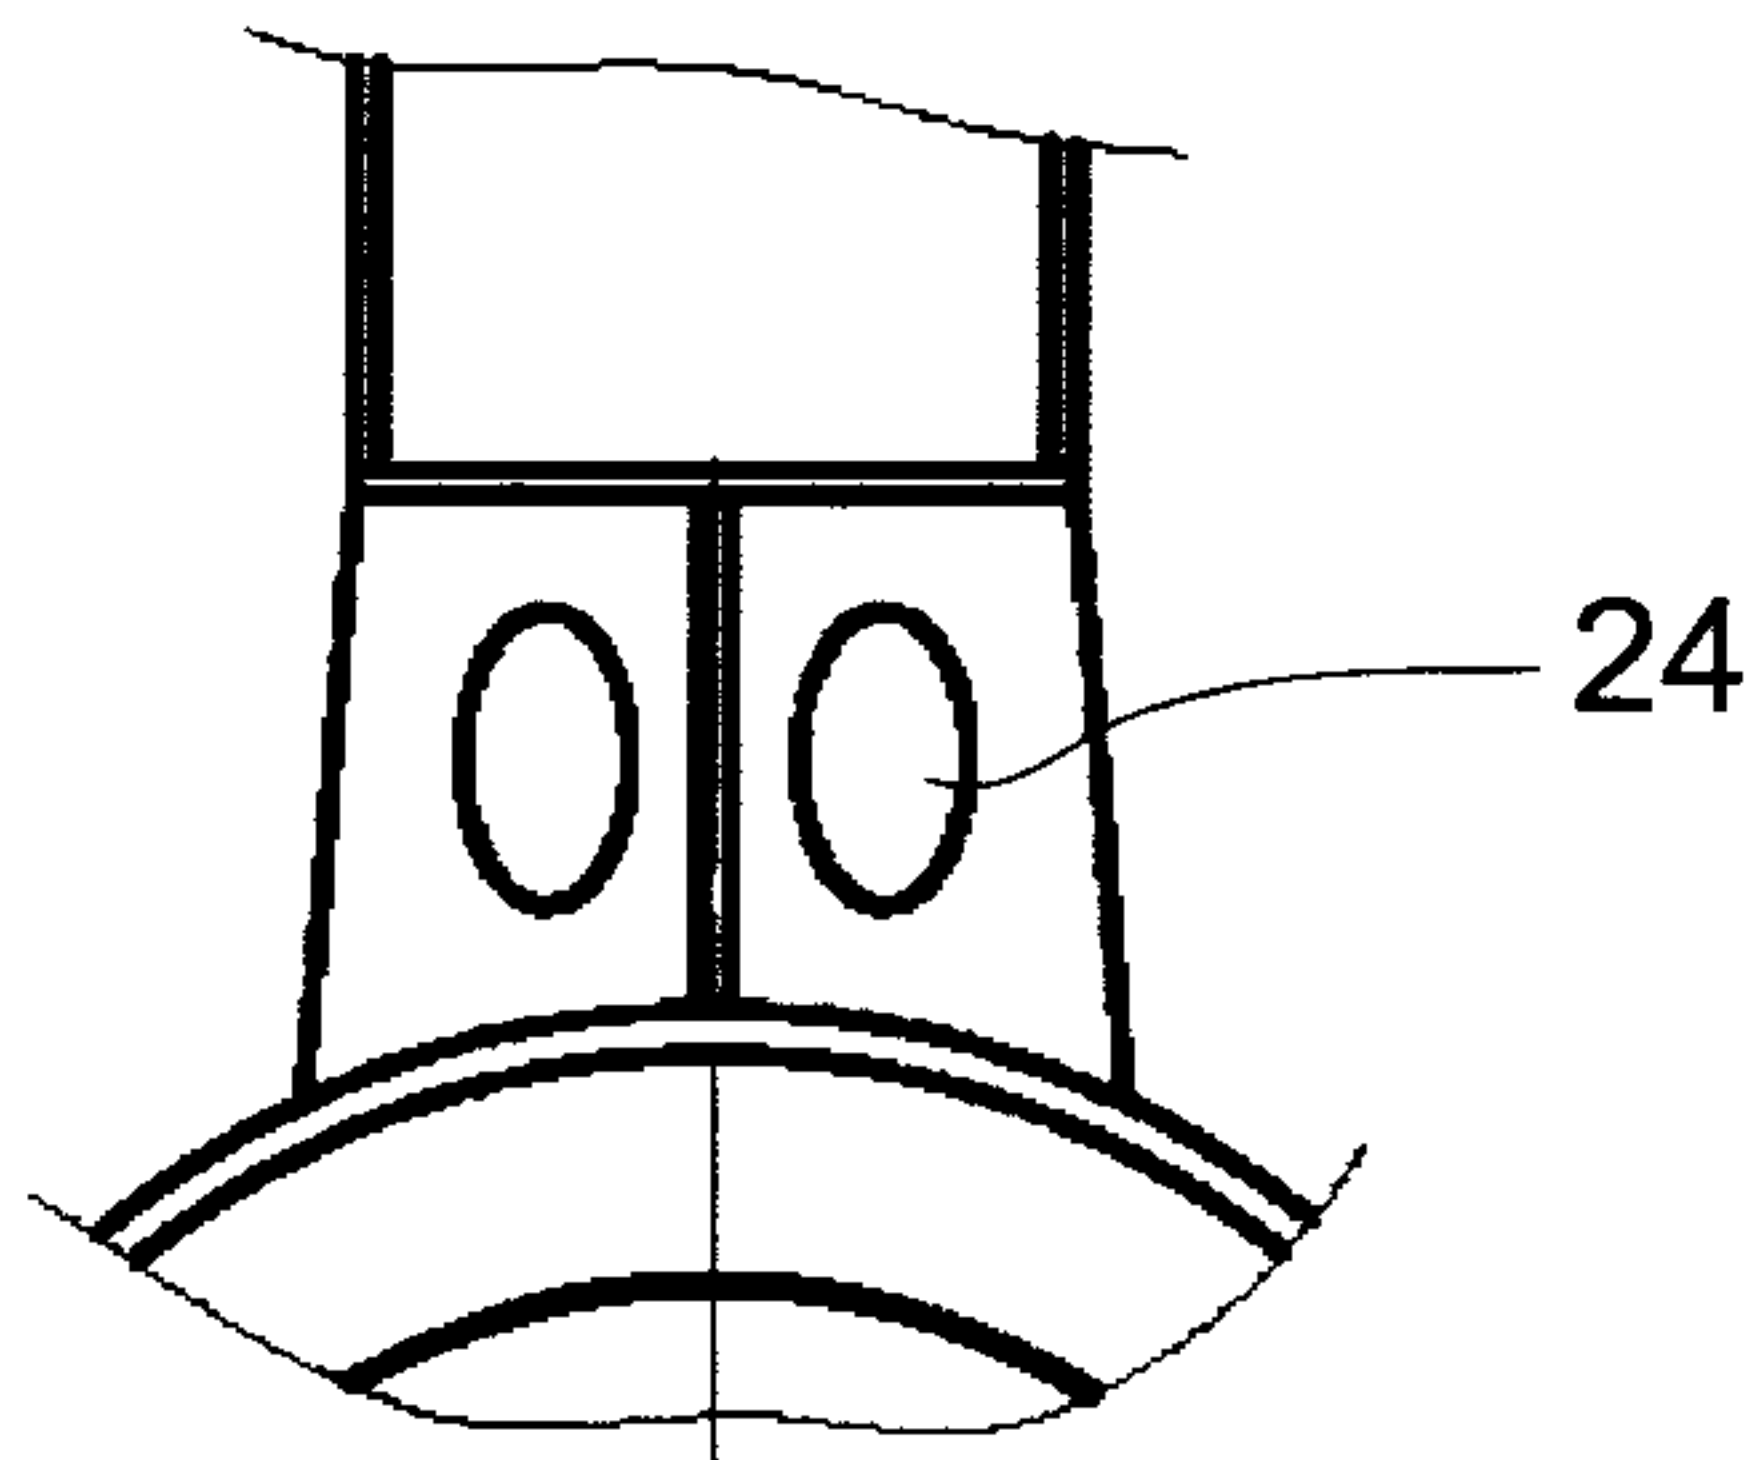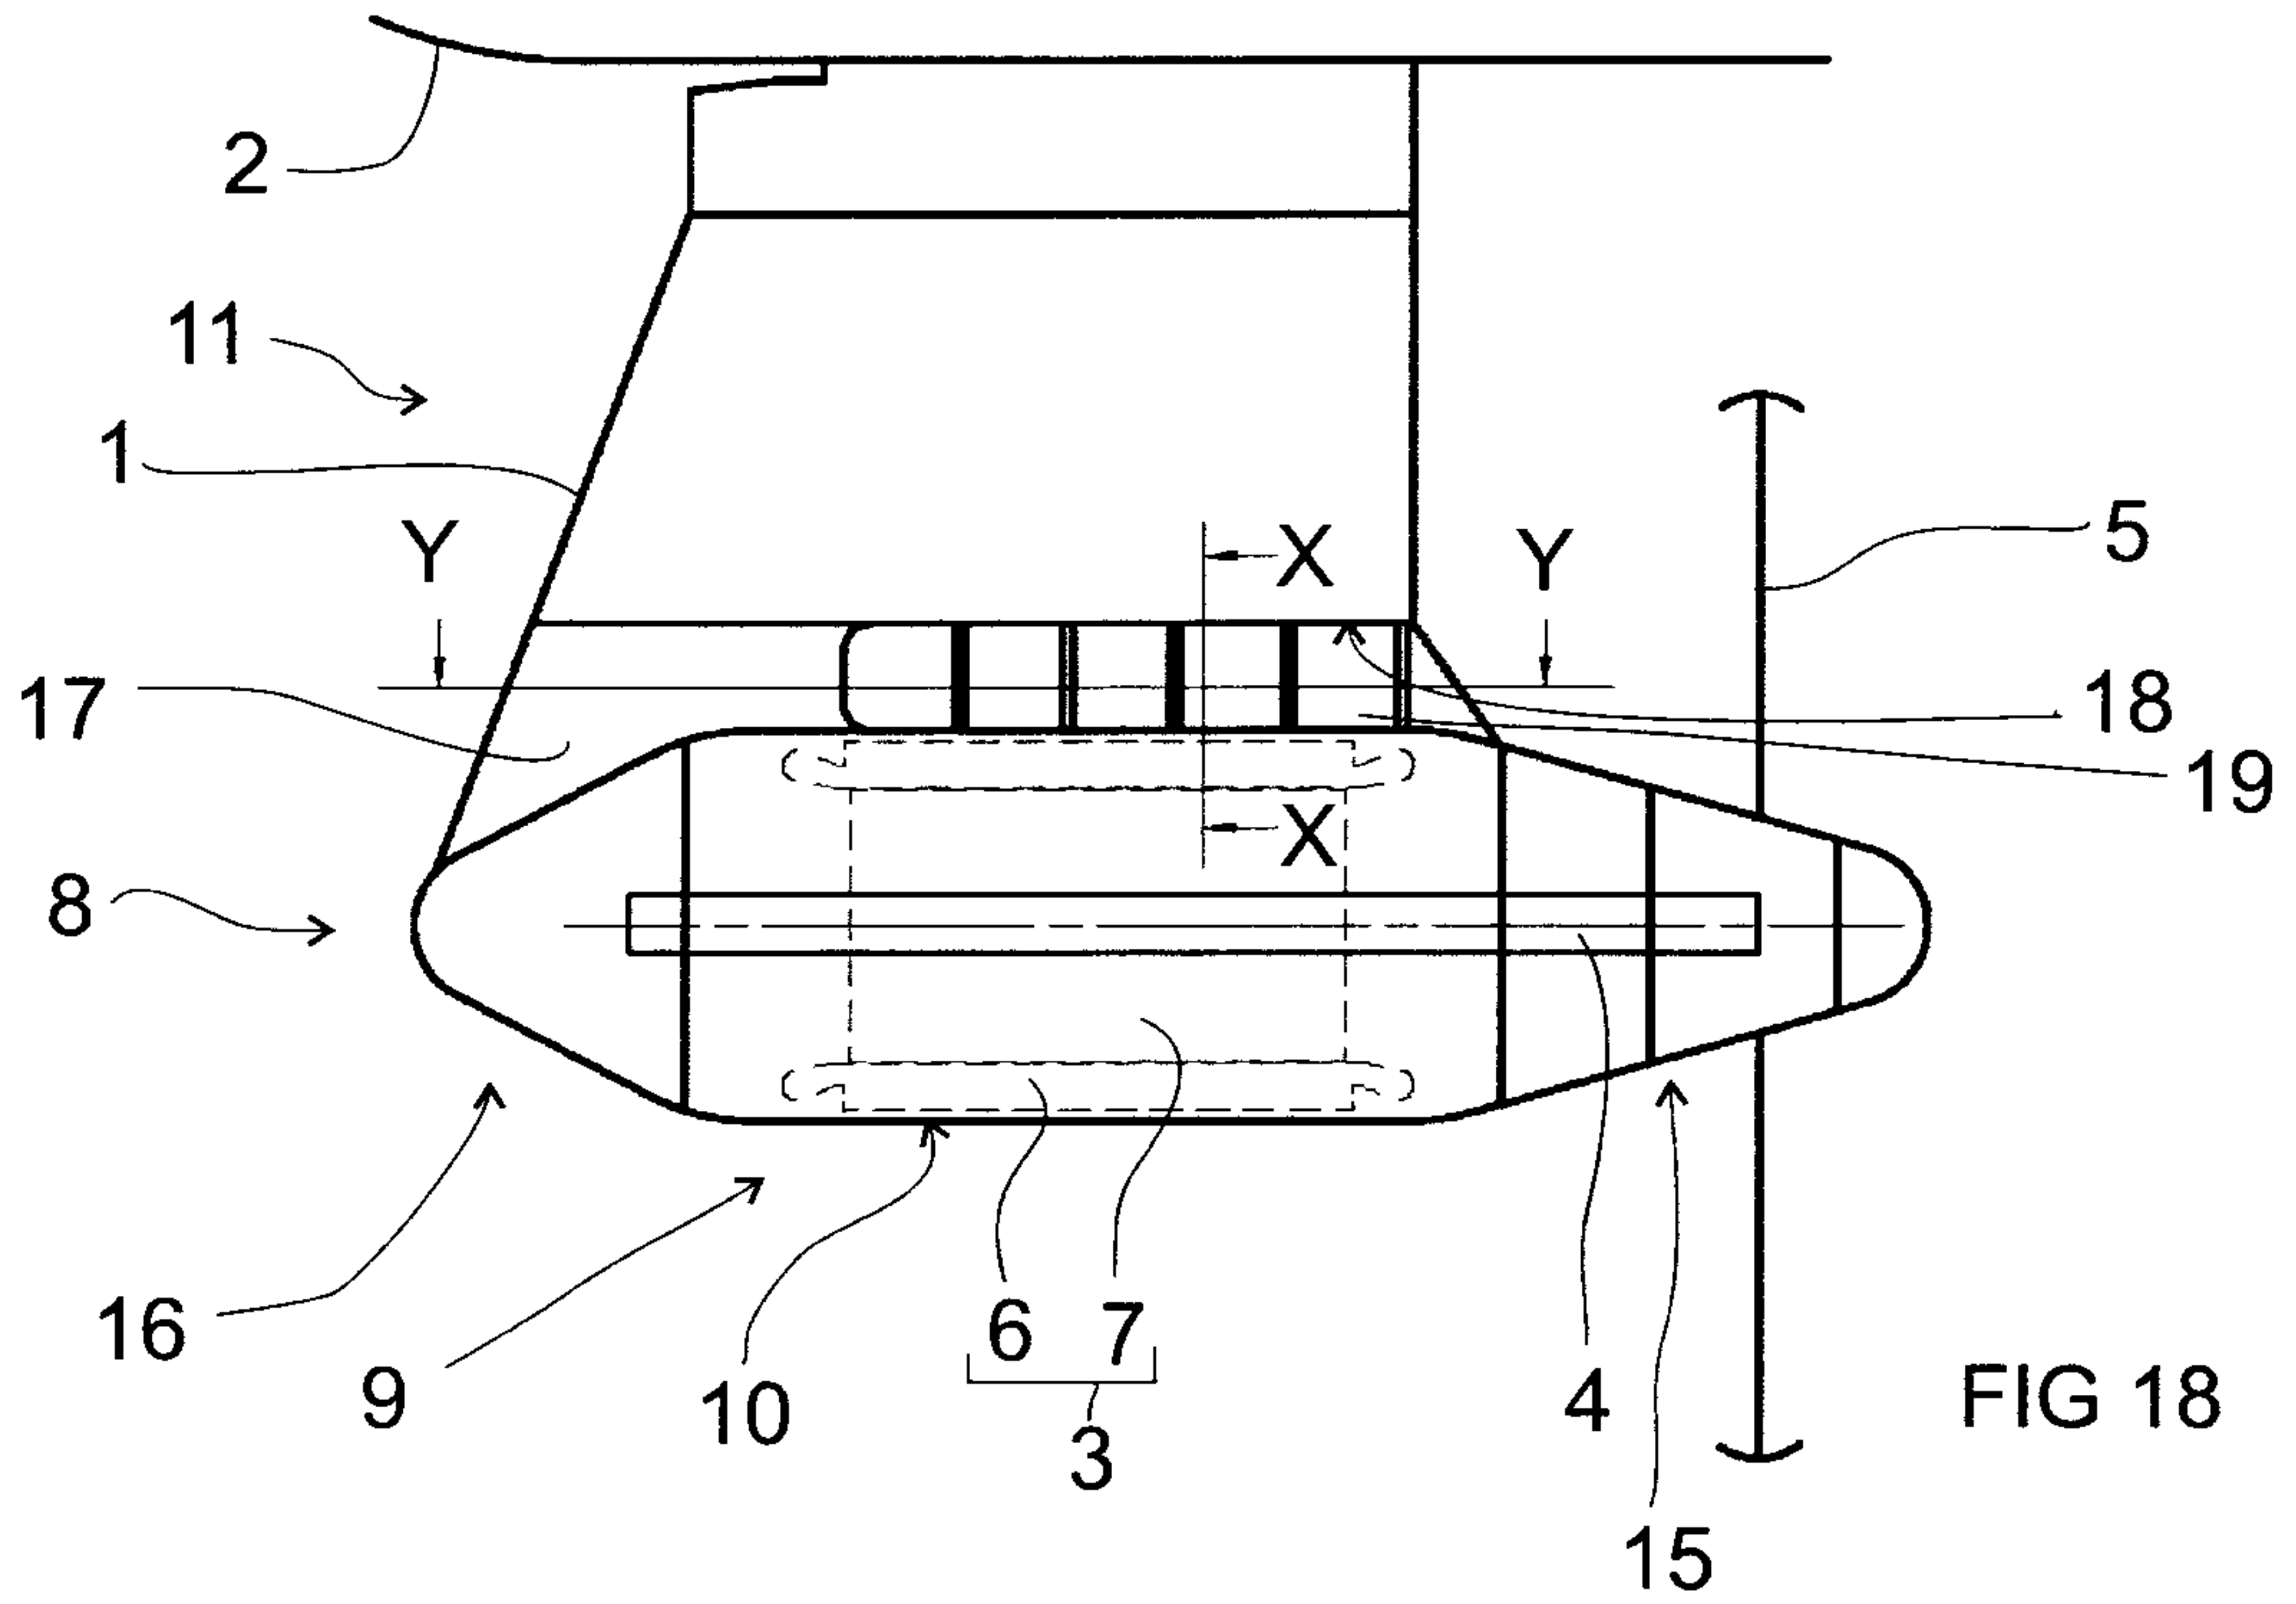

7 / 8

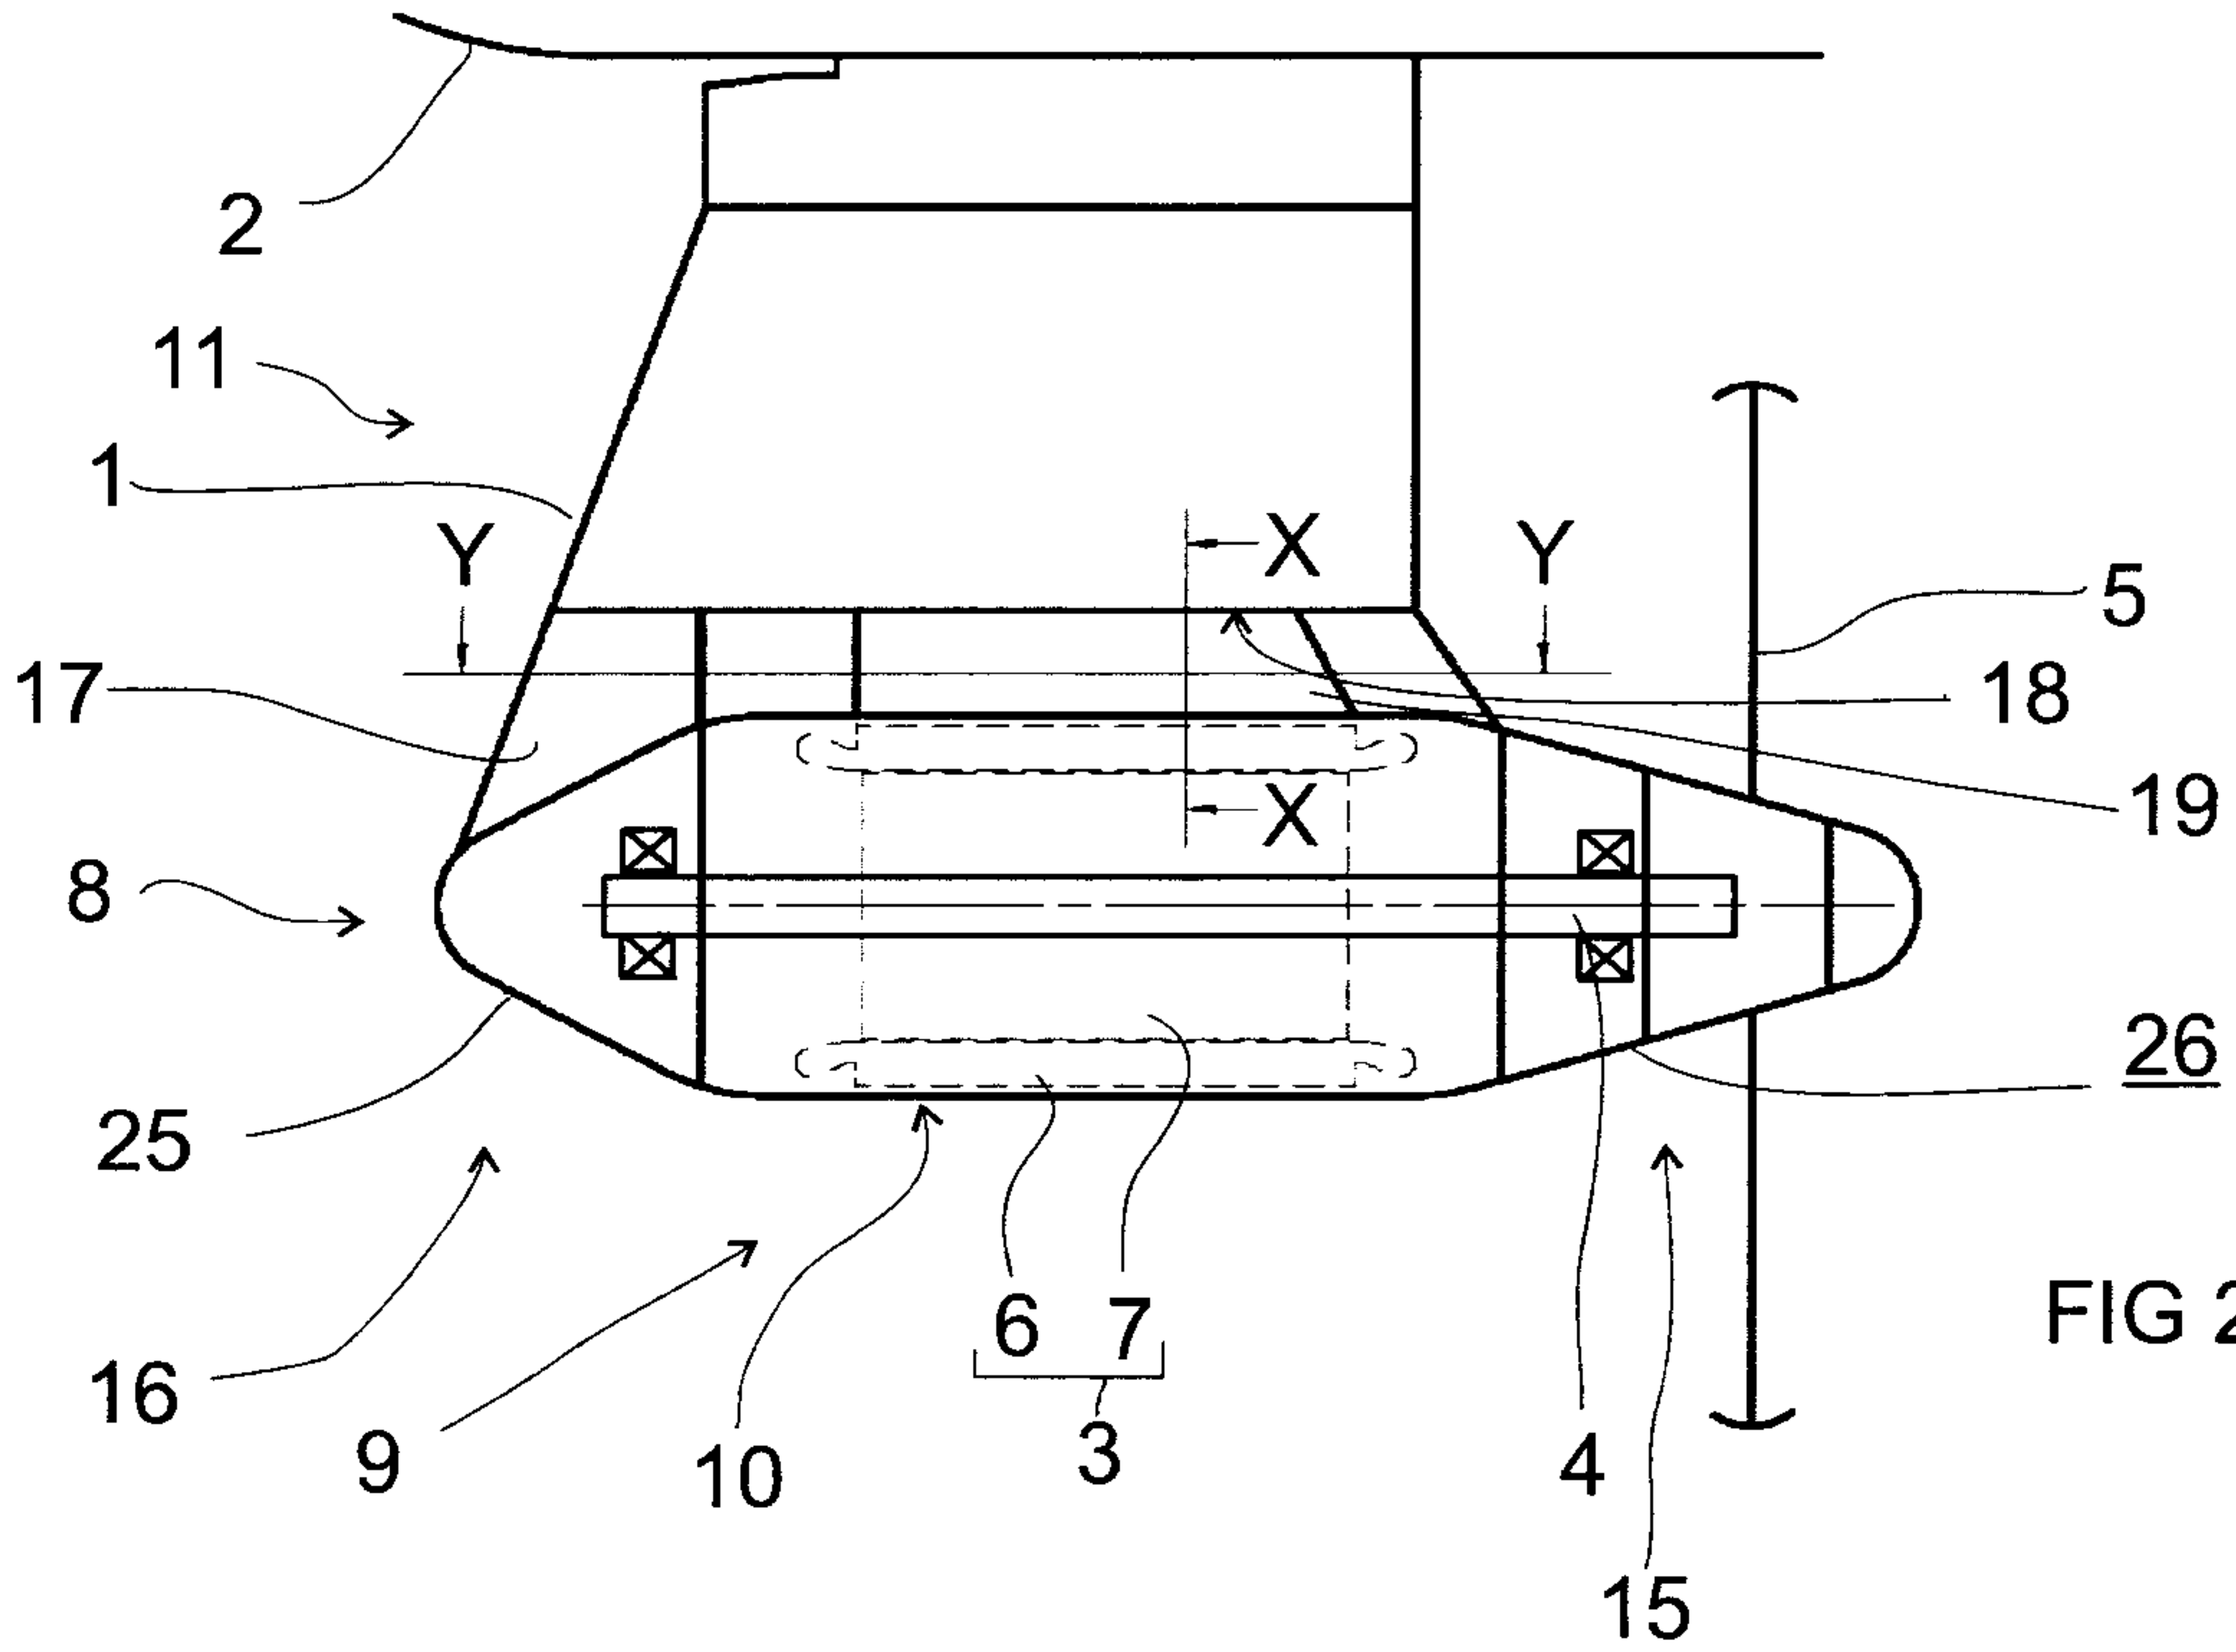


FIG 21

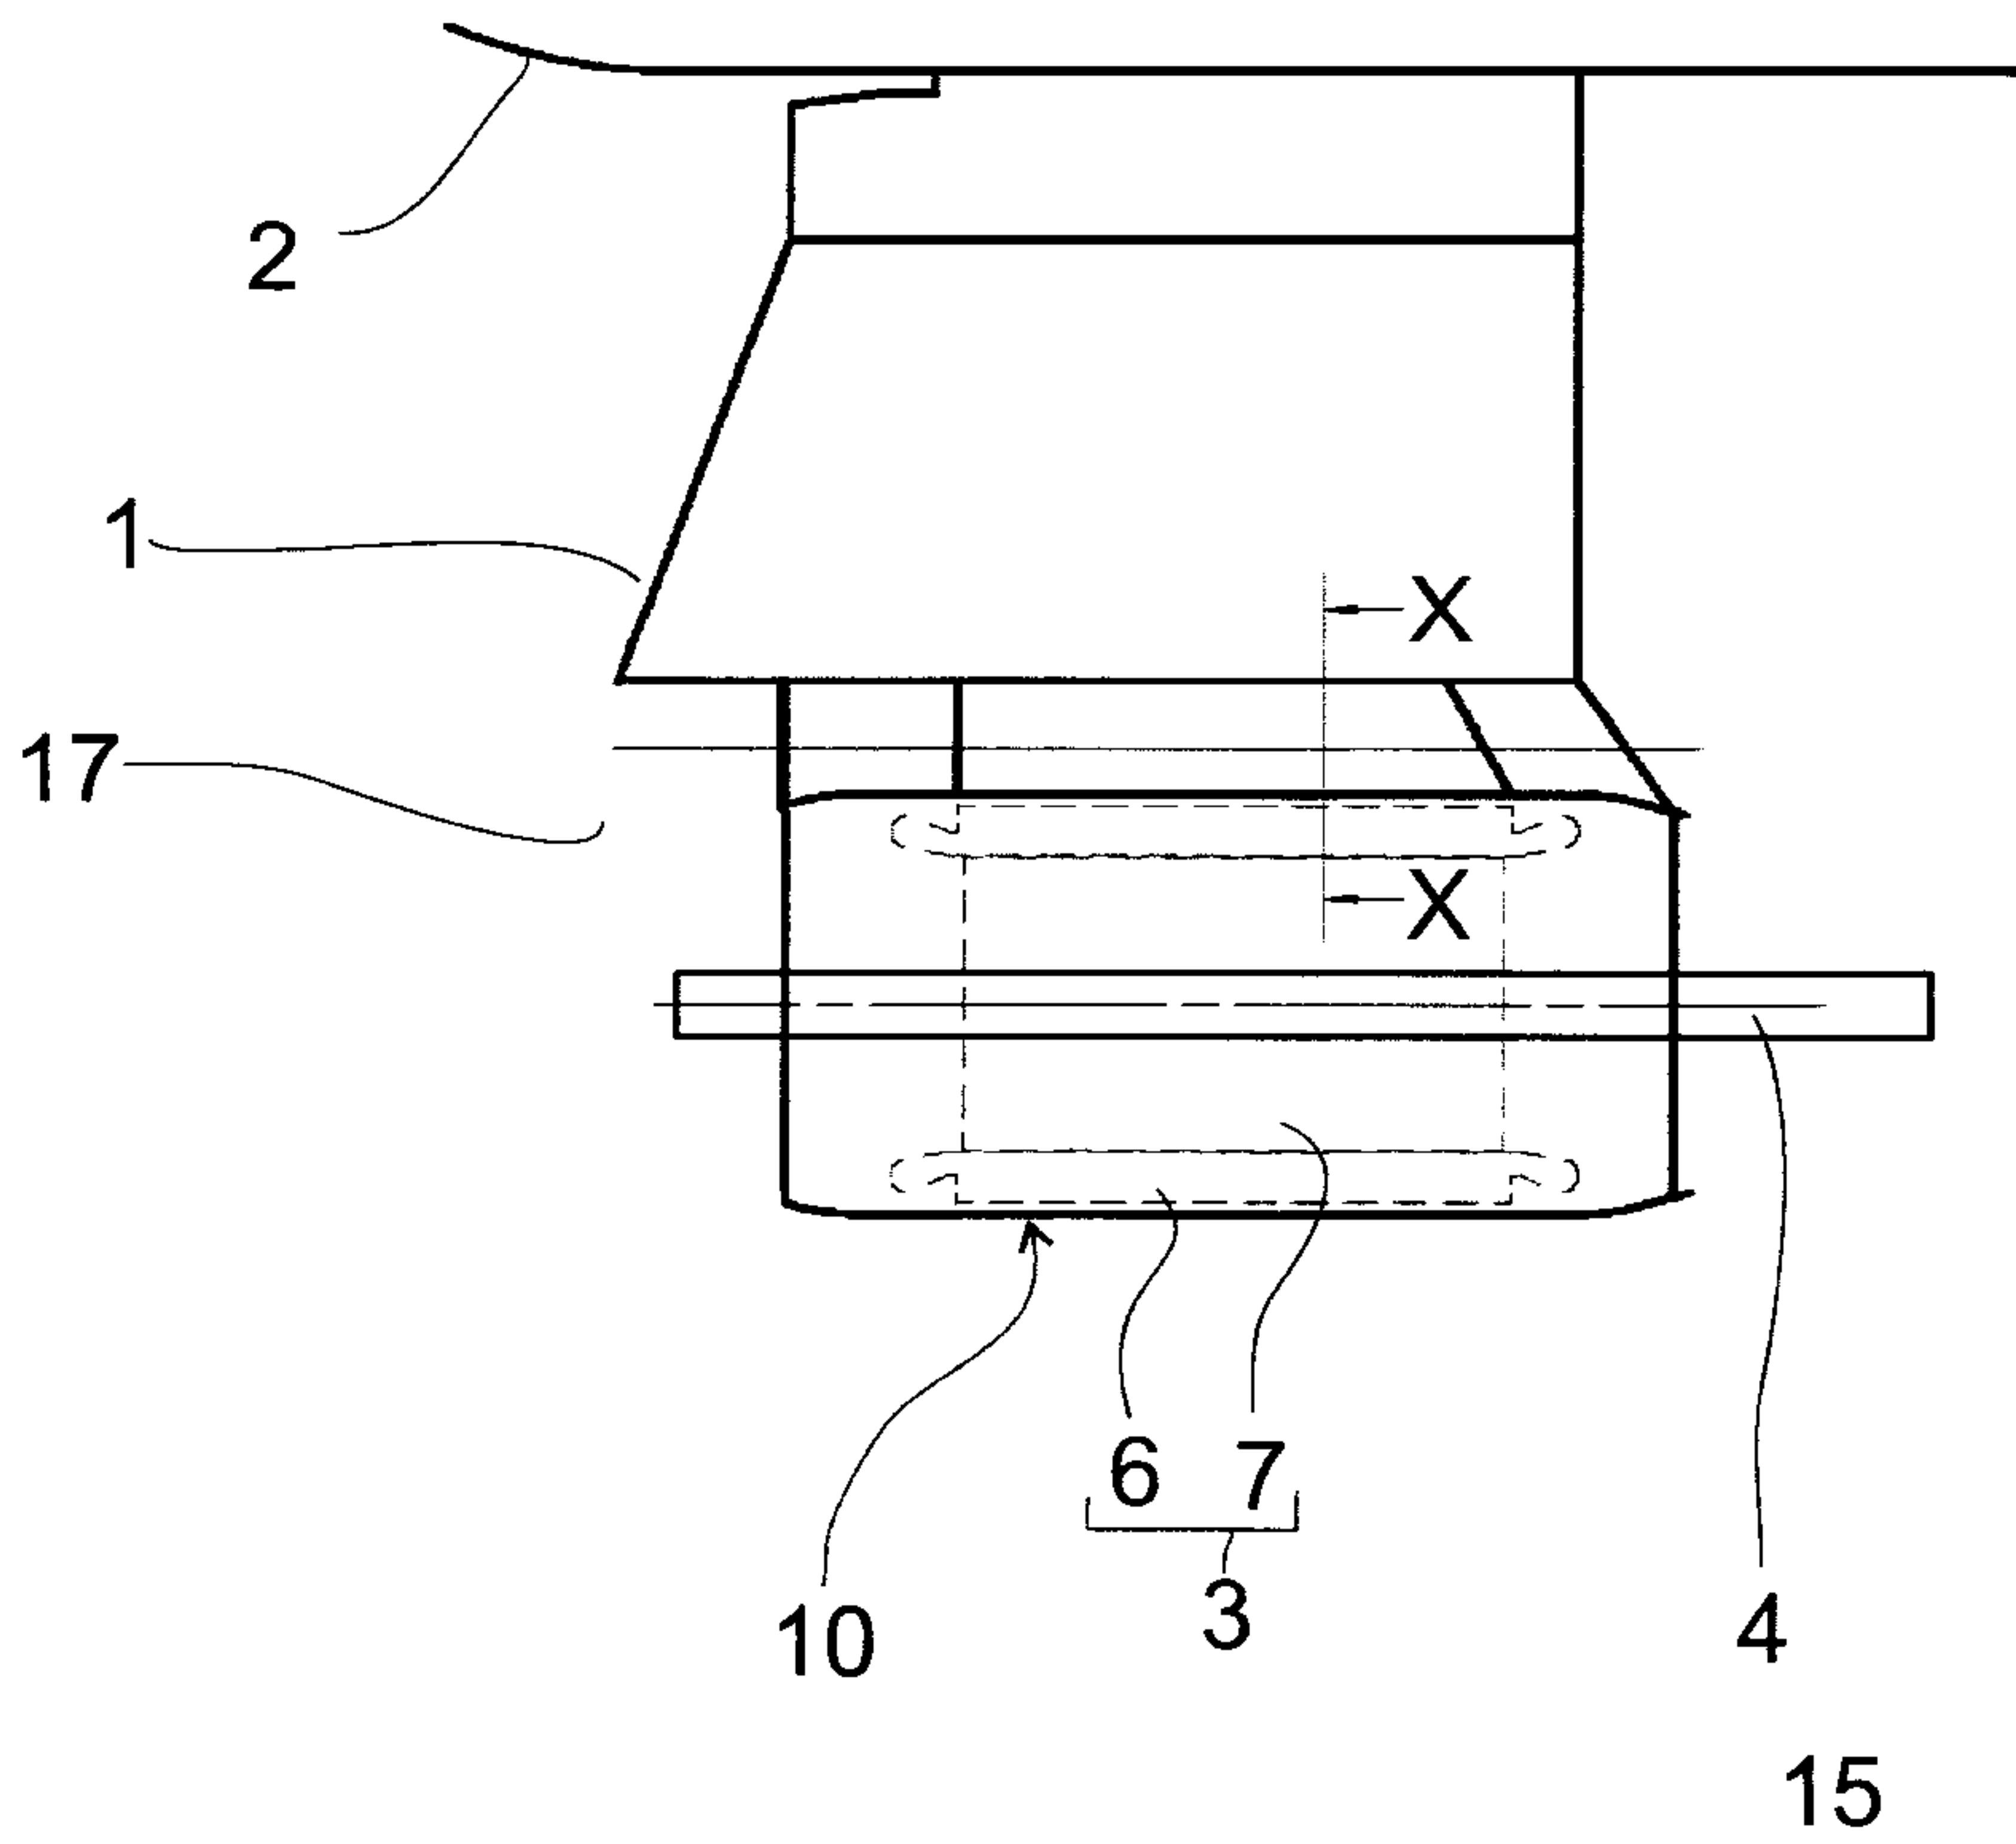


FIG 22

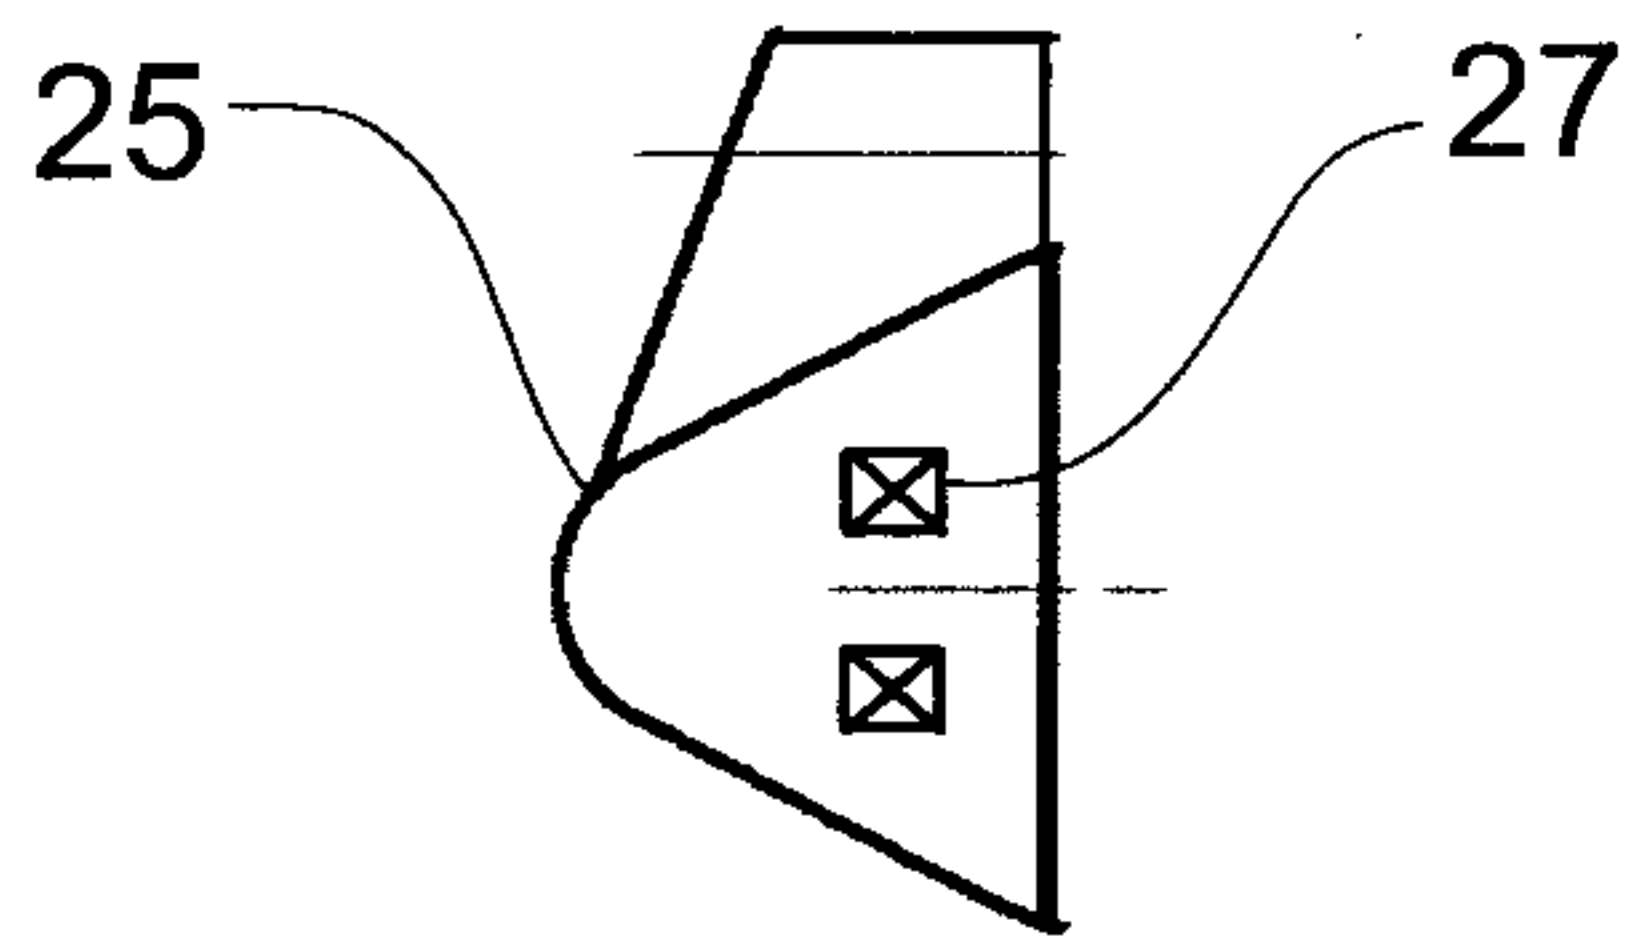


FIG 23

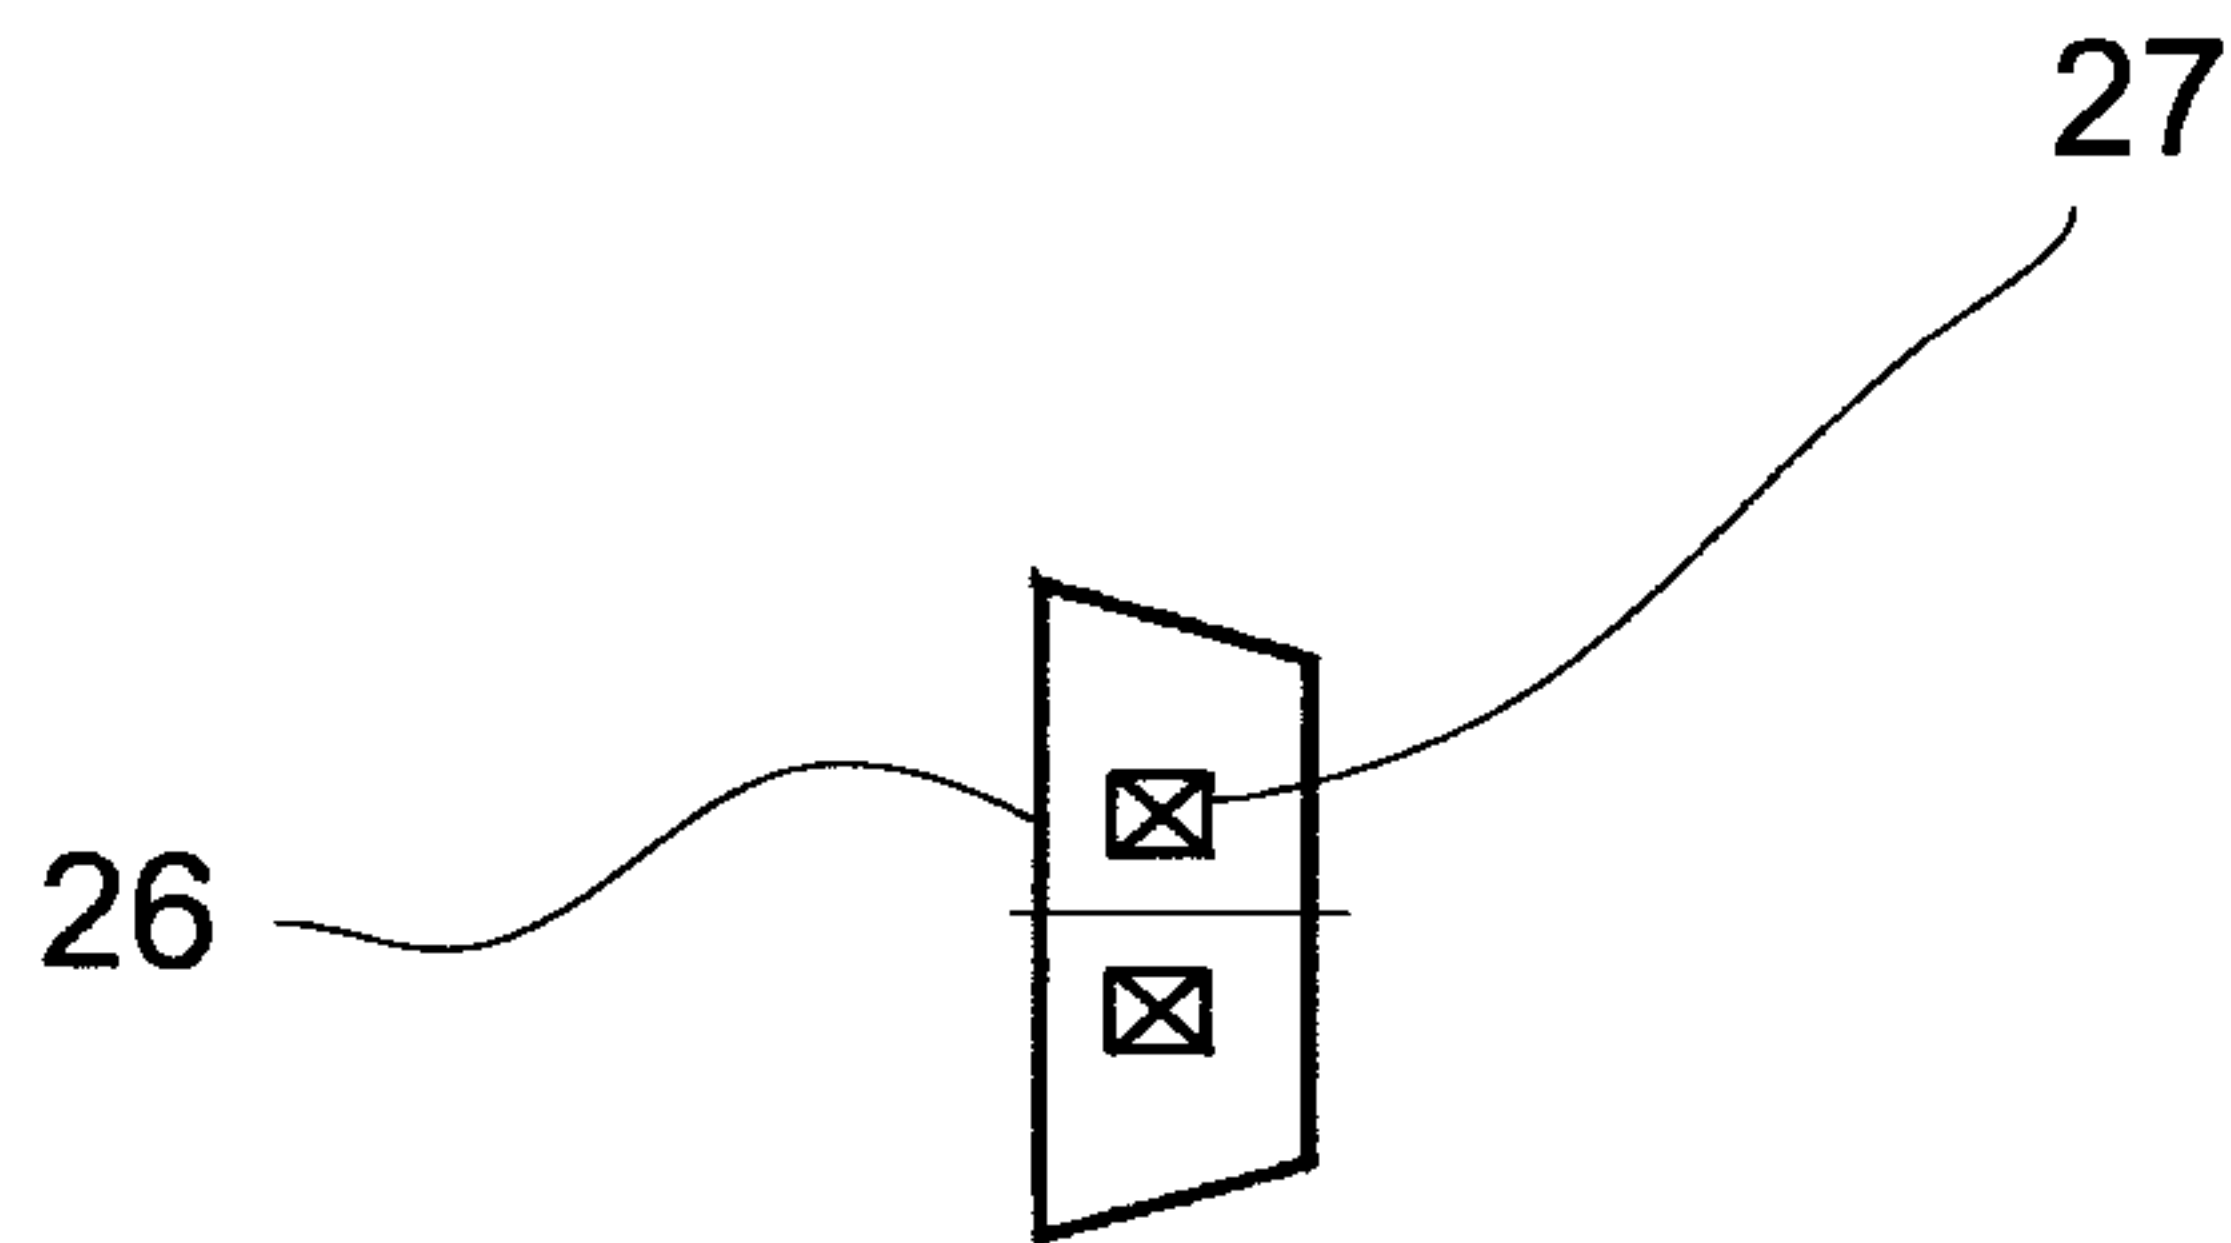


FIG 24

