



US 20170064998A1

(19) **United States**(12) **Patent Application Publication**
CADIEUX et al.(10) **Pub. No.: US 2017/0064998 A1**(43) **Pub. Date: Mar. 9, 2017**(54) **ELECTRONIC SMOKING ARTICLE**


(60) Provisional application No. 61/787,088, filed on Mar. 15, 2013.



(71) Applicant: **ALTRIA CLIENT SERVICES LLC,**
RICHMOND, VA (US)**Publication Classification**(72) Inventors: **EDMOND J. CADIEUX,**
MECHANICSVILLE, VA (US);
GEOFFREY BRANDON JORDAN,
MIDLOTHIAN, VA (US); **BARRY S.**
SMITH, HOPEWELL, VA (US);
STEVE R. RINEHART,
CHESTERFIELD, VA (US)(51) **Int. Cl.**
A24F 47/00 (2006.01)
(52) **U.S. Cl.**
CPC **A24F 47/008** (2013.01)(73) Assignee: **ALTRIA CLIENT SERVICES LLC,**
RICHMOND, VA (US)(21) Appl. No.: **15/354,201**(22) Filed: **Nov. 17, 2016****Related U.S. Application Data**

(63) Continuation of application No. 14/199,442, filed on Mar. 6, 2014.

(57) **ABSTRACT**

An electronic smoking article includes a first section containing a liquid supply reservoir including liquid material, a heater operable to heat the liquid material to a temperature sufficient to vaporize the liquid material and form an aerosol, and a wick in communication with the liquid material and operable to deliver the liquid material to the heater, and a second section containing a power supply. The first section is connected to the second section at a breakaway connection. The breakaway connection includes a weakened region.

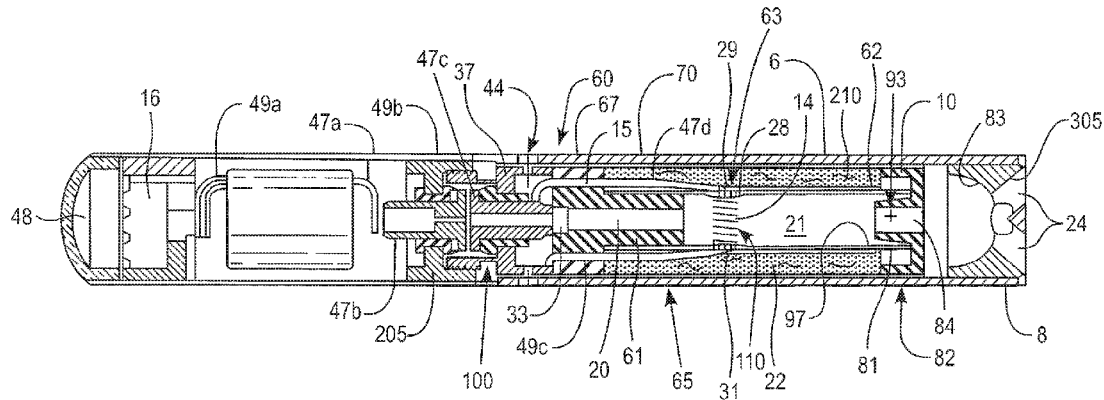

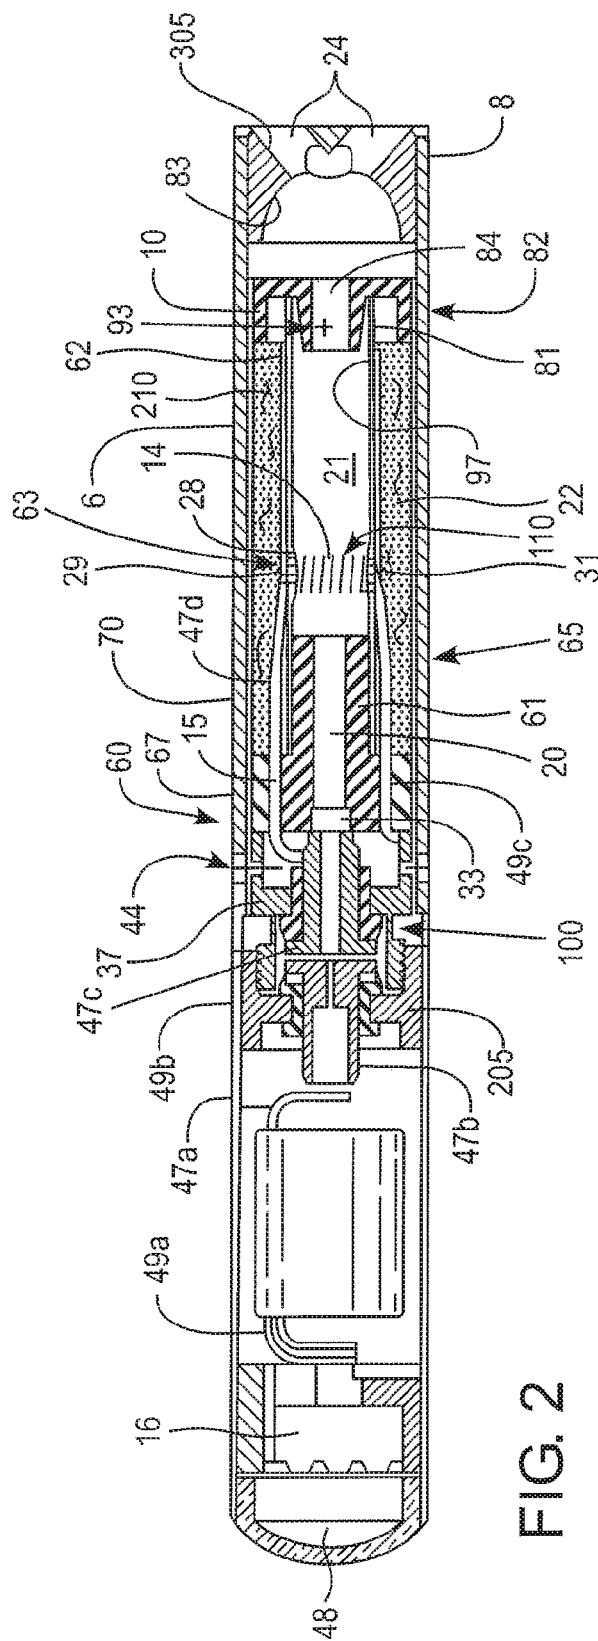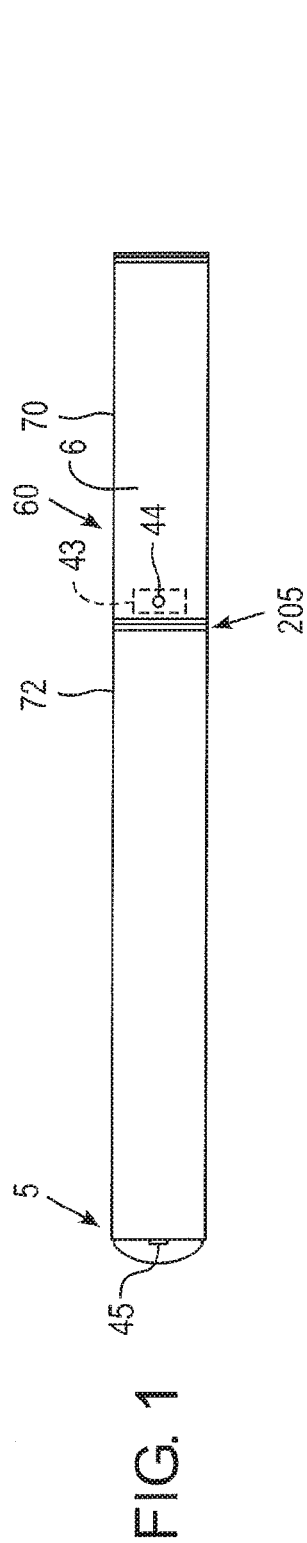

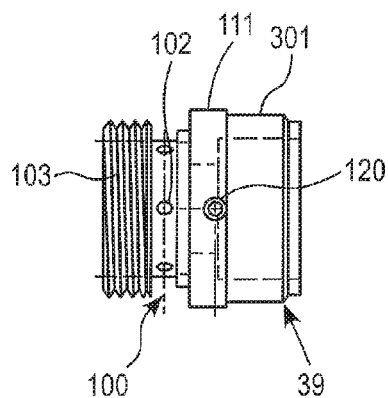


FIG. 3A

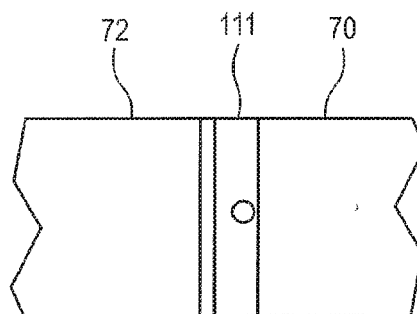


FIG. 3B

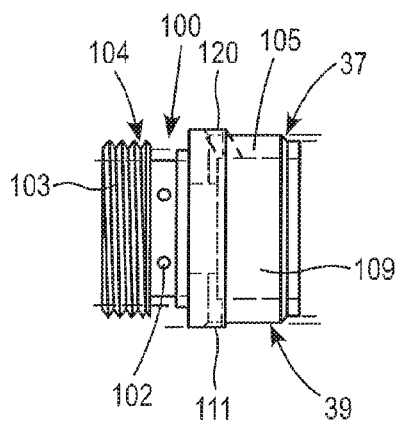


FIG. 4




FIG. 5

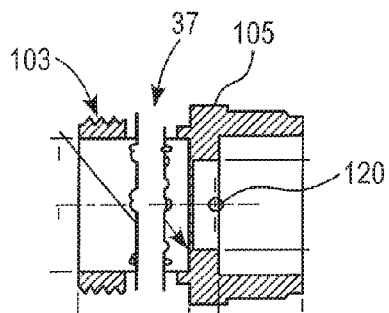


FIG. 6

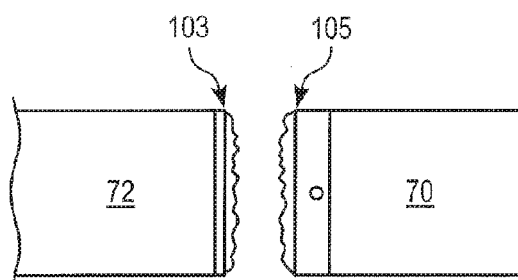


FIG. 7

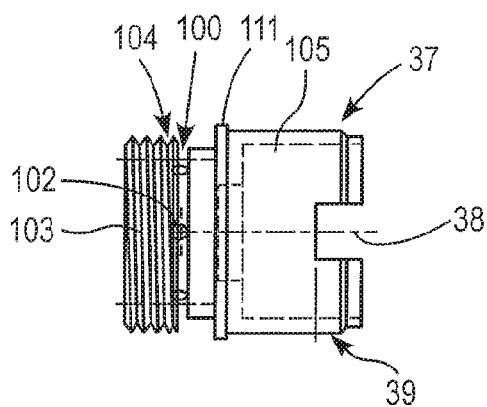


FIG. 8

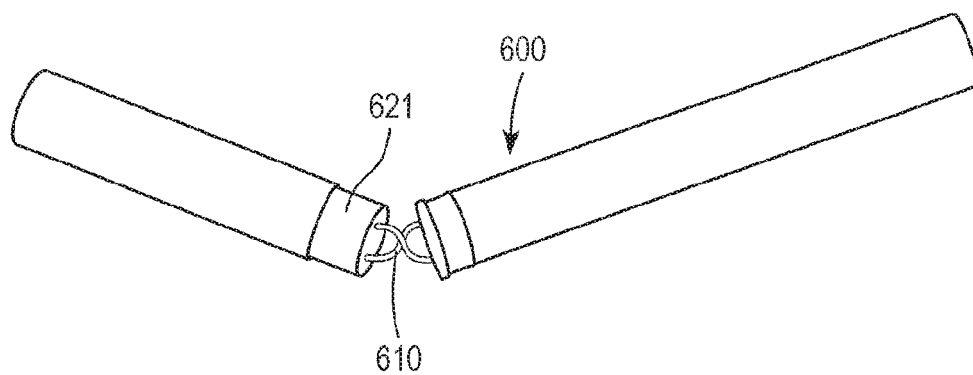


FIG. 9
(Prior Art)

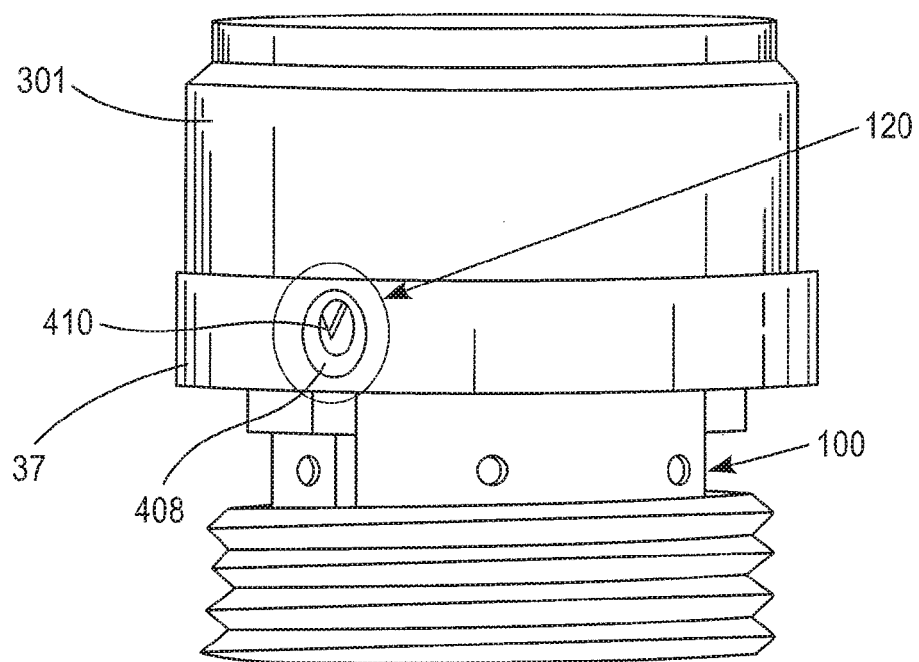


FIG. 10

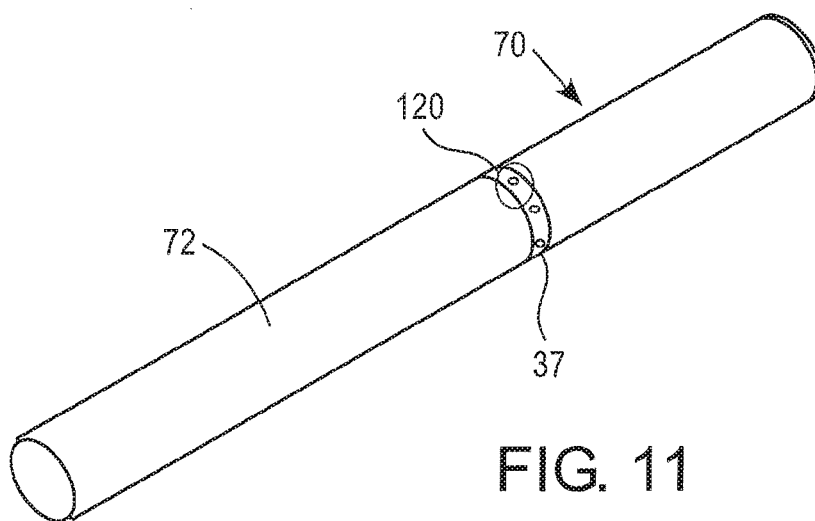


FIG. 11

ELECTRONIC SMOKING ARTICLE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. patent application Ser. No. 14/199,442, filed on Mar. 6, 2014, which claims priority under 35 U.S.C. §119(e) to U.S. Provisional Application No. 61/787,088, filed on Mar. 15, 2013, the entire contents of each of which are incorporated herein by reference thereto.

SUMMARY OF SELECTED FEATURES

[0002] An electronic smoking article (electronic cigarette, electronic cigar or the like) is provided which includes a heater element which vaporizes liquid material to produce an aerosol or “vapor”. The heater element preferably comprises a resistive heater coil with a wick extending there-through and into a liquid supply reservoir.

[0003] The electronic smoking article preferably includes a breakaway connection such as a cartridge (cathode) connector piece designed to prevent accidental exposure of fibrous media and wick materials containing a nicotine solution and/or other liquid if the electronic smoking article is inadvertently broken. To facilitate breaking at a location upstream of the liquid supply reservoir, heater and wick, the breakaway connection can comprise a connector piece having a weakened region which causes the connector piece to break apart when the electronic smoking article is subjected to a bending force above a threshold breaking force. Preferably, the connector piece is a cartridge (cathode) connector having an annular, circumferential recess, which is operable to increase stress adjacent thereto so as to cause the cartridge connector piece to break at the annular recess.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] FIG. 1 is a top planar view of an electronic smoking article according to a first embodiment.

[0005] FIG. 2 is a side cross-sectional view of the electronic smoking article shown in FIG. 1.

[0006] FIG. 3A is a side view of a connector piece as described herein and FIG. 3B is a side view of a first section of an electronic smoking article connected to a second section of the electronic smoking article using the cathode connector piece of FIG. 3A;

[0007] FIG. 4 is a side view of the cathode connector piece of FIG. 3A turned 90 degrees.

[0008] FIG. 5 is a cross-sectional view of the cathode connector piece of FIGS. 3A and 4.

[0009] FIG. 6 is an illustration of the connector piece of FIG. 3A in a broken condition.

[0010] FIG. 7 is an illustration of the electronic smoking article of FIG. 3A after being broken at the connector piece.

[0011] FIG. 8 is an illustration of a connector piece of a second embodiment.

[0012] FIG. 9 is an illustration of a prior art electronic smoking article that is broken.

[0013] FIG. 10 is a side view of a connector piece showing details of an improved air-inlet.

[0014] FIG. 11 is a perspective view of an electronic smoking article comprising the air-inlet of FIG. 10.

DETAILED DESCRIPTION

[0015] Electronic smoking articles can include two sections mated together at a threaded connection. Occasionally, the electronic smoking articles may break when inadvertently bent. As shown in FIG. 9, when broken, prior electronic smoking articles 600 typically break in the casing downstream of the threaded connection such that electrical wires 610, fibrous media 621 and liquid material are released from the electronic smoking article 600.

[0016] As described herein, an electronic smoking article includes an improved breakaway connection, which is designed to break at a weakened region of the connection so as to prevent accidental release of liquid material, fibrous media and/or electrical wires from the broken electronic smoking article. Thus, if the electronic smoking article including the breakaway connection is bent beyond a threshold breaking force, the breakaway connection will break at the weakened region of the cartridge connector and/or a portion of the connector remains with the liquid containing cartridge so that the liquid supply reservoir remains sealed. Preferably, the connector extends in a longitudinal direction within an electronic smoking article and has a weakened region at a location along a length thereof. The weakened region can include an annular recess and/or one or more holes extending radially from the annular recess to a central passage of the breakaway connection. The breakaway connection can be a connector piece such as a cathode connector piece. The breakaway connection can include a threaded joint or other suitable connection, such as a snap fit connection, friction fit connection or other suitable arrangement.

[0017] Referring to FIGS. 1 and 2, the electronic smoking article 60 is provided and comprises a replaceable cartridge (cartomizer or first section) 70 and a reusable fixture (battery or second section) 72, which in a preferred embodiment are coupled together at a connection 205. The connection can be a threaded connection, a friction fit connection, or a snap fit connection. Preferably, the connection 205 includes a cathode connector piece 37. Generally, the second section 72 includes a puff sensor 16 responsive to air drawn into the second section 72 via an air inlet port 45 adjacent the free end or tip of the smoking article 60, a battery 1 and control circuitry integrally arranged with the puff sensor 16. The disposable first section 70 includes a liquid supply reservoir 22 including liquid and optionally fibrous media 210 and a heater-wick element such as a heater 14 and a wick 28 that wicks liquid from the liquid supply reservoir 22 and heats the liquid to form an aerosol in a central air channel 21. Upon completing the connection 205, the battery 1 is electrically connected with the heater element 14 of the first section 70 upon actuation of the puff sensor. Air is drawn primarily into the first section 70 through one or more air inlets 44.

[0018] Heretofore electronic smoking articles, when bent, had been known to break in a manner that would cause a rupture of the cartridge casing or body, thereby releasing liquid contained in the cartomizer section. To address this problem, the electronic smoking article 60, described herein, includes a breakaway portion preferably located in a connector piece such as a cathode connector piece 37, which is designed to break at the connector piece 37 such that a portion of the broken connector 37 remains with the cartridge such that the liquid supply reservoir 22 remains intact and accidental release of liquid is avoided.

[0019] The electronic smoking article can be disposable or reusable. In a preferred embodiment, the electronic smoking article is reusable and once the liquid of the cartomizer section is spent, only the first (cartomizer) section 70 is replaced. In a disposable electronic smoking article, the breakaway connector can be located between a liquid storage area and the power supply.

[0020] In a preferred embodiment, the electronic smoking article 60 is about the same size as a conventional cigarette. In some embodiments, the electronic smoking article 60 can be about 80 mm to about 110 mm long, preferably about 80 mm to about 100 mm long and about 7 mm to about 8 mm in diameter. For example, in a preferred embodiment, the electronic smoking article is about 84 mm long and has a diameter of about 7.8 mm.

[0021] The first section 70 includes an outer tube (or casing) 6 extending in a longitudinal direction and an inner tube (or chimney) 62 coaxially positioned within the outer tube 6. Preferably, a nose portion 61 of an upstream gasket (or seal) 15 is fitted into an upstream end portion 65 of the inner tube 62, while at the same time, an outer perimeter 67 of the gasket 15 provides a liquid-tight seal with an interior surface 97 of the outer casing 6. The upstream gasket 15 also includes a central, longitudinal air passage 20, which opens into an interior of the inner tube 62 that defines a central channel 21. A transverse channel 33 (shown in FIG. 2) at an upstream portion of the gasket 15 intersects and communicates with the central channel 20 of the gasket 15. This channel 33 assures communication between the central channel 20 and a space 35 (see FIG. 2) defined between the gasket 15 and the cathode connector piece 37.

[0022] Preferably, at least one adhesive-backed label is applied to the outer tube 6. The label completely circumscribes the electronic smoking article 60 and can be colored and/or textured to provide the look and/or feel of a traditional cigarette. The label can include holes therein which are sized and positioned so as to prevent blocking of the air inlets 44.

[0023] The outer tube 6 and/or the inner tube 62 may be formed of any suitable material or combination of materials. Examples of suitable materials include metals, alloys, plastics or composite materials containing one or more of those materials, or thermoplastics that are suitable for food or pharmaceutical applications, for example polypropylene, polyetheretherketone (PEEK), ceramic, and polyethylene. Preferably, the material is light and non-brittle. The inner tube 62 is preferably formed from a woven fiberglass.

[0024] In a preferred embodiment, and shown in FIGS. 3A, 3B, 4, 5 and 8, the cathode connector piece 37 includes at its upstream end portion a threaded section 103 for threading into the connector piece 49b of the battery section 72 so as to establish the threaded connection 205. The cathode connector piece 37 of the cartridge section 70 also includes an annular (circumferential) recess 100 adjacent the threaded section 103 and a cylindrical portion 301 at the downstream portion of the connector piece 37 that slidably receives the outer casing 6 until the casing 6 stops at a rim 111. The annular recess 100 can be continuous about the circumference of the cathode connector piece 37 or can be discontinuous. Preferably, the annular recess 100 is inset from an external surface 104 of the threaded section 103 by about 0.2 to about 0.6 mm, preferably about 0.5 mm. In an embodiment, the wall of the piece 37 at the recess 100 is reduced to about 0.003 inch thickness. In a preferred

embodiment the recess 100 may have a wall thickness in the range of about 0.07 to about 0.16 mm. Additionally, the annular recess 100 is about 0.2 to about 0.6 mm wide, preferably about 0.5 mm wide.

[0025] Moreover, spaced apart, radially extending holes 102 can be formed about the circumference of the annular recess 100 and intersect with a central passage 112 of the cathode connector piece 37, as shown in FIG. 5. The holes 102 can be spaced about 45° to about 90° apart and the cathode connector piece 37 can include two to eight holes 102. In a preferred embodiment, the annular recess 100 includes six holes spaced about 60° apart, each having a diameter approximately equal to the width of the recess 100.

[0026] In a preferred embodiment, the cathode connector piece 37 is formed of a conductive material, such as one or more electrically conductive metals selected from the group consisting of silver, zinc, nickel, aluminum, copper, tin, iron, aluminum, lead, and combinations thereof.

[0027] In use, if the electronic smoking article 60 is subjected to a strong enough bending force, the electronic smoking article 60 breaks at the annular recess 100, which acts as a weak point in the cathode connector piece 37. The holes 102 aid in weakening the annular recess 100. Accordingly, as shown in FIGS. 6 and 7, when the electronic smoking article 60 breaks, the break is preferably a brittle fracture at the annular recess 100 such that the threaded section 103 remains connected to connector 49b of the second section 72 of the electronic smoking article 60 and a fractured body portion 105 of the cathode connector piece 37 remains connected with the casing 6 of the first section 70 of the electronic smoking article 60.

[0028] In an embodiment, as shown in FIG. 8, the cathode connector piece 37 can include opposing notches 38 about its perimeter 39, which, upon insertion of the cathode connector piece 37 into the casing (outer tube) 6, are aligned with the location of each of two RTD-controlling, air inlets 44 and 44' in the outer casing 6 so as to allow air flow into the central air channel 21 via the central air passage 20 in the gasket 15. The notches 38 can be about 1.0 to about 3.0 mm wide, preferably about 2.0 mm wide. If desired, the cathode connector piece 37 can include additional notches 38. Alternatively, a single air inlet 44 can be included. Alternatively, as shown in FIG. 3A, an air hole 120 formed in the rim 111 of the connector piece 37 permits airflow into the electronic smoking article 60.

[0029] In a preferred embodiment, as shown in FIGS. 1 and 2, the electronic smoking article 60 includes at least one air inlet 44 formed in the outer tube 6, preferably adjacent the threaded connection 205. In a preferred embodiment, the air inlets 44, 44' are sized and configured such that the electronic smoking article 60 has a RTD in the range of from about 60 mm H₂O to about 150 mm H₂O, more preferably about 90 mm H₂O to about 110 mm H₂O, most preferably about 100 mm H₂O to about 130 mm H₂O.

[0030] In a preferred embodiment, the second (battery) section 72 includes an air inlet 45 at an upstream end 5 of the smoking article 60, which is sized just sufficient to assure proper operation of the puff sensor 16, located nearby. Drawing action upon the mouth end insert 8 is communicated to the air inlet port 45 through the central air channel provided in the anode post 47c of the first section 70 and the anode connection post 47b of the second section 72 and along space 13 between the battery 1 and the casing of the second section 72. The air inlet port 45 is sized such that the

airflow rate therethrough is much smaller than the airflow rates through the air inlets 44, 44', so that the impact on RTD is minimized and consistency in RTD is maintained. For example, each air inlet 44, 44' can be less than about 2.0 mm in width and less than about 1.5 mm in length.

[0031] Referring now to FIGS. 10 and 11, the air inlet 120 preferably comprises a beveled entrance 408 and an angled passageway for 410. In a preferred embodiment, the smoking article includes a pair of air inlets 120. Each of the air inlets 120 are angled toward the mouth end of the smoking article at an angle in the range of about 35 to about 55 degrees, more preferably at about 40 to about 50 degrees, most preferably about 45 degrees. Such arrangement minimizes (abates) "whistling" noise during a puff.

[0032] In an embodiment, a cylindrical downstream portion 301 of the connector piece 37, which slidably receives the casing 6 of the cartridge 70, is provided additional length so as to strengthen the engagement between the connector piece 37 and the casing 6. In an embodiment, the length of the upstream portion 301 was increased by approximately 30% (from about 3.4 mm to about 4.4 mm) to strengthen the engagement as compared to other embodiments.

[0033] Preferably, a nose portion 93 of a downstream gasket 10 is fitted into a downstream end portion 81 of the inner tube 62. An outer perimeter 82 of the gasket 10 provides a substantially liquid-tight seal with an interior surface 97 of the outer casing 6. The downstream gasket 10 includes a central channel 84 disposed between the central passage 21 of the inner tube 62 and the interior of the mouth end insert 8 and which communicates aerosol from the central passage 21 to the mouth end insert 8.

[0034] In a preferred embodiment, the liquid supply reservoir 22 is contained in an outer annulus between inner tube 62 and outer tube 6 and between the gaskets 10 and 15. Thus, the liquid supply reservoir 22 at least partially surrounds the central air passage 21. The liquid supply reservoir 22 comprises a liquid material and optionally a liquid storage medium operable to store the liquid material therein.

[0035] Preferably, the liquid storage medium is a fibrous material comprising cotton, polyethylene, polyester, rayon and combinations thereof. Preferably, the fibers have a diameter ranging in size from about 6 microns to about 15 microns (e.g., about 8 microns to about 12 microns or about 9 microns to about 11 microns). The liquid storage medium can be a sintered, porous, sponge, or foamed material. Also preferably, the fibers are sized to be irrespirable and can have across-motion which has a y shape, cross shape, clover shape or any other suitable shape. In one embodiment, the liquid storage medium may comprise a winding of cotton gauze or other fibrous material about the inner tube 62.

[0036] Also preferably, the liquid material has a boiling point suitable for use in the electronic smoking article 60. If the boiling point is too high, the heater element 14 will not be able to vaporize the liquid. However, if the boiling point is too low, the liquid may vaporize even when the heater element 14 is not activated.

[0037] Preferably, the liquid material includes a tobacco-containing material including volatile tobacco flavor compounds which are released from the liquid upon heating. The liquid may also be a tobacco flavor containing material or a nicotine-containing material. Alternatively, or in addition, the liquid may include a non-tobacco material and/or a nicotine-free material. For example, the liquid may include water, solvents, ethanol, plant extracts and natural or arti-

cial flavors. Preferably, the liquid further includes an aerosol former. Examples of suitable aerosol formers are glycerin and propylene glycol.

[0038] In use, liquid material is transferred from the liquid supply reservoir 22 and/or liquid storage medium 210 in proximity of the 14 heater by capillary action of the wick 28. In one embodiment, the wick 28 has a first end portion 29 and a second end portion 31. The first end 29 and the second end 31 extend into opposite sides of the liquid supply reservoir 22 for contact with liquid material contained therein. Also preferably, the heater 14 at least partially surrounds a central portion of the wick 28 such that when the heater 14 is activated, the liquid in the central portion of the wick 28 is vaporized by the heater 14 to form an aerosol.

[0039] The wick 28 preferably comprises filaments having a capacity to draw a liquid, more preferably a bundle of glass (or ceramic) filaments and most preferably a bundle comprising a group of strands of glass filaments, preferably three of such strands, all which arrangements are capable of drawing liquid via capillary action via interstitial spacings between the filaments. Preferably, the wick 28 is flexible and includes three strands, each strand including a plurality of intertwined filaments. Moreover, it is noted that the end portions of the 29 and 31 of the wick 28 are flexible and foldable into the confines of the liquid supply reservoir 22.

[0040] Advantageously, the liquid material in the liquid supply reservoir 22 is protected from oxygen (because oxygen cannot generally enter the liquid supply reservoir 22 via the wick 28). In a preferred embodiment, the liquid material is also protected from light so that the risk of degradation of the liquid material is significantly reduced. Thus, a high level of shelf-life and cleanliness can be maintained.

[0041] In a preferred embodiment, the liquid supply reservoir 22 is sized and configured to hold enough liquid material such that the electronic smoking article 60 is operable for smoking for at least about 200 seconds, preferably at least about 250 seconds, more preferably at least 300 seconds and most preferably at least about 350 seconds. Thus, liquid supply reservoir 22 is equivalent to about one pack of traditional cigarettes. Moreover, the electronic smoking article 60 can be configured to allow each puff to last a maximum of about 5 seconds.

[0042] Referring to FIG. 2, the first section 70 also includes a mouth end insert 8 having at least two diverging outlets 24 (e.g., 3, 4, 5 or more, preferably 2 to 10 outlets or more, more preferably 6 to 8 outlets, even more preferably 2 to 6 outlets 24 or 4 outlets 24). Preferably, the outlets 24 are located off-axis and are angled outwardly in relation to the central channel 21 of the inner tube 62 (i.e., divergently). Also preferably, the mouth end insert (or flow guide) 8 includes outlets 24 uniformly distributed about the perimeter of mouth end insert 8 so as to substantially uniformly distribute aerosol in a smoker's mouth during use and create a greater perception of fullness in the mouth. Thus, as the aerosol passes into a smoker's mouth, the aerosol enters the mouth and moves in different directions so as to provide a full mouth feel. In contrast, electronic smoking article a having a single, on-axis orifice tend to direct its aerosol as single jet of greater velocity toward a more limited location within a smoker's mouth.

[0043] In addition, the diverging outlets 24 are arranged and include interior surfaces such that droplets of unaerosolized liquid material, if any, that may be entrained in the

aerosol impact the interior surfaces **83** of the mouth end insert **8** and/or impact portions of walls **305** which define the diverging outlet passages **24**. As a result such droplets are substantially removed or broken apart, to the enhancement of the aerosol.

[0044] In a preferred embodiment, the diverging outlet passages **24** are angled at about 5° to about 60° with respect to the longitudinal axis of the outer tube **6** so as to more completely distribute aerosol throughout a mouth of a smoker during use and to remove droplets. In a preferred embodiment, there are four diverging outlet passages **24** each at an angle of about 40° to about 50° with respect to the longitudinal axis of the outer tube **6**, more preferably about 40° to about 45° and most preferably about 42°.

[0045] Preferably, each of the diverging outlet passages **24** has a diameter ranging from about 0.015 inch to about 0.090 inch (e.g., about 0.020 inch to about 0.040 inch or about 0.028 inch to about 0.038 inch).

[0046] The mouth end insert **8** may be integrally affixed within the tube **6** of the cartridge **70**. Moreover, the mouth end insert **8** can be formed of a polymer selected from the group consisting of low density polyethylene, high density polyethylene, polypropylene, polyvinylchloride, polyetheretherketone (PEEK) and combinations thereof. The mouth end insert **8** may also be colored if desired.

[0047] In a preferred embodiment, the power supply **1** includes a battery arranged in the electronic smoking article **60** such that the anode **47a** is downstream of the cathode **49a**. A battery anode connection post **47b** of the second section **72** preferably contacts the battery anode **47a**.

[0048] More specifically, electrical connection between the anode **47a** of the battery **1** and the heater coil **14** in the first section **70** is established through a battery anode connection post **47b** in the second section **72** of the electronic smoking article **60**, an anode post **47c** of the cartridge section **70** and an electrical lead **47d** connecting a rim portion of the anode post **47c** with an electrical lead the heater element **14**. Likewise, electrical connection between the cathode **49a** of the battery **1** and the other lead of the heater coil **14** is established through the threaded connection **205** between a cathode connection fixture **49b** of the second portion **72** and the cathode connector piece **37** of the first section **70** and from there through an electrical lead **49c** which electrically connects the fixture **37** to the opposite lead **47d** of the heater coil **14**.

[0049] Preferably, the electrical leads **47d**, **49c** and the heater leads are highly conductive and temperature resistant while the coiled section **110** of the heater **14** is highly resistive so that heat generation occurs primarily along the coils **110** of the heater **14**. Also preferably, the electrical lead **47d** is connected to the heater lead by crimping. Likewise, the electrical lead **49c** is connected to the heater lead by crimping. In an alternative embodiment, the electrical leads **47d**, **49c** can be attached to the heater leads via soldering. Crimping is preferred as it speeds manufacture.

[0050] Upon a breach of the annular recess **100**, the electrical leads **47d** and **49c**, together with the contents of the liquid supply reservoir **22**, remain contained within the cartridge section **70**.

[0051] The battery can be a Lithium-ion battery or one of its variants, for example a Lithium-ion polymer battery. Alternatively, the battery may be a Nickel-metal hydride battery, a Nickel cadmium battery, a Lithium-manganese battery, a Lithium-cobalt battery or a fuel cell. In that case,

preferably, the electronic smoking article **60** is usable by a smoker until the energy in the power supply is depleted or in the case of lithium polymer battery, a minimum voltage cut-off level is achieved.

[0052] Alternatively, the power supply **1** may be rechargeable and include circuitry allowing the battery to be chargeable by an external charging device. In that case, preferably the circuitry, when charged, provides power for a predetermined number of puffs, after which the circuitry must be re-connected to an external charging device. To recharge the electronic smoking article **60**, an USB charger or other suitable charger assembly can be used.

[0053] Preferably, the electronic smoking article **60** also includes control circuitry including a puff sensor **16**. The puff sensor **16** is operable to sense an air pressure drop and initiate application of voltage from the power supply **1** to the heater **14**. As shown in FIG. 2, the control circuitry can also include a heater activation light **48** operable to glow when the heater **14** is activated. Preferably, the heater activation light **48** comprises an LED and is at an upstream end of the electronic smoking article **60** so that the heater activation light **48** takes on the appearance of a burning coal during a puff. Moreover, the heater activation light **48** can be arranged to be visible to the smoker. In addition, the heater activation light **48** can be utilized for cigarette system diagnostics or to indicate that recharging is in progress. The light **48** can also be configured such that the smoker can activate and/or deactivate the light **48** for privacy, such that the light **48** would not activate during smoking if desired.

[0054] Preferably, the at least one air inlet **45**, shown in FIG. 1, is located adjacent the puff sensor **16**, such that the puff sensor **16** senses air flow indicative of a smoker taking a puff and activates the power supply **1** and the heater activation light **48** to indicate that the heater **14** is working.

[0055] A control circuit is preferably integrated with the puff sensor **16** and supplies power to the heater **14** responsive to the puff sensor **16**, preferably with a maximum, time-period limiter.

[0056] Alternatively, the control circuitry may include a manually operable switch for a smoker to initiate a puff. The time-period of the electric current supply to the heater may be pre-set depending on the amount of liquid desired to be vaporized. Alternatively, the circuitry may supply power to the heater **14** as long as the puff sensor **16** detects a pressure drop.

[0057] Preferably, when activated, the heater **14** heats a portion of the wick **28** surrounded by the heater for less than about 10 seconds, more preferably less than about 7 seconds. Thus, the power cycle (or maximum puff length) can range in period from about 2 seconds to about 10 seconds (e.g., about 3 seconds to about 9 seconds, about 4 seconds to about 8 seconds or about 5 seconds to about 7 seconds).

[0058] Preferably, the heater **14** is a wire coil that surrounds the wick **28**. Examples of suitable electrically resistive materials include titanium, zirconium, tantalum and metals from the platinum group. Examples of suitable metal alloys include stainless steel, nickel-, cobalt-, chromium-, aluminium-titanium-zirconium-, hafnium-, niobium-, molybdenum-, tantalum-, tungsten-, tin-, gallium-, manganese- and iron-containing alloys, and super-alloys based on nickel, iron, cobalt, stainless steel. For example, the heater can be formed of nickel aluminide, a material with a layer of alumina on the surface, iron aluminide and other composite materials, the electrically resistive material may

optionally be embedded in, encapsulated or coated with an insulating material or vice-versa, depending on the kinetics of energy transfer and the external physicochemical properties required. Preferably, the heater **14** comprises at least one material selected from the group consisting of stainless steel, copper, copper alloys, nickel-chromium alloys, super alloys and combinations thereof. In a preferred embodiment, the heater **14** is formed of nickel-chromium alloys or iron-chromium alloys, although the latter is not preferred for reasons which follow. In another embodiment, the heater **14** can be a ceramic heater having an electrically resistive layer on an outside surface thereof.

[0059] In another embodiment, the heater **14** may be constructed of an iron-aluminide (e.g., FeAl or Fe₃Al), such as those described in commonly owned U.S. Pat. No. 5,595,706 to Sikka et al., or nickel aluminide (e.g., Ni₃Al). Use of iron-aluminide is advantageous in that iron-aluminide exhibits high resistivity. FeAl exhibits a resistivity of approximately 180 micro-ohms, whereas stainless steel exhibits approximately 50 to 91 micro-ohms. The higher resistivity lowers current draw or load on the power source (battery) **1**.

[0060] In a preferred embodiment, the heater coil **14** is formed from a nickel-chromium alloy that is essentially free of iron content. Experience has indicated that heater coils constructed from an iron chromium alloy suffered oxidation of their iron content if the alloys were contacted with water during manufacturing operations, during shelf-life and/or operation of the device.

[0061] In a preferred embodiment, the inner tube **62** is constructed from woven fiberglass. Moreover, in a preferred embodiment, the inner tube **62** has a diameter of about 4 mm and opposing slots **63** therein having major and minor dimensions of about 2 mm by about 4 mm. Preferably, the end portions **29**, **31** of the wick **28** extend through the opposing slots **63**.

[0062] In one embodiment, the heater **14** comprises a wire coil which at least partially surrounds the wick **28**. In that embodiment, preferably the wire is a metal wire and/or the heater coil may extend fully or partially along, the length of the wick **28**. The heater coil **14** may extend fully or partially around the circumference of the wick **28**. In another embodiment, the heater coil is not in contact with the wick **28**.

[0063] Preferably, the heater **14** heats liquid in the wick **28** by thermal conduction. Alternatively, heat from the heater **14** may be conducted to the liquid by means of a heat conductive element or the heater **14** may transfer heat to the incoming ambient air that is drawn through the electronic smoking article **60** during use, which in turn heats the liquid by convection.

[0064] In a preferred embodiment, the wick **28** comprises filaments and comprises a bundle of glass filaments. For example, the wick **28** may include a plurality of filaments. The filaments or threads may be generally aligned in a direction perpendicular (transverse) to the longitudinal direction of the electronic smoking article. Preferably, the wick **28** includes 1 to 8 filaments, more preferably 2 to 6 filaments. In a preferred embodiment, the wick **28** includes 3 strands, each strand comprising a plurality of glass filaments twisted together.

[0065] In a preferred embodiment, the structure of the wick **28** is formed of filaments through which the liquid can be transported to the heater **14** by capillary action. The wick

28 can include filaments having a cross-section which is generally cross-shaped, clover-shaped, Y-shaped or in any other suitable shape.

[0066] Preferably, the wick **28** includes any suitable material or combination of materials. Examples of suitable materials are glass, ceramic- or graphite-based materials. Moreover, the wick **28** may have any suitable capillarity drawing action to accommodate aerosol generating liquids having different liquid physical properties such as density, viscosity, surface tension and vapor pressure. The capillary properties of the wick **28**, combined with the properties of the liquid, ensure that the wick **28** is always wet in the area of the heater **14** to avoid overheating of the heater **14**.

[0067] When the word “about” is used in this specification in connection with a numerical value, it is intended that the associated numerical value include a tolerance of $\pm 10\%$ around the stated numerical value. Moreover, when reference is made to percentages in this specification, it is intended that those percentages are based on weight, i.e., weight percentages.

[0068] Moreover, when the words “generally” and “substantially” are used in connection with geometric shapes, it is intended that precision of the geometric shape is not required but that latitude for the shape is within the scope of the disclosure. When used with geometric terms, the words “generally” and “substantially” are intended to encompass not only features which meet the strict definitions but also features which fairly approximate the strict definitions.

[0069] It will now be apparent that a new, improved, and nonobvious electronic smoking article has been described in this specification with sufficient particularity as to be understood by one of ordinary skill in the art. Moreover, it will be apparent to those skilled in the art that numerous modifications, variations, substitutions, and equivalents exist for features of the electronic smoking article which do not materially depart from the spirit and scope of the invention. Accordingly, it is expressly intended that all such modifications, variations, substitutions, and equivalents which fall within the spirit and scope of the invention as defined by the appended claims shall be embraced by the appended claims.

1. (canceled)
2. A connector for a section of an electronic device, comprising:
 - a major body including a stem and a base, the base including a cylindrical portion of the body, the stem extending from a distal end of the base,
 - the distal end of the base defining at least one air inlet in fluid communication with an internal area of the major body, wherein sidewalls of a rim of the at least one air inlet are beveled.
3. The connector of claim 2, wherein the distal end of the base further defines an annular rim along at least a portion of a periphery of the base of the major body, the at least one air inlet penetrating the annular rim.
4. The connector of claim 3, wherein the at least one air inlet enters the distal end of the base at an angle that is about 35 degrees to 50 degrees relative to a longitudinal centerline of the connector, the at least one air inlet being slanted toward an expected direction of air flow through the major body once the connector is attached to the section of the electronic device.

5. The connector of claim 4, wherein the cylindrical portion of the base of the major body defines a cylindrical cavity that encircles the longitudinal centerline of the connector.

6. The connector of claim 3, wherein the at least one air inlet includes two air inlets.

7. The connector of claim 6, wherein the two air inlets are evenly spaced apart along a periphery of the annular rim of the base of the major body.

8. The connector of claim 3, wherein the stem defines threads at a distal end of the stem, the connector being a male threaded connector.

9. The connector of claim 4, wherein the major body includes a weakened region at a location along a longitudinal length of the major body, the weakened region being configured to cause the major body to break along a plane that is about perpendicular to the longitudinal centerline of the connector if the connector is bent beyond a threshold breaking force.

10. The connector of claim 9, wherein the weakened region includes an annular recess defined by the stem of the connector, the stem further defining a plurality of holes traversing through the annular recess.

11. An e-vaping device, comprising:

a first section with a first end;

a second section with a second end;

a connector configured to connect the first end of the first section to the second end of the second section, the connector defining at least one air inlet in fluid communication with an internal area of the connector, wherein sidewalls of a rim of the at least one air inlet are beveled.

12. The e-vaping device of claim 11, wherein the connector includes a stem and a base, the base including a cylindrical portion, the stem extending from a distal end of the base, the distal end of the base defining the at least one air inlet.

13. The e-vaping device of claim 12, wherein the distal end of the base of the connector further defines an annular

rim along at least a portion of a periphery of the base of the connector, the at least one air inlet penetrating the annular rim.

14. The e-vaping device of claim 13, wherein the at least one air inlet enters the distal end of the base of the connector at an angle that is about 35 degrees to 50 degrees relative to a longitudinal centerline of the connector, the at least one air inlet being slanted toward an expected direction of air flow through the connector.

15. The e-vaping device of claim 14, wherein the cylindrical portion of the base of the connector defines a cylindrical cavity that encircles the longitudinal centerline of the connector.

16. The e-vaping device of claim 13, wherein the at least one air inlet of the connector includes two air inlets.

17. The e-vaping device of claim 16, wherein the two air inlets are evenly spaced apart along a periphery of the annular rim of the base of the connector.

18. The e-vaping device of claim 13, wherein the stem of the connector defines threads at a distal end of the stem, the connector being a male threaded connector.

19. The e-vaping device of claim 14, wherein the connector includes a weakened region at a location along a longitudinal length of the connector, the weakened region being configured to cause the connector to break along a plane that is about perpendicular to the longitudinal centerline of the connector, if the connector is bent beyond a threshold breaking force.

20. The e-vaping device of claim 19, wherein the weakened region of the connector includes an annular recess defined by the stem of the connector, the stem further defining a plurality of holes traversing through the annular recess.

21. The e-vaping device of claim 20, wherein upon breakage of the connector, a portion of the connector remains connected to the first section such that contents of the first section remain substantially intact.

* * * * *