




(86) **Date de dépôt PCT/PCT Filing Date:** 2009/12/16
(87) **Date publication PCT/PCT Publication Date:** 2010/06/24
(45) **Date de délivrance/Issue Date:** 2015/04/21
(85) **Entrée phase nationale/National Entry:** 2011/03/24
(86) **N° demande PCT/PCT Application No.:** EP 2009/009050
(87) **N° publication PCT/PCT Publication No.:** 2010/069563
(30) **Priorités/Priorities:** 2008/12/18 (DE10 2008 063 529.4);
2009/10/09 (DE10 2009 048 989.4)

(51) **Cl.Int./Int.Cl. B66B 9/00** (2006.01),
B66B 11/00 (2006.01)
(72) **Inventeur/Inventor:**
FRITZ, VOLKER, DE
(73) **Propriétaire/Owner:**
THOMA AUFZUGE GMBH, DE
(74) **Agent:** INNOVATE LLP

(54) **Titre : CHARPENTE DE PUITS POUR UNE INSTALLATION D'ASCENSEUR**
(54) **Title: WELL CARCASS FOR AN ELEVATOR INSTALLATION**

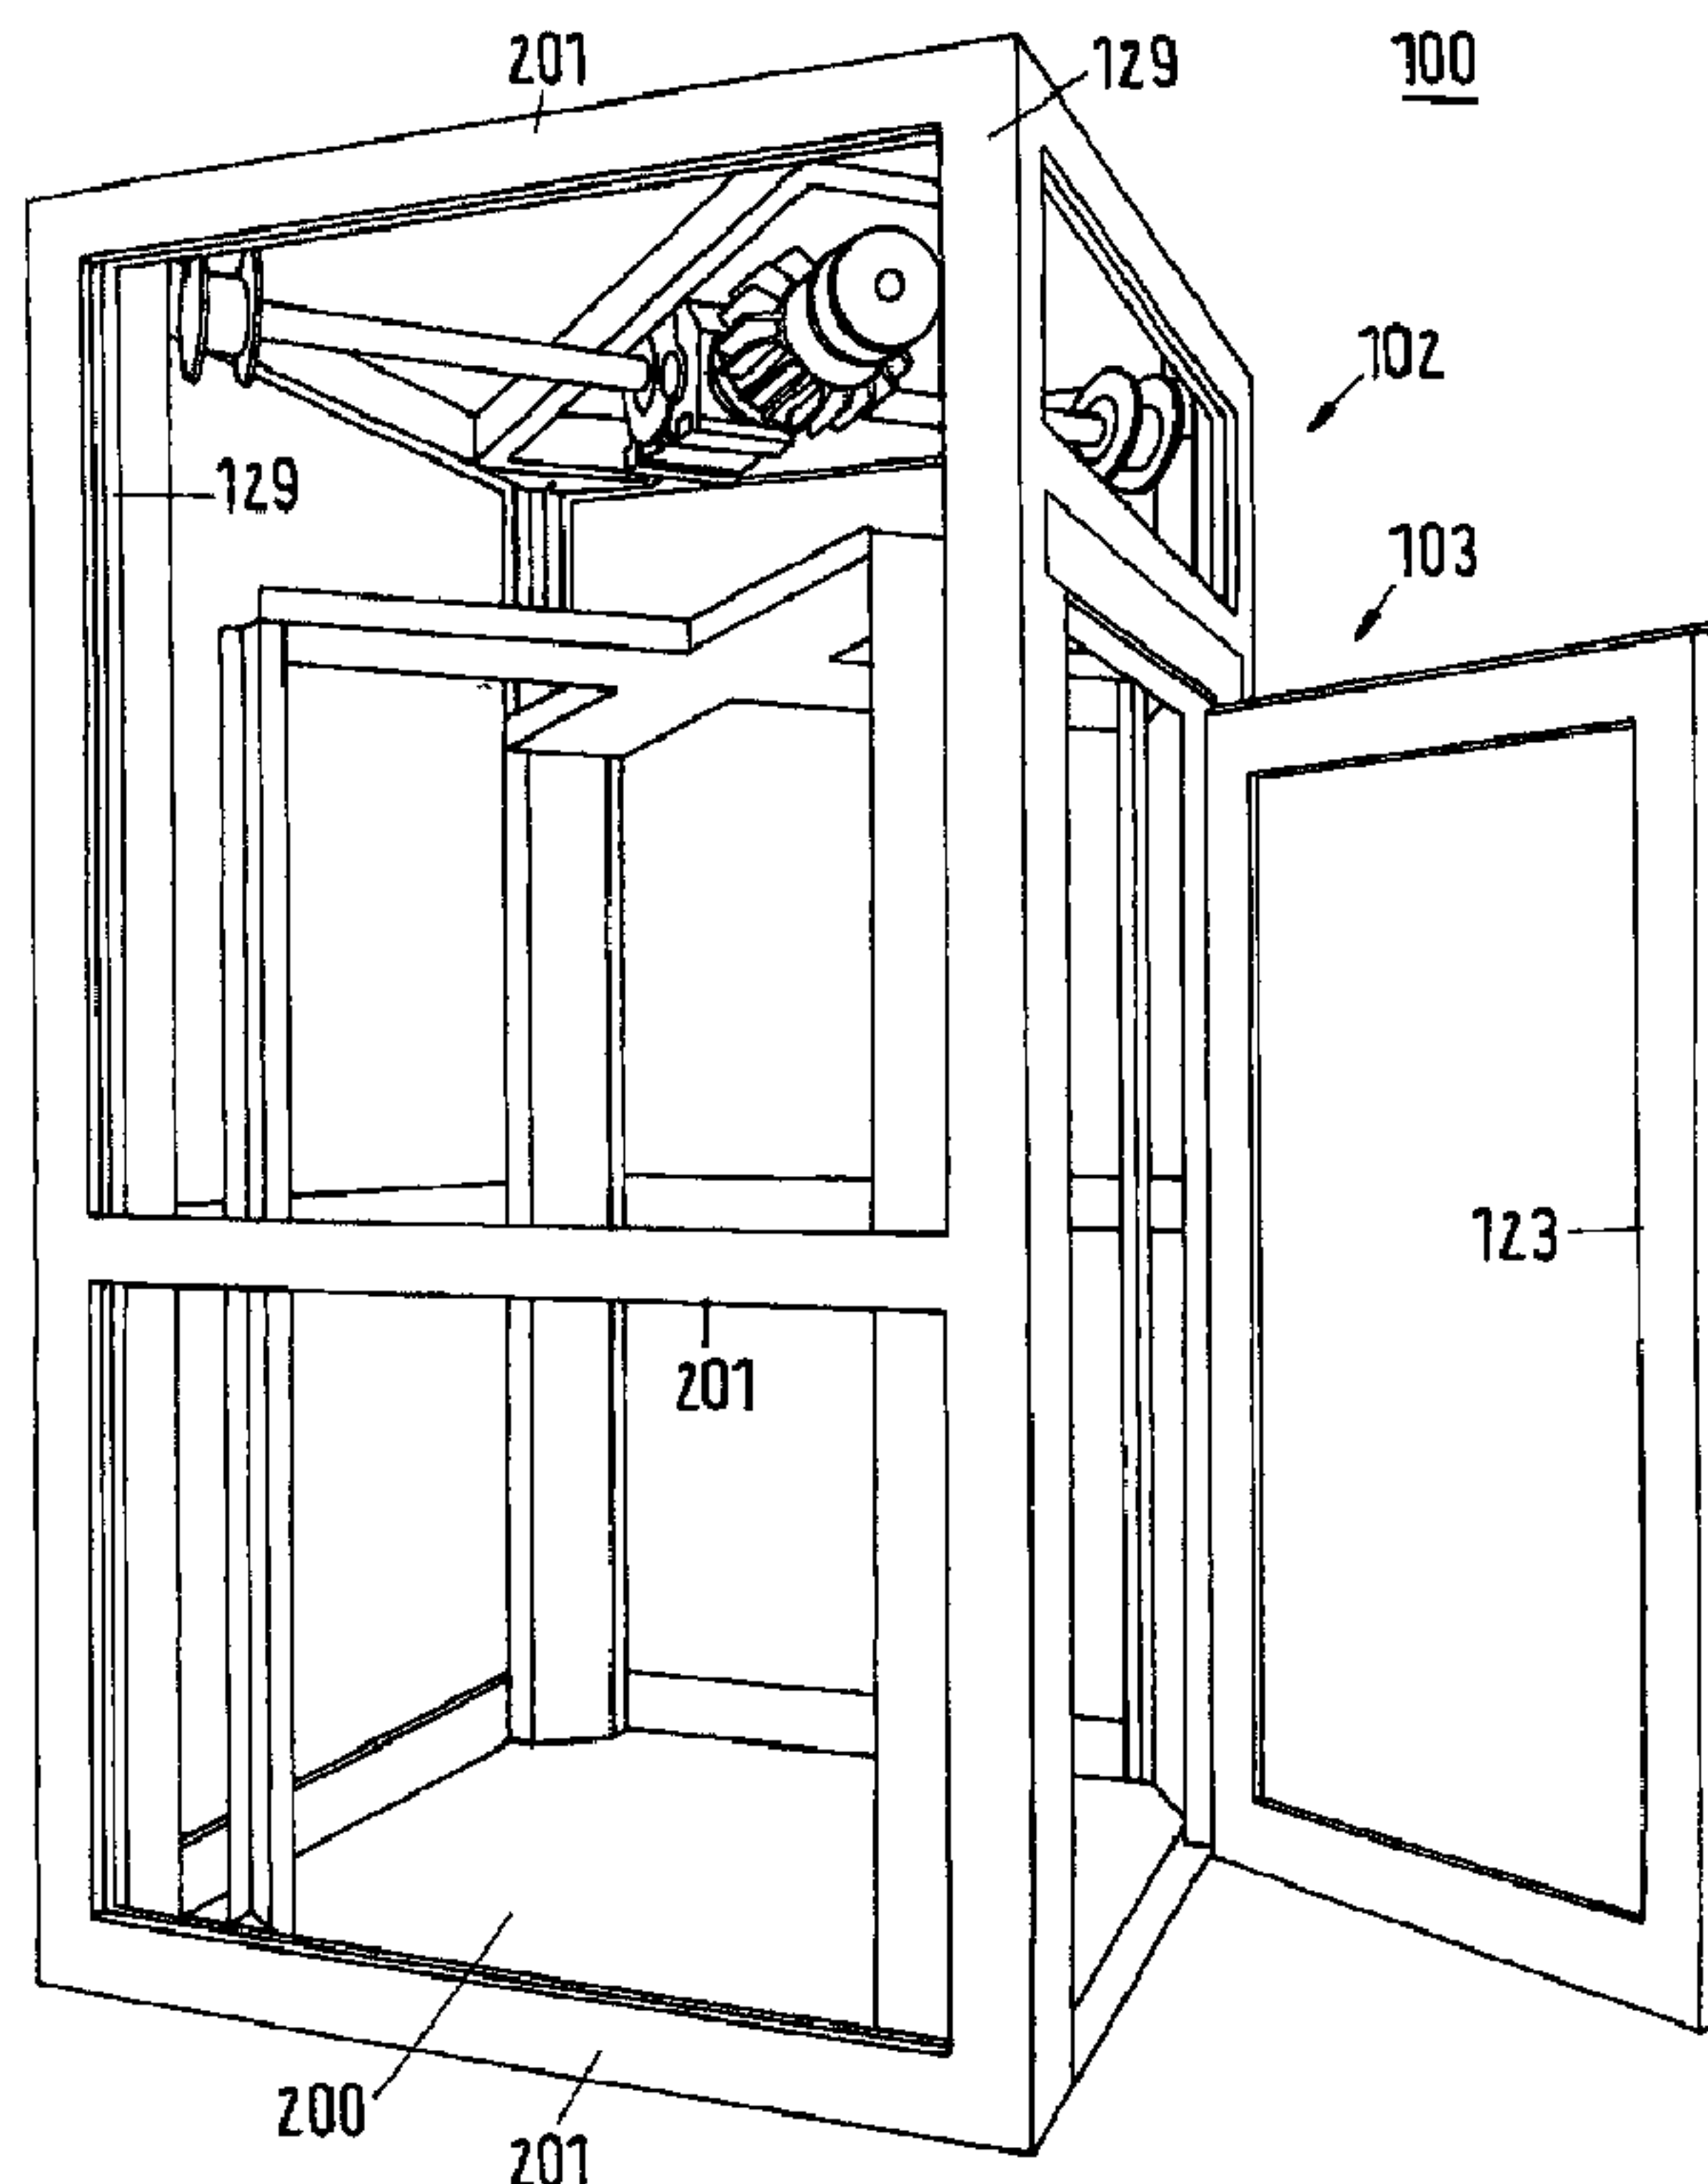

(57) **Abrégé/Abstract:**

The invention relates to a shaft frame (102) for a lift system (103), which can be arranged in a free-standing manner and/or in a lift shaft (100) and which is used to receive a load lifting means (200) that is moved up and down in the shaft frame (102) by way of at

(57) Abrégé(suite)/Abstract(continued):

least one drive shaft (204) connected to a drive motor (126) and mounted horizontally on the shaft frame (102) or in the lift well (100) using supporting means, particularly a traction means device (208). The aim of the invention is to produce the shaft frame (102) and the associated lift system in a simple and cost-effective manner with optimum space utilization for the load lifting means. According to the invention, the aim is achieved in that at least one drive shaft (204) extends approximately horizontally between two diagonally opposed corner regions (105) of the shaft frame (102) and are connected directly or indirectly to parts located on opposite sides, particularly to longitudinal sides (109, 111, 113, 115), of the shaft frame (102) or wall parts of the lift well (100), and in the region of the two ends comprises a drive wheel (206) that is moved up or down by supporting means (208) of the load lifting means (200).

