



US 20180181517A1

(19) **United States**

(12) **Patent Application Publication**
Sadeghi et al.

(10) **Pub. No.: US 2018/0181517 A1**

(43) **Pub. Date: Jun. 28, 2018**

(54) **DISCOVERY MECHANISMS FOR UNIVERSAL SERIAL BUS (USB) PROTOCOL ADAPTATION LAYER**

continuation of application No. 13/728,820, filed on Dec. 27, 2012, now Pat. No. 9,075,923.

Publication Classification

(71) Applicant: **Intel Corporation**, Santa Clara, CA (US)

(51) **Int. Cl.**
G06F 13/38 (2006.01)
G06F 13/42 (2006.01)

(72) Inventors: **Bahareh Sadeghi**, Portland, OR (US);
Carlos Cordeiro, Portland, OR (US);
Abdul Ismail, Beaverton, OR (US);
Emily H. Qi, Gig Harbor, WA (US);
Necati Canpolat, Beaverton, OR (US)

(52) **U.S. Cl.**
CPC **G06F 13/387** (2013.01); **G06F 13/4282** (2013.01); **G06F 13/385** (2013.01)

(21) Appl. No.: **15/817,788**


(57) **ABSTRACT**

(22) Filed: **Nov. 20, 2017**

A WiFi serial bus (WSB) attribute for use in Wi-Fi Alliance defined point-to-point (P2P) discovery mechanism includes a plurality of fields disposed in the frame. The WiFi serial bus attribute is arranged to provide information in the plurality of fields to support connectivity decisions for a USB device in a point-to-point network using a WSB protocol. The WSB attribute includes WSB architectural element information and information associated with a USB device behind a USB protocol adaptation layer (PAL).

Related U.S. Application Data

(63) Continuation of application No. 14/729,399, filed on Jun. 3, 2015, now Pat. No. 9,824,047, which is a

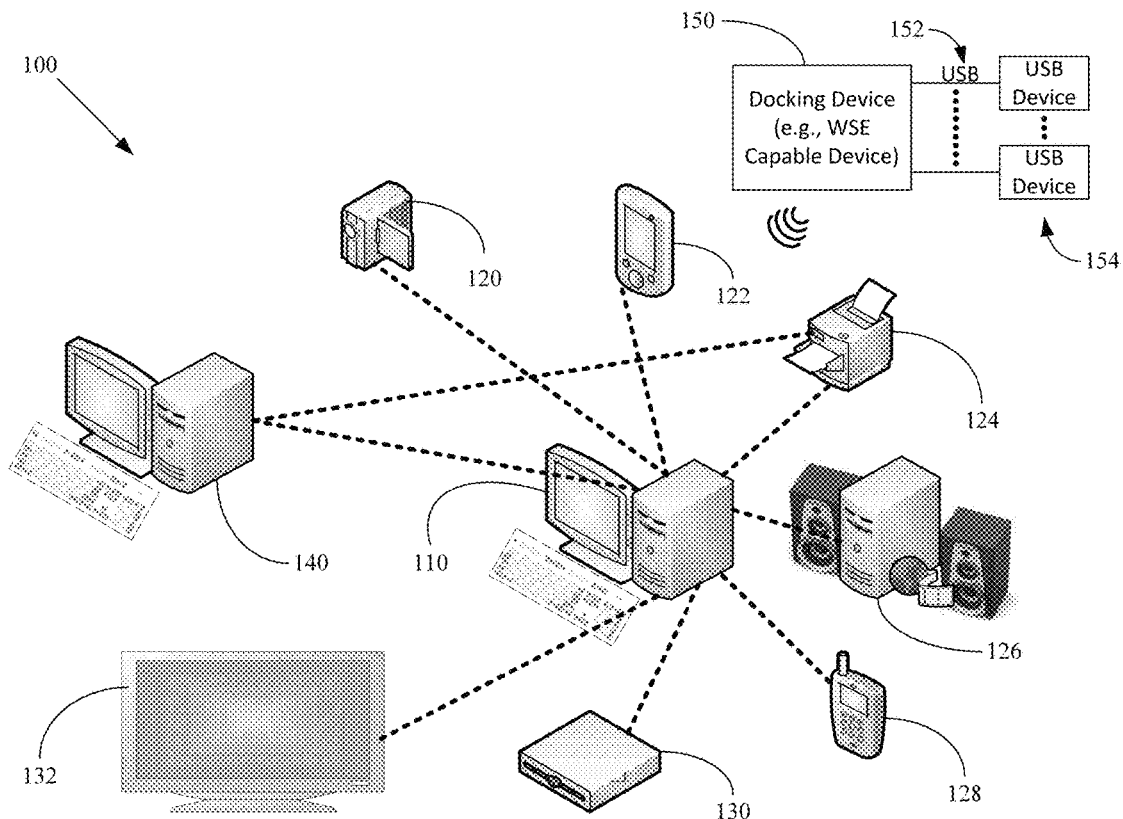

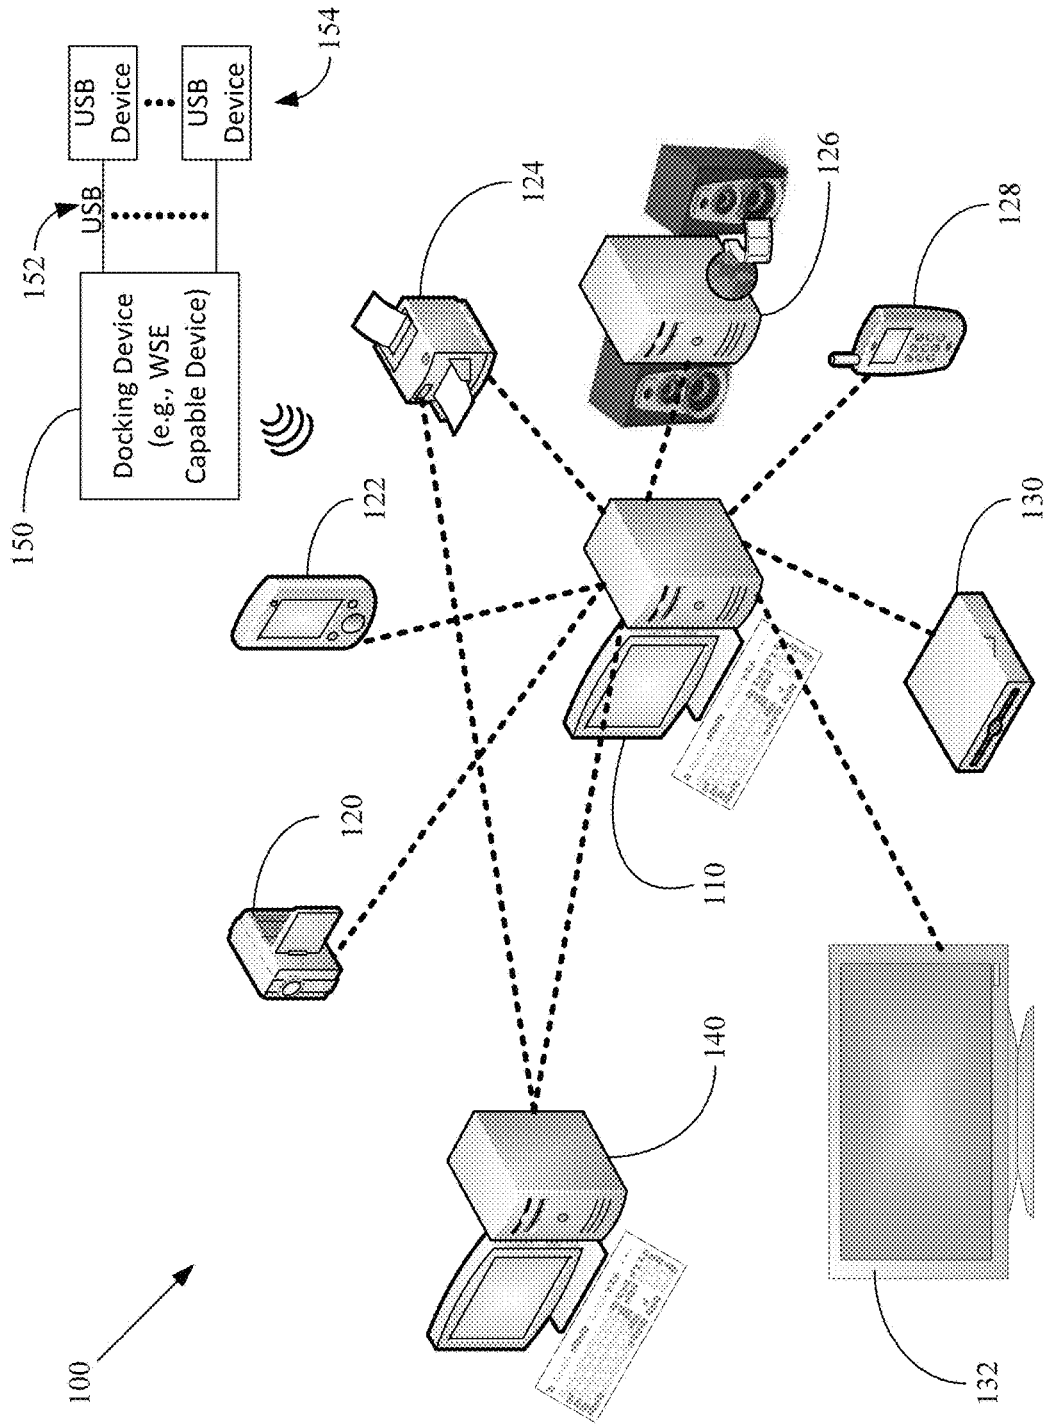


Fig. 1

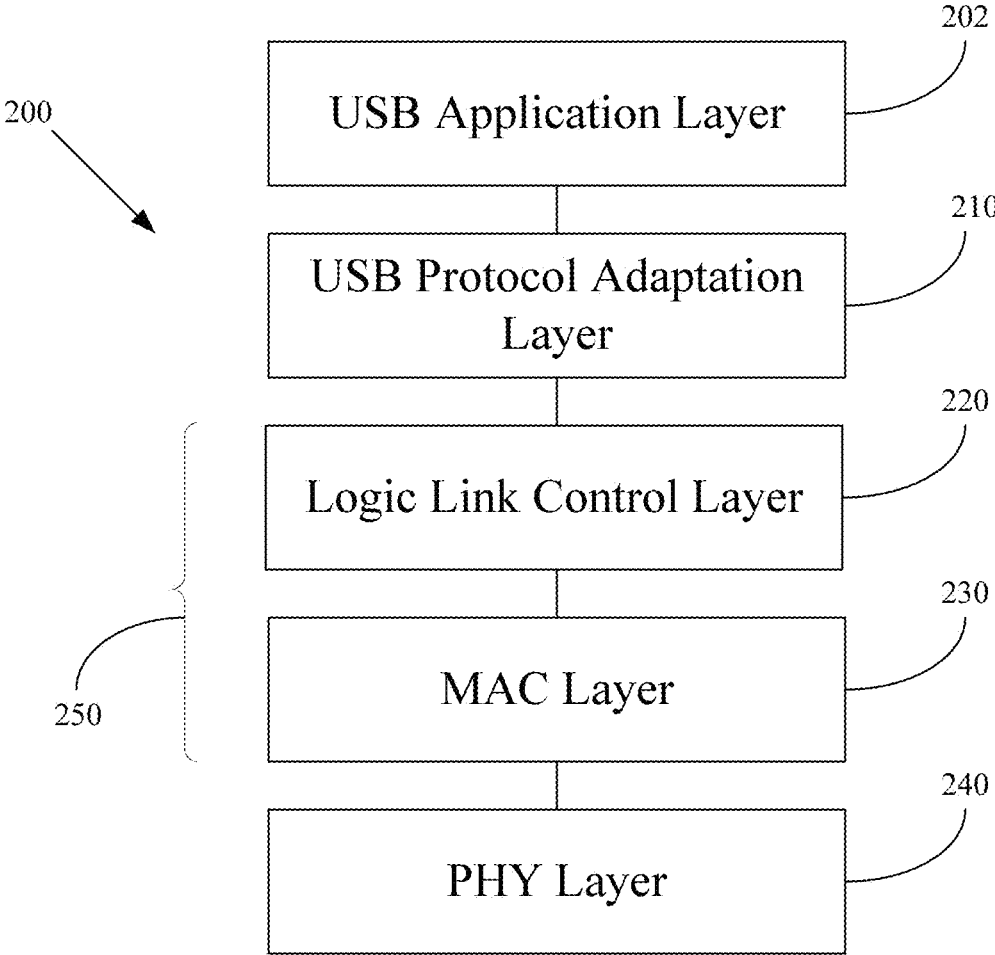


Fig. 2

Field	Size (octets)	Value	Description
Attribute ID	1	2	Identifying the type of P2P attribute.
Length	2	2	Length of the following fields in the attribute.
USB Version	2	variable	Identifying the USB Specification Number which the USB device behind the WSB PAL complies to.
USB Device Class	1	variable	Identifying the USB-IF defined Device Class of the USB device behind the WSB PAL. Shall be set to zero if not identified.
USB Device Sub-class	1	variable	Identifying the USB-IF defined Device Sub-class of the USB device behind the WSB PAL. Shall be set to zero if not identified.
WSB Capability Bitmap	1	variable	A set of parameters indicating P2P Device's WSB capabilities, as shown in Fig 4
WSB String	8	variable	UNICODE string (UNICODE UTF-16LE encoding) identifying WSB friendly name
WSB Icon	variable	variable	including one WSB icon. The format of WSB icon field is shown in Fig 8
USB Configuration Entry List	variable	variable	including one or more USB Configuration Entries. The format of Configuration Entry field as shown in Fig 5

Fig. 3

Bit(s)	Information	Notes
0-2	WSB Version	The version of WSB protocol supported
3-4	Architectural Element	The Architectural Element field identifies the WSB architectural element supported by the P2P Device. 428 Value 429 0 425 1 426 2 427 3 421 Meaning WSB Host WSB Hub WSB Peripheral Reserved
5	IP Support	The IP Support field shall be set to 1 when the P2P Device supports WSB IP option, and is set to 0 otherwise.
6	Available for Connection	The Available for Connection field shall be set to 1 when the P2P Device is available to connect with other WSB capable P2P Devices, and set to 0 otherwise.
7	Reserved	Reserved

Fig. 4

500

Field	Size (octets)	Value	Description
Number of Configurations	1		Indicating the number of configurations contained in the USB Configuration List field.
Configuration List	variable		Including one or more Configuration. The format of Configuration field as shown in Fig 6

514

512

520

522

524

Fig. 5

600

Field	Size (octets)	Value	Description
Number of interfaces	1		indicating the number of interfaces contained in the interface List field.
Interface List	variable		Including one or more interface. The format of interface field as shown in Fig 7

610

612

614

620

622

624

Fig. 6

700

Field	Size (octets)	Value	Description
Interface Class	1	variable	Identifying the USB-IF defined Interface Class of the USB function exposed by the WSB PAL. Shall be set to zero if not identified.
Interface Sub-class	1	variable	Identifying the USB-IF defined Interface Sub-class of the USB function exposed by the WSB PAL. Shall be set to zero if not identified.

710 712 714 720 722 724


Fig. 7

800

Field	Size (octets)	Value	Description
Icon Type Length	1	variable	Identifying the length of the Icon Type field.
Icon Type	variable		Containing the MIME media type of the Icon Binary Data. The Icon Type subfield is formatted in accordance with RFC-4288 and its value is selected from the IANA MIME media types registered at http://www.iana.org/assignments/media-types/index.html .
Icon Binary Data Length	2	variable	Identifying the length of the Icon Binary Data field.
Icon Binary Data	variable		Containing the binary data for the icon encoded per the Icon Type field.

810 820 830 840 812 824 832 834 844 842

Fig. 8

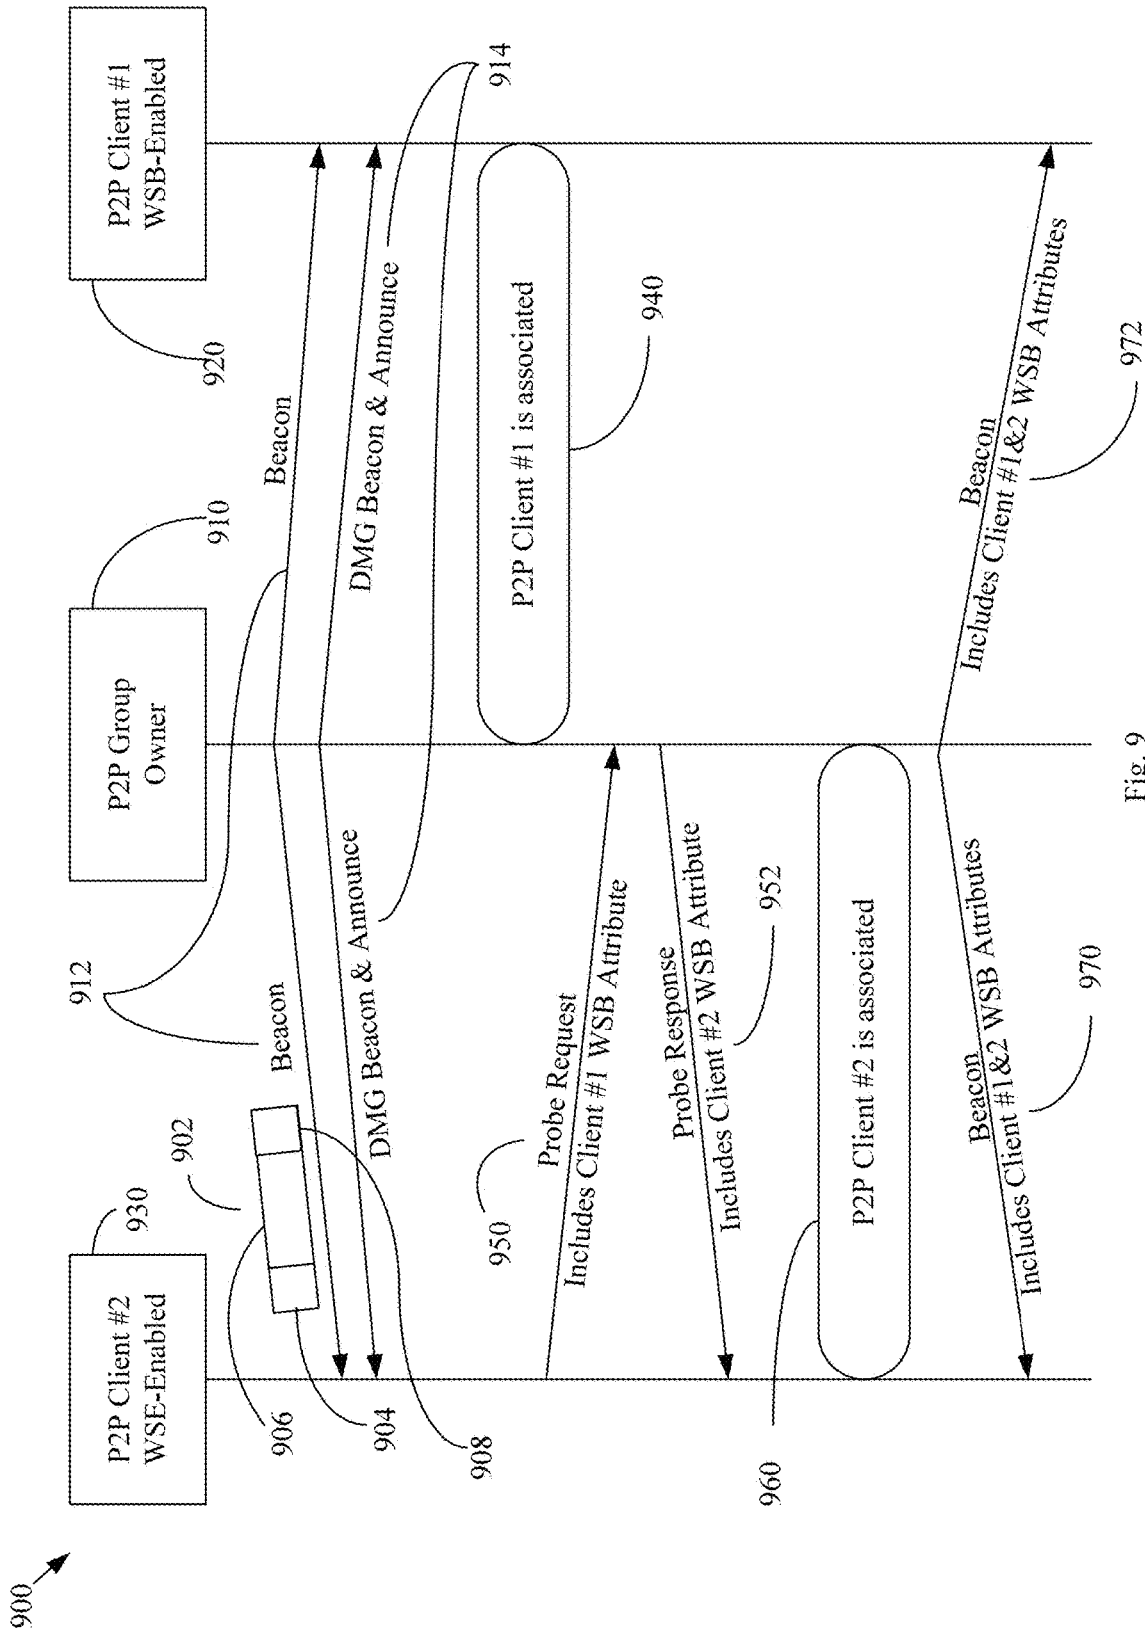

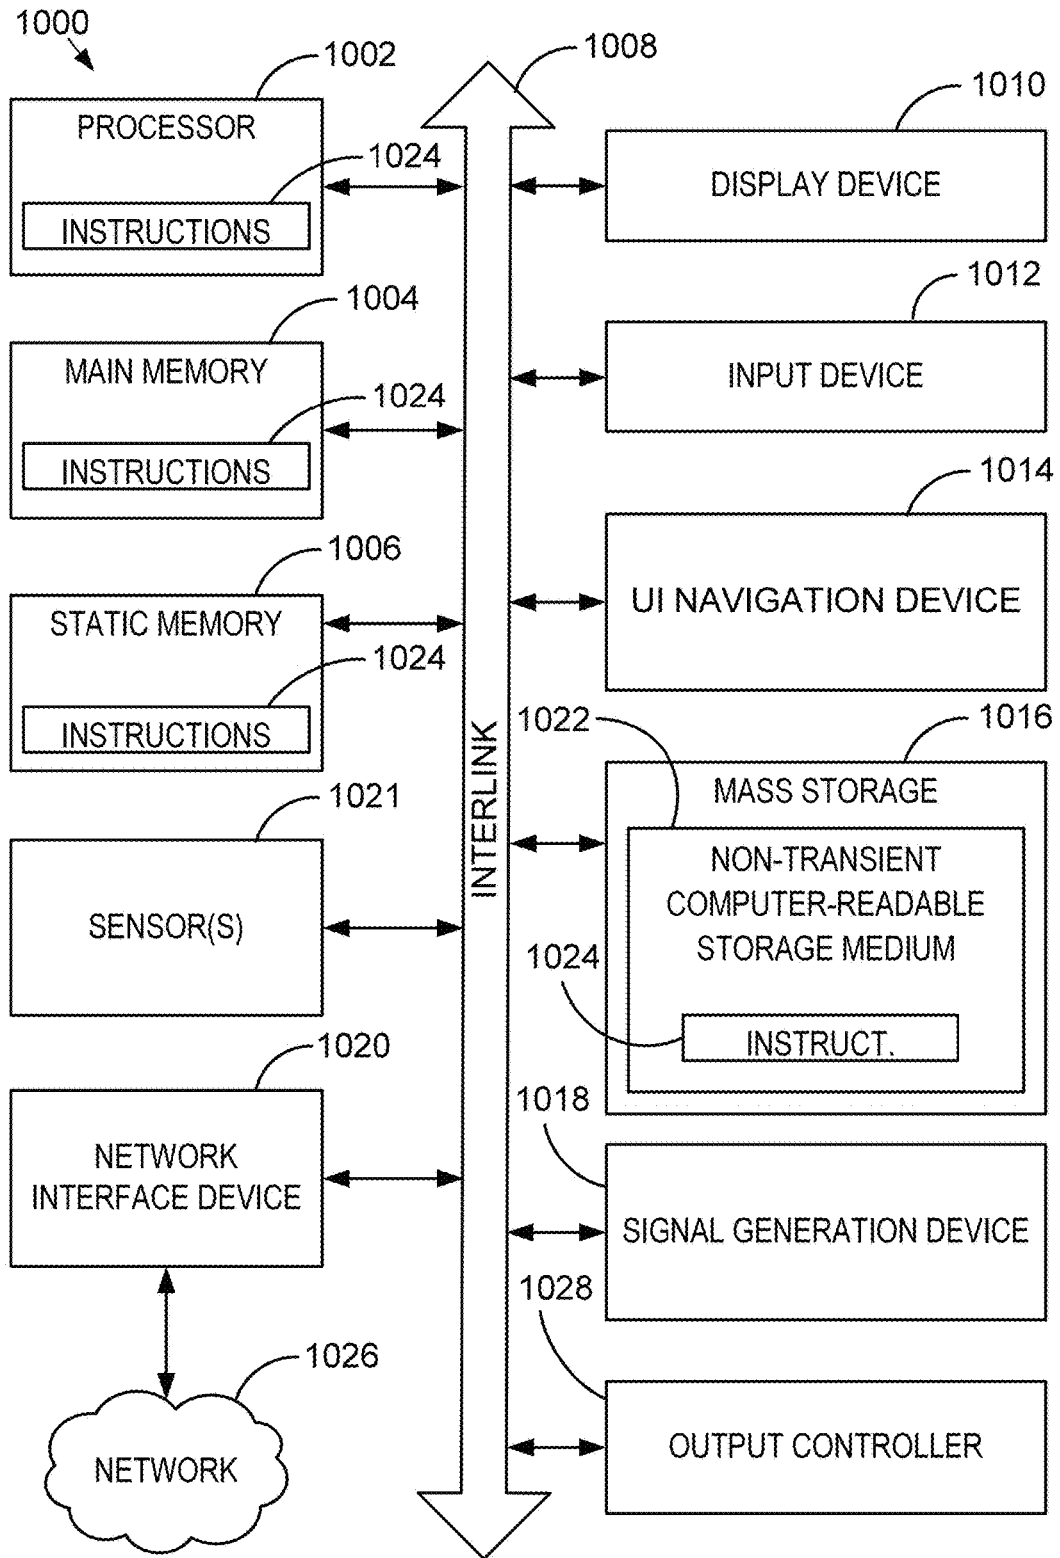


Fig. 10

DISCOVERY MECHANISMS FOR UNIVERSAL SERIAL BUS (USB) PROTOCOL ADAPTATION LAYER

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation of U.S. patent application Ser. No. 14/729,399, filed Jun. 3, 2015, now issued as U.S. Pat. No. 9,824,047, which is a continuation of U.S. patent application Ser. No. 13/728,820, filed Dec. 27, 2012, now issued as U.S. Pat. No. 9,075,923, each which are hereby incorporated herein by reference in their entities.

BACKGROUND

[0002] Recently, application services of transmitting various multimedia data at high speed have been widely used in wireless communication fields. In addition, the potential market for consumer electronic (CE) devices with these services has grown. Electronic devices, such as computers and other devices, often transmit signals to receiving stations such as displays or speakers. Such transmission often occurs via wires or cables. However, wireless transmission offers freedom from wires and cables. For interoperability among various manufacturers' products, these devices may communicate according to a standard, such as the WiFi Alliance (WFA) and the Wireless Gigabit Alliance (WGA or WiGig) standard as described in one or more upcoming published specifications.

[0003] The Universal serial bus (USB) Protocol Adaptation Layer (PAL) is a technology that enables support of USB traffic over a medium other than USB. Specifically with the WiFi Alliance, the WiFi Serial Bus (WSB) provides USB PAL as a service for WiFi links, and similarly with the WiGig Alliance, WiGig Serial Extension (WSE) provides USB PAL as a service for WiGig links. On a wired USB, the user makes the decision of choosing and using a USB peripheral device by physically plugging it into the USB port on the USB host, e.g., by connecting a USB mouse to the PC. In contrast, when used over a wireless medium, the user needs to rely on discovery mechanisms provided by lower layers, e.g., media access control (MAC) mechanisms provided in data link layer (layer 2), internet protocol (IP) mechanisms provided in network layer (layer 3), etc., to learn about USB PAL capable devices which are available for connection.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] In the drawings, which are not necessarily drawn to scale, like numerals may describe similar components in different views. Like numerals having different letter suffixes may represent different instances of similar components. The drawings illustrate generally, by way of example, but not by way of limitation, various embodiments discussed in the present document.

[0005] FIG. 1 illustrates a wireless system according to an embodiment;

[0006] FIG. 2 illustrates the layers used to provide USB wireless connectivity according to an embodiment;

[0007] FIG. 3 is a table showing the definitions for the WSB Attribute according to an embodiment;

[0008] FIG. 4 is a table describing the format of the WSB Capability Bitmap field according to an embodiment;

[0009] FIG. 5 is a table describing the format of the USB Configuration Entry field according to an embodiment;

[0010] FIG. 6 is a table describing the format of the Configuration field according to an embodiment;

[0011] FIG. 7 is a table describing the format of the Interface List field according to an embodiment;

[0012] FIG. 8 is a table describing the format of the WSB Icon field according to an embodiment;

[0013] FIG. 9 illustrates WSB discovery in a point-to-point (P2P) framework according to an embodiment; and

[0014] FIG. 10 illustrates a block diagram of an example machine upon which any one or more of the techniques (e.g., methodologies) discussed herein may perform.

DETAILED DESCRIPTION

[0015] The Universal serial bus (USB) Protocol Adaptation Layer (PAL) is a technology that enables support of USB traffic over a medium other than USB. A WiFi Serial Bus (WSB) provides USB PAL as a service for WiFi links and a WiGig Serial Extension (WSE) provides USB PAL as a service for WiGig links. The WSB protocol is a USB PAL protocol for providing USB over WiFi links. Point-to-Point (P2P) WiFi provides device-to-device connectivity. WSB needs to use P2P for discovery of available WSB devices. However, WiFi P2P does not apply to WSB. Embodiments described herein extend the applicability of P2P to the WSB protocol.

[0016] In one embodiment, a WSB attribute is arranged to provide for discovery of WSB enabled devices using the WiFi P2P framework. More specifically, a WSB Attribute according to an embodiment carries information for the user to be able to make an informed connectivity decision.

[0017] FIG. 1 illustrates a wireless system 100 according to an embodiment. In FIG. 1, Universal serial bus (USB) Protocol Adaptation Layer (PAL) enables support of USB traffic over WiFi links and WiGig links. Accordingly, a first computing device 110, such as a personal computer, communicates wirelessly with wireless enabled devices within range. For example, the first computing device may wirelessly communicate with a video camera 120, a media player 122, a printer 124, a media server 126, a mobile phone 128, external storage 130 and a television 132. A docking device 150 is wirelessly coupled to at least the first computing device 110. USB devices 154 are coupled to the docking device using USB cables 152. However, those skilled in the art will recognize that this is not meant to be an exhaustive list, but is provided only as examples of devices that a first computing device may communicate with. The first device 110 may also communicate wirelessly with a second computing device 140. The second computing device 140 may wireless communicate with at least some of the other devices 120-132. For example, the second computer device 140 may share the printer 124 with the first computing device, and therefore communicate wirelessly with the printer 124.

[0018] On a wired USB, the user makes the decision of choosing and using a USB peripheral device by physically plugging it into the USB port on the USB host, e.g., by connecting a USB mouse to the personal computer (PC). In contrast, when used over a wireless medium, the user needs to rely on a discovery mechanisms provided by lower layers, e.g., MAC, IP, etc., to learn about USB PAL capable devices which are available for connection. While WiFi links may be used by P2P for device-to-device connectivity, available

WSB capable devices may be discovered through the use of P2P. To extend the applicability of P2P to the WSB protocol, the WSB according to an embodiment provides for the discovery of WSB enabled devices using the WiFi P2P framework by carrying information for the user to be able to make an informed connectivity decision.

[0019] FIG. 2 illustrates the layers 200 used to provide USB wireless connectivity according to an embodiment. FIG. 2 shows a USB protocol adaptation layer (PAL) 210, the logic link control (LLC) 220, the media access (MAC) layer 230 and the physical (PHY) layer 240. The logic link control (LLC) 220 and MAC layer 230 form the data link layer 250. The USB PAL layer 210 may also sit on the network/transport layers (not shown). A device according to an embodiment passes data through the USB protocol adaptation layer (PAL) 210 and furthermore through the logic link control (LLC) 220 and MAC layer 230. The MAC layer 230 transmits the data through the PHY layer 240 in the assigned radio frequency spectrum. The USB PAL 210 is used to enable communication through a USB application layer 202 for use with other forms of MACs for other physical media such as USB cabling. The USB PAL 210 packages data and instructions from the USB application layer 202 to conform to the protocol used by the MAC layer 230.

[0020] FIG. 3 is a table showing the definitions for the WSB Attribute 300 according to an embodiment. The WSB Attribute 300 includes fields for information about the WSB device as well as identifying the USB device behind the PAL. The USB device behind the PAL may be a real USB device or a software emulation of a non-USB interface appearing as a USB interface. An attribute ID field 310 has a size of 1 octet 312 and identifies the type of P2P attribute 314. The attribute ID field 310 provides a WSB support field as a signaling mechanism indicating support of the WSB protocol by the P2P device. The length field 316 has a size of 2 octets 318 and specifies the length of the fields in the USB attribute 320. A USB Version field 322 has a size of 2 octets 324 and identifies the USB specification number of which the USB device behind the WSB PAL complies 326. More specifically, the protocol version identifies the version of USB which is supported by the USB device behind the PAL. This information assists the user with the selection to connect to a USB device.

[0021] The USB device class and sub-class, as well as the interface class and sub-class may be used either directly by the user or indirectly after being processed by the application on the device to learn about the functions provided by the device. For example, the USB device class and sub-class may be mapped to an icon and a user friendly description of the device.

[0022] The USB device class field 328 has a size of 1 octet 330 and identifies the USB interface (IF) device behind the WSB PAL 332. The USB device class field 328 may be set to zero if the USB interface (IF) defined device class of the USB device is not identified. The USB Device sub-class field 334 has a size of 1 octet 336 and identifies the USB-IF device sub-class of the USB device behind the WSB PAL 338. The USB Device sub-class field 334 may be set to zero if the USB IF defined subclass of the Device sub-class is not identified.

[0023] The WSB capability bitmap 340 has a length of 1 octet 342 and provides a set of parameters indicating P2P Device's WSB bitmap capabilities 344, as defined more

specifically in FIG. 4. The WSB string field 346 has a length of 8 octets 348 and identifies a WSB friendly name 350. The WSB Icon field 352 has a variable length 354 and includes one WSB Icon depicting the WSB device in a user friendly manner 356. The format of WSB Icon field 352 is shown in FIG. 8. The USB configuration entry list field 358 has a variable length 360 and includes one or more USB configuration entities 362. The format of the configuration entry field 358 is described in more detail with respect to FIG. 5.

[0024] FIG. 4 is a table describing the format of the WSB Capability Bitmap field 400 according to an embodiment. Bits 0-2 410 provide a field to identify the WSB version 412 of the WSB protocol supported by the P2P device 414. The WSB version identifier 412 ensures devices that establish connection use the same version of WSB protocol. Bits 3-4 420 provide architectural element information 422 by indicating the devices role to other devices 424. The bits 420 of the architectural element field 424 identify the WSB architectural element supported by the P2P Device. A WSB device may take the role of a WSB Host 425, a WSB peripheral device 426, or a WSB hub (or dock) 427. A first value 428 indicates that a WSB host is supported by the device. A second value 429 indicates that a WSB hub is supported by the device. A third value 423 indicates that a WSB peripheral is supported by the device. A fourth field is reserved 421. The WSB role identifier 420 is a field used by devices looking for other devices performing a specific role, e.g., a WSB host 425 looking for WSB peripherals 427, to narrow down the selection. If a device supports more than one WSB role, e.g., a device that may take the role of either a WSB Host 425 or a WSB Hub 426, then the device uses two WSB attributes, one for each role. Bit 5 430 is used as IP-support indicator 432 to communicate whether USB PAL over IP is an option supported by the P2P device. The IP support field 432 shall be set to a first value when the P2P device supports WSB IP option, and is set to a second value otherwise 434. This information enables other devices supporting the IP option to establish the connection based on IP if so desired. Bit 6 440 identifies whether the device is available for connection 442. The available for connection field may be set to a first value when the P2P device is available to connect with other WSB capable P2P devices, and set to a second value otherwise 444. Bit 7 450 is reserved 452.

[0025] FIG. 5 is a table describing the format of the USB Configuration Entry field 500 according to an embodiment. The first field 510 is 1 octet 512 in length and identifies the number of configurations contained in the USB Configuration List field 514. A second field 520 is the configuration list field. The length of the configuration field 520 has a variable length 522 and includes one or more configurations 524. The format of the configuration list field is shown in FIG. 6.

[0026] FIG. 6 is a table describing the format of the Configuration field 600 according to an embodiment. The first field 610 is the number of interfaces field and has a length of 1 octet 612. The number of interfaces field indicates the number of interfaces contained in the interfaces list field 614. The second field 620 is the interface list field. The interface list field 620 has a variable length 622 and includes one or more interfaces 624. The format of the interface field is shown in FIG. 7.

[0027] FIG. 7 is a table describing the format of the Interface List field 700 according to an embodiment. The USB-IF defines the device class of the USB device behind

the PAL. The USB-IF defines the device sub-class of the USB device behind the PAL and the interface class for functions in the USB device behind the PAL. The USB-IF also defines the interface sub-class for functions in the USB device behind the PAL.

[0028] The first field is the interface class field **710** and has a length of 1 octet **712**. The interface class field identifies the USB Interface (IF) defined interface class of the USB function exposed by the WSB PAL **714**. The interface class field is set to zero if not identified. The second field is the interface sub-class field **720**. The interface sub-class field **720** has a length of 1 octet **722** and identifies the USB-IF defined Interface Sub-class of the USB function exposed by the WSB PAL **724**. The interface sub-class field **720** is set to zero if not identified.

[0029] FIG. **8** is a table describing the format of the WSB Icon field **800** according to an embodiment. A first field is the icon type length field **810** and has a length of 1 octet **812**. The icon type length field identifies the length of the Icon Type field **814**. A second field is the icon type field **820**. The length of the icon type field is variable **822**. The icon type field **820** includes the MIME media type of the icon binary data **824**. The icon type subfield is formatted in accordance with RFC-4288 and its value is selected from registered internet assigned numbers authority (IANA) multipurpose internet mail extensions (MIME) media types. The third field is the icon binary data length field. The icon binary data length field **830** has a length of 2 octets **832**. The icon binary data length field **830** identifies the length of the icon binary data field **834**. The fourth field is the icon binary data field **840** and has a variable length **842**. The icon binary data field **840** includes the binary data for the icon encoded per the icon type field **844**.

[0030] Thus, a WSB attribute according to an embodiment carries information to facilitate connectivity decisions by a user. The WSB attribute is carried in the P2P frames as discussed above. Examples of P2P frames include a beacon frame, a probe Request frame, a probe response frame, a directional multi gigabit (DMG) beacon and announce frame, an information request frame and an information response frame.

[0031] FIG. **9** illustrates WSB discovery in a P2P framework **900** according to an embodiment. Each type of frame transmitted in a P2P framework **900** is arranged into packets. In FIG. **9**, a packet **902** is shown. The packet **902** includes a header **904** and a data section **906**. Typically, control information is found in packet headers **904** with payload data **906** in between the header and a trailer **908**. The header **904** may also provide identification of a destination. Wireless USB supports one-to-one links between a pair of devices, or one-to-multiple-device links. In either case, one device assumes ownership of the connection. The device that assumes ownership of the connection is referred to as a P2P group owner **910**. The other devices are referred to as P2P client devices. FIG. **9** shows first and second P2P client devices. P2P client **1 920** is WSB enabled. P2P client **2 930** is WSE enabled.

[0032] The P2P group owner device **910** transmits a beacon frame **912** on the operating channel. The beacon frame **912** is a frame transmitted by the P2P group owner **910** that carries information about the P2P group and the devices present in the P2P group. In FIG. **9**, P2P client **1** that is WSB enabled associates **940** with the P2P group owner **910**. The P2P group owner **910** listens for a probe request

frame **950** (or association request frame) from P2P client **2 930**. The probe request frame **950** is transmitted by P2P client **2 930** to inquire about existing P2P groups and the devices present. The Probe Response frame **952** is transmitted by P2P group owner **910**, in response to the probe request frame **950**. The Probe Response frame **952** includes information about the P2P group and the devices present. P2P client **2 930** may then become associated **960** with the P2P group owner **910**. Thereafter, the P2P group owner **910** transmits a beacon that includes the WSB attributes of P2P client **1 920** and P2P client **2 930**.

[0033] A directional multi gigabit (DMG) beacon and announce frame **914** may be used to identify a P2P group operating at a frequency band higher than 45 GHz. The USB attribute may also be used to specify the form of an information element (IE), e.g., WSB IE, to be included in the frames that carry P2P IEs. An information request frame may be transmitted by a P2P device in a 60 GHz P2P to solicit information about other P2P devices that are present. The information request frame is not shown, but would appear in FIG. **9** much like probe request frame **950**. An information response frame is transmitted by a P2P group owner in response to the information request frame. The information response frame is not shown, but would appear in FIG. **9** much like probe response frame **952**.

[0034] To connect to the P2P group, the P2P client device **1 920** and the P2P client device **2 930** transmit an association request frame and the P2P group owner may transmit an association response frame. These frames are also not shown, but would also appear in FIG. **9** much like probe request frame **950** and probe response frame **952**. Association allows a wireless device to send information to the devices within the group. The P2P group owner **910** transmits a first beacon **970** to P2P client **2 930** and a second beacon **972** to P2P client **1 920**. The first beacon **970** and second beacon **972** identifies the attributes for P2P client **1 920** and P2P client **2 930**.

[0035] FIG. **10** illustrates a block diagram of an example machine **1000** upon which any one or more of the techniques (e.g., methodologies) discussed herein may perform. In alternative embodiments, the machine **1000** may operate in a standalone mode or may be connected (e.g., networked) to other machines in a network mode. In a networked deployment, the machine **1000** may operate in the capacity of a server machine, a client machine, or both in server-client network environments. In an example, the machine **1000** may act as a peer machine in peer-to-peer (P2P) (or other distributed) network environment. In another example, the machine **1000** may act as a client (a station (STA)) or an access point (AP) during a link setup when domain crossing occurs.

[0036] The machine **1000** may further be a personal computer (PC), a tablet PC, a set-top box (STB), a Personal Digital Assistant (PDA), a mobile device, a web appliance, a network router, switch or bridge, or any machine capable of executing instructions (sequential or otherwise) that specify actions to be taken by that machine.

[0037] Further, while only a single machine is illustrated, the term “machine” shall also be taken to include any collection of machines that individually or jointly execute a set (or multiple sets) of instructions to perform any one or more of the methodologies discussed herein, such as cloud computing, software as a service (SaaS), other computer cluster configurations. Examples, as described herein, may

include, or may operate on, logic or a number of components, modules, or mechanisms. Modules are tangible entities (e.g., hardware) capable of performing specified operations and may be configured or arranged in a certain manner. In an example, circuits may be arranged (e.g., internally or with respect to external entities such as other circuits) in a specified manner as a module. In an example, the whole or part of one or more computer systems (e.g., a standalone, client or server computer system) or one or more hardware processors may be configured by firmware or software (e.g., instructions, an application portion, or an application) as a module that operates to perform specified operations. In an example, the software may reside on a machine readable medium. In an example, the software, when executed by the underlying hardware of the module, causes the hardware to perform the specified operations.

[0038] Accordingly, the term “module” is understood to encompass a tangible entity, be that an entity that is physically constructed, specifically configured (e.g., hardwired), or temporarily (e.g., transitorily) configured (e.g., programmed) to operate in a specified manner or to perform at least part of any operation described herein. Considering examples in which modules are temporarily configured, each of the modules need not be instantiated at any one moment in time. For example, where the modules comprise a general-purpose hardware processor configured using software, the general-purpose hardware processor may be configured as respective different modules at different times. Software may accordingly configure a hardware processor, for example, to constitute a particular module at one instance of time and to constitute a different module at a different instance of time.

[0039] Machine (e.g., computer system) **1000** may include a hardware processor **1002** (e.g., a central processing unit (CPU), a graphics processing unit (GPU), a hardware processor core, or any combination thereof), a main memory **1004** and a static memory **1006**, at least some of which may communicate with each other via an interlink (e.g., bus) **1008**. The machine **1000** may further include a display unit **1010**, an alphanumeric input device **1012** (e.g., a keyboard), and a user interface (UI) navigation device **1014** (e.g., a mouse). In an example, the display unit **1010**, input device **1012** and UI navigation device **1014** may be a touch screen display. The machine **1000** may additionally include a storage device (e.g., drive unit) **1016**, a signal generation device **1018** (e.g., a speaker), a network interface device **1020**, and one or more sensors **1021**, such as a global positioning system (GPS) sensor, compass, accelerometer, or other sensor. The machine **1000** may include an output controller **1028**, such as a serial (e.g., universal serial bus (USB), parallel, or other wired or wireless (e.g., infrared (IR)) connection to communicate or control one or more peripheral devices (e.g., a printer, card reader, etc.).

[0040] The signal generation device **1018** is arranged to generate a frame having a WiFi serial bus (WSB) attribute, the WSB attribute further including a plurality of fields to provide information to support connectivity decisions for a wireless USB device in a point-to-point network using a WSB protocol. The network interface device **1020** to transmit and receive frames that include a WSB attribute. The processor **1002** provides control network communications and is arranged to process the plurality of fields of the WSB attribute in a received frame to extract information in the

plurality of fields to support connectivity decisions for a wireless USB device in a point-to-point network using a WSB protocol.

[0041] The storage device **1016** may include a non-transient computer-readable storage medium **1022** on which is stored one or more sets of data structures or instructions **1024** (e.g., software) embodying or utilized by any one or more of the techniques or functions described herein. The instructions **1024** may also reside, completely or at least partially, within the main memory **1004**, within static memory **1006**, or within the hardware processor **1002** during execution thereof by the machine **1000**. In an example, one or any combination of the hardware processor **1002**, the main memory **1004**, the static memory **1006**, or the storage device **1016** may constitute machine readable media.

[0042] While the machine readable medium **1022** is illustrated as a single medium, the term “machine readable medium” may include a single medium or multiple media (e.g., a centralized or distributed database, and/or associated caches and servers) that configured to store the one or more instructions **1024**.

[0043] The term “machine readable medium” may include any medium that is capable of storing, encoding, or carrying instructions for execution by the machine **1000** and that cause the machine **1000** to perform any one or more of the techniques of the present disclosure, or that is capable of storing, encoding or carrying data structures used by or associated with such instructions. Non-limiting machine readable medium examples may include solid-state memories, and optical and magnetic media. In an example, a massed machine readable medium comprises a machine readable medium with a plurality of particles having resting mass. Specific examples of massed machine readable media may include: non-volatile memory, such as semiconductor memory devices (e.g., Electrically Programmable Read-Only Memory (EPROM), Electrically Erasable Programmable Read-Only Memory (EEPROM)) and flash memory devices; magnetic disks, such as internal hard disks and removable disks; magneto-optical disks; and compact disk-read only memory (CD-ROM) and digital versatile disk-read only memory (DVD-ROM) disks.

[0044] The instructions **1024** may further be configured for transmission and reception over a communications network **1026** using a transmission medium via the network interface device **1020** utilizing any one of a number of transfer protocols (e.g., frame relay, internet protocol (IP), transmission control protocol (TCP), user datagram protocol (UDP), hypertext transfer protocol (HTTP), etc.). Example communication networks may include a local area network (LAN), a wide area network (WAN), a personal area network (PAN), a packet data network (e.g., the Internet), mobile telephone networks ((e.g., channel access methods including Code Division Multiple Access (CDMA), Time-division multiple access (TDMA), Frequency-division multiple access (FDMA), and Orthogonal Frequency Division Multiple Access (OFDMA) and cellular networks such as Global System for Mobile Communications (GSM), Universal Mobile Telecommunications System (UMTS), CDMA 2000 1×* standards and Long Term Evolution (LTE)), Plain Old Telephone (POTS) networks, and wireless data networks (e.g., Institute of Electrical and Electronics Engineers (IEEE) 802 family of standards including IEEE 802.11 standards (WiFi®), IEEE 802.16 standards (WiMax)

and others), peer-to-peer (P2P) networks, or other protocols now known or later developed.

[0045] For example, the network interface device **1020** may include one or more physical jacks (e.g., Ethernet, coaxial, or phone jacks) or one or more antennas to connect to the communications network **1026**. In an example, the network interface device **1020** may include a plurality of antennas to wirelessly communicate using at least one of single-input multiple-output (SIMO), multiple-input multiple-output (MIMO), or multiple-input single-output (MISO) techniques. The term “transmission medium” shall be taken to include any intangible medium that is capable of storing, encoding or carrying instructions for execution by the machine **1000**, and includes digital or analog communications signals or other intangible medium to facilitate communication of such software.

[0046] The above detailed description includes references to the accompanying drawings, which form a part of the detailed description. The drawings show, by way of illustration, specific embodiments. These embodiments are also referred to herein as “examples.” Such examples can include elements in addition to those shown or described. However, the present inventors also contemplate examples in which only those elements shown or described are provided. Moreover, the present inventors also contemplate examples using any combination or permutation of those elements shown or described (or one or more aspects thereof), either with respect to a particular example (or one or more aspects thereof), or with respect to other examples (or one or more aspects thereof) shown or described herein.

[0047] In this document, the terms “a” or “an” are used, as is common in patent documents, to include one or more than one, independent of any other instances or usages of “at least one” or “one or more.” In this document, the term “or” is used to refer to a nonexclusive or, such that “A or B” includes “A but not B,” “B but not A,” and “A and B,” unless otherwise indicated. In the appended claims, the terms “including” and “in which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.” Also, in the following claims, the terms “including” and “comprising” are open-ended, that is, a system, device, article, or process that includes elements in addition to those listed after such a term in a claim are still deemed to fall within the scope of that claim. Moreover, in the following claims, the terms “first,” “second,” and “third,” etc. are used merely as labels, and are not intended to impose numerical constraints on their objects.

[0048] The above description is intended to be illustrative, and not restrictive. For example, the above-described examples (or one or more aspects thereof) may be used in combination with each other. Other embodiments can be used, such as by one of ordinary skill in the art upon reviewing the above description. The Abstract is to allow the reader to quickly ascertain the nature of the technical disclosure, for example, to comply with 37 C.F.R. § 1.72(b). It is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. Also, in the above Detailed Description, various features may be grouped together to streamline the disclosure. This should not be interpreted as intending that an unclaimed disclosed feature is essential to any claim. Rather, subject matter of embodiments may lie in less than the features of a particular disclosed embodiment. Thus, the following claims are hereby incorporated into the Detailed Description, with each

claim standing on its own as a separate embodiment. The scope of the embodiments should be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

1. (canceled)
2. An apparatus comprising: memory to store instructions and processing circuitry coupled to the memory, the processing circuitry configured to:
 - provide information during Wi-Fi Serial Bus (WSB) discovery, the information identifying services of the apparatus;
 - establish a Wi-Fi connection to another apparatus based on services identified during the WSB discovery, at a link layer in a Wi-Fi Peer-to-Peer (Wi-Fi P2P) group; and
 - generate signaling to cause universal serial bus (USB) device communications over the Wi-Fi connection using a plurality of USB interfaces.
3. The apparatus of claim 2, wherein the information includes at least one of class information of the apparatus and subclass information of the apparatus.
4. The apparatus of claim 2, wherein the apparatus includes the plurality of USB interfaces and wherein the information includes identification information for each of the associated plurality of USB interfaces.
5. The apparatus of claim 2, wherein the information includes a friendly name to identify the apparatus.
6. The apparatus of claim 2, further including a signal generation device.
7. The apparatus of claim 2, further including a touch screen.
8. The apparatus of claim 2, further including two or more antennas.
9. The apparatus of claim 2, wherein the apparatus is configured to operate using a near field communication (NFC) protocol.
10. The apparatus of claim 2, wherein the apparatus is a WSB Host.
11. A non-transitory computer-readable storage medium that stores instructions for execution by one or more processors of a Wi-Fi Serial Bus (WSB) device to perform operations comprising:
 - establishing a Wi-Fi connection to another apparatus based on services identified during the Wi-Fi Serial Bus (WSB) discovery, at a link layer in a Wi-Fi Peer-to-Peer (Wi-Fi P2P) group; and
 - performing universal serial bus (USB) device communications over the Wi-Fi connection.
12. The non-transitory computer-readable storage medium of claim 11, wherein the WSB device is a Peer-to-Peer (P2P) group owner.
13. The non-transitory computer-readable storage medium of claim 11, wherein the information includes at least one of class information of the apparatus and subclass information of the apparatus.
14. The non-transitory computer-readable storage medium of claim 11, wherein the WSB device includes a plurality of USB interfaces, and wherein the information includes identification information for each of the plurality of USB interfaces.
15. The non-transitory computer-readable storage medium of claim 11, wherein the information includes a friendly name to identify the apparatus.

- 16.** A Wi-Fi Serial Bus (WSB) device comprising:
a network interface device, a processor, and a memory, the network interface device to:
provide information during Wi-Fi Serial Bus (WSB) discovery, the information identifying services of the apparatus;
establish a Wi-Fi connection to another apparatus based on services identified during the WSB discovery, at a link layer in a Wi-Fi Peer-to-Peer (Wi-Fi P2P) group;
and
generate signaling to perform universal serial bus (USB) device communications over the Wi-Fi connection.
- 17.** The WSB device of claim **16**, wherein the service information is provided subsequently to performing a P2P probe request and P2P probe response exchange.
- 18.** The WSB device of claim **16**, further comprising two or more antennas.
- 19.** An apparatus comprising: memory to store instructions and processing circuitry coupled to the memory, the processing circuitry configured to:

- decode information from a second apparatus during Wi-Fi Serial Bus (WSB) discovery, the information identifying services of the second apparatus and the information including at least one of class information of the second apparatus and subclass information of the second apparatus;
 - establish a Wi-Fi connection to the second apparatus based on services identified during the WSB discovery, at a link layer in a Wi-Fi Peer-to-Peer (Wi-Fi P2P) group; and
 - generate signaling to perform universal serial bus (USB) device communications over the Wi-Fi connection.
- 20.** The apparatus of claim **19**, wherein the second apparatus is a WSB Host.
 - 21.** The apparatus of claim **19**, wherein the apparatus is a WSB Host and the second apparatus is a WSB Hub.

* * * * *