



US008959339B2

(12) **United States Patent**  
**Conti**

(10) **Patent No.:** **US 8,959,339 B2**

(45) **Date of Patent:** **Feb. 17, 2015**

(54) **METHOD AND SYSTEM FOR PREVENTING UNAUTHORIZED PROCESSOR MODE SWITCHES**

USPC ..... **713/166**; 712/220; 712/225; 712/227; 712/229

(75) Inventor: **Gregory R. Conti**, Saint Paul (FR)

(58) **Field of Classification Search**  
CPC ..... G06F 2221/2149; G06F 2221/2153; H04L 63/105

(73) Assignee: **Texas Instruments Incorporated**, Dallas, TX (US)

USPC ..... 713/164, 166, 167, 194; 726/23, 25, 27, 726/30; 712/1, 3, 5, 17, 20, 21, 22, 33, 36, 712/40, 229, 244

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1465 days.

See application file for complete search history.

(21) Appl. No.: **11/343,061**

(56) **References Cited**

(22) Filed: **Jan. 30, 2006**

U.S. PATENT DOCUMENTS

(65) **Prior Publication Data**

US 2007/0150730 A1 Jun. 28, 2007

6,694,401 B2 \* 2/2004 Nalawadi et al. .... 711/2  
6,795,905 B1 \* 9/2004 Ellison et al. .... 711/163  
7,165,135 B1 \* 1/2007 Christie et al. .... 710/269  
2001/0047456 A1 11/2001 Schrobenuhauer et al.  
2003/0101322 A1 \* 5/2003 Gardner ..... 711/163  
2003/0140205 A1 \* 7/2003 Dahan et al. .... 711/163  
2003/0140245 A1 \* 7/2003 Dahan et al. .... 713/200

(30) **Foreign Application Priority Data**

Dec. 23, 2005 (EP) ..... 05292787

(Continued)

OTHER PUBLICATIONS

(51) **Int. Cl.**

**G06F 21/00** (2013.01)  
**G06F 21/56** (2013.01)  
**G06F 21/52** (2013.01)  
**G06F 21/53** (2013.01)  
**G06F 21/74** (2013.01)  
**G06F 21/81** (2013.01)  
**H04L 29/06** (2006.01)

Joseph, Mark, Integration Problems in Fault-Tolerant, Secure Computer Design, 1991, Springer Vienna, Dependable Computing for Critical Applications, vol. 4, pp. 347-364.\*

*Primary Examiner* — Taghi Arani

*Assistant Examiner* — Kenneth Chang

(74) *Attorney, Agent, or Firm* — Ronald O. Neerings; Frederick J. Telecky, Jr.


(52) **U.S. Cl.**

CPC ..... **G06F 21/567** (2013.01); **G06F 21/52** (2013.01); **G06F 21/53** (2013.01); **G06F 21/74** (2013.01); **G06F 21/81** (2013.01); **G06F 2221/034** (2013.01); **G06F 2221/2101** (2013.01); **G06F 2221/2105** (2013.01); **G06F 2221/2111** (2013.01); **G06F 2221/2113** (2013.01); **G06F 2221/2115** (2013.01); **G06F 2221/2119** (2013.01); **G06F 2221/2141** (2013.01); **G06F 2221/2149** (2013.01); **G06F 2221/2153** (2013.01); **H04L 63/105** (2013.01)

(57) **ABSTRACT**

A system comprising a processor adapted to activate multiple security levels for the system and a monitoring device coupled to the processor and employing security rules pertaining to the multiple security levels. The monitoring device restricts usage of the system if the processor activates the security levels in a sequence contrary to the security rules.

**26 Claims, 2 Drawing Sheets**

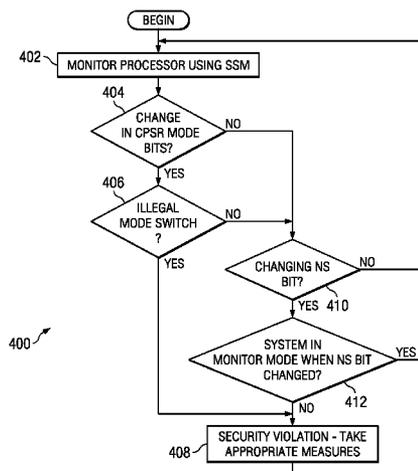

(56)

**References Cited**

U.S. PATENT DOCUMENTS

2004/0158727 A1*	8/2004	Watt et al. ....	713/193
2004/0181682 A1*	9/2004	Orino et al. ....	713/200
2004/0260910 A1*	12/2004	Watt et al. ....	712/43
2004/0105298 A1*	6/2004	Symes .....	365/149

\* cited by examiner

FIG. 1




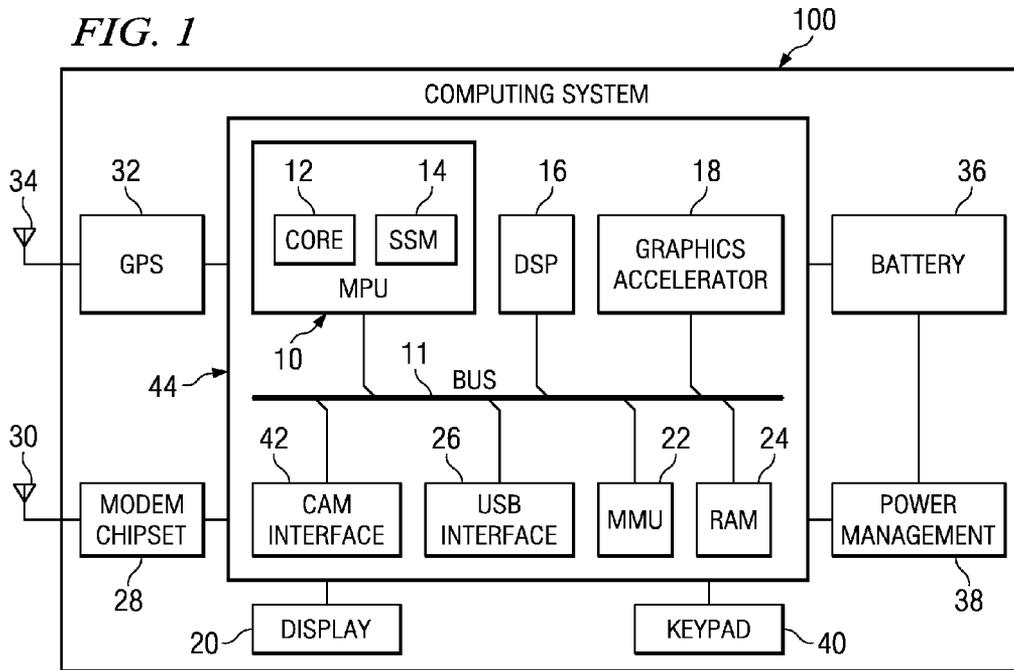


FIG. 2

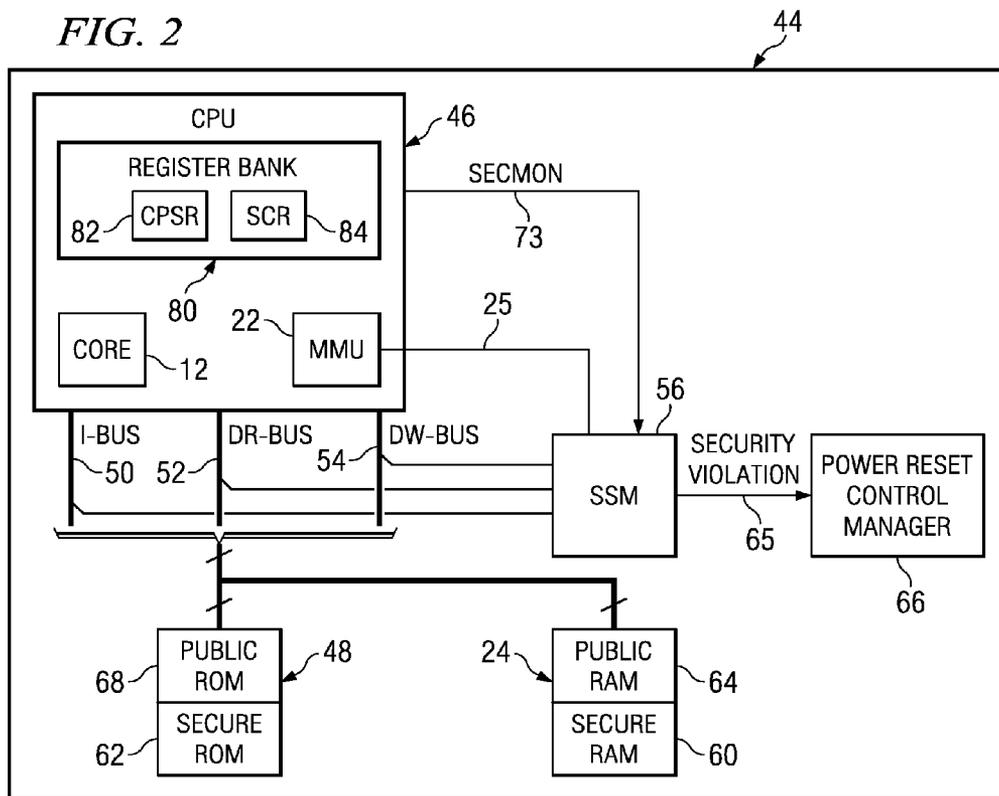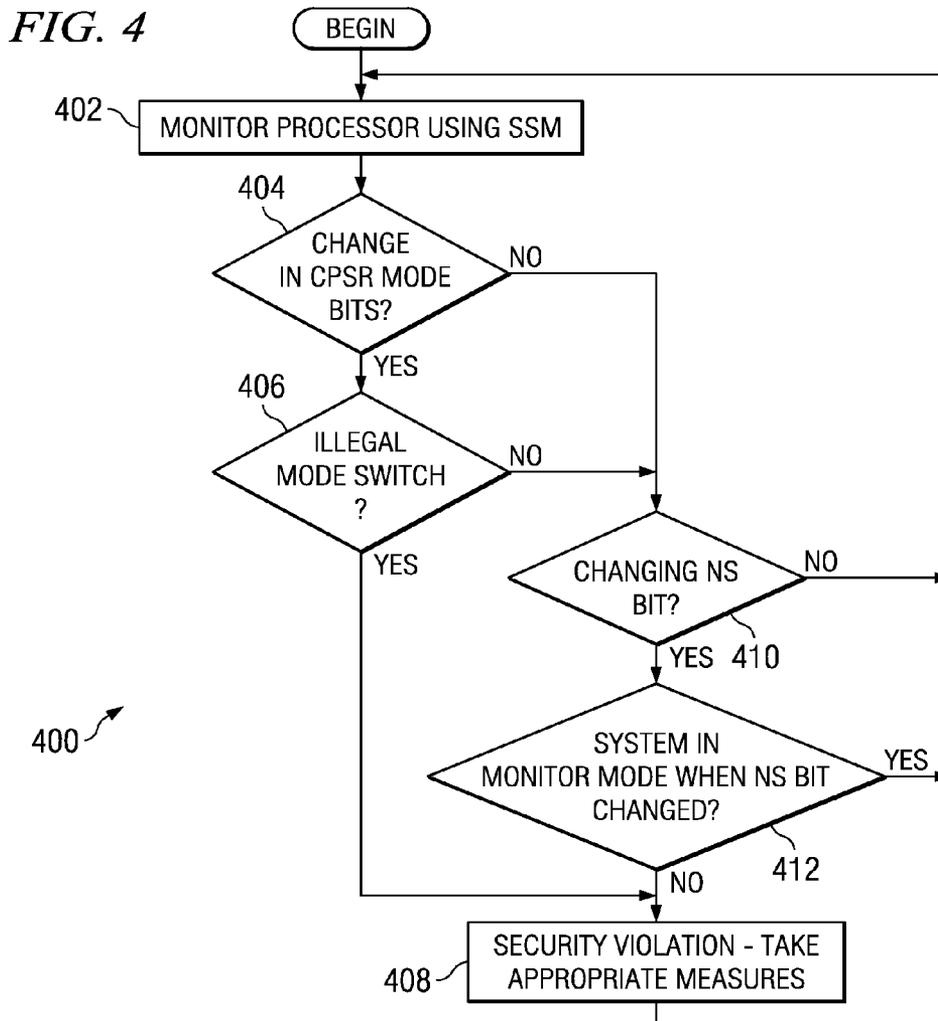

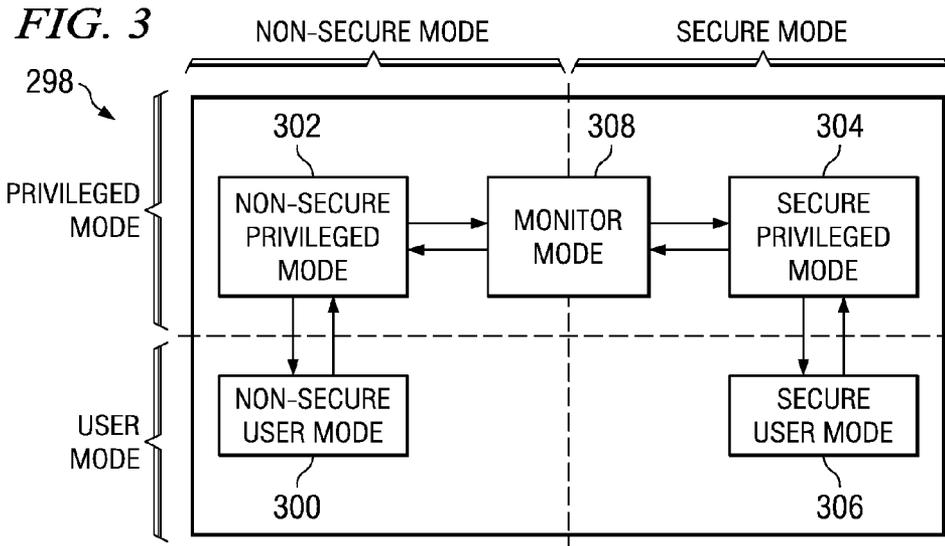

1

## METHOD AND SYSTEM FOR PREVENTING UNAUTHORIZED PROCESSOR MODE SWITCHES

### CROSS-REFERENCE TO RELATED APPLICATION

This application claims foreign priority to patent application EP 05292787.8, filed Dec. 23, 2005. This application may relate to the commonly-assigned, co-pending U.S. patent application entitled, "Method and System for Preventing Unsecure Memory Accesses," Ser. No. 11/343,072, incorporated herein by reference.

### BACKGROUND

Mobile electronic devices such as personal digital assistants (PDAs) and digital cellular telephones are increasingly used for electronic commerce (e-commerce) and mobile commerce (m-commerce). It is desired for the programs that execute on the mobile devices to implement the e-commerce and m-commerce functionality in a secure mode to reduce the likelihood of attacks by malicious programs and to protect sensitive data.

For security reasons, most processors provide two levels of operating privilege: a lower level of privilege for user programs; and a higher level of privilege for use by the operating system. The higher level of privilege may or may not provide adequate security for m-commerce and e-commerce, however, given that this higher level relies on proper operation of operating systems with vulnerabilities that may be publicized. In order to address security concerns, some mobile equipment manufacturers implement a third level of privilege, or secure mode, that places less reliance on corruptible operating system programs, and more reliance on hardware-based monitoring and control of the secure mode. U.S. Patent Publication No. 2003/0140245, entitled "Secure Mode for Processors Supporting MMU and Interrupts," incorporated herein by reference, describes a hardware-monitored secure mode for processors.

A flexible architecture providing a third level of privilege, such as that described above, may be exploitable by software attacks. Thus, there exists a need for methods and related systems to eliminate the potential for malicious software to manipulate the system into entering a secure mode and executing non-secure instructions.

### BRIEF SUMMARY

Disclosed herein are techniques for preventing unauthorized processor mode switches. An illustrative embodiment includes a system comprising a processor adapted to activate multiple security levels for the system and a monitoring device coupled to the processor and employing security rules pertaining to the multiple security levels. The monitoring device restricts usage of the system if the processor activates the security levels in a sequence contrary to the security rules.

Another illustrative embodiment includes a device comprising a security bus port adapted to couple to a processing unit comprising bits which determine a security level of the processing unit. The device also comprises a security violation bus port coupled to the security bus port and logic coupled to the security and security violation bus ports and adapted to monitor the bits via the security bus port. If the logic determines that the processing unit adjusted the bits in a sequence contrary to the security rules, the logic outputs an alert signal via the security violation bus.

2

Yet another illustrative embodiment includes a method comprising monitoring bits in a processing unit, where the bits are indicative of a security level of the processing unit. The method also comprises determining whether the bits indicate a switch between security levels in a sequence contrary to a predetermined sequence stored on the processing unit.

### NOTATION AND NOMENCLATURE

Certain terms are used throughout the following description and claims to refer to particular system components. As one skilled in the art will appreciate, various companies may refer to a component by different names. This document does not intend to distinguish between components that differ in name but not function. In the following discussion and in the claims, the terms "including" and "comprising" are used in an open-ended fashion, and thus should be interpreted to mean "including, but not limited to." Also, the term "couple" or "couples" is intended to mean either an indirect or direct connection. Thus, if a first device couples to a second device, that connection may be through a direct connection, or through an indirect connection via other devices and connections.

### BRIEF DESCRIPTION OF THE DRAWINGS

For a more detailed description of the preferred embodiments of the present invention, reference will now be made to the accompanying drawings, wherein:

FIG. 1 shows a computing system constructed in accordance with at least some embodiments of the invention;

FIG. 2 shows a portion of the megacell of FIG. 1 in greater detail, and in accordance with embodiments of the invention;

FIG. 3 shows various security modes used by the system of FIG. 1, in accordance with embodiments of the invention; and

FIG. 4 shows a flow diagram of an exemplary method in accordance with embodiments of the invention.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The following discussion is directed to various embodiments of the invention. Although one or more of these embodiments may be preferred, the embodiments disclosed should not be interpreted, or otherwise used, as limiting the scope of the disclosure, including the claims, unless otherwise specified. In addition, one skilled in the art will understand that the following description has broad application, and the discussion of any embodiment is meant only to be exemplary of that embodiment, and not intended to intimate that the scope of the disclosure, including the claims, is limited to that embodiment.

FIG. 1 shows a computing system **100** constructed in accordance with at least some embodiments of the invention. The computing system **100** preferably comprises the ARM® TrustZone® architecture, but the scope of disclosure is not limited to any specific architecture. The computing system **100** may comprise a multiprocessing unit (MPU) **10** coupled to various other system components by way of a bus **11**. The MPU **10** may comprise a processor core **12** that executes applications, possibly by having a plurality of processing pipelines. The MPU **10** may further comprise a security state machine (SSM) **56** which, as will be more fully discussed below, aids in allowing the computer system **100** to enter a secure mode for execution of secure software, such as m-commerce and e-commerce software.

The computing system **100** may further comprise a digital signal processor (DSP) **16** that aids the MPU **10** by performing task-specific computations, such as graphics manipulation and speech processing. A graphics accelerator **18** may couple both to the MPU **10** and DSP **16** by way of the bus **11**. The graphics accelerator **18** may perform necessary computations and translations of information to allow display of information, such as on display device **20**. The computing system **100** may further comprise a memory management unit (MMU) **22** coupled to random access memory (RAM) **24** by way of the bus **11**. The MMU **22** may control access to and from the RAM **24** by any of the other system components such as the MPU **10**, the DSP **16** and the graphics accelerator **18**. The RAM **24** may be any suitable random access memory, such as synchronous RAM (SRAM) or RAMBUS™-type RAM.

The computing system **100** may further comprise a USB interface **26** coupled to the various system components by way of the bus **11**. The USB interface **26** may allow the computing system **100** to couple to and communicate with external devices.

The SSM **56**, preferably a hardware-based state machine, monitors system parameters and allows the secure mode of operation to initiate such that secure programs may execute from and access a portion of the RAM **24**. Having this secure mode is valuable for any type of computer system, such as a laptop computer, a desktop computer, or a server in a bank of servers. However, in accordance with at least some embodiments of the invention, the computing system **100** may be a mobile (e.g., wireless) computing system such as a cellular telephone, personal digital assistant (PDA), text messaging system, and/or a computing device that combines the functionality of a messaging system, personal digital assistant and a cellular telephone. Thus, some embodiments may comprise a modem chipset **28** coupled to an external antenna **30** and/or a global positioning system (GPS) circuit **32** likewise coupled to an external antenna **34**.

Because the computing system **100** in accordance with at least some embodiments is a mobile communication device, computing system **100** may also comprise a battery **36** which provides power to the various processing elements. The battery **36** may be under the control of a power management unit **38**. A user may input data and/or messages into the computing system **100** by way of the keypad **40**. Because many cellular telephones also comprise the capability of taking digital still and video pictures, in some embodiments the computing system **100** may comprise a camera interface **42** which may enable camera functionality, possibly by coupling the computing system **100** to a charge couple device (CCD) array (not shown) for capturing digital images.

Inasmuch as the systems and methods described herein were developed in the context of a mobile computing system **100**, the remaining discussion is based on a mobile computing environment. However, the discussion of the various systems and methods in relation to a mobile computing environment should not be construed as a limitation as to the applicability of the systems and methods described herein to just mobile computing environments.

In accordance with at least some embodiments of the invention, many of the components illustrated in FIG. 1, while possibly available as individual integrated circuits, are preferably integrated or constructed onto a single semiconductor die. Thus, the MPU **10**, digital signal processor **16**, memory controller **22** and RAM **24**, along with some or all of the remaining components, are preferably integrated onto a single die, and thus may be integrated into a computing device **100** as a single packaged component. Having multiple

devices integrated onto a single die, especially devices comprising a multiprocessor unit **10** and RAM **24**, may be referred to as a system-on-a-chip (SoC) or a megacell **44**. While using a system-on-a-chip may be preferred, obtaining the benefits of the systems and methods as described herein does not require the use of a system-on-a-chip.

FIG. 2 shows a portion of the megacell **44** in greater detail. The processor **46** comprises a core **12**, a memory management unit (MMU) **22** and a register bank **80** including a current program status register (CPSR) **82** and a secure configuration register (SCR) **84**, described further below. The processor **46** couples to a security state machine (SSM) **56** by way of a security monitoring (SECMON) bus **73**, also described below. The processor **46** couples to the RAM **24** and ROM **48** by way of an instruction bus **50**, a data read bus **52** and a data write bus **54**. The instruction bus **50** may be used by the processor **46** to fetch instructions for execution from one or both of the RAM **24** and ROM **48**. Data read bus **52** may be the bus across which data reads from RAM **24** propagate. Likewise, data writes from the processor **46** may propagate along data write bus **54** to the RAM **24**.

The ROM **48** and the RAM **24** are partitioned into public and secure domains. Specifically, the ROM **48** comprises a public ROM **68**, accessible in non-secure mode, and a secure ROM **62**, accessible in secure mode. Likewise, the RAM **24** comprises a public RAM **64**, accessible in non-secure mode, and a secure RAM **60**, accessible in secure mode. In at least some embodiments, the public and secure domain partitions in the ROM **48** and the RAM **24** are virtual (i.e., non-physical) partitions generated and enforced by the MMU **22**. The SSM **56** monitors the MMU **22** for security purposes via bus **25**, as described further below.

Secure ROM **62** and secure RAM **60** preferably are accessible only in secure mode. In accordance with embodiments of the invention, the SSM **56** monitors the entry into, execution during and exiting from the secure mode. The SSM **56** preferably is a hardware-based state machine that monitors various signals within the computing system **100** (e.g., instructions on the instruction bus **50**, data writes on the data write bus **52** and data reads on the data read bus **54**) and activity in the processor core **12** through SECMON bus **73**.

Each of the secure and non-secure modes may be partitioned into “user” and “privileged” modes. Programs that interact directly with an end-user, such as a web browser, are executed in the user mode. Programs that do not interact directly with an end-user, such as the operating system (OS), are executed in the privileged mode. By partitioning the secure and non-secure modes in this fashion, a total of four modes are made available. As shown in FIG. 3, in order of ascending security level, these four modes include the non-secure user mode **300**, the non-secure privileged mode **302**, the secure user mode **306**, and the secure privileged mode **304**. There is an intermediate monitor mode **308**, described further below, between the modes **302** and **304**. The computer system **100** may operate in any one of these five modes at a time.

The computer system **100** may switch from one mode to another. FIG. 3 illustrates a preferred mode-switching sequence **298**. The sequence **298** is preferred because it is more secure than other possible switching sequences. For example, to switch from the non-secure user mode **300** to the secure privileged mode **304**, the system **100** should first pass through non-secure privileged mode **302** and the monitor mode **308**. Likewise, to pass from the secure user mode **306** to the non-secure user mode **300**, the system **100** should switch from the secure user mode **306** to the secure privileged mode **304**, from the secure privileged mode **304** to the monitor

mode **308**, from the monitor mode **308** to the non-secure privileged mode **302**, and from the non-secure privileged mode **302** to the non-secure user mode **300**.

Each mode switch is enacted by the adjustment of bits in the CPSR **82** and the SCR **84**. The CPSR **82** comprises a plurality of mode bits. The status of the mode bits determines which mode the computer system **100** is in. Each mode corresponds to a particular combination of mode bits. The mode bits may be manipulated to switch modes. For example, the bits may be manipulated to switch from mode **300** to mode **302**.

The SCR **84** comprises a non-secure (NS) bit. The status of the NS bit determines whether the computer system **100** is in secure mode or non-secure mode. In at least some embodiments, an asserted NS bit indicates that the system **100** is in non-secure mode. In other embodiments, an asserted NS bit indicates that the system **100** is in secure mode. Adjusting the NS bit switches the system **100** between secure and non-secure modes. Because the status of the NS bit is relevant to the security of the system **100**, the NS bit preferably is adjusted only in the monitor mode **308**, since the monitor mode **308** is, in at least some embodiments, the most secure mode.

More specifically, when the system **100** is in the monitor mode **308**, the processor **46** executes monitor mode software (not specifically shown) on the secure ROM **62**, which provides a secure transition from the non-secure mode to the secure-mode, and from the secure mode to the non-secure mode. In particular, the monitor mode software performs various security tasks to prepare the system **100** for a switch between the secure and non-secure modes. The monitor mode software may be programmed to perform security tasks as desired. If the processor **46** determines that these security tasks have been properly performed, the monitor mode software adjusts the NS bit in the SCR register **84**, thereby switching the system **100** from non-secure mode to secure mode, or from secure mode to non-secure mode.

The NS bit and the CPSR bits are provided by the processor **46** to the SSM **56** via the SECMON bus **73**. The SSM **56** uses the SECMON bus **73** to monitor any mode switches enacted by the processor **46**. For example, if the system **100** switches from the non-secure user mode **300** to the non-secure privileged mode **302**, the CPSR mode bits on the SECMON bus **73** reflect the mode switch. The SSM **56** receives the updated CPSR mode bits and determines that the system **100** has switched from the non-secure user mode **300** to the non-secure privileged mode **302**. Likewise, if the system **100** switches from the non-secure privileged mode **302** to the secure privileged mode **304**, the processor **46** updates the CPSR mode bits to reflect the mode switch, and further unasserts the NS bit in the SCR **84** to reflect the switch from the non-secure mode to the secure mode. Upon receiving the updated CPSR mode bits and the NS bit, the SSM **56** determines that the system **100** has switched from the non-secure mode to the secure mode and, more specifically, from the non-secure privileged mode **302** to the secure privileged mode **304**.

The SSM **56** uses the SECMON bus **73** in this way to ensure that the processor **46** does not take any action that may pose a security risk. For example, for security reasons, the processor **46** preferably adjusts the NS bit in the SCR **84** only when the system **100** is in the monitor mode **308**. The SSM **56** uses the SECMON bus **73** to ensure that the processor **46** does not adjust the NS bit when the system **100** is not in monitor mode **308**. Thus, if the SSM **56** detects that the NS bit is being adjusted by the processor **46** and the CPSR **82** mode bits indicate that the system **100** is in the monitor mode **308**, the

SSM **56** takes no action. However, if the SSM **56** detects that the NS hit is being adjusted and the CPSR mode bits indicate that the system **100** is not in monitor mode **308** (e.g., the system **100** is in one of the modes **300**, **302**, **304** or **306**), the SSM **56** may report a security violation to the power reset control manager **66** via the security violation bus **65**. The power reset control manager **66** then may reset the system **100**. The SSM **56** also may take any of a variety of alternative actions to protect the computer system **100**. Examples of such protective actions are provided in the commonly owned patent application entitled, "System and Method of Identifying and Preventing Security Violations Within a Computing System," U.S. patent application Ser. No. 10/961,748, incorporated herein by reference.

In addition to monitoring the NS bit and/or CPSR bits, the SSM **56** also may use the SECMON bus **73** to ensure that when switching modes, the processor **46** does not deviate from the preferred mode switching path shown in FIG. **3**. In particular, the SSM **56** monitors the CPSR bits provided on the SECMON bus **73**. Each mode (e.g., mode **300**, **302**, **304**, **306**, and **308**) corresponds to a particular combination of CPSR bits. By decoding the CPSR bits provided on the SECMON bus **73**, the SSM **56** determines the mode in which the computer system **100** is operating. If, in decoding the CPSR bits, the SSM **56** determines that the processor **46** has performed an illegal mode switch (e.g., from mode **300** to mode **304** without first passing through modes **302** and **308**), the SSM **56** reports a security violation to the power reset control manager **66** via the security violation bus **65**. The SSM **56** alternatively may take any other suitable action(s) to protect the computer system **100**, such as those disclosed in the U.S. patent application Ser. No. 10/961,748 referenced above.

In addition to monitoring the NS bit, the SSM **56** also may use the SECMON bus **73** in conjunction with the MMU bus **25** to monitor the MMU **22** and to ensure that the MMU's activities do not compromise the security of the computer system **100**. For example, for security reasons, it is undesirable for the MMU **22** to be disabled when switching from non-secure mode to secure-mode. Accordingly, the SSM **56** checks bus **25** to ensure that the MMU **22** is enabled when the NS bit on the SECMON bus **73** indicates that the system **100** is switching from the non-secure mode to the secure mode. For example, if the MMU **22** is disabled when the NS bit is unasserted, the SSM **56** reports a security violation to the power reset control manager **66** via the security violation bus **65**. Alternatively, the SSM **56** may take any of the protective actions mentioned above.

For security reasons, it is also undesirable to fetch instructions from public (i.e., unsecure) memory when in the secure or monitor modes. For this reason, the SSM **56** may monitor both the instruction bus **50** and the SECMON bus **73** to ensure that while the system **100** is in either the monitor mode or secure mode, the processor **46** does not fetch an instruction from the public ROM **68** and/or the public RAM **64**. If the SSM **56** detects that an instruction tagged as "unsecure" is fetched on the instruction bus **50** while bits on the SECMON bus **73** indicate that the system **100** is in monitor or secure mode, the SSM **56** reports a security violation to the power reset control manager **66** via the security violation bus **65**. The SSM **56** also may take alternative measures to protect the computer system **100** as mentioned above.

For security reasons, it is also undesirable to read data from and/or write data to public (i.e., unsecure) memory when in the monitor mode. For this reason, the SSM **56** may monitor the data read bus **52**, the data write bus **54** and the SECMON bus **73** to ensure that the processor **46** does not read data from and/or write data to either the public ROM **68** and/or the

public RAM 64 while the system 100 is in the monitor mode. For example, if the SSM 56 detects that data read from the public ROM 68 is being carried on the data read bus 52 while bits on the SECMON bus 73 indicate that the system 100 is in the monitor mode, the SSM 56 reports a security violation to the power reset control manager 66 or takes some other suitable, protective measure. In another example, if the SSM 56 detects that data is being written to the public RAM 64 via data write bus 54 and the SECMON bus 73 indicates that the system 100 is in monitor mode, the SSM 56 takes a suitable, protective measure (e.g., reports a security violation to the power reset control manager 66).

FIG. 4 illustrates a flow diagram of a process 400 used to monitor the computer system 100 for at least some of the security violations mentioned above. The process 400 begins by monitoring the processor 46 using the SSM 56 (block 402). The process 400 further comprises determining whether one or more of the CPSR mode bits have been altered (block 404). As mentioned above, the SSM 56 determines whether one or more of the CPSR mode bits have been altered by monitoring the SECMON bus 73. If any of the CPSR mode bits have been altered, the process 400 comprises determining whether an illegal mode switch has occurred (block 406). An illegal mode switch may be, for example, a deviation from the preferred mode switching pattern shown in FIG. 3. The pattern may be stored, for instance, on the CPU 46 or on one of the memories 24 or 48. If an illegal mode switch has occurred, the process 400 comprises reporting a security violation and taking one or more suitable, protective measures (block 408).

Otherwise, the process 400 then comprises using the SECMON bus 73 to determine whether the NS bit is being changed (block 410). If the NS bit is being changed, the process 400 comprises using the CPSR bits on the SECMON bus 73 to determine whether the change is occurring (or occurred) with the computer system 100 in the monitor mode (block 412). If the change in the NS bit is occurring (or occurred) with the computer system 100 in a mode other than the monitor mode, the process 400 comprises reporting a security violation and taking one or more suitable, protective measures (block 408).

The above discussion is meant to be illustrative of the principles and various embodiments of the present invention. Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. It is intended that the following claims be interpreted to embrace all such variations and modifications.

What is claimed is:

1. A system, comprising:
  - a processor apparatus adapted to activate one of more than two operating modes for the system, each mode having an assigned security level wherein the security levels are partitioned into secure and non-secure modes with an intermediate mode between the secure and non-secure modes and wherein the system switches between the secure and non-secure modes by adjusting a single bit stored in the processor apparatus, said bit adjusted only in the intermediate mode; and
  - a monitoring device coupled to the processor apparatus and employing security rules pertaining to the more than two operating modes, wherein the monitoring device restricts usage of the system if the processor apparatus switches to a secure operating mode from a non-secure operating mode or to a non-secure operating mode from a secure operating mode without first switching to the intermediate mode.
2. The system of claim 1, wherein the monitoring device determines that the processor has activated an operating mode

contrary to security rules by monitoring a plurality of bits stored on the processor, said bits indicative of a current security level.

3. The system of claim 2, wherein the monitoring device restricts usage of the system if said bits are altered in a pattern contrary to a predetermined pattern stored on the system.

4. The system of claim 1, wherein the monitoring device restricts usage of the system by causing the system to be reset.

5. The system of claim 1, wherein the monitoring device restricts usage of the system by blocking execution of software that causes the processor to activate the security levels in the sequence contrary to the security rules.

6. The system of claim 1, wherein the system comprises a wireless communications device.

7. A device, comprising:

- a first bus coupled to a processing unit for carrying bits which identify an operating mode of the processing unit and a security level of the operating mode wherein the security level is one of a secure mode, a non-secure mode and an intermediate mode between the secure and non-secure modes and wherein the processing unit switches between the secure and non-secure modes by adjusting one of the bits stored on the processing unit;
- a second bus coupled to the first bus; and

- logic coupled to the first and second busses for monitoring said bits via the second bus and for permitting the processing unit to adjust the bits only while in the intermediate mode, wherein if the logic determines that the processing unit adjusted the bits in order to move from a secure operating mode to a non-secure operating mode or from a non-secure operating mode to a secure operating mode without first switching to the intermediate mode the logic outputs an alert signal via the second bus.

8. The device of claim 7, wherein said alert signal causes the processing unit to be reset.

9. The device of claim 7, wherein said alert signal causes software running on the processing unit to be aborted.

10. The device of claim 7, wherein the device comprises a mobile communication device.

11. A method, comprising:
 

- monitoring bits in a processing unit, said bits indicative of one of more than two security levels associated with an operating mode of the processing unit wherein said security levels are partitioned into secure and non-secure modes; and

- determining whether a change is made to at least one of the monitoring bits in a mode other than a monitor mode indicating a switch by the processing unit to a secure operating mode from a non-secure operating mode or to a non-secure operating mode from a secure operating mode and restricting usage of the processing unit if there has been such a change.

12. The method of claim 11, wherein restricting usage of the processing unit comprises resetting the processing unit.

13. The method of claim 11, wherein restricting usage of the processing unit comprises preventing execution of software that causes said switch between security levels.

14. A system, comprising:

- a processor apparatus adapted to activate one of more than two operating modes for the system, each mode having an assigned security level wherein said security levels are partitioned into at least two secure and at least two non-secure modes with a monitor mode being between said secure and non-secure modes, and wherein the system switches between the secure and non-secure modes by adjusting a single bit stored on the processor apparatus, said bit adjusted only in the monitor mode; and

9

a monitoring device coupled to the processor apparatus and employing security rules pertaining to said more than two operating modes, wherein the monitoring device restricts usage of the system if said single bit is adjusted in a mode other than the monitor mode.

15. The system of claim 14, wherein the monitoring device determines that the processor has activated an operating mode contrary to security rules by monitoring a plurality of bits stored on the processor, said bits indicative of a current security level.

16. The system of claim 15, wherein the monitoring device restricts usage of the system if said bits are altered in a pattern contrary to a predetermined pattern stored on the system.

17. The system of claim 14, wherein the monitoring device restricts usage of the system by causing the system to be reset.

18. The system of claim 14, wherein the monitoring device restricts usage of the system by blocking execution of software that causes the processor to activate the security levels in the sequence contrary to the security rules.

19. The system of claim 14, wherein the system comprises a wireless communications device.

20. A device, comprising:

a first bus coupled to a processing unit for carrying bits which identify an operating mode of the processing unit and a security level of the operating mode wherein security levels comprise a secure operating mode, a non-secure operating mode and a monitor operating mode between the secure and non-secure modes and wherein the processing unit switches between the secure and non-secure modes by adjusting one of the bits;

a second bus coupled to the first bus; and

logic coupled to the first and second busses for monitoring the bits via the second bus wherein the logic permits the

10

processing unit to adjust the bits only while in the monitor operating mode and wherein if the logic determines that the processing unit adjusted the bits in a sequence in order to move from a secure operating mode to a non-secure operating mode or to a non-secure operating mode from a secure operating mode without first switching to a monitor operating mode, the logic outputs an alert signal via the second bus.

21. The device of claim 20, wherein said alert signal causes the processing unit to be reset.

22. The device of claim 20, wherein said alert signal causes software running on the processing unit to be aborted.

23. The device of claim 20, wherein the device comprises a mobile communication device.

24. A method, comprising:

monitoring bits in a processing unit, said bits indicative of one of more than two security levels associated with an operating mode of the processing unit wherein said security levels are partitioned into secure and non-secure modes activated by adjusting a single bit; and determining whether said bits indicate the processing unit has switched to a secure operating mode from a non-secure operating mode or to a non-secure operating mode from a secure operating mode without first switching to a monitor operating mode and restricting usage of the processing unit if there has been such a switch.

25. The method of claim 24, wherein restricting usage of the processing unit comprises resetting the processing unit.

26. The method of claim 24, wherein restricting usage of the processing unit comprises preventing execution of software that causes said switch between security levels.

\* \* \* \* \*