

PATENT APPLICATION

Atty. Docket: H-EB-00175 (203-8045)

SURGICAL FORCEPS**BACKGROUND***Technical Field*

[0001] The present disclosure relates to a surgical forceps and, more particularly, to a surgical forceps for sealing and/or cutting tissue.

Background of Related Art

[0002] A forceps is a plier-like instrument which relies on mechanical action between its jaws to grasp, clamp and constrict vessels or tissue. Electrosurgical forceps utilize both mechanical clamping action and electrical energy to affect hemostasis by heating tissue and blood vessels to coagulate and/or cauterize tissue. Certain surgical procedures require more than simply cauterizing tissue and rely on the unique combination of clamping pressure, precise electrosurgical energy control and gap distance (i.e., distance between opposing jaw members when closed about tissue) to "seal" tissue, vessels and certain vascular bundles. Typically, once a vessel is sealed, the surgeon has to accurately sever the vessel along the newly formed tissue seal. Accordingly, many vessel sealing instruments have been designed which incorporate a knife or blade member which effectively severs the tissue after forming a tissue seal.

[0003] Generally, surgical instruments, including forceps, can be classified as single-use instruments, e.g., instruments that are discarded after a single use, partially-

reusable instruments, e.g., instruments including both replaceable portions and portions that are sterilizable for reuse, and completely reusable instruments, e.g., instruments that are completely sterilizable for repeated use. As can be appreciated, those instruments (or components of instruments) that can be sterilized and reused help reduce the costs associated with the particular surgical procedure for which they are used. However, although reusable surgical instruments and surgical instruments with replaceable components are cost-effective, it is important that these instruments be capable of performing the same functions as their single-use counterparts and that any replaceable components of these instruments be removable and replaceable with new components efficiently and easily.

SUMMARY

[0004] In accordance with one embodiment of the present disclosure, a forceps is provided. The forceps includes an end effector assembly having first and second jaw members. One (or both) of the first and second jaw members is moveable relative to the other between a spaced-apart position and an approximated position for grasping tissue therebetween. One (or both) of the jaw members includes a longitudinally-extending blade channel defined therein. An electrical cutting insert is releasably engageable within the blade channel of the jaw member such that the jaw member is transitionable between a mechanical cutting mode and an electrical cutting mode. In the mechanical cutting mode, the electrical cutting insert is disengaged from the jaw member to permit reciprocation of a knife blade through the blade channel for mechanically cutting tissue grasped between the jaw members. In the electrical cutting

mode, the electrical cutting insert is engaged within the blade channel of the jaw member for electrically cutting tissue grasped between the jaw members.

[0005] In one embodiment, an electrical connection member is provided. The electrical connection member is adapted to connect to a source of electrosurgical energy and is configured to extend into the jaw member. The electrical connection member includes a first contact point electrically coupled to the jaw member for selectively supplying energy to the jaw member.

[0006] In another embodiment, the jaw member includes an electrically conductive tissue sealing plate. The tissue sealing plate is adapted to connect to the source of electrosurgical energy, e.g., via the electrical connection member. More specifically, the tissue sealing plate may include a finger configured to extend into the jaw member. The finger is configured to electrically couple to the first contact point of the electrical connection member.

[0007] In another embodiment, the electrical connection member includes a second contact point configured to electrically couple to the electrical cutting insert when the jaw member is disposed in the electrical cutting mode for selectively supplying energy to the electrical cutting insert. The electrical cutting insert may similarly include a finger configured to extend into the jaw member. The finger is configured to electrically couple to the second contact point.

[0008] In yet another embodiment, the electrical connection member is configured to independently supply energy to the jaw member and the electrical cutting insert, e.g.,

via the first and second contact points, respectively. The electrical connection member may be a flex circuit.

[0009] in still another embodiment, the electrical cutting insert is configured to snap-fit into engagement within the blade channel of the jaw member.

[0010] A method of using a forceps is also provided in accordance with the present disclosure. The method includes providing an end effector assembly including first and second jaw members. One (or both) of the first and second jaw members is moveable relative to the other between a spaced-apart position and an approximated position for grasping tissue therebetween. One (or both) of the jaw members includes a longitudinally-extending blade channel defined therein. The method further includes selecting a mode of operation for the forceps, e.g., selecting between a mechanical cutting mode and an electrical cutting mode. if the electrical cutting mode is selected, an electrical cutting insert is engaged within the blade channel of the jaw member.

[0011] in one embodiment, the method further includes grasping tissue between the first and second jaw members. Energy may then be conducted between the jaw members to seal tissue grasped between the jaw members.

[0012] In another embodiment, one (or both) of the jaw members includes an electrically conductive tissue sealing plate adapted to connect to a source of electrosurgical energy for sealing tissue grasped between the jaw members.

10013] in yet another embodiment, in the mechanical cutting mode, the method further includes translating a knife blade longitudinally through the blade channel to cut tissue grasped between the jaw members. On the other hand, in the electrical cutting

mode, the method further includes energizing the electrical cutting insert to electrically cut tissue grasped between the jaw members.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] Various embodiments of the present disclosure are described herein with reference to the drawings wherein:

[0015] Fig. 1 is a front, perspective view of a surgical forceps configured for use in accordance with the present disclosure;

[0016] Fig. 2 is a front, perspective view of an end effector assembly configured for use with the forceps of Fig. 1;

[0017] Fig. 3 is a side view of the end effector assembly of Fig. 2;

[0018] Fig. 4 is a front, perspective view of the end effector assembly of Fig. 2 with parts separated to show the pivotable connection between first and second Jaw members of the end effector assembly;

[0019] Fig. 5 is a front, perspective view of the end effector assembly of Fig. 2 wherein first and second replaceable components of the first and second jaw members, respectively, have been removed;

[0020] Fig. 6A is a front, perspective view of the end effector assembly of Fig. 2 wherein the first and second replaceable components of the first and second jaw members, respectively, are shown with parts separated;

[0021] Fig. 6B is a front, perspective view of one of the jaw members of the end effector assembly of Fig. 2 wherein the jaw member is shown with parts separated;

[0022] Fig. 7 is a front, perspective view of one of the jaw members of the end effector assembly of Fig. 2 shown in a mechanical cutting mode;

[0023] Fig. 8A is a longitudinal, cross-sectional view of the end effector assembly of Fig. 2 with the jaw members disposed in a spaced-apart position;

[0024] Fig. 8B is a longitudinal, cross-sectional view of the end effector assembly of Fig. 2 with the jaw members disposed in an approximated position and with a knife blade disposed in a retracted position;

[0025] Fig. 8C is a longitudinal, cross-sectional view of the end effector assembly of Fig. 2 with the jaw members disposed in an approximated position and with a knife blade disposed in an extended position;

[0026] Fig. 9A is a front, perspective view of one of the jaw members of the end effector assembly of Fig. 2 including an electrical cutting insert configured for positioning therein;

[0027] Fig. 9B is a front, perspective view of the jaw member of Fig. 9A shown in an electrical cutting mode;

[0028] Fig. 10 is a front, perspective view of another embodiment of an end effector assembly configured for use with the forceps of Fig. 1;

[0029] Fig. 11A is a front, perspective view of one of the jaw members of the end effector assembly of Fig. 10 shown with parts separated;

[0030] Fig. 11B is a front, perspective view of the other jaw member of the end effector assembly of Fig. 10 shown with parts separated;

[0031] Fig. 12 is a longitudinal, cross-sectional view of one of the jaw members of the end effector assembly of Fig. 10;

[0032] Fig. 13A is a rear, perspective view of one of the jaw members of the end effector assembly of Fig. 10 shown in an assembled condition in an electrical cutting mode; and

[0033] Fig. 13B is a front, perspective view of the other jaw member of the end effector assembly of Fig. 10 shown in an assembled condition in an electrical cutting mode.

DETAILED DESCRIPTION

[0034] Embodiments of the present disclosure are described in detail with reference to the drawing figures wherein like reference numerals identify similar or identical elements. As used herein, the term "distal" refers to the portion that is being described which is further from a user, while the term "proximal" refers to the portion that is being described which is closer to a user.

[0035] Referring now to Fig. 1, a forceps 10 for use in connection with endoscopic surgical procedures is shown, although forceps 10 may also be configured for use in connection with traditional open surgical procedures. Forceps 10 defines a longitudinal axis "A-A" and includes a housing 20, a handle assembly 30, a rotating assembly 70, a trigger assembly 80 and an end effector assembly 100. End effector assembly 100

includes first and second jaw members 110, 120, respectively, configured to pivot relative to one another between a spaced-apart position (Fig. 1) and an approximated position (Fig. 8B) for grasping tissue therebetween. Forceps 10 further includes a shaft 12 having a distal end 14 configured to mechanically engage end effector assembly 100 and a proximal end 16 that mechanically engages housing 20. Forceps 10 also includes an electrosurgical cable 310 that connects forceps 10 to a generator (not shown) or other suitable power source, although forceps 10 may alternatively be configured as a battery powered instrument. Cable 310 includes a wire (or wires) (not explicitly shown) extending therethrough and into housing 20 to ultimately connect the source of electrosurgical energy (not explicitly shown) to jaw member 110 and/or jaw member 120 of end effector assembly 100, as will be described in greater detail below.

[0036] With continued reference to Fig. 1, handle assembly 30 includes a fixed handle 50 and a moveable handle 40. Fixed handle 50 is integrally associated with housing 20 and handle 40 is moveable relative to fixed handle 50. Rotating assembly 70 is rotatable in either direction about a longitudinal axis "A-A" to rotate end effector 100 about longitudinal axis "A-A." The housing 20 houses the internal working components of the forceps 10.

[0037] Referring momentarily to Fig. 2, end effector assembly 100 is shown attached at a distal end 14 of shaft 12 and includes a pair of opposing jaw members 110 and 120. Each of the first and second jaw members 110, 120 includes a fixed jaw frame 112, 122, respectively, and a replaceable component 210, 220, respectively, selectively engageable with the respective jaw frame 112, 122 to form the fully assembled jaw members 110, 120, respectively. However, jaw members 110, 120 of end effector

assembly 100 may also be configured as integral components, e.g., wherein components 210, 220 are fixedly engaged to jaw frames 112, 122 of jaw members 110, 120, respectively.

[0038] End effector assembly 100, as shown in Fig. 2, is designed as a unilateral assembly, i.e., where jaw member 120 is fixed relative to shaft 12 and jaw member 110 is moveable relative to both shaft 12 and fixed jaw member 120. However, end effector assembly 100 may alternatively be configured as a bilateral assembly, i.e., where both jaw member 110 and jaw member 120 are moveable relative to one another and with respect to shaft 12.

[0039] With continued reference to Fig. 2, each jaw member 110, 120 or, more particularly, the replaceable component 210, 220 of each jaw member 110, 120, respectively, includes an electrically conductive tissue sealing plate 216, 226 disposed thereon. Tissue sealing plates 216, 226 are positioned on jaw members 110, 120, respectively, to define opposed tissue sealing surfaces for grasping and sealing tissue between jaw members 110, 120, as best shown in Fig. 2, and as will be described in greater detail below. In some embodiments, a knife assembly 180 (see Figs. 8A-8C) is disposed within shaft 12 and a knife channel 215, 225 (Figs. 8A-8C) is defined within one or both of tissue sealing plates 216, 226, of jaw members 110, 120, respectively, to permit reciprocation of a knife blade 182 (see Figs. 8A-8C) therethrough for mechanically cutting tissue grasped between Jaw members 110, 120. In such an embodiment, trigger 82 of trigger assembly 80 is operable to advance the knife blade 182 (Figs. 8A-8C) between a retracted position (see Figs. 8A-8B), wherein knife blade 182 (Figs. 8A-8C) is disposed within shaft 12, and an extended position (see Fig. 8C),

wherein knife blade 182 (Figs. 8A-8C) extends between jaw members 110, 120 to cut tissue grasped therebetween. Alternatively, end effector assembly 100 may be adapted for electrical cutting via an electrical cutting insert 190, thus obviating the need for knife assembly 180 (Figs. 8A-8C). Further, end effector assembly 100 may be adapted for both mechanical cutting and electrical cutting, thus allowing a user to select a mode of operation best suited for the particular surgical procedure to be performed. End effector assembly 100, including the various modes of operation and assembly thereof, will be described in greater detail below.

[0040] Referring again to Fig. 1, moveable handle 40 of handle assembly 30 is ultimately connected to a drive assembly (not shown) that, together, mechanically cooperate to impart movement of jaw members 110 and 120 between a spaced-apart position and an approximated position to grasp tissue between sealing plates 216 and 226 of jaw members 110, 120, respectively. As shown in Fig. 1, moveable handle 40 is initially spaced-apart from fixed handle 50 and, correspondingly, jaw members 110, 120 are disposed in the spaced-apart position. Moveable handle 40 is depressible from this initial position to a depressed position corresponding to the approximated position of jaw members 110, 120 (see Fig. 8B).

[0041] Continuing with reference to Fig. 1, in conjunction with Figs. 2-4, and as mentioned above, jaw members 110, 120 of end effector assembly 100 each include a respective jaw frame 112, 122. Each jaw frame 112, 122 is monolithically formed as a single component and includes a proximal base 113, 123, respectively, and a distal portion 114, 124, respectively, extending from the respective proximal base 113, 123. Distal portions 114, 124, of jaw frames 112, 122, respectively, are configured to receive

replaceable components 210, 220, respectively, thereon, as will be described in greater detail below. Further, distal portion 124 of jaw frame 122 includes a longitudinally-extending recess 142 configured to receive an electrical connection member, e.g., a flex circuit 140, therein. Distal portion 114 of jaw frame 112 may similarly include a recess (not shown) defined therein that is configured to receive a flex circuit 150, or other electrical connection member, although only one of jaw frames 112, 122 need include a flex circuit 150, 140 disposed thereon. Flex circuits 150, 140 of jaw frames 112, 122, respectively, as will be described in greater detail below, extend proximally into shaft 12, ultimately coupling to a source of electrosurgical energy (not explicitly show) for supplying energy to jaw members 110, 120, respectively. However, any other suitable electrical connection member(s) for supplying energy to jaw member 110 and/or jaw member 120 may also be provided.

[0042] With continued reference to Figs 1-4, and in particular to Fig. 4, proximal base 123 of jaw frame 122 includes a pair of spaced apart flags 125 and a proximal connector 134 disposed at the proximal ends 136 of flags 125. Proximal connector 134 is fixedly engaged to shaft 12, thereby fixing jaw member 120 in position relative to shaft 12. Flags 125 are substantially similar to one another and each include an aperture 126 defined therethrough and a longitudinally-extending slot 127 defined therethrough. Apertures 126 are transversely-aligned with one another and are longitudinally-aligned with slots 127, although apertures 126 may be positioned in other configurations, e.g., offset relative to slots 127. Slots 127 are likewise transversely aligned with one another and extend in a substantially parallel orientation relative to longitudinal axis "A-A." Slots

127 may be centered relative to longitudinal axis "A-A," or may be offset relative to longitudinal axis "A-A" (e.g., above or below longitudinal axis "A-A").

[0043] Proximal base 113 of jaw frame 112, similar to proximal base 123 of jaw frame 122, includes a pair of spaced-apart flags 115. Flags 125 of proximal base 123 of jaw frame 122, however, are spaced further apart from one another relative to flags 115 of proximal base 113 of jaw frame 112, such that proximal base 113 of jaw frame 112 is positionable within proximal base 123 of jaw frame 122, e.g., such that flags 115 of jaw frame 112 are positionable between flags 123 of jaw frame 122. This configuration may be reversed, or flags 115 jaw frame 112 and flags 125 of jaw frame 122 may alternatively be spaced-apart a similar distance and may be offset relative to one another. Flags 115 of jaw frame 112 each also include an aperture 116 defined therein and a longitudinally-extending slot 117 defined therethrough. Apertures 116 are transversely aligned with one another and are configured to align with apertures 126 of flags 125 of proximal base 123 of jaw frame 122. Slots 117, on the other hand, are aligned with one another, but are disposed at an oblique angle relative to slots 127 of proximal base 123 of jaw frame 122 and, thus with respect to longitudinal axis "A-A." Slots 117 may alternatively define a splined, or curvate configuration.

[0044] With continued reference to Figs. 1-4, during assembly, with flags 115 of jaw frame 112 disposed between flags 125 of jaw frame 122, a pivot pin 102 is inserted through each pair of apertures 116 and 126 of jaw frames 112, 122, respectively, to pivotably engage jaw frames 112, 122 to one another. Thus, with proximal connector 134 of jaw frame 122 engaging jaw frame 122 to shaft 12, the engagement between pivot pin 102 and apertures 116, 126 of jaw frames 112, 122, respectively, permits jaw

frame 112 to pivot relative to jaw frame 122 and, thus, shaft 12, between the spaced-apart position (Fig. 2) and the approximated position (Fig. 88).

[0045] As best shown in Fig. 4, a drive bar 130 is provided for selectively pivoting jaw frames 112, 122 between the spaced-apart position and the approximated position. Drive bar 130 extends from end effector assembly 100 proximally through shaft 12, ultimately coupling to the drive assembly (not explicitly shown) that, in turn, is coupled to handle assembly 30. More specifically, moveable handle 40 of handle assembly 30 is depressible from the initial position to the depressed position to translate drive bar 130 proximally through shaft 12 relative to end effector assembly 100, i.e., towards handle assembly 30. On the other hand, when moveable handle 40 is released, or moved back to the initial position, drive bar 130 is translated distally through shaft 12 relative to end effector assembly 100, i.e., towards end effector assembly 100.

[0046] With continued reference to Fig. 4, drive bar 130 includes a distal aperture 132 defined therethrough. During assembly, distal aperture 132 of drive bar 130 is aligned with slots 117 of flags 115 of jaw frame 112 and slots 127 of flags 125 of jaw frame 122 and a pin 104 is inserted therethrough, thereby coupling drive bar 130 to jaw frames 112, 122. Thus, as drive bar 130 is translated proximally, e.g., upon depression of moveable handle 40 relative to fixed handle 50, pin 104 is likewise translated proximally along slots 117 of flags 115 of jaw frame 112 and slots 127 of flags 125 of jaw frame 122. Since slots 117 of flags 115 of jaw frame 112 are disposed at an oblique angle relative to slots 127 of flags 125 of jaw frame 122, distal translation of pin 104 urges jaw frame 112 to pivot about pivot pin 102 relative to jaw frame 122 from the spaced-apart position toward the approximated position. On the other hand, when drive

bar 130 is translated distally, e.g., when moveable handle 40 is released, pin 104 is translated distally along slots 117, 127 to urge jaw frame 112 to pivot about pivot pin 102 relative to jaw frame 122 from the approximated position back to the spaced-apart position. As can be appreciated, the double-flagged configuration of jaw frames 112, 122 and the double pin configuration of end effector assembly 100 both help provide structural stability and support to end effector assembly 100 as jaw members 110, 120 are moved between the spaced-apart and approximated positions and as jaw members 110, 120 are retained in either the spaced-apart or approximated position.

[0047] Referring now to Figs. 4-5, flex circuit 140 of jaw member 120 will be described. Flex circuit 150 of jaw member 110 is substantially similar to flex circuit of jaw member 120 and, thus, will not be substantially described herein for purposes of brevity. Further, as mentioned above, although each of jaw members 110, 120 is shown including a flex circuit 150, 140, respectively, only one of jaw members 110, 120 need include a flex circuit 150, 140, respectively. Flex circuit 140, as best shown in Fig. 4, defines a generally flat, elongated configuration having a distal segment 143, an intermediate segment 144 and a proximal segment 145. Flex circuit 140 may be formed from a flexible material, e.g., a flexible polymer, allowing flex circuit 140 to be bent in a vertical direction without effecting the operation of flex circuit 140. Further, intermediate segment 144 of flex circuit 140, which is disposed adjacent the pivot point of jaw members 110, 120, may include one or more flex members 146 configured to facilitate flexing of flex circuit 140 upon movement of jaw members 110, 120 between the spaced-apart and approximated positions. Such a feature is particularly advantageous in embodiments where end effector assembly 100 is defined as a bilateral assembly,

e.g., where both jaw members 110, 120 are moveable relative to shaft 12, or in unilateral embodiments where jaw member 120 is the moveable jaw member. As can be appreciated, flex circuit 150 also includes a distal segment 153, an intermediate segment 154 and a proximal segment 155, intermediate segment 154 of flex circuit 150 of jaw member 110 likewise includes flex members 156 to facilitate flexing of flex circuit 150 as jaw member 110 is moved relative to jaw member 120 between the spaced-apart and approximated positions.

[0048] With continued reference to Figs. 4-5, flex circuit 140 is substantially encased within an insulative covering 147. However, flex circuit 140 includes one or more exposed electrical contacts, e.g., first electrical contact 148 and second electrical contact 149, disposed on distal segment 143 thereof for electrically coupling to tissue sealing plate 226 and/or electrical cutting insert 190, as will be described in greater detail below. Proximal segment 145 of flex circuit 140 may be adhered, laser-welded, or otherwise secured within recess 142 of jaw frame 122 with first and second electrical contacts 148, 149, respectively, facing upwardly therefrom, as shown in Fig. 5. Flexible circuit 140 may also be releasably secured within recess 142 of jaw frame 122, such that flexible circuit 140 may be replaced or interchanged with new and/or different flex circuits 140. For example, it may be desirable to select a different flex circuit 140, e.g., a flex circuit having greater or fewer electrical contacts or electrical contacts disposed in different positions, depending on the particular procedure to be performed or the particular configuration of the replaceable component 220 to be secured to jaw frame 122. Distal segment 143 of flexible circuit 140 may be releasably couplable to intermediate segment 144 of flexible circuit 140 to permit replacement of distal segment

143, or, alternatively, the entire flexible circuit 140 may be replaceable. As can be appreciated, the flexible configuration of flex circuit 140 (and flex circuit 150) facilitates installation, removal and replacement of flex circuit 140 from jaw frame 122 of end effector assembly 100.

J0049] Proximal segment 145 of flex circuit 140 is configured to extend proximally from jaw frame 122 of jaw member 120 into shaft 12, ultimately coupling to cable 310 (Fig. 1) which, in turn, is coupled to a source of electrosurgical energy (not explicitly shown), or coupling to the battery (not shown) disposed within housing 20, in embodiments where forceps 10 is a battery-powered device. Further, proximal segment 145 may extend completely through shaft 12 and into housing 20 (Fig. 1), or may extend only partially into shaft 12. In either configuration, proximal segment 145 may be releasably coupleable to the source of electrosurgical energy, e.g., via the wire(s) (not explicitly shown) of cable 310 (Fig. 1), to permit replacement of flex circuit 140.

[0050] Referring now to Figs. 5-6B, as mentioned above, jaw members 110, 120 of end effector assembly 100 each include a replaceable component 210, 220, respectively, that is releasably engageable with the respective jaw frame 112, 122. Replaceable components 210, 220 are removable from jaw frames 112, 122, respectively, and are replaceable with new replaceable components 210, 220, e.g., replaceable components 210, 220 may be configured to be discarded and replaced after a single use (or a single procedure), while the remaining components of forceps 10 may be formed from a sterilizable material such that they may be sterilized, e.g., placed in an autoclave (not shown), after each procedure for repeated use. Alternatively, the remaining components of forceps 10 may likewise be replaceable and/or disposable.

For example, flex circuits 150, 140 of jaw frames 112, 122, respectively, as mentioned above, may be configured to be replaced after each use, or a particular flex circuit 150, 140 may be selected for use in accordance with the particular surgical procedure to be performed. In either embodiment, e.g., where replaceable components 210, 220 and/or flex circuits 150, 140 are disposable or reusable, the ability to interchange the components of end effector assembly 100 is advantageous in that the user may select the components for use with forceps 10 that are best suited for the particular procedure to be performed, without requiring an entirely new surgical instrument. Further, as can be appreciated, requiring only a new set of replaceable components 210, 220 (and/or flex circuits 150, 140), rather than an entire new surgical instrument, helps reduce the equipment costs associated with performing a particular surgical procedure.

[0051] With continued reference to Figs. 5-6B, replaceable components 210, 220 of jaw members 110, 120, respectively, each include an outer jaw housing 214, 224, an electrically conductive tissue sealing plate 216, 226, and an insulator 218, 228 configured to electrically isolate tissue sealing plates 216, 226 from outer jaw housings 214, 224, respectively. Further, one (or both) of replaceable components 210, 220, e.g., replaceable component 220, may include an electrical cutting insert 190 releasably engageable therewith, while the other replaceable component 210, 220, e.g., replaceable component 210, may include an insulting insert 198 (see Fig. 2) releasably engageable therewith, as will be described in greater detail below. Other configurations are also contemplated, e.g., where electrical cutting insert 190 is fixed within replaceable component 220 and/or where insulting insert 198 (see Fig. 2) is fixed within replaceable component 210. The subcomponents of replaceable components 210, 220

are substantially similar and, thus, only those subcomponents of replaceable component 220 and the differences between replaceable components 210, 220 will be described herein for purposes of brevity.

[0052] Outer jaw housing 224 of replaceable component 220 is configured to house insulator 228 therein and to engage tissue sealing plate 226 thereon. In particular, outer jaw housing 224 defines an internal passageway 224a configured to receive insulator 228 therein and an outer channel 224b extending about the outer periphery of internal passageway 224a that is configured to receive a portion of tissue sealing plate 226 therein. More specifically, outer jaw housing 224 includes a series of alternating tabs 224c and recesses 224d on an internal surface thereof that defines internal passageway 224a. Likewise, insulator 228 includes a series of complementary alternating tabs 228a and recesses 228b on an outer periphery thereof such that, upon insertion of insulator 228 into internal passageway 224a of outer jaw housing 224, tabs 224c, 228a and recesses 224d, 228b, engage one another to inhibit substantial movement of insulator 228 relative to jaw housing 224. Alternatively, insulator 228 may be overmolded within jaw housing 224 to define complementary tabs 228a and recesses 228b as a result of the tabs 224c and recesses 224d formed within jaw housing 224.

[0053] As shown in Figs. 6A-6B, outer channel 224b of outer jaw housing 224 includes a plurality of spaced-apart slots 224e, each of which is configured to receive a downwardly extending flange 226a of tissue sealing plate 226. Downwardly-extending flanges 226a of tissue sealing plate 226 may taper from the free ends to the fixed ends thereof, as best shown in Fig. 6A, such that flanges 226a are resiliently compressed

upon insertion into slots 224e and "snap" into engagement therewith to secure tissue sealing plate 226 about outer jaw housing 224, although overmolding is also contemplated. Further, in the assembled condition of replaceable component 220, distal finger 226b of tissue sealing plate 226, which projects downwardly from tissue sealing plate 226, extends through longitudinal channel 228c of insulator 228 and internal passageway 224a of outer jaw housing 224, the importance of which will be described below.

[0054] With continued reference to Figs. 6A-6B, with insulator 228 disposed within outer jaw housing 224 and with tissue sealing plate 226 secured thereto, longitudinal channel 228c defined within insulator 228 and blade channel 226c defined within tissue sealing plate 226 are substantially aligned with one another to form blade channel 225 (see Figs. 8A-8C). Such a configuration permits, in a mechanical cutting mode of forceps 10, reciprocation of knife blade 182 (see Figs. 8A-8C) through blade channel 125 of jaw member 120 (and/or blade channel 115 of jaw member 110) (see Figs. 8A-8C) for cutting tissue grasped between jaw members 110, 120, as will be described in greater detail below. Outer jaw housing 224 also includes a shelf 224f disposed within internal passageway 224a that has one or more engagement features 224g configured to receive corresponding engagement features 192 extending from electrical cutting insert 190. Engagement features 192 may be in the form of tapered tabs, similar to those discussed above with respect to tissue sealing plate 226, such that corresponding tabs 192 of electrical cutting insert 190 may be snap-fittingly engageable with engagement features, or slots 224g of shelf 224f of outer jaw housing 224 to releasably secure electrical cutting insert 190 within longitudinal channel 228c of insulator 228 and

blade channel 226c of tissue sealing plate 226. Alternatively, in embodiments where electrical cutting insert 190 is fixed jaw housing 224, electrical cutting insert 190 may be fixed therein via overmolding. Electrical cutting insert 190 is formed at least partially from an electrically conductive material and is configured to be positioned within and to extend at least partially from blade channel 226c of tissue sealing plate 226, for use in an electrical cutting mode of forceps 10. Further, similar to distal finger 226b of tissue sealing plate 226, proximal finger 194 of electrical cutting insert 190, which projects downwardly from electrical cutting insert 190, extends through longitudinal channel 228c of insulator 228 and internal passageway 224a of outer jaw housing 224, the importance of which will be described below,

[0055] Replaceable component 210 of jaw member 110, as mentioned above, and as shown in Fig. 6A, similarly includes an outer jaw housing 214, an insulator 218, and a tissue sealing plate 216. Insulator 218 of replaceable component 210 may include a longitudinal channel (not explicitly shown) defined therethrough and tissue sealing plate 216 of replaceable component 210 may include a blade channel (not explicitly shown) defined therethrough that cooperate to form blade channel 215 (Figs. 8A-8C). As mentioned above, blade channel 215 (Figs. 8A-8C) of replaceable component 210 may cooperate with blade channel 225 (Figs. 8A-8C) of replaceable component 220 to permit reciprocation of knife blade 182 (Figs. 8A-8C) therethrough, or, alternatively, one of jaw members 110, 120, e.g., jaw member 110, may define a continuous tissue sealing plate 216 such that knife blade 182 (Figs. 8A-8C) extends through only one of jaw members 110, 120, e.g., jaw member 120. Additionally, an electrical cutting insert 190 may be engaged within either or both of jaw members 110, 120, similarly as

described above with respect to jaw member 120, or may be engaged within only one of jaw members 110, 120, e.g., jaw member 120, while the other jaw member, e.g., jaw member 110, defines a continuous tissue sealing plate or includes an insulating insert 198 (see Fig. 2) disposed within the blade channel 215 (Figs. 8A-8C) thereof.

[0056] Turning back to Fig. 5, replaceable components 210, 220 of jaw members 110, 120, respectively, are slidably positionable about jaw frames 112, 122, respectively, to secure replaceable components 210, 220 thereon. More specifically, jaw frames 112, 122 each include a pair of lateral wings 118, 128, respectively, that are slidably received within longitudinal groove 214h of outer jaw housing 214 of replaceable component 210 and a longitudinal groove (not shown), similar to longitudinal groove 214h, defined within outer jaw housing 224 of replaceable component 220, respectively, as replaceable components 210, 220 are slid proximally over jaw frames 112, 122, respectively. Outer jaw housings 214, 224 each further include a pair of tangs 214i, 224i, respectively, disposed on opposite sides thereof that are configured to engage complementary stops 119, 129, respectively, disposed on opposite sides of jaw frames 112, 122, respectively, e.g., in snap-fit engagement therewith, to secure replaceable components 210, 220 about jaw frames 112, 122. More particularly, as best shown in Fig. 5, outer jaw housings 214, 224 of replaceable components 210, 220, respectively, each include a pair of tangs 214i, 224i, respectively, that are configured to engage complementary stops 119, 129, respectively, defined on respective jaw frames 112, 122. Upon slidable positioning of replaceable components 210, 220 about jaw frames 112, 122, respectively, tangs 214i, 224i are flexed outwardly about stops 119, 129, respectively, and snap into engagement therewith to secure

replaceable components 210, 220 on jaw frames 112, 122, respectively. Alternatively, any other suitable engagement member(s) or engagement mechanisms may be provided.

[0057] Continuing with reference to Fig. 5, tangs 214i, 224i of outer jaw housings 214, 224 of replaceable components 210, 220, respectively, may be configured to transition between a new state and a used state upon the initial use of replaceable components 210, 220, ensuring that replaceable components 210, 220 are single-use only components. In the new state, replaceable components 210, 220 may be engaged to jaw frames 112, 122, respectively, e.g., in the new state, tangs 214i, 224i and stops 119, 129, respectively, define complementary configurations. However, in the used state, replaceable components 210, 220 are inhibited from being engaged to jaw frames 112, 122, respectively, e.g., in the used state, tangs 214i, 224i, are rendered incompatible with stops 119, 129, respectively. In particular, tangs 214i, 224i may be altered, or deformed upon engagement with stops 119, 129, respectively, e.g., upon engagement of replaceable components 210, 220 with respective jaw frames 112, 122, to inhibit repeated engagement of replaceable components 210, 220 with jaw frames 112, 122, respectively. For example, as tangs 214i, 224i are flexed laterally about stops 119, 129 during slidable positioning of replaceable components 210, 220 about jaw frames 112, 122, respectively, tangs 214i, 224i may be bent, cracked, snapped, or otherwise uni-directionally destroyed, e.g., a portion or portions thereof may be mechanically altered, such that tangs 214i, 224i are capable of sufficiently securing replaceable components 210, 220 about jaw frames 112, 122, but are inhibited from being re-engaged to stops 119, 129, respectively. Tangs 214i, 224i, may alternatively

be similarly bent, cracked, snapped, or otherwise uni-directionally destroyed as tangs 214i, 224i, are flexed laterally outwardly during disengagement of replaceable components 210, 220 from jaw frames 112, 122, respectively, thus transitioning replaceable components 210, 220 from the new state to the used state upon disengagement from jaw frames 112, 122, respectively. In either embodiment, as can be appreciated, reuse of replaceable components 210, 220 is substantially inhibited in that once removed, replaceable components 210, 220 would no longer be capable of being re-engaged to jaw frames 112, 122, respectively. Further, tangs 214i, 224i may otherwise be electrically or electro-mechanically altered in any other suitable fashion to prevent re-use of replaceable components 210, 220.

[0058] With continued reference to Fig. 5, replaceable components 210, 220 may alternatively be configured to transition from the new state to the used state upon use of forceps 10. More specifically, as will be described in greater detail below, and as mentioned above, jaw members 110, 120 are adapted to connect to a source of electrosurgical energy (not explicitly shown) for conducting energy through tissue grasped between jaw members 110, 120 to effect a tissue seal. As can be appreciated, a certain amount of heat is created during the tissue sealing process. As such, tangs 214i, 224i, of replaceable components 210, 220, respectively, may be formed at least partially of a relatively low-melting point material such that the heat created during the tissue sealing process is sufficient to alter a portion of tangs 214i, 224i, thereby transitioning tangs 214i, 224i from the new state to the used state. Thus, after the initial tissue sealing process, replaceable components 210, 220 are rendered incapable of being re-engaged to jaw frames 112, 122, respectively. More particularly, tangs 214i,

224i may melt into an altered or non-compatible configuration, or may include a fusible linkage (not explicitly shown) that melts in order to transition tongs 214i, 224i into a non-compatible configuration in order to transition replaceable components 210, 220 from the new state to the used state. Other one-way features configured to transition replaceable components 210, 220 from a new state to a used state may alternatively or additionally be provided.

[0059] Referring now to Figs. 1-2 and 7-9B, the use and operation of forceps 10 will be described. Initially, as described above, flex circuits 150, 140 are coupled to a source of electrosurgical energy (not explicitly shown) and are positioned within jaw frames 112, 122, respectively. Next, replaceable components 210, 220 are assembled, as discussed above, and are engaged on respective jaw frames 112, 122 of jaw members 110, 120. More specifically, as replaceable components 210, 220 are slid proximally about jaw frames 112, 122 into engagement thereon, distal fingers 216b, 226b of tissue sealing plates 216, 226, respectively, are translated into position adjacent the first electrical contacts of flex circuits 150, 140, respectively, e.g., distal finger 226b is translated into contact with first contact 148 of flex circuits 140 (and similarly with regard to the corresponding components of tissue sealing plate 216 and flex circuit 150), such that tissue sealing plates 216, 226, are electrically coupled to flex circuits 150, 140, respectively. Fingers 216b, 226b of tissue sealing plates 216, 226, respectively, may be configured to be resiliently deflected upon engagement of replaceable components 210, 220 and jaw frames 112, 122 such that fingers 216b, 226b are resiliently biased into contact with flex circuits 150, 140, respectively, ensuring electrical coupling therebetween. As can be appreciated, this configuration permits

electrosurgical energy to be supplied to tissue sealing plate 216 and/or tissue sealing plate 226 of jaw members 110, 120, respectively, to seal tissue grasped therebetween.

[0060] Turning now to Figs. 1, 7 and 8A-8C, at this point, blade channels 215, 225 of jaw members 110, 120, respectively, remain empty, or unfilled. This configuration corresponds to the mechanical cutting mode of forceps 10. In use, as shown in Fig. 8A, with jaw members 110, 120 disposed in the spaced-apart position, end effector assembly 100 is maneuvered into position such that tissue to be grasped, sealed, and or cut, is disposed between jaw members 110, 120. Next, moveable handle 40 is pulled proximally relative to fixed handle 50 such that jaw member 110 is pivoted relative to jaw member 120 from the spaced-apart position to the approximated position to grasp tissue therebetween (see Fig. 8B). Thereafter, electrosurgical energy may be supplied, e.g., via activation of actuator 92, to tissue sealing plate 216 and/or tissue sealing plate 226 (e.g., via flex circuits 150, 140, respectively) and conducted through tissue to effect a tissue seal. As shown in Fig. 8C, knife blade 182 may then be advanced from the retracted position (Fig. 8B) to the extended position (Fig. 8C), e.g., via activation of trigger 82, and through blade channels 215, 225 jaw members 110, 120, respectively, to cut the previously sealed tissue grasped between jaw members 110, 120,

[0061] On the other hand, as shown in Figs. 1-2 and 9A-9B, forceps 10 may alternatively be used for grasping, sealing and/or cutting tissue in an electrical cutting mode. In the electrical cutting mode, as best shown in Figs. 9A-9B, electrical cutting insert 190 is snap-fit, or otherwise engaged to shelf 224f (Fig. 6B) of outer jaw housing 224 within longitudinal channel 228c (see Fig. 6B) of insulator 228 (see Fig. 6B) and blade channel 226c (Fig. 6B) of tissue sealing plate 226 (collectively blade channel 225)

of jaw member 120, although electrical cutting insert 190 may alternatively be molded or otherwise fixed within blade channel 225. More particularly, upon insertion of electrical cutting insert 190 into blade channel 225, proximal finger 194 of electrical cutting insert 190 is moved into position adjacent to and in electrical communication with second electrical contact 149 of flex circuit 140 such that electrosurgical energy may be supplied to electrical cutting insert 190 to electrically cut tissue grasped between jaw members 110, 120. Similar to finger 226b of tissue sealing plate 226 (Fig. 6B), finger 194 of electrical cutting insert 190 may be configured to be resiliently deflected upon engagement within jaw member 120 to bias finger 194 into electrical communication with flex circuit 140. Further, electrical contacts 148, 149 of flex circuit 140 may be independent of one another, such that electrosurgical energy may be independently supplied to tissue sealing plate 226 and/or electrical cutting insert 190, e.g., such that actuator 92 is operable to supply electrosurgical energy to tissue sealing plate 226, while actuator 96 is independently operable to supply electrosurgical energy to electrical cutting insert 190.

[0062] In use, end effector assembly 100 is maneuvered into position such that tissue to be grasped, sealed, and or cut, is disposed between jaw members 110, 120. Next, moveable handle 40 is pulled proximally relative to fixed handle 50 such that jaw member 110 is pivoted relative to jaw member 120 from the spaced-apart position to the approximated position to grasp tissue therebetween. Thereafter, electrosurgical energy may be supplied, e.g., via activation of actuator 92, to tissue sealing plate 216 and/or tissue sealing plate 226 and conducted through tissue to effect a tissue seal. Next, electrical cutting insert 190 may be activated, e.g., via activation of actuator 96, to

conduct energy through tissue to cut the previously sealed tissue grasped between jaw members 110, 120.

[0063] As discussed above, upon engagement of replaceable components 210, 220 with jaw frames 112, 122, respectively, upon disengagement of replaceable components 210, 220 from jaw frames 112, 122, respectively, and/or upon use of end effector assembly 100, e.g., upon application of electrosurgical energy to jaw members 110, 120, replaceable components 210, 220 may be transitioned from a new state to a used state. Accordingly, after the initial use and subsequent removal of replaceable components 210, 220 from jaw frames 112, 122, respectively, replaceable components 210, 220 can no longer be engaged to jaw frames 112, 122 and, thus are inhibited from being re-used. As such, once the reusable components of forceps 10 have been sterilized or otherwise prepared for re-use, a new set of replaceable components 210, 220 for positioning about jaw frames 112, 122, respectively, are required.

[0064] Turning now to Figs. 10-13B, another embodiment of an end effector assembly configured for use with forceps 10 (Fig. 1) is shown generally identified by reference numeral 1000. End effector assembly 1000 is similar to end effector assembly 100 (see Figs. 1-2) and includes first and second jaw members 1100, 1200, respectively, that are pivotable relative to one another between a spaced-apart position and an approximated position for grasping tissue therebetween. Each jaw member 1100, 1200 includes a fixed jaw frame 1120, 1220, respectively, and a replaceable component 2100, 2200 that is engageable with fixed jaw frame 1120, 1220, respectively. As best shown in Fig. 11A and 11B, jaw frames 1120, 1220 each include a electrical contact pin 1300, 1400, e.g., a male electrical connector 1300, 1400,

extending from a distal end 1140, 1240, respectively, thereof, although only one of jaw frames 1120, 1220 need include an electrical contact pin 1300, 1400, respectively. One or both of electrical contact pins 1300, 1400 is adapted to connect to a source of electrosurgical energy (not explicitly shown) for supplying electrosurgical energy to one or both of jaw members 1100, 1200. Further, each jaw frame 1120, 1220 defines a generally trapezoidal-shaped cross-sectional configuration, although jaw frames 1120, 1220 may define other suitable configurations. Each jaw frame 1120, 1220 also includes a pair of lateral flanges 1160, 1260, respectively, configured to engage replaceable components 2100, 2200, respectively, to secure replaceable components 2100, 2200 thereon.

[0065] Referring now to Fig. 12, in conjunction with Fig. 11B, replaceable component 2200 and the assembly of jaw member 1200 will be described. The configuration and assembly of replaceable component 2100 of jaw member 1100 is similar to that of replaceable component 2200 jaw member 1200 and thus will not be repeated here for purposed of brevity. Replaceable component 2200, as best shown in Fig. 12, includes an outer jaw housing 2210, an electrically conductive tissue sealing plate 2220, and an insulator 2230 configured to electrically isolate tissue sealing plate 2220 from outer jaw housing 2210. Outer jaw housing 2210 of replaceable component 2200 houses insulator 2230 therein and engages tissue sealing plate 2220 thereon. More specifically, tissue sealing plate 2220 is positioned about outer jaw housing 2210 to define an opposed tissue sealing surface in conjunction with tissue sealing plate 1220 of replaceable component 2100 of jaw member 1100 (see Figs. 10, 11A and 13A), while insulator 2230 is disposed between outer jaw housing 2210 and tissue sealing plate

2220. Tissue sealing plate 2220 further includes a distal flange 2240 extending downwardly therefrom into outer jaw housing 2210 and into communication with female electrical connection hub 2250. Flange 2240 of tissue sealing plate 2220 may surround, abut, or may otherwise be disposed in electrical communication with female electrical connection hub 2250 disposed within outer jaw housing 2210. As can be appreciated, female electrical connection hub 2250 is formed at least partially from an electrically conductive material such that electrosurgical energy may be supplied therethrough to tissue sealing plate 2220. Outer jaw housing 2210 further includes an internal cavity defining a complementary configuration relative to jaw frame 1220, e.g., a trapezoidal-shaped cross-sectional configuration, to facilitate insertion and engagement of jaw housing 2210 and jaw frame 1220 to one another.

[0066] With continued reference to Fig. 12, in conjunction with Fig. 10, tissue sealing plate 2220 includes a longitudinally-extending blade channel 2260 defined therein and insulator 2230 includes a longitudinal channel 2270 defined therein that is aligned within blade channel 2260 of tissue sealing plate 2220 to permit reciprocation of a knife blade 182 (see Figs. 8A-8C) therethrough for cutting tissue grasped between jaw members 1100, 1200. Similar to end effector assembly 100 discussed above (see Figs. 1-9B), tissue sealing plate 2220 and insulator 2230 of replaceable component 2200 may also be configured to receive an electrical cutting insert 2300 (Fig. 13B) therein for electrically cutting tissue, or may come integrally assembled with electrical cutting insert 2300 (Fig. 13B) disposed therein, as will be described below.

[0067] In order to engage replaceable components 2100, 2200 about jaw frames 1120, 1220, respectively, replaceable components 2100, 2200 are slid proximally over

jaw frames 1120, 1220, respectively, until lateral flanges 1160, 1260, of jaw frames 1120, 1220, respectively, snap into engagement with respective slots 2180, 2280 defined within replaceable components 2100, 2200, respectively. As replaceable components 2100, 2200 are slid proximally into engagement about jaw frames 1120, 1220, respectively, electrical contact pin 1400 of jaw frame 1220 is inserted into female connection hub 2250 of replaceable component 2200, thereby electrically coupling tissue sealing plate 2220 to the source of electrosurgical energy (not explicitly shown). Similarly, electrical contact pin 1300 of jaw frame 1120 is inserted into a corresponding connection hub (not shown) disposed within replaceable component 2100 of jaw member 1100. Slots 2180, 2280 of replaceable components 2100, 2200, respectively, may be configured as single-use elements, e.g., slots 2180, 2280 may be transitioned from a new state to a used state upon engagement thereof, disengagement thereof, and/or use of end effector assembly 1000, similarly to any of the embodiments discussed above with respect to end effector assembly 100 to inhibit reengagement of replaceable components 2100, 2200 to jaw frames 1120, 1220, respectively, after the initial use.

[0068] Referring now to Figs. 13A-13B, replaceable component 2100 and/or replaceable component 2200 may be configured as electrical cutting components. More specifically, an electrical cutting member 2300 may be engaged within either or both of jaw members 1100, 1200, similarly as described above with respect to end effector assembly 100 (see Figs. 9A-9B), or may be engaged within only one of jaw members 1100, 1200, e.g., jaw member 1200, while the other jaw member, e.g., jaw member 1100, defines a continuous tissue sealing plate or includes an insulating

member 2400 disposed therein and configured to oppose electrical cutting member 2300 of jaw member 1200. The electrical cutting components, e.g., electrical cutting member 2300 and/or insulating member 2400, may be integrally formed with replaceable components 2200, 2100, respectively, or may be removably engageable therewith. The use and operation of end effector assembly 1000 is similar to that of end effector assembly 100 described above and, thus, will not be repeated herein. Further, any of the features or embodiments of end effector assembly 100 (Figs. 1-9B) and/or end effector assembly 1000 (Figs. 10-13B) described herein may similarly be adapted for use with the other end effector assembly 100, 1000.

[0069] From the foregoing and with reference to the various figure drawings, those skilled in the art will appreciate that certain modifications can also be made to the present disclosure without departing from the scope of the same. While several embodiments of the disclosure have been shown in the drawings, it is not intended that the disclosure be limited thereto, as it is intended that the disclosure be as broad in scope as the art will allow and that the specification be read likewise. Therefore, the above description should not be construed as limiting, but merely as exemplifications of particular embodiments. Those skilled in the art will envision other modifications within the scope and spirit of the claims appended hereto.

WHAT IS CLAIMED IS:

1. A forceps, comprising:

an end effector assembly including first and second jaw members, at least one of the first and second jaw members moveable relative to the other between a spaced-apart position and an approximated position for grasping tissue therebetween, at least one of the jaw members including a longitudinally-extending blade channel defined therein; and

an electrical cutting insert releasably engageable within the blade channel of the at least one jaw member;

wherein, the at least one jaw member is transitionable between a mechanical cutting mode, wherein the electrical cutting insert is disengaged from the at least one jaw member to permit reciprocation of a knife blade through the blade channel for mechanically cutting tissue grasped between the jaw members, and an electrical cutting mode, wherein the electrical cutting insert is engaged within the blade channel of the at least one jaw member for electrically cutting tissue grasped between the jaw members.

2. The forceps according to claim 1, further comprising an electrical connection member adapted to connect to a source of electrosurgical energy and configured to extend at least partially into the at least one jaw member, the electrical connection member including a first contact point electrically coupled to the at least one jaw member for selectively supplying energy to the at least one jaw member.

3. The forceps according to claim 2, wherein the at least one jaw member includes an electrically conductive tissue sealing plate, the tissue sealing plate adapted to connect to the source of electrosurgical energy.
4. The forceps according to claim 3, wherein the tissue sealing plate includes a finger configured to extend into the at least one jaw member, the finger configured to electrically couple to the first contact point.
5. The forceps according to claim 2, wherein the electrical connection member includes a second contact point configured to electrically couple to the electrical cutting insert when the at least one jaw member is disposed in the electrical cutting mode for selectively supplying energy to the electrical cutting insert.
6. The forceps according to claim 5, wherein the electrical cutting insert includes a finger configured to extend into the at least one jaw member, the finger configured to electrically couple to the second contact point.
7. The forceps according to claim 5, wherein the electrical connection member is configured to independently supply energy to the at least one jaw member and the electrical cutting insert.
8. The forceps according to claim 2, wherein the electrical connection member is a flex circuit.

9. The forceps according to claim 1, wherein the electrical cutting insert is configured to snap-fit into engagement within the blade channel.

10. A method of manufacturing a forceps for either mechanical or electrical cutting, comprising the steps of:

providing an end effector assembly including first and second jaw members, at least one of the first and second jaw members moveable relative to the other between a spaced-apart position and an approximated position for grasping tissue therebetween, at least one of the jaw members including a longitudinally-extending blade channel defined therein;

selecting a mode of operation from the group consisting of a mechanical cutting mode and an electrical cutting mode; and

engaging an electrical cutting insert within the blade channel of the at least one jaw member if the mode of operation is the electrical cutting mode or engaging a translatable blade to the end effector assembly if the mode of operation is the mechanical cutting mode.

11. The method according to claim 10, further comprising the step of grasping tissue between the first and second jaw members.

12. The method according to claim 11, further comprising the step of conducting energy between the jaw members and through tissue to effect a tissue seal.

13. The method according to claim 12, wherein at least one of the jaw members includes an electrically conductive tissue sealing plate adapted to connect to a source of electrosurgical energy for sealing tissue.

14. The method according to claim 11, wherein, in the mechanical cutting mode, the method further comprises translating a knife blade longitudinally through the blade channel to cut tissue grasped between the jaw members.

15. The method according to claim 11, wherein, in the electrical cutting mode, the method further comprises energizing the electrical cutting insert to electrically cut tissue grasped between the jaw members.

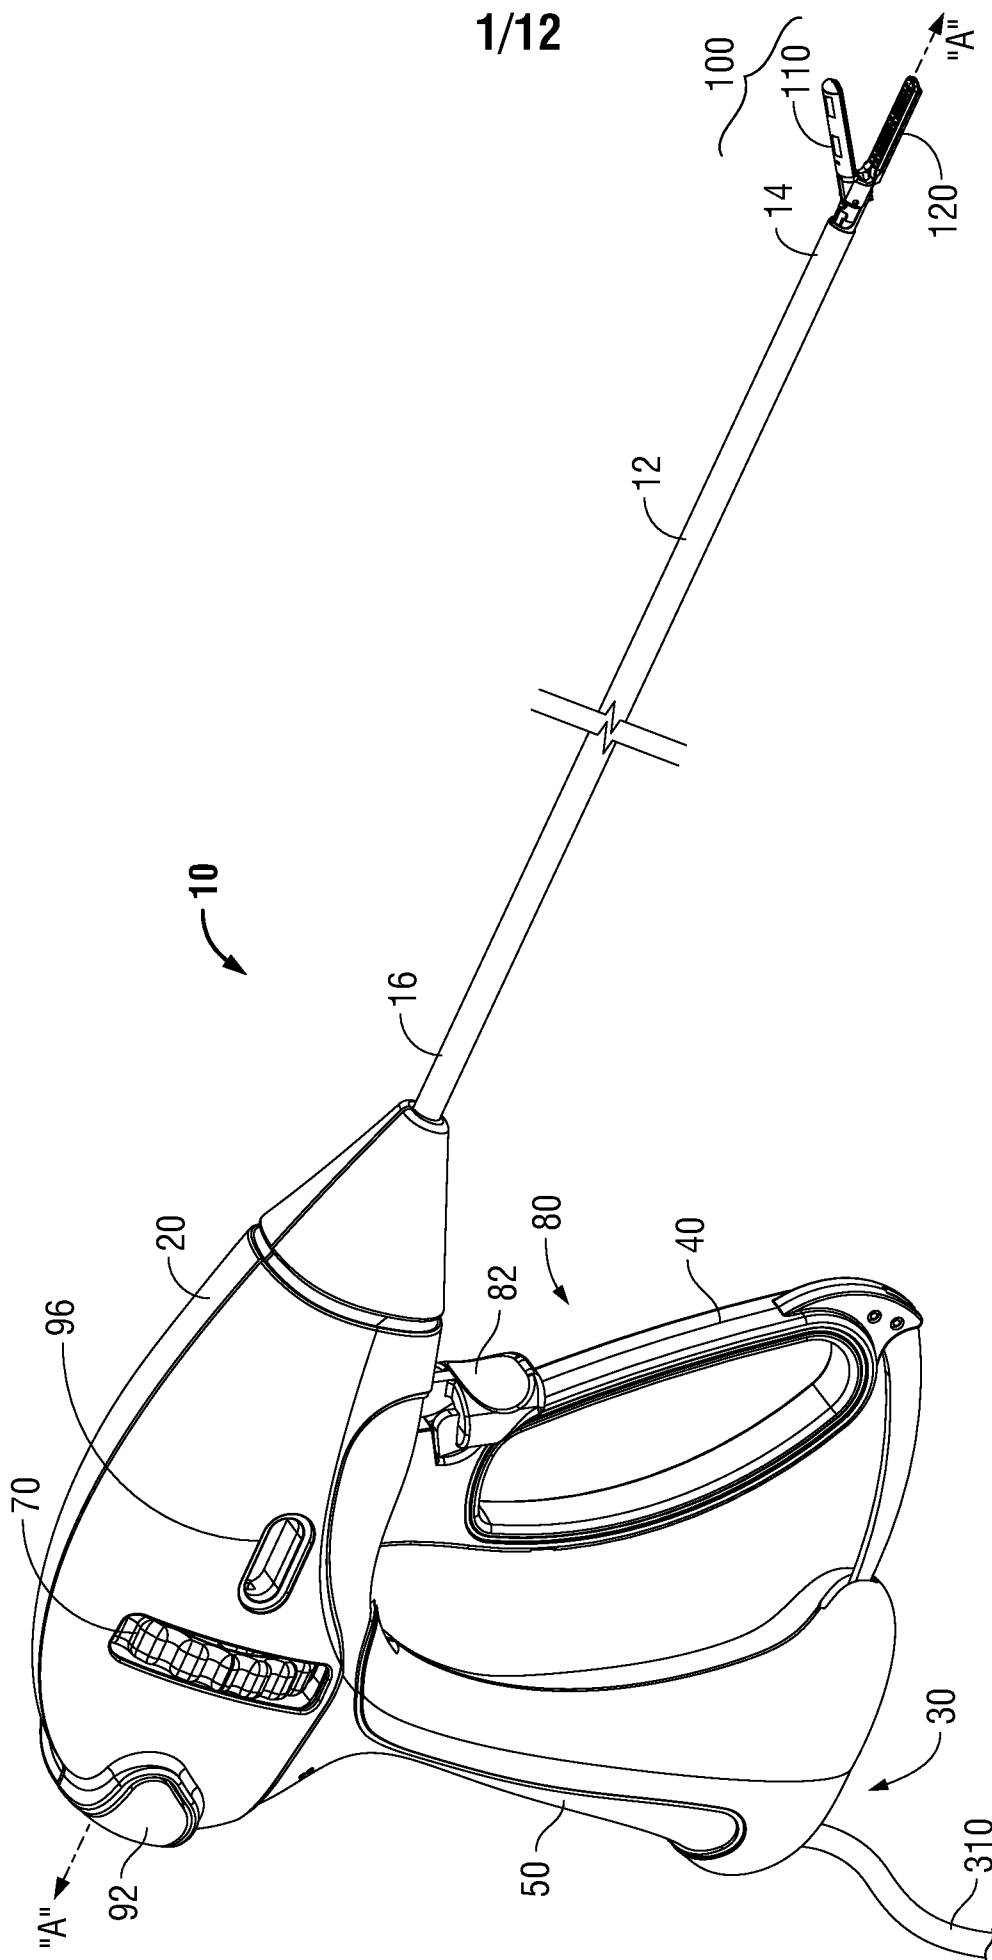


FIG. 1

2/12

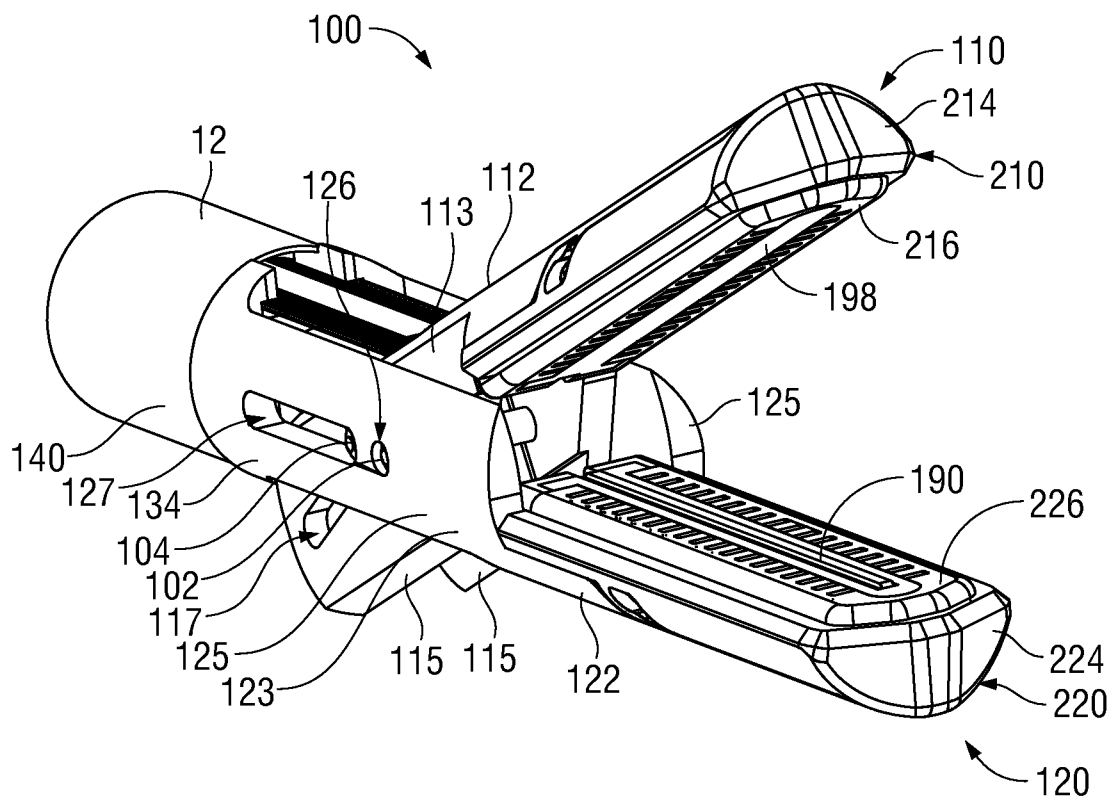


FIG. 2

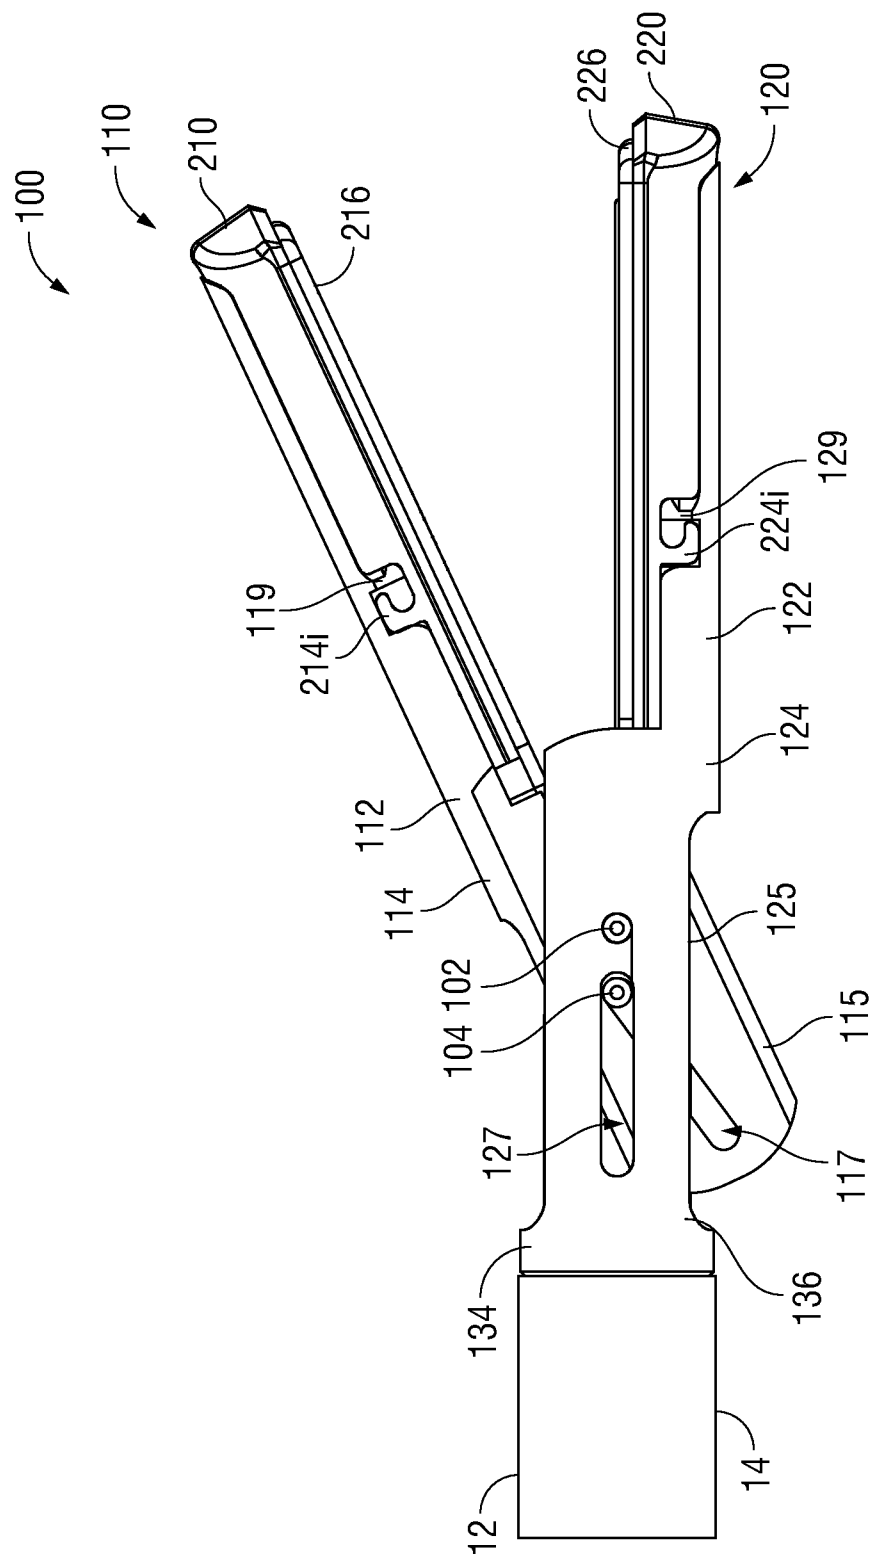


FIG. 3

4/12

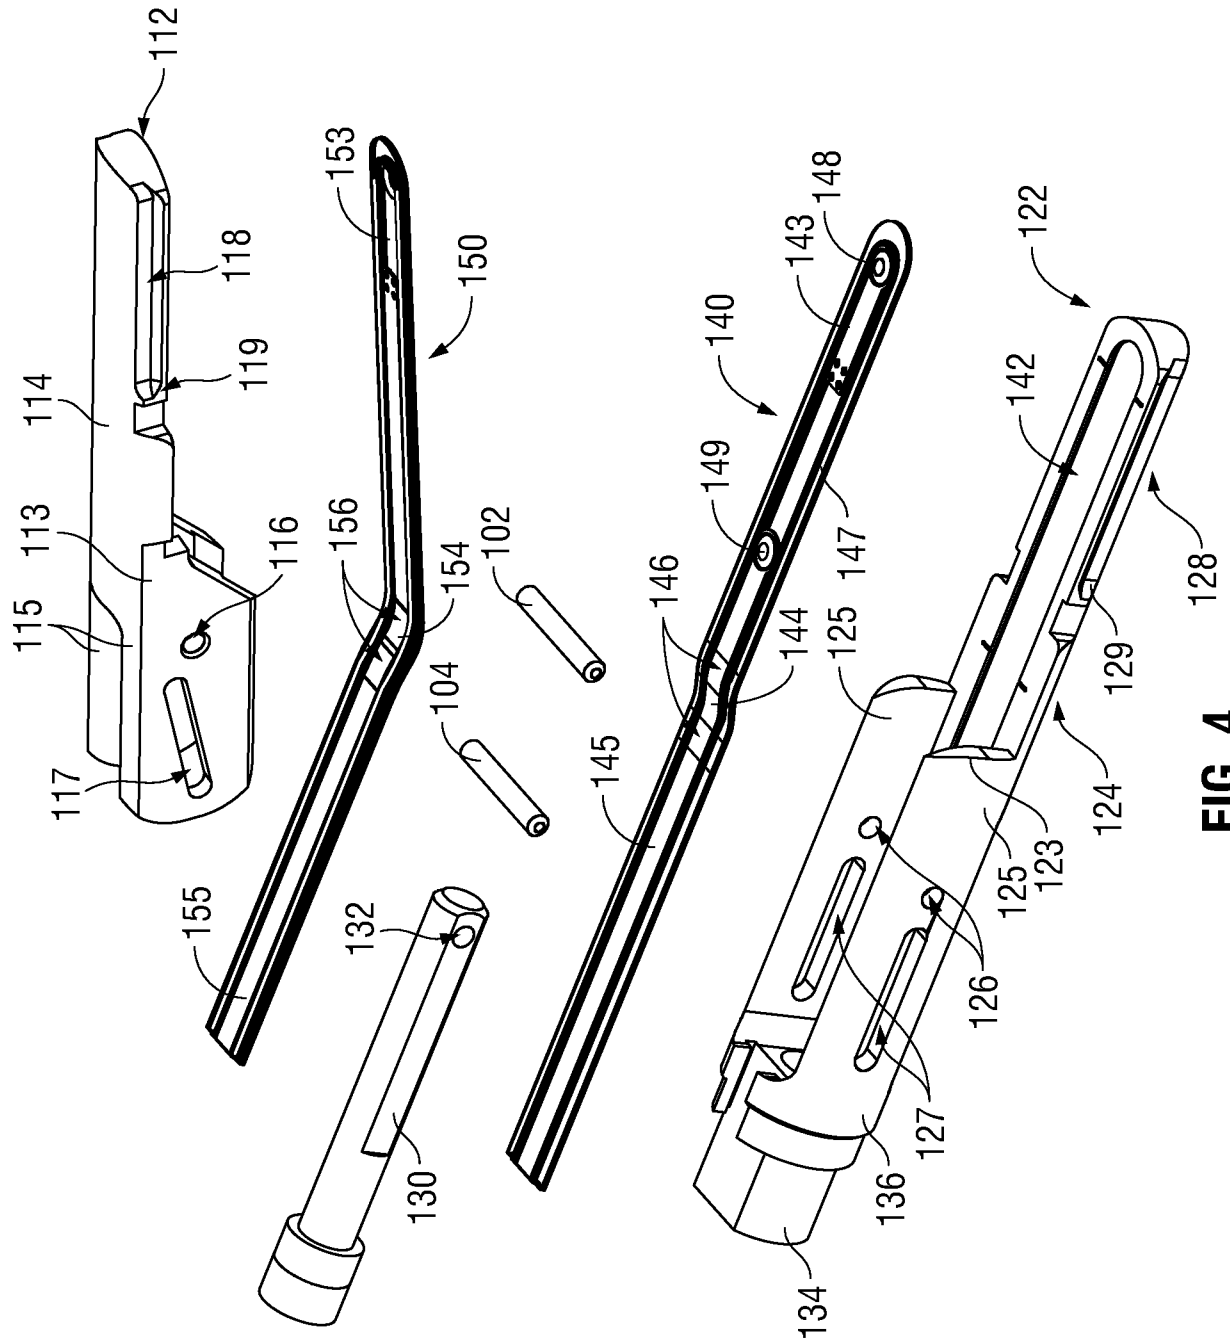


FIG. 4

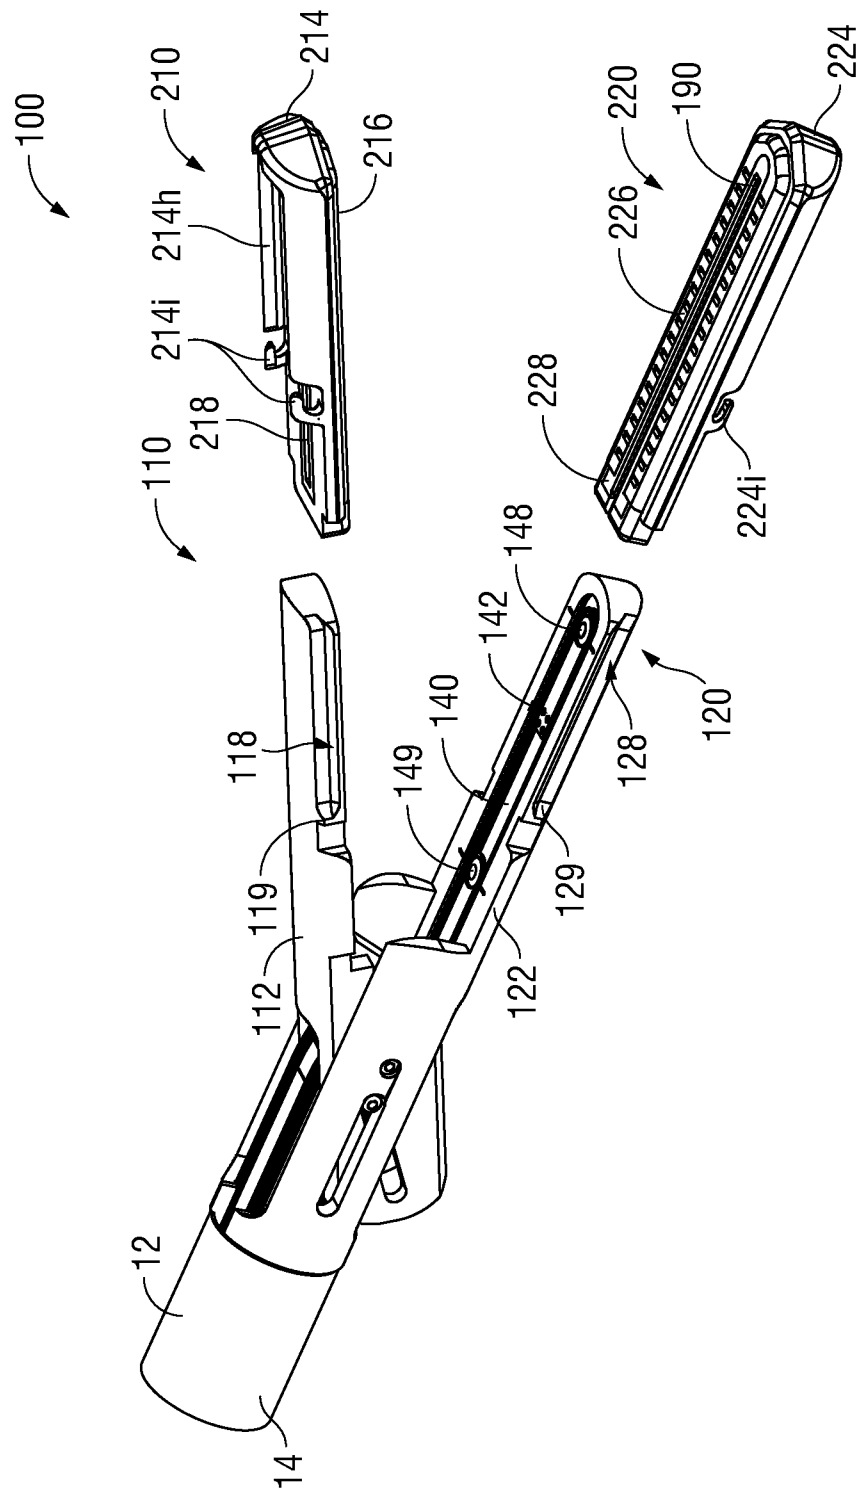


FIG. 5

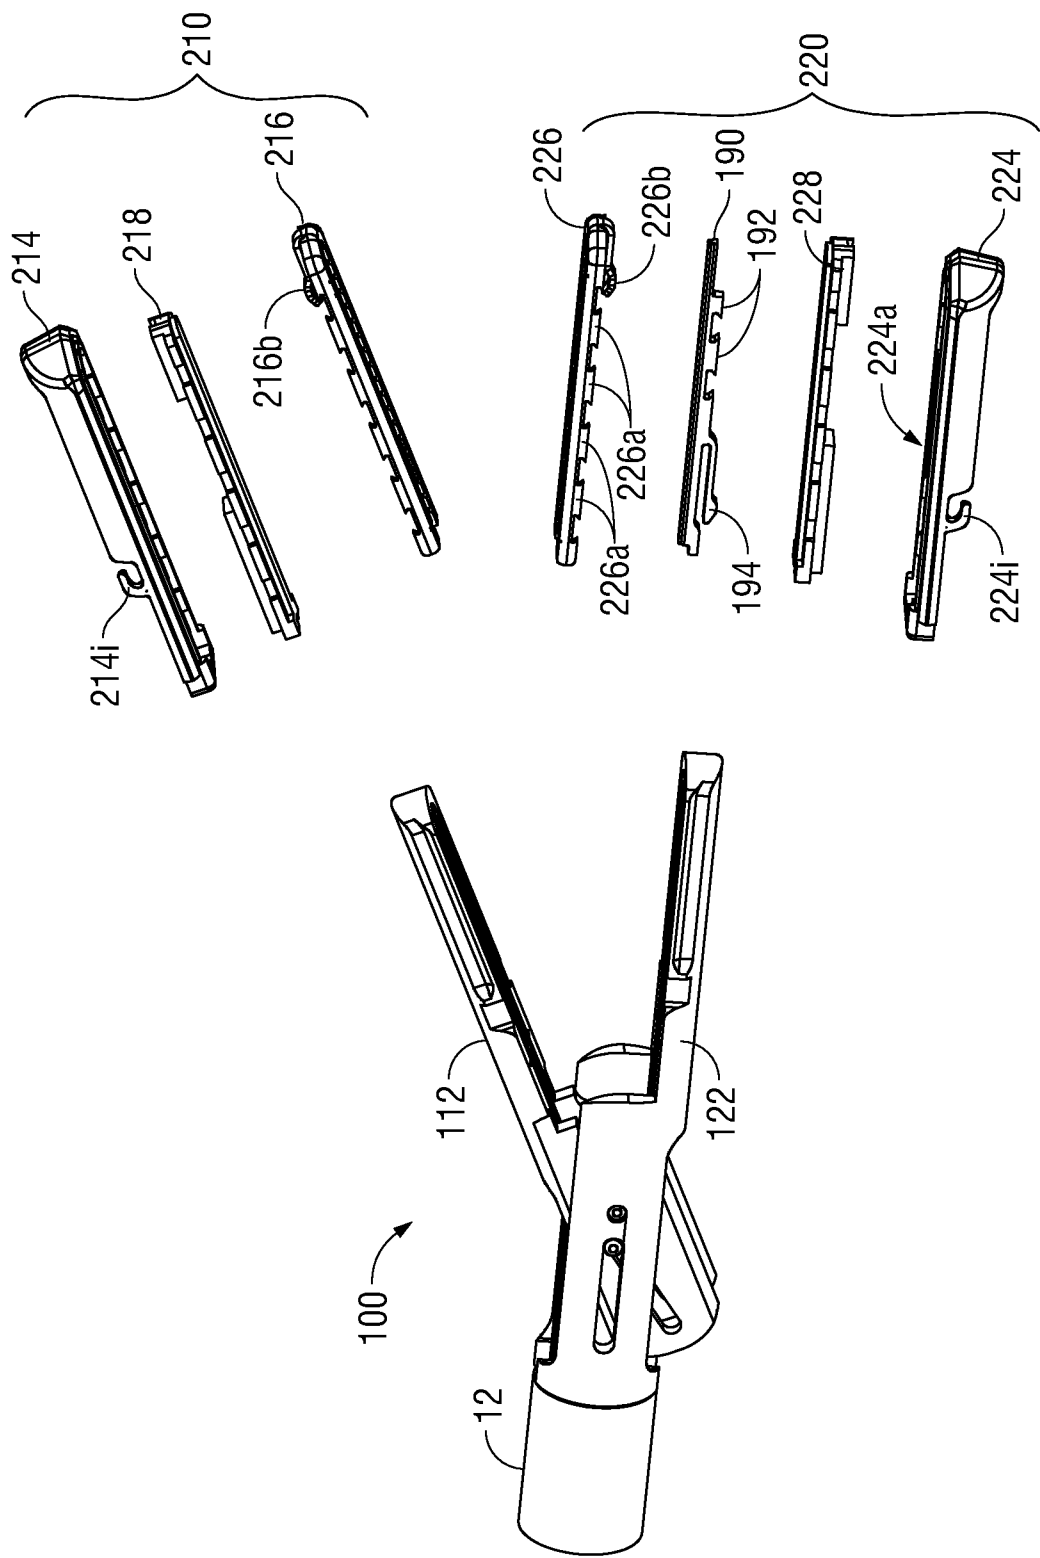


FIG. 6A

7/12

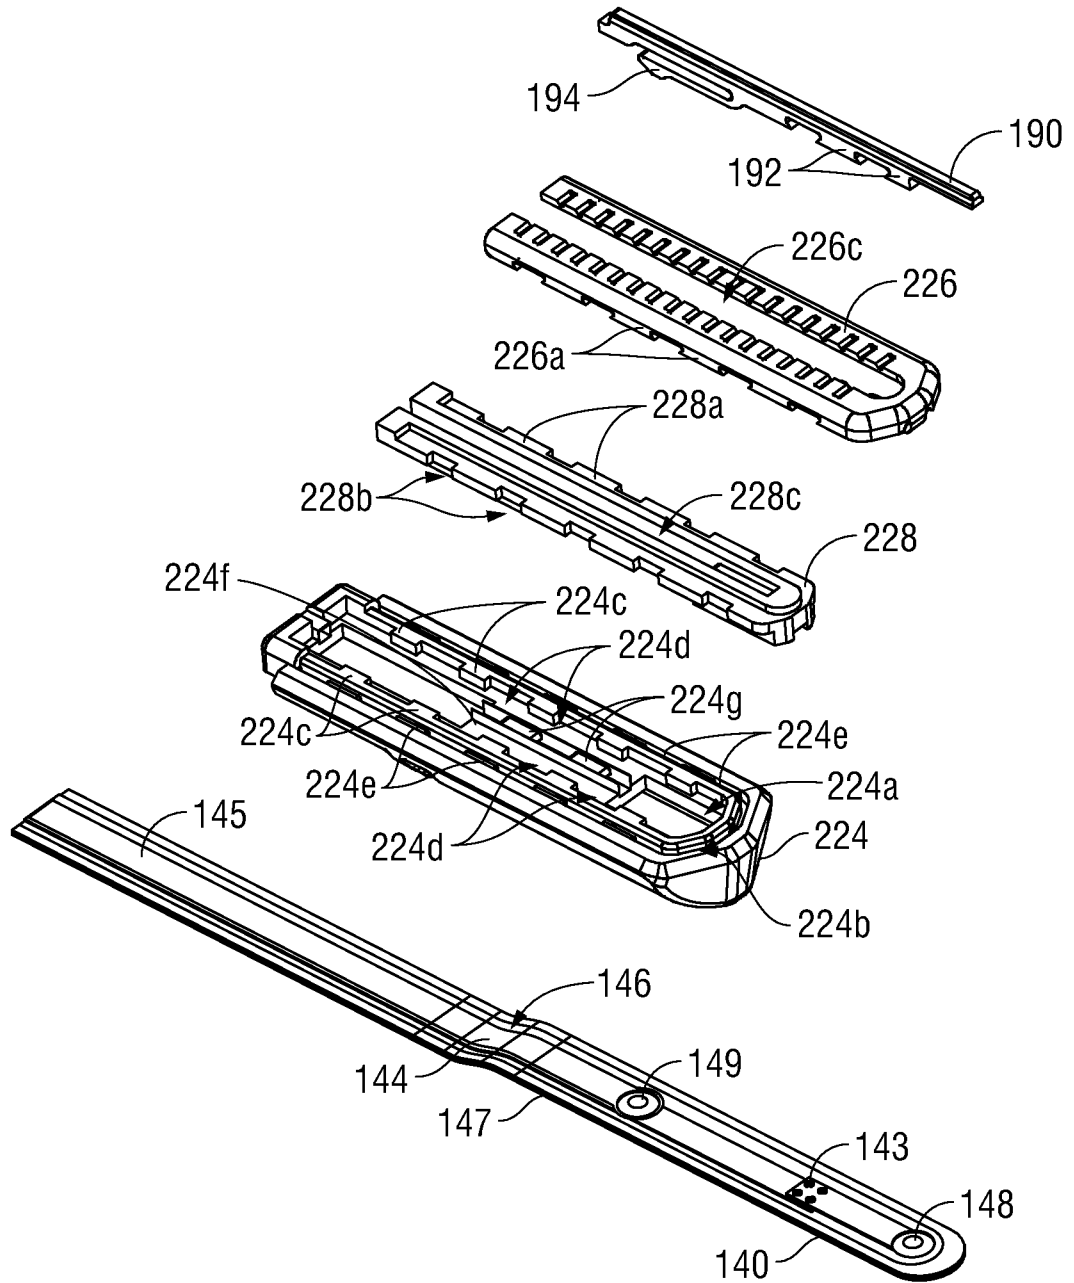


FIG. 6B

8/12

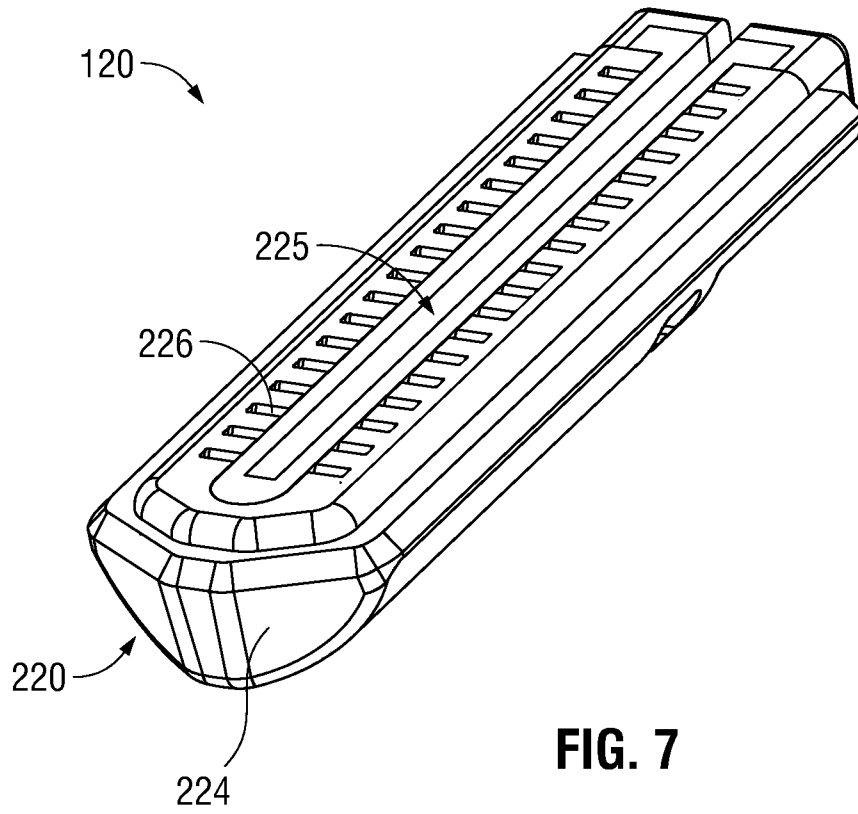


FIG. 7

9/12

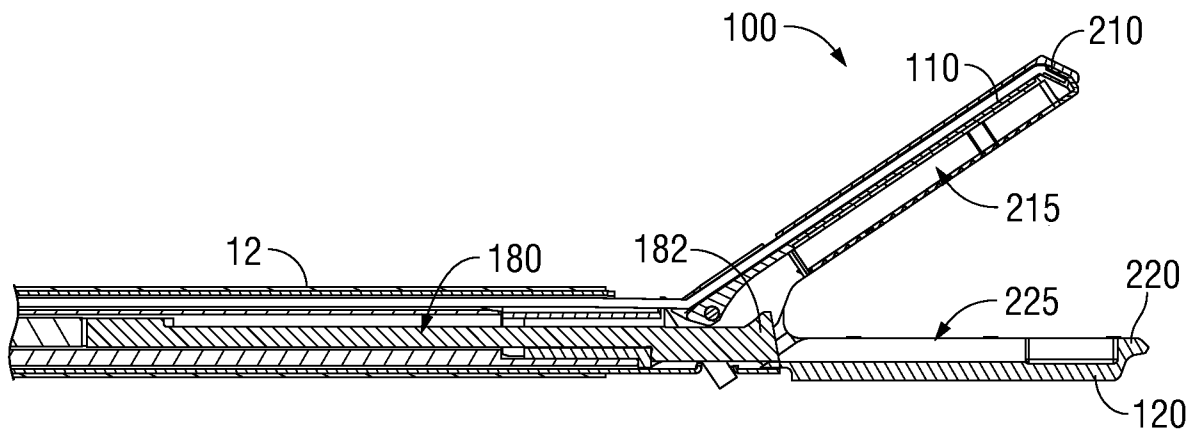


FIG. 8A

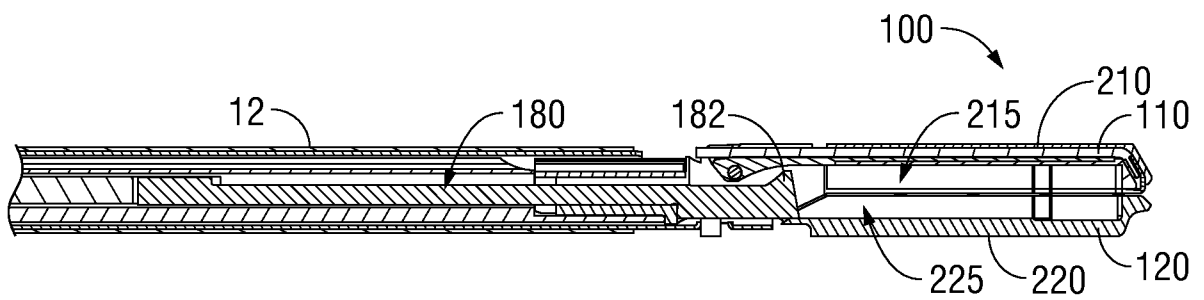


FIG. 8B

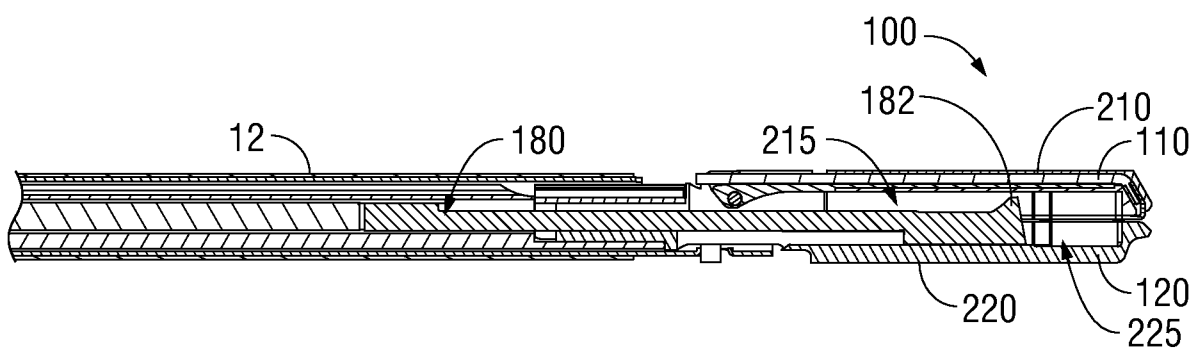


FIG. 8C

10/12

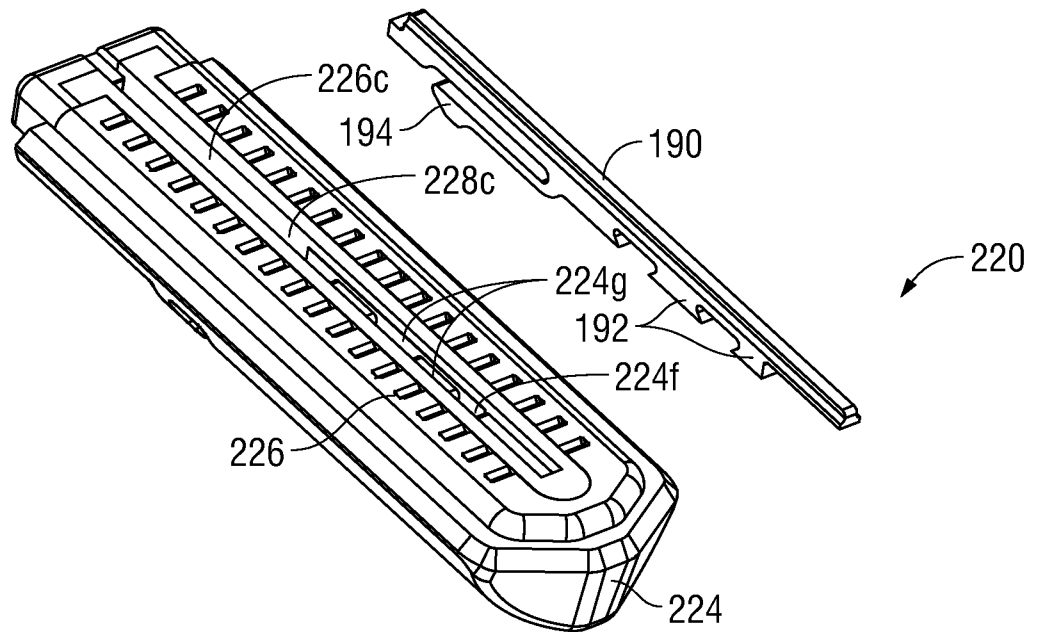


FIG. 9A

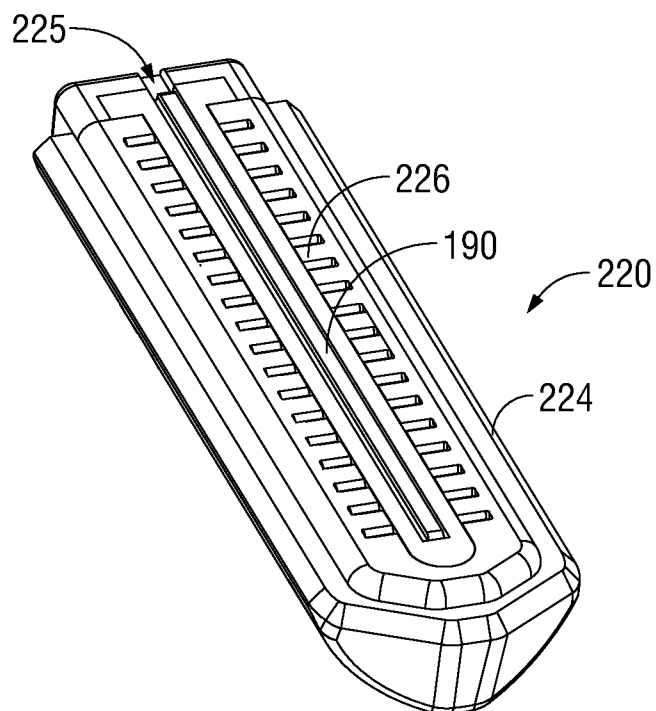


FIG. 9B

11/12

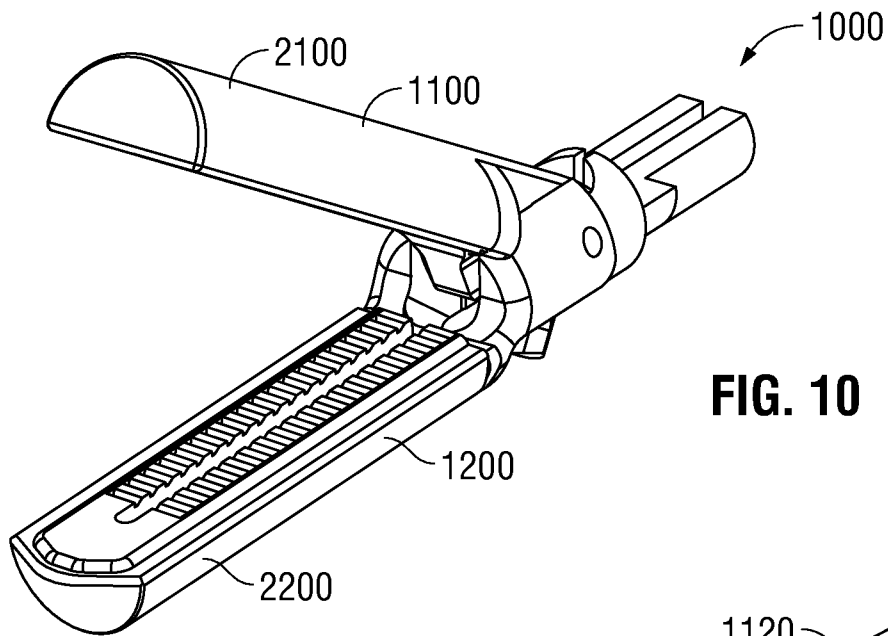


FIG. 10

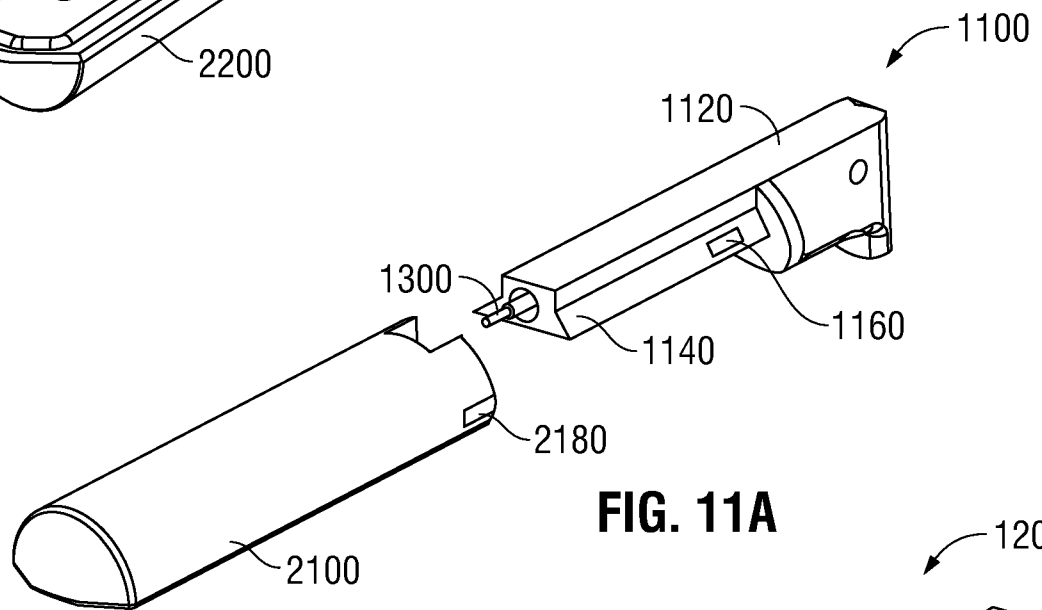


FIG. 11A

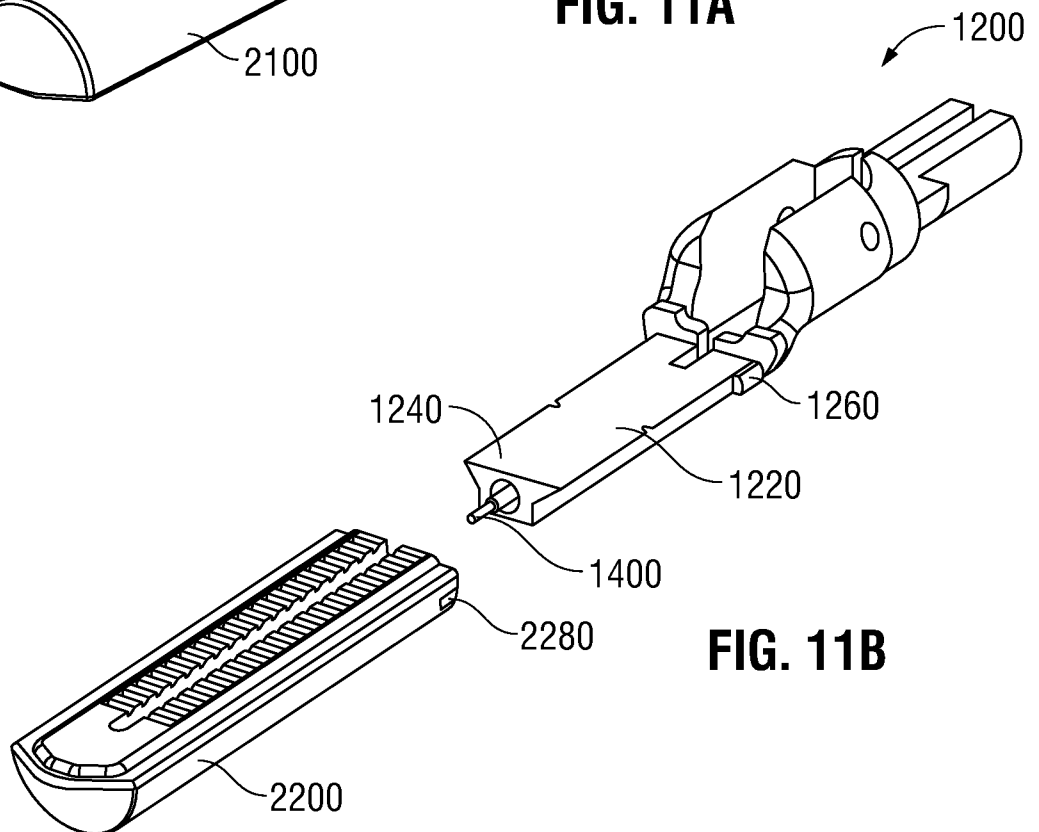


FIG. 11B

12/12

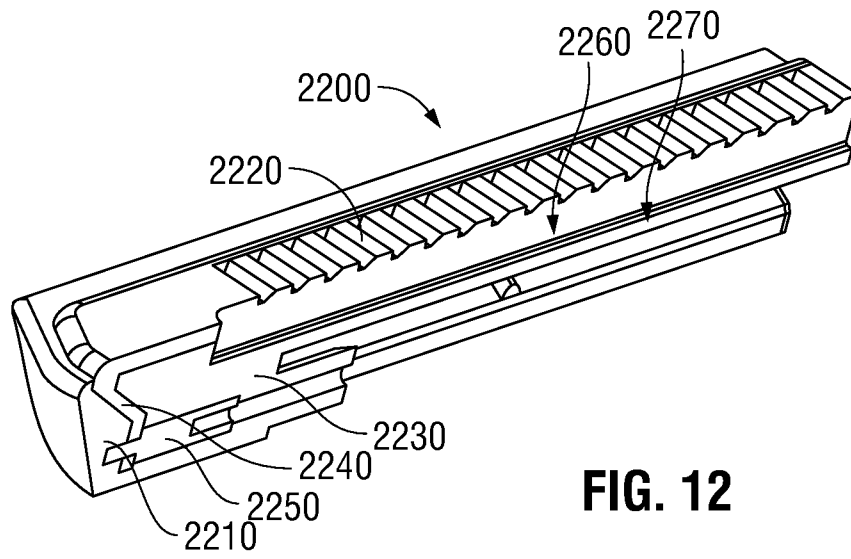


FIG. 12

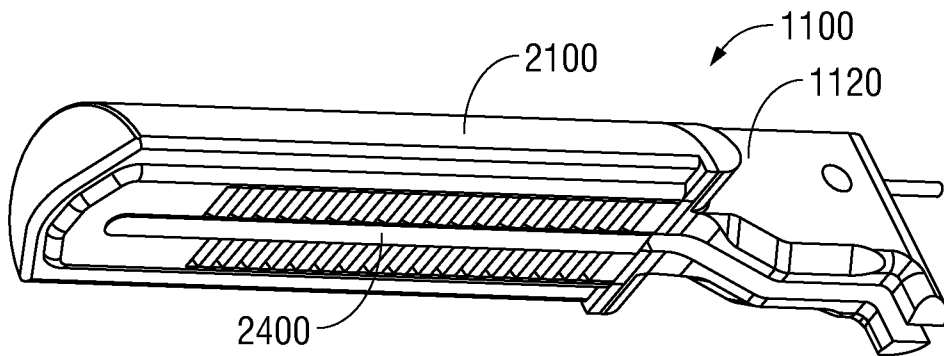


FIG. 13A

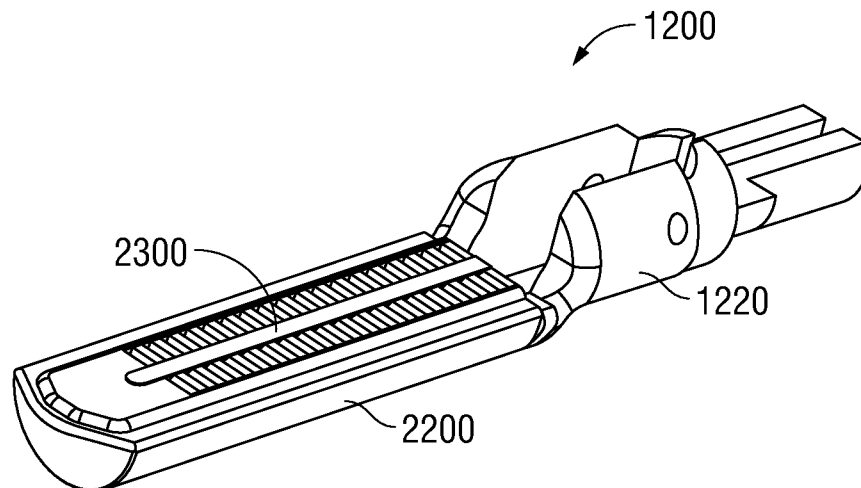


FIG. 13B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2012/050674**A. CLASSIFICATION OF SUBJECT MATTER****A61B 18/12(2006.01)i, A61B 17/28(2006.01)1**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B 18/12; A61B 18/14; A61B 17/29; A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: electrosurgery, forcep, jaw, blade, electrical cutting, tissue.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 2238938 A1 (TYCO HEALTHCARE GROUP, LP) 13 October 2010 See abstract; paragraphs [0007], [0012]; claim 1.	1-10
A	WO 99-23933 A2 (VALLEYLAB, INC.) 20 May 1999 See abstract; and claims 1, 2, 7.	1-10
A	US 2003-0109875 A1 (PHILIP M. TETZLAFF et al.) 12 June 2003 See abstract; paragraph [0040]; and claims 1, 2.	1-10
A	US 6773434 B2 (SCOTT CIARROCCA) 10 August 2004 See the whole document.	1-10

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 OCTOBER 2012 (30.10.2012)

Date of mailing of the international search report

31 OCTOBER 2012 (31.10.2012)

Name and mailing address of the ISA/KR


Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

YOO Min Jeong

Telephone No. 82-42-481-3463



INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2012/050674

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 11-15
because they relate to subject matter not required to be searched by this Authority, namely:
Claims 11-15 pertain to methods for treatment of the human body by surgery or therapy (PCT Article 17(2)(a)(i) and Rule 39.1(iv)).
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. IAs all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. IAs all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. IAs only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. INo required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☒ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- I No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/050674

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2238938 A1	13 . 10 . 2010	AU 2010-201369 A1 CA 2698907 A1 JP 2010-240432 A US 2010-0256635 A1 US 825 1994 B2	21 . 10 , 2010 07 . 10 , 2010 28 . 10 , 2010 07 . 10 , 2010 28 . 08 , 2012
WO 99-23933 A2	20 . 05 . 1999	AU 1999- 13952 A1 AU 1999- 13952 B2 CA 2310039 A1 CA 2310039 C CA 2442706 A1 CA 2443246 A1 CA 2443246 C CA 2443252 A1 DE 69835763 D1 DE 69835763 T2 DE 69840920 D1 EP 1032318 A2 EP 1032318 A4 EP 1032318 B1 EP 1372487 A1 EP 1372505 A1 EP 1372505 B1 EP 1372506 A1 EP 1372506 B1 EP 1586278 A2 EP 1586278 A3 EP 1586278 B1 EP 2095785 A1 ES 2268801 T3 ES 2328367 T3 JP 04-074746 B2 JP 04-394880 B2 JP 04-39488 1 B2 JP 2001-522622 A JP 2004-524919 A JP 2004-524920 A JP 2004-524921 A US 06050996 A US 2001-0037110 A1 US 2003-0018332 A1 US 2004-0176762 A1 US 2005-0004568 A1 US 2005-0021025 A1 US 2007-0255279 A1 US 6464704 B2 US 7135020 B2 US 7160298 B2 US 7435249 B2	31.05 , 1999 26.07 , 2001 20.05 , 1999 07 . 10 , 2008 17 . 10 , 2002 17 . 10 , 2002 24.01, 2012 17 . 10 , 2002 12 . 10 , 2006 23.08 , 2007 30.07 , 2009 06.09 , 2000 19.09 , 2001 30.08 , 2006 02.01, 2004 02.01, 2004 21.06 , 2006 02.01, 2004 28.06 , 2006 19 . 10 , 2005 05.04 , 2006 17 . 06 , 2009 02.09 , 2009 16 . 03 , 2007 12 . 11 , 2009 09.04 , 2008 23 . 10 , 2009 23 . 10 , 2009 20 . 11 , 2001 19 . 08 , 2004 19 . 08 , 2004 19 . 08 , 2004 18 . 04 , 2000 01.11, 2001 23.01, 2003 09.09 , 2004 06.01, 2005 27.01, 2005 01.11, 2007 15 . 10 , 2002 14.11, 2006 09.01, 2007 14.10 , 2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/050674

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 8211105 B2	03.07,2012
		Wo 02-080784 A1	17.10,2002
		Wo 02-080785 A1	17.10,2002
		wo 02-080786 A1	17.10,2002
		wo 99-23933 A3	15.07,1999
US 2003-0 109875 A1	12.06.2003	AU 2000- 12257 A1	15.05,2000
		AU 2000- 12257 B2	16.01,2003
		AU 2000- 12258 A1	15.05,2000
		AU 2000- 12258 B2	13.02,2003
		AU 2001-249909 B2	22.12,2005
		AU 2001-49909 A1	05.02,2002
		CA 2347014 A1	04.05,2000
		CA 2347014 C	04.01,2011
		CA 2347633 A1	04.05,2000
		CA 2347633 C	04.01,2011
		CA 2414900 A1	31.01,2002
		CA 2414900 C	14.06,2011
		CA 2442960 A1	17.10,2002
		CA 2442960 C	22.03,2011
		CA 2443279 A1	17.10,2002
		CA 2443279 C	14.06,2011
		EP 1123058 A1	16.08,2001
		EP 1123058 B1	28.12,2005
		EP 1131010 A1	12.09,2001
		EP 1131010 B1	15.06,2005
		EP 1301135 A1	16.04,2003
		EP 1301135 B1	07.09,2005
		EP 1301135 B2	18.08,2010
		EP 1372508 A1	02.01,2004
		EP 1372508 B1	21.12,2005
		EP 1377227 A1	07.01,2004
		EP 1377227 B1	23.11,2005
		EP 1595508 A2	16.11,2005
		EP 1595508 A3	11.01,2006
		EP 1595508 B1	08.04,2009
		EP 2072017 A2	24.06,2009
		EP 2072017 A3	26.10,2011
		JP 04- 164235 B2	15.10,2008
		JP 04-245278 B2	25.03,2009
		JP 04-460217 B2	19.02,2010
		JP 04-570843 B2	20.08,2010
		JP 04-699679 B2	11.03,2011
		JP 04-8 19091 B2	09.09,2011
		JP 04-85 1489 B2	28.10,2011
		JP 2002-528 166 A	03.09,2002
		JP 2002-528 167 A	03.09,2002
		JP 2004-516043 A	03.06,2004
		JP 2004-524124 A	12.08,2004
		JP 2004-524923 A	19.08,2004

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/050674

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 2008-2462 16 A	16 . 10 . 2008
		JP 2008-253792 A	23 . 10 . 2008
		JP 2010-017587 A	28 . 01 . 2010
		JP 2012- 130720 A	12 . 07 . 2012
		JP 4699679 B2	15 . 06 . 2011
		JP 4819091 B2	16 . 11 . 2011
		JP 4851489 B2	11 . 01 . 2012
		us 2003-0014053 A1	16 . 01 . 2003
		us 2003-0040745 A1	27 . 02 . 2003
		us 2003-0181910 A1	25 . 09 . 2003
		us 2003-0199869 A1	23 . 10 . 2003
		us 2004-0162557 A1	19 . 08 . 2004
		us 2004-0236325 A1	25 . 11 . 2004
		us 2004-0249374 A1	09 . 12 . 2004
		us 2005-0137592 A1	23 . 06 . 2005
		us 2006-0189980 A1	24 . 08 . 2006
		us 2006-0259036 A1	16 . 11 . 2006
		us 2008-0114356 A1	15 . 05 . 2008
		us 2008-0167651 A1	10 . 07 . 2008
		us 2009-0171353 A1	02 . 07 . 2009
		us 2009-0306660 A1	10 . 12 . 2009
		us 2009-043304 A1	12 . 02 . 2009
		us 2010-0042100 A1	18 . 02 . 2010
		us 6277117 B1	21 . 08 . 2001
		us 6458130 B1	01 . 10 . 2002
		us 6511480 B1	28 . 01 . 2003
		us 6585735 B1	01 . 07 . 2003
		us 6682528 B2	27 . 01 . 2004
		us 7118570 B2	10 . 10 . 2006
		us 7267677 B2	11 . 09 . 2007
		us 7329256 B2	12 . 02 . 2008
		us 7510556 B2	31 . 03 . 2009
		us 7513898 B2	07 . 04 . 2009
		us 7553312 B2	30 . 06 . 2009
		us 7582087 B2	01 . 09 . 2009
		us 7887536 B2	15 . 02 . 2011
		us 7896878 B2	01 . 03 . 2011
		us 7947041 B2	24 . 05 . 2011
		Wo 00-24330 A1	04 . 05 . 2000
		Wo 00-24331 A1	04 . 05 . 2000
		wo 02-07627 A1	31 . 01 . 2002
		wo 02-080793 A1	17 . 10 . 2002
		wo 02-080797 A1	17 . 10 . 2002
us 6773434 B2	10 . 08 . 2004	us 2003-055424 A1	20 . 03 . 2003