

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
8 December 2005 (08.12.2005)

PCT

(10) International Publication Number
WO 2005/115272 A2

- (51) International Patent Classification⁷: **A61F 2/00**
- (21) International Application Number:
PCT/US2005/013057
- (22) International Filing Date: 18 April 2005 (18.04.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/830,787 23 April 2004 (23.04.2004) US
- (71) Applicant (for all designated States except US): **BOSTON SCIENTIFIC SCIMED, INC** [US/US]; One Scimed Place, Maple Grove, Minnesota 55311 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **RAKOS, Ronald** [US/US]; 962 Old York Road, Neshanic Station, NJ 08853 (US). **SOWINSKI, Krzysztof** [US/US]; 92 Maple Avenue, Wallington, NJ 07057 (US).
- (74) Agents: **SCOLA, Daniel, A., Jr.** et al.; Hoffmann & Baron, LLP, 6900 Jericho Turnpike, Syosset, NY 11791 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COMPOSITE MEDICAL TEXTILE MATERIAL AND IMPLANTABLE DEVICES MADE THEREFROM

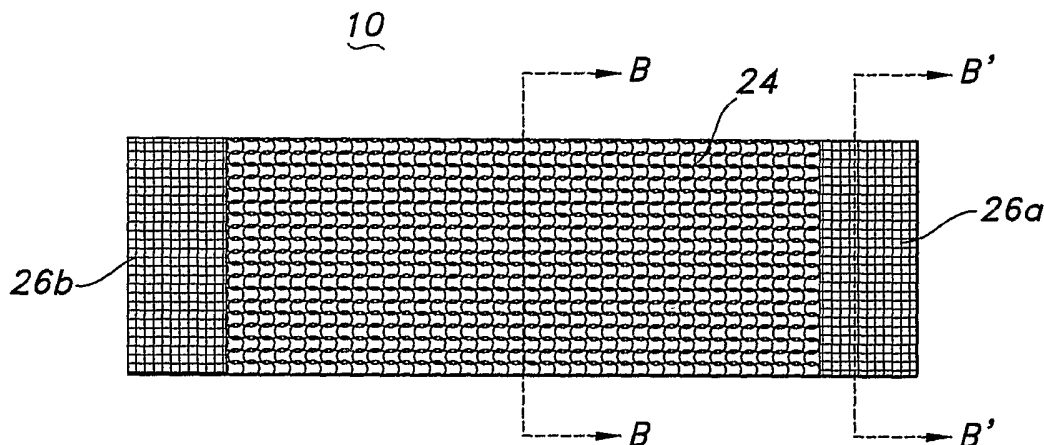

(57) Abstract: An implantable composite medical device having a longitudinal length a woven textile portion having yarns interlaced in a woven pattern, a knitted textile portion having yarns interlooped in a knitted pattern. The woven and knitted portions are securably attached to one and the other to provide a composite woven and knitted textile surface along the longitudinal length of the device. The woven portion may have a permeability from about 30 to about 500 ml/min/cm², and the knitted portion may have a permeability from about 10 to about 15,000 ml/min/cm². Further, a crimped woven portion with a resiliently longitudinal stretchability from about 10 to about 100 linear percent over its quiescent longitudinal dimension or an uncrimped woven portion with a resiliently longitudinal stretchability of less than about 10 linear percent over its quiescent longitudinal dimension are useful. A knitted portion with a resiliently longitudinal stretchability from about 5 to about 200 linear percent over its quiescent longitudinal dimension is also useful.

WO 2005/115272 A2

760-156 PCT

PATENT

**COMPOSITE MEDICAL TEXTILE MATERIAL
AND IMPLANTABLE DEVICES MADE THEREFROM**

FIELD OF INVENTION:

5 The present invention is directed to a composite textile medical material having at least two different textile patterns and implantable devices made therefrom.

BACKGROUND OF RELATED TECHNOLOGY:

10 An intraluminal prosthesis is a medical device used in the treatment of diseased blood vessels. An intraluminal prosthesis is typically used to repair, replace, or otherwise correct a diseased or damaged blood vessel. An artery or vein may be diseased in a variety of different ways. The prosthesis may therefore be used to prevent or treat a wide variety of defects such as stenosis of the vessel, thrombosis, occlusion, dissection or an aneurysm.

15 One type of intraluminal prosthesis used in the repair of diseases in various body vessels is a stent. A stent is a generally longitudinal tubular device formed of biocompatible material which is useful to open and support various lumens in the body. For example, stents may be used in the vascular system, urogenital tract, tracheal/bronchial tubes and bile duct, as well as in a variety of other applications in the body. Endovascular stents have become
20 widely used for the treatment of stenosis, strictures and aneurysms in various blood vessels. These devices are implanted within the vessel to open and/or reinforce collapsing or partially occluded sections of the vessel.

25 Stents generally include an open flexible configuration. This configuration allows the stent to be inserted through curved vessels. Furthermore, this configuration allows the stent to be configured in a radially compressed state for intraluminal catheter implantation. Once properly positioned adjacent the damaged vessel, the stent is radially expanded so as to support and reinforce the vessel. Radial expansion of the stent may be accomplished by inflation of a balloon attached to the catheter or the stent may be of the self-expanding variety
30 which will radially expand once deployed. Structures which have been used as intraluminal vascular grafts have included coiled stainless steel springs; helically wound coil springs manufactured from a heat-sensitive material; and expanding stainless steel stents formed of

stainless steel wire in a zig-zag pattern. Examples of various stent configurations are shown in U.S. Patent Nos. 4,503,569 to Dotter; 4,733,665 to Palmaz; 4,856,561 to Hillstead; 4,580,568 to Gianturco; 4,732,152 to Wallsten and 4,886,062 to Wiktor, all of whose contents are incorporated herein by reference.

5

A graft is another commonly known type of intraluminal prosthesis which is used to repair and replace various body vessels. A graft provides a lumen through which blood may flow. Moreover, a graft is often configured to have porosity to permit the ingrowth of cells for stabilization of an implanted graft while also being generally impermeable to blood to inhibit substantial leakage of blood therethrough. Grafts are typically tubular devices which may be formed of a variety of materials, including textile and non-textile materials.

10

Grafts may be flexible to provide compliance within a bodily lumen or within the bodily system. Such flexibility may result from the stretching of the textile yarns that form the graft. Such stretching, however, may effect the securement of the graft to the bodily lumen, which is typically secured by the use of sutures. In other words, the graft flexibility may create undesirable stresses at the suture locations of the implanted graft.

15

A stent and a graft may be combined to form an intraluminal device, such as a stent-graft, which may dilate over time after implantation within a bodily lumen. The dilation of the implanted intraluminal device is a radial enlargement of the device resulting from pulsating stresses or pressures present within the bodily lumen. The actions of the pulsating stresses or pressures often fatigue the structure of the device resulting in radial expansion and possibly longitudinal foreshortening.

20

Thus, there is a need for graft having improved compliance by reducing potential stresses at locations where the graft is secured to a bodily lumen. Further, there is a need for a prosthesis having improved resistance to dilation.

25 **SUMMARY OF THE INVENTION:**

The present invention provides a graft or graft/composite implantable device having improved compliance and/or improved resistance to dilation by providing different textile portions which advantageously have different, but desirable, mechanical properties.

In one aspect of the present invention an implantable composite medical device having a longitudinal length is provided. The device includes a woven textile portion having yarns interlaced in a woven pattern; a knitted textile portion having yarns interlooped in a knitted pattern; and an attachment means for securing the woven and the knitted textile portions to provide a composite woven and knitted textile surface along the longitudinal length. Desirably, the woven portion has a permeability from about 30 to about 500 ml/min/cm², and the knitted portion has a permeability from about 30 to about 15,000 ml/min/cm². A knitted portion with a permeability from about 8,000 to about 12,000 ml/min/cm² is also useful. Further, a woven portion, such as a crimped woven portion, with a resiliently longitudinal stretchability from about 10 to about 100 linear percent over its quiescent longitudinal dimension is useful. A woven portion, such as an uncrimped woven portion, with a resiliently longitudinal stretchability of less than about 10 linear percent is also useful. A knitted portion with a resiliently longitudinal stretchability from about 5 to about 200 linear percent over its quiescent longitudinal dimension is also useful.

15

The attachment means for securably attaching the two different textile portions may include yarns which are present in both the knitted and the woven portions; yarns or textile components which join the knitted and the woven portions; sutures; an adhesive bonding of the knitted and the woven portions; a heat-fusible bonding of the knitted and the woven portions; ultrasonic bonding of the knitted and the woven portions and combinations thereof.

20

The woven and knitted portions may be seamless tubular portions defining a cylindrical textile wall having an interior surface and an exterior surface and having opposed first and second textile open ends, defining an implantable graft. Desirably, the portions of the cylindrical textile wall proximal to the first and the second textile open ends are the woven portions and a transitional portion of the cylindrical textile wall between the woven portions is the knitted portion. The graft of this aspect of the present invention may also be crimped.

25

In another aspect of the present invention, an implantable graft is provided. The graft further includes a polymeric tube or layer circumferentially disposed about portions of the interior surface or about portions of the exterior surface of the textile wall; and a second attachment means for securing the polymeric tube or layer about portions of the interior surface or about portions of the exterior surface of the textile wall. The second attachment

30

means may include adhesive bonding of the polymeric tube or layer about portions of the interior surface or about portions of the exterior surface of the textile wall. The implantable graft may be of straight or tapered configuration. Desirably, the polymeric tube or layer is polytetrafluoroethylene (PTFE) and more desirably expanded polytetrafluoroethylene (ePTFE). Such a tube or layer may be formed from an extruded tube, a sheet wrapped into a tubular structure, a helically wound ribbon of material, and the like. The graft of this aspect of the present invention may also be crimped along its length or just along portions of its length.

10 In another aspect of the present invention, the medical device of claim further includes a generally tubular stent having openings in its wall structure and having opposed first and second stent open ends, and a third attachment means for securing stent to portions of the interior or exterior surface of the textile wall to define a stent/graft prosthesis. Desirably, the stent is a radially distensible stent, such as a wire stent, including a braided wire stent. The third attachment means may include mechanical securement of the stent to portions of the interior or exterior surface of the textile wall or adhesive securement of the stent to portions of the interior or exterior surface of the textile wall.

20 The prosthesis of this aspect of the present invention may further include a polymeric tube or layer circumferentially disposed and securably attached by the third attachment means to the interior and/or exterior portions of the prosthesis. The third attachment means may include adhesive securement of the stent to portions of the interior or exterior surface of the textile wall. Desirably, the polymeric tube or layer is a PTFE or ePTFE tube or layer.

25 Desirably, the prosthesis of this aspect of the present invention has specific textile portions where portions of the cylindrical textile wall proximal to the first and the second opposed textile open ends are the woven portions and a transitional portion of the cylindrical textile wall between the opposed woven portions is the knitted portion. Further, the stent of this aspect of the present invention may have a varying diameter between the first and second stent open ends defining a transitional stent section therebetween; the textile wall may also have a varying diameter between the first and second textile open ends defining a transitional textile section therebetween with the transitional textile section being securable attached to the transitional stent section by the third attachment means; and where the transitional textile portion is the woven textile portion. Further, portions of the cylindrical textile wall proximal

to the first and the second opposed textile open ends may be the woven portions and other portions of the cylindrical textile wall between the woven portions and the transitional textile portion are knitted portions.

5 In another aspect of the present invention, the prosthesis may further include a second tubular textile wall at the second textile open end to define a multi-lumen textile portion, the multi-lumen textile portion being secured by the attachment means to a transitional portion of the cylindrical textile wall which is secured by the attachment means to a portion of the cylindrical textile wall of the first textile open end; and a second tubular stent wall at the
10 second stent open end to define a multi-lumen stent portion, the multi-lumen stent portion being secured to a transitional portion of the stent wall which is connected to the stent wall proximal to the first stent open end; wherein the multi-lumen stent portion is securably attached by the third attachment means to the multi-lumen textile portion to define a multi-lumen prosthesis. Desirably, the transitional portion of the cylindrical textile wall is the
15 woven portion. More desirably, the transitional portion of the cylindrical textile wall is the woven portion, and the multi-lumen textile portion and the portion of the cylindrical textile wall of the first textile open end are knitted portions.

Useful woven patterns include a simple weave, a basket weave, a twill weave, a satin
20 weave, a velour weave, a double velour weave, and combinations thereof. Useful knitted patterns include a locknit pattern, a reverse locknit pattern, a velour pattern, a double velour pattern, a high-stretch knit pattern having at least a two-needle underlap with a one-needle overlap, and combinations thereof. The woven and knitted textile portions may be single-layered textile portions.

25 In another aspect of the present invention, a composite textile graft is provided. The graft includes a seamless tubular knitted textile portion having yarns interlooped in a knitted pattern defining a cylindrical knitted textile wall having opposed open ends; a seamless tubular woven textile portion having yarns interlaced in a woven pattern defining a
30 cylindrical woven textile wall having opposed open ends; and attachment means for securing one of the open ends of the woven textile portion to one of the open ends of the knitted textile portion. The graft may further include a second seamless tubular woven textile portion having yarns interlaced in a woven pattern defining a cylindrical woven textile wall having opposed open ends; wherein the second woven textile portion is securably attached by the

attachment means to the other of the open ends of the knitted textile portion. Desirably, the woven portion has a permeability from about 30 to about 500 ml/min/cm², and the knitted portion has a permeability from about 30 to about 15,000 ml/min/cm². Also desirably, the woven portion is a crimped portion having a resiliently longitudinal stretchability from about 5
10 to about 100 linear percent over its quiescent longitudinal dimension or an uncrimped portion having a resiliently longitudinal stretchability of less than about 10 linear percent, and the knitted portion has a resiliently longitudinal stretchability from about 5 to about 200 linear percent over its quiescent longitudinal dimension. The graft may further include a polymeric tube or layer circumferentially disposed and securably attached about interior or
10 exterior portions of the woven and the knitted textile walls.

In another aspect of the present invention a stent/graft prosthesis is provided. The stent/graft prosthesis includes a seamless tubular knitted textile portion having yarns interlooped in a knitted pattern defining a cylindrical knitted textile wall having opposed first
15 and second open ends; a first seamless tubular woven textile portion having yarns interlaced in a woven pattern defining a cylindrical woven textile wall having opposed open ends; an attachment means for securing the first open end of the first woven textile portion to the first open end of the knitted textile portion; a second seamless tubular woven textile portion having yarns interlaced in a woven pattern defining a cylindrical woven textile wall having
20 opposed open ends, wherein the second woven textile portion is securably attached by the attachment means to the second open end of the knitted textile portion; a generally tubular stent having openings in its wall structure and having opposed first and second stent open ends, wherein the stent is circumferentially disposed about interior portions of the knitted textile and the woven textile walls; and a second attachment means for securing the stent
25 about interior portions of the knitted textile and the woven textile walls. Desirably, the woven portions have a permeability from about 30 to about 500 ml/min/cm² and the knitted portion has a permeability from about 30 to about 15,000 ml/min/cm². Also desirably, the woven portions may be crimped to provide resiliently longitudinal stretchability from about 10 to about 100 linear percent over its quiescent longitudinal dimension, or uncrimped with a
30 resiliently longitudinal stretchability of less than about 10 linear percent, and the knitted portion has a resiliently longitudinal stretchability from about 5 to about 200 linear percent over its quiescent longitudinal dimension. The prosthesis may further include a polymeric tube or layer circumferentially disposed and securably attached by the second attachment

means about interior portions of the woven and the knitted textile walls. Desirably, the stent is a radially distensible stent.

In another aspect of the present invention another stent/graft prosthesis is provided.

5 This stent/graft prosthesis includes a generally tubular stent having openings in its wall structure and having opposed first and second stent open ends, wherein a diameter of the first stent open end is different from a diameter of the second stent open end thereby defining a transitional stent portion therebetween stent portions proximal to the first and the second stent open ends; a seamless tubular woven textile portion having yarns interlaced in a woven
10 pattern defining a cylindrical woven textile wall having an interior surface, an exterior surface and opposed open ends; attachment means for securing the woven textile portion to interior and/or exterior portions of the transitional stent portion; and first and second seamless tubular knitted textile portions having yarns interlooped in a knitted pattern defining
15 cylindrical knitted textile walls having interior surfaces, exterior surfaces and opposed open ends, wherein the first knitted textile portion is securably attached by the attachment means to interior and/or exterior portions of the stent portion proximal to the first stent open end and the second knitted textile portion is securably attached by the attachment means to interior and/or exterior portions of the stent portion proximal to the second stent open end. The woven portion may have a permeability from about 30 to about 500 ml/min/cm² and the
20 knitted portion may have a permeability from about 30 to about 15,000 ml/min/cm². Further, the woven portion may have a resiliently longitudinal stretchability from about 10 to about 100 linear percent or less than about 10 linear percent over its quiescent longitudinal dimension, and the knitted portions may have a resiliently longitudinal stretchability from
25 about 5 to about 200 linear percent over its quiescent longitudinal dimension.

This prosthesis may further include a polymeric tube or layer circumferentially disposed about interior and/or exterior portions of the prosthesis; and second attachment means for securing the polymeric tube or layer about the interior and/or the exterior portions of the prosthesis. This prosthesis may further a third attachment means for securing the
30 knitted textile portions to the woven portion.

In another aspect of the present invention, a bifurcated stent-graft is provided where the main tubular textile portion is a woven textile and the tubular textile legs are knitted portions. The stents for the different portions of the bifurcated device may be the same or

different in design. Desirably, the stent for the main tubular prosthesis is a balloon-expandable stent, and the stents for the legs are braided self-expanding stents.

BRIEF DESCRIPTION OF THE DRAWINGS:

5 FIG. 1 is a perspective view of a tubular prosthesis of the present invention.

FIG. 2 is a perspective view of a bifurcated tubular prosthesis of the present invention.

FIG. 3 is a perspective view of an implantable patch of the present invention.

10 FIG. 4 is side longitudinal view of the prosthesis of FIG. 1 taken along the A-A axis depicting a prosthesis having a composite textile surface with a first textile portion disposed between terminal second textile portions.

15 FIG. 5 is a side longitudinal view of a second embodiment of the prosthesis of FIG. 1 taken along the A-A axis depicting a prosthesis having a composite textile surface with a first and a second textile portion.

20 FIG. 6 is a side longitudinal view of yet another embodiment of the prosthesis of FIG. 1 taken along the A-A axis depicting a flared prosthesis with composite textile surface having a first textile portion disposed between terminal second textile portions.

25 FIG. 7 is a side longitudinal view of yet another embodiment of the prosthesis of FIG. 1 taken along the A-A axis depicting a flared prosthesis with composite textile surface with multiple first and second textile portions.

FIG. 8 is a cross sectional view of the prosthesis of FIG. 4 taken along the B-B axis depicting a textile tubular wall.

30 FIG. 9 is a cross sectional view of the prosthesis of FIG. 4 taken along the B-B axis depicting a tubular wall having a textile outer wall portion and a polymeric inner layer wall portion.

FIG. 10 is a cross sectional view of the prosthesis of FIG. 4 taken along the B-B axis depicting a tubular wall having a textile inner wall portion and a polymeric outer layer wall portion.

5 FIG. 11 is a cross sectional view of the prosthesis of FIG. 4 taken along the B-B axis depicting a tubular wall having a textile outer wall portion, a polymeric inner layer wall portion, and a stent disposed therebetween.

10 FIG. 12 is a cross sectional view of the prosthesis of FIG. 4 taken along the B-B axis depicting a tubular wall having a textile outer wall portion, a polymeric inner layer wall portion, and a stent disposed on the inner surface of the polymeric inner layer.

15 FIG. 13 is a cross sectional view of the prosthesis of FIG. 4 taken along the B-B axis depicting a tubular wall having a textile outer wall portion and a stent having interior and exterior polymeric wall portions.

20 FIG. 14 is a cross-sectional view of the prosthesis of FIG. 4 taken along the B-B axis depicting a tubular wall having an exterior stent portion with a polymeric inner layer portion disposed on the inner surface of the stent and a textile inner wall portion disposed on the interior surface of the polymeric portion.

25 FIG. 15 is a cross-sectional view of the prosthesis of FIG. 4 taken along the B-B axis depicting a tubular wall having an exterior stent portion with a textile inner wall portion disposed on the inner surface of the stent and a polymeric inner layer portion disposed on the interior surface of the textile portion.

30 FIG. 16 is a cross-sectional view of the prosthesis of FIG. 4 taken along the B-B axis depicting a tubular wall having an exterior textile inner wall portion disposed over a first polymeric inner layer portion which is disposed on an outer surface of a stent with a second polymeric inner layer portion disposed on the inner surface of the stent and an interior textile portion disposed over the inner surface of the second polymeric layer.

FIG. 17 is side longitudinal view of a shaped prosthesis of the present invention having a composite textile surface.

FIG. 18 is side longitudinal view of a bifurcated prosthesis of the present invention having a composite textile surface with the legs and body being a first textile portion and having a second textile portion disposed therebetween.

5

FIG. 19 is side longitudinal view of another bifurcated prosthesis of the present invention having a composite textile surface with the legs and body being a first textile portion and having a second textile portion at the terminal ends thereof.

10 FIG. 20 is side longitudinal view of yet another bifurcated prosthesis of the present invention having a composite textile surface with the legs and body being a first textile portion and having a second flared textile portion disposed therebetween.

FIG. 21 is perspective view of a bifurcated stent/graft of the present invention.

15

FIG. 22 is a perspective view of another embodiment of a bifurcated stent-graft of the present invention.

FIG. 23 is a longitudinal view of a wire stent of the present invention.

20

FIG. 24 is a longitudinal view of a zig-zag stent of the present invention.

FIG. 25 is a perspective view of slotted stent of the present invention.

25 FIG. 26 is a perspective view of a helical coil stent formed of a single wound wire according to the present invention.

FIG. 27 is a perspective view of a stent having an elongate pre-helically coiled configuration according to the present invention.

30

FIG. 28 is an expanded view of a woven portion of the textile prosthesis of the present invention.

FIG. 29 is an expanded view of a knitted portion of the textile prosthesis of the present invention.

5 FIG. 30 is an expanded view of a knitted portion having a two-needle underlap of the textile prosthesis of the present invention.

FIG. 31 is an expanded view of a knitted portion having a three-needle underlap of the textile prosthesis of the present invention.

10 FIG. 32 is a depiction of two different textile portions of the present invention being securably attached to one and the other by sutures.

FIG. 33 is a cross-sectional view of the sutured textile portions of FIG. 32 depicting the textile portions being sutured in an end-to-end arrangement.

15

FIG. 34 is a cross-sectional view of the sutured textile portions of FIG. 32 depicting the textile portions being sutured in a top-to-bottom arrangement.

20 FIG. 35 is a cross-sectional view of the sutured textile portions of FIG. 32 depicting the textile portions being flipped and sutured in a top-to-bottom arrangement.

FIG. 36 is a cross-sectional view of the sutured textile portions of FIG. 35 depicting the sutured portions being laid flat against a textile wall.

25 FIG. 37 is a depiction of two different textile portions of the present invention being securably attached to one and the other in a top-to-bottom fashion by an adhesive.

FIG. 38 is a depiction of two different textile portions of the present invention being securably attached to one and the other in a side-to-side fashion by an adhesive.

30

FIG. 39 is a depiction of two different textile portions of the present invention being securably attached to one and the other in a top-to-bottom fashion by fusingly bonding portions thereof.

FIG. 40 is a depiction of two different textile portions of the present invention being securably attached to one and the other in a side-to-side fashion by fusingly bonding portions thereof.

5 FIG. 41 is a depiction of two different textile portions of the present invention having extending yarns which are used to securably attach or form the different textile portions of the prosthesis of FIG. 4 taken along the B-B axis depicting

10 FIGS. 42 and 43 are cross-sectional views of the prosthesis of FIG. 4 taken along the B-B axis depicting a crimped prosthesis.

FIGS. 44 and 45 are top planar views of the patch of FIG. 3 depicting different textile portions thereat.

15 **DETAILED DESCRIPTION OF THE INVENTION:**

The present invention is an implantable medical device having a composite textile construction defined by at least two textile portions with substantially different textile porosity or permeability. The permeability variation is achieved by the use of different textile patterns; such as woven or knitted patterns; different yarn types, and different post
20 textile processing, such as compaction.

The composite textile medical device of the present invention may be a hollow tubular prosthesis **10**, as illustrated in FIG. 1. The prosthesis **10** is a single lumen device defined by a cylindrical wall **12**. The cylindrical wall **12** of prosthesis **10** includes the
25 composite textile construction of the present invention and may further include a polymeric tube or film-like tube associated with it to provide a composite textile/polymeric prosthesis. Further, the composite textile prosthesis and the composite textile/polymeric prosthesis may have a stent associated with it to provide a stent/graft device.

30 The present invention, however, is not limited to composite textile constructions of single lumen construction. For example, a multi-lumen prosthesis, such as bifurcated prosthesis **14**, may suitably be provided with a composite textile construction. As depicted in FIG. 2, bifurcated prosthesis **14** includes two hollow tubular legs **16**, **18** and a main hollow tubular body **20**. Further, the present invention is not limited to tubular prostheses, and non-

tubular medical devices may suitably contain composite textile constructions of the present invention. For example, as depicted in FIG. 3, a medical patch **22** may be formed as a composite medical device. Although medical patch **22** is depicted as a square, other non-limiting shapes may suitably be used. Such other non-limiting shapes include oval, circular, rectangular, triangular, polygonal and non-polygonal shapes.

A side longitudinal view of the prosthesis **10** of FIG. 1 taken along the A-A axis is depicted in FIG. 4. As depicted in FIG. 4, prosthesis **10** includes a first textile portion **24** and second textile portions **26a**, **26b**. The textile portions **26a**, **26b**, which may be the same or different, are depicted as having a lower permeability and/or stretchability, as compared to the first textile portion. Desirably, first textile portion **24** is a knitted textile portion. Second textile portions **26a**, **26b** are desirably woven textile portions.

The second textile portions **26a**, **26b** advantageously aid in securing prosthesis **10** to bodily lumens. For example, when second textile portions **26a**, **26b** are woven portions, sutures which secure the prosthesis **10** to a bodily lumen (not shown) are more readily secured within the woven pattern as compared to other more resilient textile patterns, such as knitted or braided patterns. The second textile portions **26a**, **26b** are depicted as being minor portions proximally located at the ends of the prosthesis **10**. The present invention, however, is not so limited.

As depicted in FIG. 5, prosthesis **10'** is a composite textile having significant portions formed from different textile patterns. Prosthesis **10'** includes a first textile portion **24**, which is desirably a knitted textile portion, and a second textile portion **26a**, which is desirably a woven textile portion. Although prosthesis **10'** is depicted as having about 50 percent textile portion **24** and about 50 percent textile portion **26a**, the present invention is not so limited. For example, prosthesis **10'** may include from about 5 to 95 percent textile portion **24** and from about 95 to 5 percent textile portion **26a**, where the percents are based on the longitudinal length of the overall prosthesis **10'**.

Further, as depicted in FIG. 6, the composite textile prosthesis **10''** of the present invention is not limited to substantially straight tubular devices as depicted in FIGS. 4 and 5. Prosthesis **10''** may have a varying diameter, such as a tapered shape as shown in FIG. 6. Although prosthesis **10''** is depicted as a first textile portion **24** and second textile portions

26a, 26b at both ends thereof, the present invention is not so limited. Prosthesis **10''**, as well as prosthesis **10, 10'**, includes at least two different textile portions in various proportions and shapes.

5 Further, as depicted in FIG. 7, the composite textile prosthesis **10'''** of the present invention may have a plurality of different textile portions. Prosthesis **10'''** may have alternating first textile portions **24** and second textile portions **26a** along the longitudinal length of the prosthesis. Such a varied textile pattern is useful where, but not limited to, body lumens that are curved or where there is a need to vary the textile properties, such as
10 compliance, dilation resistance or stretchability, along the length of prosthesis **10'''**.

FIGS. 8-16 depict cross-sectional views of the prosthesis **10** of FIG. 4 taken along the B-B or the B'-B' axes. As depicted in FIG. 8, the cylindrical wall **12** of prosthesis **10** is a textile layer, i.e., either first textile portion **24** or second textile portion **26a**. As depicted in
15 FIG. 9, the cylindrical wall **12** may further include a polymeric layer or tube **28** circumferentially disposed about the inner surface of first textile portion **24**, second textile portion **26a**, or both first and second textile portions **24, 26a**. As depicted in FIG. 10, the polymeric layer or tube **28** may be circumferentially disposed about the exterior of the first textile portion **24**, the second textile portion **26a** or both the first and second textile portions
20 **24, 26a**. Further, as depicted in FIG. 11, the cylindrical wall **12** may consist of the outer textile portions **24, 26a** and a stent **30** circumferentially disposed about the inner surface of the textile portions to define a stent-graft **32**. The stent-graft **32** may optionally include the polymeric layer or tube **28** circumferentially disposed about the interior portions of stent **30**, as depicted in FIG. 11, or circumferentially disposed about exterior portions of stent **30**, as
25 depicted in FIG. 12, or circumferentially disposed about both interior and exterior portions of stent **30**, as depicted in FIG. 13. Alternatively, the polymeric layer or tube **28** may be directly associated with stent **30** to provide a unitary polymeric covered stent (not shown). Further, stent-graft **32** may be formed as having textile and/or polymeric portions disposed to interior portions of stent **30**. As depicted in FIG. 14, stent-graft **32** may include stent **30** having the polymeric tube or layer circumferentially disposed about the interior portions of the stent **30**
30 with textile portions **24, 26a** being circumferentially disposed about the interior portions of the polymeric tube or layer **28**. As depicted in FIG. 15, stent-graft **32** may alternatively include stent **30** having the textile portions **24, 26a** circumferentially disposed about the interior portions of the stent **30** with polymeric tube or layer **28** being circumferentially

disposed about the interior portions of the textile portions **24, 26a**. As depicted in FIG. 16, stent-graft **32** may alternatively include stent **30** having polymeric tubes or layers **28** circumferentially disposed over the interior and exterior stent surfaces with the textile portions **24, 26a** being circumferentially disposed about the polymeric tubes or layers **28** to provide a stent graft **32** having both interior and exterior textile surfaces.

The present invention, however, is not limited to substantially uniform single lumen implantable devices, such as the above-described prosthesis **10** and stent-graft **32**. As depicted in FIG. 17, shaped prosthesis **34** consists of straight portions **36, 38** of different diameters interconnected by a transitional portion **40**. Although transitional portion **40** is shown as an inwardly tapered shape in FIG. 17, other shapes may suitably be used. The different portions **36, 38, 40** of shaped prosthesis **30** are different textile portions **42, 44, 46**. Desirably, textile portions **42** and **44**, which can be the same or different, are high stretch or high permeability textile portions as compared to textile portion **46**. Preferably, textile portion **46** is a woven portion and textile portions **42, 44** are knitted portions. When shaped prosthesis **34** is a stent-graft, such as any of the above-described stent-grafts **32**, a woven textile portion **46** exhibits less dilation as compared to textile portions **42, 44**. Dilation effects are more pronounced at areas of dimensional change, especially when going from a large diameter artery to a smaller diameter artery, and a woven pattern at textile portion **40** prohibits dilation as compared to typical knitted patterns.

FIG. 18 is a top surface view of the bifurcated prosthesis **14** of FIG. 2. As depicted in FIG. 18, legs **16, 18** and main body **20** are connected via a transitional portion **17**. The transitional portion **17** is often referred to as a crotch area of a bifurcated prosthesis. The transitional portion **17** may be a substantially straight walled portion or may be shaped or tapered as shown in FIG. 20. The transitional portion **17** is often subject to increased pressure variations as compared to the main body **20** and the legs **16, 18**. Accordingly, transitional area **17** of the present invention has a textile portion **54** of lower permeability and/or lower longitudinal stretchability as compared to the textile portions **48, 50, 52** of the main body **20** and legs **16, 18**, respectively. Textile patterns with lower textile permeability and/or longitudinal stretchability often have lower radial dilation tendencies as compared to textiles of higher permeability and/or higher longitudinal stretchability. Desirably, textile portion **54** is a woven patterns and textile portions **48, 50, 52**, which can be the same or different, are knitted patterns. Such textile patterns are especially useful when bifurcated

prosthesis 14 is a bifurcated stent-graft as depicted in FIG. 22 where stent 56 is internally disposed along the cylindrical walls of textile portions 16, 18, 17, 20. Further, as depicted in FIG. 19, bifurcated prosthesis 14' may include a textile composite where the main body 20' and the legs 16', 18' are of one textile portion 48', but where the terminal portions of the main body 20' and the legs 16', 18' are of another textile portion 48'. Desirably, textile portion 54' is a woven patterns and textile portion 48' is a knitted patterns.

Stent 30 or stent 56 may be attached to adjoining textile portions through mechanical securement or bonding. Mechanical securement includes, but is not limited to, the use of sutures, anchoring barbs, textile cuffs, and the like. Bonding includes, but is not limited to, chemical bonding, for instance adhesive bonding, thermal bonding or welding, ultrasonic bonding or welding, and the like. The use of sutures and these bonding techniques may also be suitably used to secure different textile portions to one and the other, such as textile portions 26a and 26b being secured to textile portion 24, textile portions 42 and 44 being secured to textile portion 46, textile portions 48, 50 and 52 being secured to textile portion 50, and the like.

Various stent types and stent constructions may be employed in the invention. Useful stents include, without limitation, self-expanding stents and balloon expandable stents. The stents may be capable of radially contracting or expanding, as well, and in this sense can be best described as radially or circumferentially distensible or deformable. Self-expanding stents include those that have a spring-like action which causes the stent to radially expand, or stents which expand due to the memory properties of the stent material for a particular configuration at a certain temperature. Nitinol is one material which has the ability to perform well while both in spring-like mode, as well as in a memory mode based on temperature. Other materials are of course contemplated, such as stainless steel, platinum, gold, titanium and other biocompatible metals, as well as polymeric stents.

The configuration of stent 30 or bifurcated stent 56 may be of any suitable geometry. As shown in FIG. 23, wire stent 58 is a hollow tubular structure formed from wire strand 60 or multiple wire strands. Wire stent 58 may be formed by, for example, braiding or spinning wire strand(s) 60 over a mandrel (not shown). Wire stent 58 is capable of being radially compressed and longitudinally extended for implantation into a bodily lumen. The degree of elongation depends upon the structure and materials of the wire stent 58 and can be quite

varied, for example, about 5% to about 200% of the length of wire stent **58**. The diameter of wire stent **58** may also become several times smaller as it elongates. Desirably, stents that have substantial dimensional variations, such as bifurcated stent **56** or a stent associated with the shaped prosthesis **34**, are wire stents. Unitary stent structures may be obtained by
5 braiding and/or filament winding stent wires to obtain complex stent geometries, including complex stent geometries, including complex bifurcated stents. Alternatively, stent components of different sizes and/or geometries may be mechanically secured by welding or suturing. Additional details of wire stents of complex geometry are described in U.S. Patent Nos. 6,325,822 and 6,585,758, the contents of which are incorporated herein by reference.

10
A zig-zag wire stent **59** is also useful as stent **30** or bifurcated stent **56**. Wire strand **63** is being arranged in what can be described as a multiple of "Z" or "zig-zag" patterns to form a hollow tubular stent. The different zig-zag patterns may optionally be connected by connecting member **61**. Further, zig-zag wire stent **59** is not limited to a series of concentric
15 loops as depicted in FIG. 24, but may be suitably formed by helically winding of the "zig-zag" pattern over a mandrel (not shown).

A slotted stent **62** is also useful as part of the stent-graft **32**. As depicted in FIG. 25, slotted stent **62** is suitably configured for implantation into a bodily lumen (not shown).
20 Upon locating the slotted stent **62** at the desired bodily site, slotted stent **62** is radially expanded and longitudinally contracted for securement at the desired site.

Other useful stents capable of radial expansion are depicted in FIGS. 26 and 27. As depicted in FIG. 26, stent **64** is a helical coil which is capable of achieving a radially
25 expanded state (not shown). Stent **66**, as depicted in FIG. 27, has an elongate pre-helically coiled configuration as shown by the waves of non-overlapping undulating windings. These helically coiled or pre-helically stents, commonly referred to as nested stents, are also useful with the practice of the present invention.

30 Stent-graft composite devices are also contemplated having self-expanding stents and balloon expandable stents. Self-expanding stents include those that have a spring-like action which causes the stent to radially distend, i.e., expand and/or contract, or stents which expand due to the memory properties of the stent material for a particular configuration at a certain

temperature. Balloon expandable stents require an applied force, typically from an expandable balloon on a catheter, to radially distend.

The stent-grafts of the present invention are not limited to the use of a single stent.

5 For example, as depicted in FIG. 22, bifurcated prosthesis 14' may include may include stents 56' and 56'', which may be the same or different, within the legs 16, 18 and include a stent 56'' within the main body 20, where stent 56'' is different from stents 56, 56'. For example, stent 56, 56' may be a self-expanding braided stent, and stent 56'' may be a balloon-expandable sent, such as a slotted stent. Further, the textile portions of legs 16, 18 are
10 advantageously knitted portions, and the textile portions of main body 20 are advantageously woven portions. Such features provide a bifurcated prosthesis 14' with enhanced compliance at legs 16, 18 and improved resistance to dilation at main body 20.

One type of polymeric or non-textile material particularly useful is
15 polytetrafluoroethylene (PTFE). PTFE exhibits superior biocompatibility and low thrombogenicity, which makes it particularly useful as vascular graft material in the repair or replacement of blood vessels. Desirably the non-textile layer is a tubular structure manufactured from expanded polytetrafluoroethylene (ePTFE). The ePTFE material has a fibrous state which is defined by interspaced nodes interconnected by elongated fibrils. The
20 space between the node surfaces that is spanned by the fibrils is defined as the internodal distance. When the term expanded is used to describe PTFE, it is intended to describe PTFE which has been stretched, in accordance with techniques which increase the internodal distance and concomitantly porosity. The stretching may be in uni-axially, bi-axially, or multi-axially. The nodes are spaced apart by the stretched fibrils in the direction of the
25 expansion.

Desirably, the ePTFE material is a physically modified ePTFE tubular structure having enhanced axial elongation and radial expansion properties of up to 600 percent by linear dimension. The physically modified ePTFE tubular structure is able to be elongated or
30 expanded and then returned to its original state without an elastic force existing therewithin. Such a physically modified ePTFE tubular structure is advantageously used in conjunction the devices of the present invention.

One example of a physically modified ePTFE tubular structure is one that has circumferentially oriented nodes and longitudinally traversing fibrils, where the fibrils have been hingeably rotated to provide for the enhance expansion properties. Additional details of the physically modified ePTFE and methods for making the same can be found in commonly
5 assigned application titled, "ePTFE Graft With Axial Elongation Properties", assigned U.S. Application No. 09/898,415, filed on July 3, 2001, published on January 9, 2003 as U.S. Application Publication No. 2003/0009210 A1, the contents of which are incorporated by reference herein.

10 The textile portions of the present invention can have virtually any textile construction, including weaves, knits, braids, filament windings and the like. Desirably, textile portions **26a**, **26b**, **46** and **54** are woven textile portions. Useful weave patterns include simple weaves, basket weaves, twill weaves, satin weaves, velour weaves and the like. The weave pattern **68** for these woven portions includes warp yarns **70** running along
15 the longitudinal length (as indicated by vector **L** in FIG. 1) of the woven product and fill yarns **72** running around the circumference (as indicated by vector **C** in FIG. 1) of the product the warp, the fill yarns being at approximately **90** degrees to one another with fabric flowing from the machine in the warp direction.

20 Desirably, textile portions **24**, **42**, **44**, **48**, **50**, and **52** are knitted textile portions. Knitting involves the interlooping or stitching of yarn into vertical columns (wales) and horizontal rows (courses) of loops to form the knitted fabric structure. Warp knitting is particularly useful with the knitted textile portions of the present invention. In warp knitting, the loops are formed along the textile length, i.e., in the wale or warp direction of the textile.
25 As depicted in FIG. 29, for a tubular textile, such as prosthesis **10**, stitches in the axial or longitudinal direction (**L**) of the tubular textile are called wales (indicated by vector **80** in FIG. 29) and stitches in the radial or circumferential direction (**C**) of the tubular textile are called courses (indicated by vector **82** in FIG. 29). Yarns **76** and **78** interloop in the warp direction to form a warp-knitted pattern **74**.

30 Knitting patterns useful with the present invention include conventional warp-knitted patterns and high-stretch, warp-knitted patterns. Commonly used warp-knitted patterns include locknit (also referred to as tricot or jersey knits), reverse locknit, sharkskin, queenscord and velour knits. Useful high stretch, warp-knitted patters include those with

multiple patterns of diagonally shifting yarns, such as certain modified atlas knits which are described in U.S. Patent No. 6,540,773, the contents of which are incorporated herein by reference. Other useful high-stretch, warp knitted patterns include certain patterns with multiple needle underlap and one needle overlap, such as those patterns described in U.S. Patent No. 6,554,855 and U.S. Patent Application Publication No. 2003/0204241 A1, the contents of which are incorporated herein by reference.

FIG. 30 is an illustration of a high-stretch knitted pattern **90** useful with the present invention having a two needle underlap. In FIG. 30, needle positions in the course direction, i.e., vector **82**, are noted by element numbers **84a** through **84g** and needle positions in the wale direction, i.e., vector **80**, are noted by element numbers **86a** through **86i**. Yarn **88a** travels in the course direction from needle position **84a** to needle position **84c**, or two needle positions, before interlooping with yarn **88c**. Yarn **88a** then travels two needle positions in the opposite course direction to interloop with a yarn. This alternating two needle position movement is repeated with different yarns to form the knitted pattern **90** with a two needle underlap.

The knitted portion **92**, as illustrated in FIG. 31, is characterized as a three-needle underlap. In FIG. 31, needle positions in the course direction, i.e., vector **82**, are noted by element numbers **84a** through **84i** and needle positions in the wale direction, i.e., vector **80**, are noted by element numbers **86a** through **86i**. Yarn **94a** travels in the course direction from needle position **84a** to needle position **84d**, or three needle positions, before interlooping with yard **94d**. Yarn **94a** then travels three needle positions in the opposite course direction to interloop with a yarn. This alternating three needle position movement is repeated with different yarns to form the knitted pattern **92** with a three needle underlap.

The knitted patterns **74**, **90** and **92** are depicted as a single knitted layer in FIGS. 29-31. The textile portions of the present invention, however, are not so limited. For instance, the knitted portions may also include more than one layer of interconnected yarns. In such a multi-layered knitted textile, yarns from one layer are often interlooped with yarns in another layer to form the multi-layered knitted textile.

The different textile portions of the present invention are desirably securably attached to one and the other. For example, one textile portion **24**, **42**, **44**, **48**, **50**, and **52** is desirably

securably attached to another textile portion **26a**, **26b**, **46**, and **54**. As depicted in FIGS. 32-41, an attachment means is useful for securing one textile portion **98**, such as a knitted textile portion, to another textile portion **100**, such as a woven portion. Useful, but non-limiting, attachment means includes mechanical means, such as clips, sutures or other engageable
5 yarns, adhesive means, or fuseable means.

As depicted in FIG. 32, sutures **102** may be used to mechanically secure the engaging portions **101** of the textile portions **98** and **100** to one and the other. Sutures **102** may be made from synthetic materials such as synthetic polymers, including, but not limited to,
10 polyesters, including PET polyesters, polypropylenes, polyethylenes, polyurethanes and polytetrafluoroethylenes.

As depicted in FIG. 33, textile portions **98** and **100** may be secured to one and the other in an end-to-end arrangement with sutures **102** where the sutures **102** are exposed on
15 only one side of the textile wall. In other words, one side of the textile wall at the engaging portions **101** has exposed threads or sutures while the other side of the textile wall does not have exposed sutures thereby providing for a seamless textile transition at that wall surface.

The present invention, however, is not limited to the suturing of different textile portions in an end-to-end arrangement. As depicted in FIG. 34, textile portions **98** and **100**
20 may be secured to one and the other in a top-to-bottom arrangement with sutures **102**. Desirably sutures **102** traverse both textile portions **98** and **100**.

Moreover, as depicted in FIG. 35, the ends of the textile portions **98** and **100** may be
25 folded upward or away from the major longitudinal extend of the textile portions **98** and **100**. Sutures **102** may then be suitably used to secure the engaging portions **101**. Additionally, as depicted in FIG. 36 the sutured engaging portions may be folded back toward textile portion **98** or **100**, such that the sutured portions or sutured flap any engage one of the textile portions **98** and **100** at engaging location **101'**. The sutured textile portion **98** or **100** may then be
30 secured to the engaging textile portion **98** or **100** portion at engaging location **101'**. Securement may include additional sutures (not shown) or use of an adhesive or heat bonding, as described below.

As depicted in FIGS. 37 and 38, textile portion **98** may be securably attached to textile portion **100** in a top-to-bottom fashion or in a side-to-side fashion by means of an adhesive **104**. Nonlimiting examples of useful material for the adhesive **104** include various biocompatible, elastomeric bonding agents such as urethanes, styrene/isobutylene/styrene
5 block copolymers (SIBS), silicones, and combinations thereof.

As depicted in FIGS. 39 and 40, textile portion **98** may be securably attached to textile portion **100** in a top-to-bottom fashion or in a side-to-side fashion by means of a fusing means **106**. Fusing means **106** includes, but is not limited to, the application of heat,
10 radiation or localized energy to melt engaging portions **101** of the textiles **98** and **100** or to melt a resin material contained thereat. For example, localized energy may be supplied to fusingly engage polyester yarns which have a melting point of about 260°C. Alternatively, a lower melting resin, resin-containing yarn, or a lower melting yarn may be used at the engaging portions **101** of the textile portions **98** and **100**. For example, certain polyethylenes,
15 copolyethylenes, copolyolefins, polyurethanes and copolyesters, as disclosed in U.S. Patent No. 5,178,630, the contents of which is incorporated herein by reference, may be selected that have a melting point from about 110°C to about 220°C may suitably be used as the fusing means **106** for the textile portions **98** and **100**.

As depicted in FIG. 41, textile portion **98** may be securably attached to textile portion **100** by means of engageable yarns **108** and **110**. Yarns **108** and **110** are trailing yarns, such as yarns that are not interlaced or interlooped in their textile pattern, from the respective textile patterns in textile portions **98** and **100**. The yarns **108** and **110** may be tied or hemmed together (not shown) to securably attach the textile portions **98** and **100** to one and the other.
20 The yarns **108** and **110** may also be integrated into the different textile portions **98** and **100** to form a unitary textile connection (not shown). For example, after textile portion **98** is formed, spools (not shown) containing the yarns **108** may be transferred from the textile machine, such as a knitting machine (not shown), used to form the textile portion **98** to a different textile machine, such as a weaving machine (not shown) used to form textile portion
25 **100**. The two textile portions **98** and **100** may then be interlaced or interloped by incorporation of yarns **108** or **110** into the different textile processing machines by transferring spools containing these yarns.
30

The prostheses of the present invention may be coated with a bio-absorbable coating, such as collagen, albumin, elastin and the like. Such coatings are known in the art and are desirable in vascular and endovascular graft applications to seal the graft and thereby prevent blood loss in the early stages of implantation. Other coatings which may be used include
5 those disclosed in U.S. Patent No. 5,851,229, which is incorporated herein. The '229 patent discloses a sealant composition that includes at least two polysaccharides in combination to form a hydrogel or solgel. Sealant compositions may include a bioactive agent and or be cross-linked subsequent to the application of these compositions to the substrate surface. Additionally, U.S. Patent No. 5,209,776, incorporated herein, discloses a composition that
10 includes a first protein component that is preferably collagen and a second protein-supporting component that can be a proteoglycan, a saccharide or a polyalcohol.

Axial yarns are added in some cases to limit a textile structure from stretching beyond a desired amount, and thereby significantly reducing the potential for scissoring action of the
15 yarns. This scissoring or shearing action is detrimental to the body's healing process. The scissoring action of the strands tends to prevent the tissue and blood vessels from infiltrating the pores of the structure. Additionally, an axial yarn may be dyed and inserted into the textile structure subsequent to or during the braiding process. A dyed axial yarn positioned in the outer surface of the prosthesis aids the surgeon during implantation to indicate whether
20 the prosthesis is straight and not twisted during the procedure.

The prosthesis may include a radiopaque guideline or marker to provide means for viewing the implanted prosthesis fluoroscopically. The marker may extend the length of the prosthesis. Other patterns for markers may also be employed. Radiopaque markers assist the
25 surgeon to visualize the prosthesis both during and after implantation. The marker helps show the surgeon that the prosthesis is properly positioned. Also, it will indicate whether the prosthesis has dilated or collapsed after implantation.

The knitted textile graft of the present invention is desirably made on a warp-knitting
30 machine (not shown) using a double needle bar. A useful number of needles per inch for warp knitting is from about 18 to about 36. About 28 to 30 needles per inch are particularly suitable. The trellis of the graft is usually made from a yarn having count from 30 to 300 denier. Desirably, the range of yarn counts for the trellis is from about 30 to about 80. A particularly suitable yarn count is about 40 denier. Moreover, the trellis yarn may be a single

ply, a double ply or a multi-ply. The term "multi-ply" is used herein to indicate more than two-ply.

In one aspect of the present invention, the knitted textile graft is a knit structure of a single layer with at least a two-needle underlap. Because of the single layer construction the textile wall thickness is minimized to yield a low profile knitted textile graft. The textile wall thickness is from about 0.2 to about 0.4 millimeters. Desirably, the textile wall thickness is from about 0.27 to about 0.31 millimeters. Furthermore, the knitted textile graft of the present invention has a burst strength from about 11 kg/cm² to about 16 kg/cm² (about 150 psi to about 220 psi). Desirably, the knitted textile graft of the present invention has a burst strength from about 13 kg/cm² to about 14 kg/cm² (about 170 psi to about 190 psi). The stretchability of the knitted textile graft is desirably 5 to 220 percent at a one-kilogram of load. Knitted textile grafts with a stretchability of about 50 to 220 percent at one-kilogram load are also useful. Knitted textile grafts with a stretchability of about 90 to 200 percent at one-kilogram load are also useful. Furthermore, knitted textile grafts with a stretchability of about 120 to 160 percent at one-kilogram load are also useful.

Any type of textile product can be used as yarns for the knitted or woven portions of the present invention. Of particular usefulness in forming the fabric portions of the present invention are synthetic materials such as synthetic polymers. Synthetic yarns suitable for use in the present invention include, but are not limited to, polyesters, including PET polyesters, polypropylenes, polyethylenes, polyurethanes and polytetrafluoroethylenes. The yarns may be of the monofilament, multifilament, spun type or combinations thereof. The yarns may also be flat, twisted or textured, and may have high, low or moderate shrinkage properties or combinations thereof.

The yarns used in forming the textile grafts of the present invention may be flat, twisted, textured or combinations thereof. Furthermore, the yarns may have high, low or moderate shrinkage properties or combination of different shrinkage properties. Additionally, the yarn type and yarn denier can be selected to meet specific properties desired for the prosthesis, such as porosity and flexibility. The yarn denier represents the linear density of the yarn (number of grams mass divided by 9,000 meters of length). Thus, a yarn with a small denier would correspond to a very fine yarn whereas a yarn with a larger denier, e.g., 1000, would correspond to a heavy yarn. The yarns used with the present invention may

have a denier from about 20 to about 200, preferably from about 30 to about 100. Preferably, the yarns are polyester, such as polyethylene terephthalate (PET).

5 After knitting or weaving the textile portion of the present invention, the textile prosthesis is optionally cleaned or scoured in a basic solution of warm water, e.g., about 50°C to about 65°C (about 120°F to about 150°F), and detergent. The textile is then rinsed to remove any remaining detergent.

10 After the textile prosthesis is optionally scoured, the prosthesis is compacted or shrunk to reduce and control, in part, the porosity of the graft. Porosity of a knitted material is measured on the Wesolowski scale and by the procedure of Wesolowski. In the Wesolowski test, a fabric test piece is clamped flatwise and subjected to a pressure head of about 120 mm. of mercury. Readings are obtained which express the number of millimeters of water permeating per minute through each square centimeter of fabric. A zero reading
15 represents absolute water impermeability and a value of about 20,000 ml/min/cm² represent approximate free flow of fluid.

The porosity of the textile graft is often from about 30 ml/min/cm² to about 15,000 ml/min/cm² on the Wesolowski scale after being knitted on the double needle bar Raschel
20 knitting machine. A more desirable porosity is from about 30 ml/min/cm² to about 5,000 ml/min/cm² on the Wesolowski scale and textile graft is compacted or shrunk in the wale direction to obtain the desired porosity. A solution of an organic component, such as hexafluoroisopropanol or trichloroacetic acid, and a halogenated aliphatic hydrocarbon, such as methylene chloride, is used to compact the textile graft by immersing it into the solution
25 for up to 30 minutes at temperatures from about 15°C to about 160°C. Other compacting solutions may suitably be used, such as those disclosed in U.S. Patent Nos. 3,853,462 and 3,986,828, whose contents are incorporated by reference herein.

30 As noted above, preferably the tubular-knitted graft of the present invention is constructed of polyester which is capable of shrinking during a heat-set process. For instance, such grafts are typically flat-knitted in a tubular form. Due to the nature of the flat-knitting process, the tubular graft is generally flat in shape after knitting. Such grafts, however, when constructed of shrinkable polyester yarn, can be heat set on a mandrel to form a generally circular shape.

Such a heat-setting process is accomplished by first knitting the graft in a seamless tubular form out of a material capable of shrinking during a heat-setting or similar process. The graft may be preshrunk before it is placed on a mandrel. Preshrinking may be achieved
5 by submitting the woven graft to moderate temperatures, such as from about 90°C to about 205°C (about 190°F to about 400°F). Usually the graft is placed in a medium for the preshrinking. Such a medium can include without limitation hot water, a chemical fluid, such as methylene chloride, or a gas, such as air or carbon dioxide. The graft of the present invention, however, may suitably be made without such a preshrinking of the yarns.

10

After the graft is knitted or alternatively knitted and preshrunk, the graft is placed on a mandrel, and heated in an oven at a temperature and time capable of causing the yarns of the graft to heat set to the shape and diameter of the mandrel. Preferably polyester yarns are used, and the heat setting is accomplished at time and temperatures appropriate for the
15 material. For example, heat setting can be accomplished at about 90°C to about 225°C (about 190°F to about 437°F) for a period of about less than an hour. Temperatures in the range of about 130°C to about 220°C (about 260°F to about 428°F) are also useful. Desirably, temperatures from about 150°C to about 215°C (about 300°F to about 419°F) are also useful. Desirably, time periods from about 5 to about 30 minutes are useful. More desirably, with
20 time periods from about 10 to about 20 minutes are useful. Other methods of heat setting known in the art may be employed. After such a heat setting process, the graft can be formed into a shape desired for implantation, having a generally circular inner lumen.

The bonding agent may include various biocompatible, elastomeric bonding agents
25 such as urethanes, styrene/isobutylene/styrene block copolymers (SIBS), silicones, and combinations thereof. Other similar materials are contemplated. Desirably, the bonding agent may include polycarbonate urethanes sold under the trade name CORETHANE[®]. This urethane is provided as an adhesive solution with preferably 7.5% Corethane, 2.5 W30, in dimethylacetamide (DMAc) solvent.

30

The composite textile graft and non-textile layer, i.e., prosthesis **10**, is desirably formed as follows. A thin non-textile, such as PTFE or ePTFE, tube is formed in a conventional forming process such as by tubular extrusion or by sheet extrusion where the sheet is formed into a tubular configuration. The non-textile tube is placed over a stainless

steel mandrel (not shown) and the ends of the tube are secured. The non-textile tube is then spray coated with an adhesive solution, for example from about 1% to about 15% Corethane[®] urethane range, 2.5 W30 in DMAc. The coated non-textile tube is placed in an oven heated in a range from 18°C to 150°C for 5 minutes to overnight to dry off the solution. If desired, the spray coating and drying process can be repeated multiple times to add more adhesive to the non-textile tube. The coated non-textile tube is then covered with the textile graft to form a composite prosthesis. One or more layers of elastic tubing, preferably silicone, are then placed over this composite structure. This holds the composite structure together and assures that complete contact and adequate pressure is maintained for bonding purposes. The assembly of the composite graft within the elastic tubing is placed in an oven and heated in a range of 180°C to 220°C for approximately 5 to 30 minutes to bond the layers together. Additional details relating to useful bonding agents and their application to textile and non-textile surfaces may be found in U.S. Patent Application Publication No. 2003/0017775 and in U.S. Application Publication No. 2003/0139806, both of which are incorporated herein by reference. The devices of the present invention may be formed from single lamination techniques or multiple lamination techniques for multilayered devices. Further, lamination may be achieved without the use of adhesive through heat bonding techniques.

Moreover, the prosthesis **10** may be crimped along the tubular surface thereof to impart longitudinal compliance, kink resistance and enhanced handling characteristics. For example, as depicted in FIG. 42, the cylindrical wall **12** of prosthesis **10** may have a series of waves or crimps **96**. The crimp may be provided by placing a coil of metal or plastic wire (not shown) around a stainless steel mandrel. The graft **10** is slid over the mandrel (not shown) and the coil wire. Another coil is wrapped around the assembly over the graft to fit between the spaces of the inner coil. The assembly is then heat set and results in the formation of the desired crimp pattern. It is further contemplated that other conventional crimping processes may also be used to impart crimp **96** to the prosthesis **10**. Further, as depicted in FIG. 43, the cylindrical wall **12** of prosthesis **10** having a textile portion, such as textile portion **24**, **26a**, and having a polymeric portion **28** may also be crimped, as described in U.S. Patent Application Publication No. 2003/0017775, the contents of which is incorporated herein by reference. Crimps **96** further provide increased longitudinal flexibility and structural integrity for prosthesis **10**. For example, an uncrimped woven textile portion of the prosthesis **10** will typically have a longitudinal flexibility or longitudinal stretchability of less than about 10% over its quiescent length under a one-kilogram force or load. The

crimped woven textile portion will have a longitudinal flexibility or stretchability from about 10% to about 100%. Desirably, the stretchability is from about 50% to about 100%, more desirably from about 70% to about 80%. A crimped woven textile portion of the prosthesis **10** will typically have a longitudinal flexibility or longitudinal stretchability of greater than about 10% over its quiescent length under a one-kilogram force or load.

Moreover, stent-graft **10** or graft **11** may be formed as an implantable prosthesis which is self-supporting and usable to maintain patency of a bodily vessel, such as in the coronary vasculature, esophagus, trachea, colon, biliary tract, urinary tract, prostate, tracheal/bronchial tubes and brain. Also, the textile portion **12** or the yarns forming textile portion **12** may be treated with any of the following therapeutic agents: anti-thrombogenic agents (such as heparin, heparin derivatives, urokinase, and PPACK (dextrophenylalanine proline arginine chloromethylketone)); anti-proliferative agents (such as enoxaprin, angiopeptin, or monoclonal antibodies capable of blocking smooth muscle cell proliferation, hirudin, and acetylsalicylic acid); anti-inflammatory agents (such as dexamethasone, prednisolone, corticosterone, budesonide, estrogen, sulfasalazine, and mesalamine); antineoplastic/antiproliferative/anti-miotoxic agents (such as paclitaxel, 5-fluorouracil, cisplatin, vinblastine, vincristine, epothilones, endostatin, angiostatin and thymidine kinase inhibitors); anesthetic agents (such as lidocaine, bupivacaine, and ropivacaine); anti-coagulants (such as D-Phe-Pro-Arg chloromethyl keton, an RGD peptide-containing compound, heparin, antithrombin compounds, platelet receptor antagonists, anti-thrombin antibodies, anti-platelet receptor antibodies, aspirin, prostaglandin inhibitors, platelet inhibitors and tick antiplatelet peptides); vascular cell growth promoters (such as growth factor inhibitors, growth factor receptor antagonists, transcriptional activators, and translational promoters); vascular cell growth inhibitors (such as growth factor inhibitors, growth factor receptor antagonists, transcriptional repressors, translational repressors, replication inhibitors, inhibitory antibodies, antibodies directed against growth factors, bifunctional molecules consisting of a growth factor and a cytotoxin, bifunctional molecules consisting of an antibody and a cytotoxin); cholesterol-lowering agents; vasodilating agents; and agents which interfere with endogenous or vasoactive mechanisms.

FIGS. 44 and 45 are top views of the medical patch **22** of FIG. 3. The patch **22** includes a knitted textile portion **120** and a woven textile portion **122**. The different textile portions **120**, **122** may be secured to one and the other by any of the above-described

methods. Further, the patch **22** may also have a layer of PTFE or ePTFE (not shown) on one or both of its planar surfaces.

5 As depicted in FIG. 44, patch **22** may have an interior woven portion and a perimetrically disposed knitted portion. Alternatively, as depicted in FIG. 45, the interior portion may be knitted and the edge portions may be woven. The present invention is, however, not so limited and different arrangements of different textile portions may suitably be used.

10 Although illustrative embodiments of the present invention have been described herein with reference to the accompanying drawings, it is to be understood that the invention is not limited to those precise embodiments, and that various other changes and modifications may be effected therein by one skilled in the art without departing from the scope or spirit of the invention.

15

WHAT IS CLAIMED IS:

1. An implantable composite medical device having a longitudinal length comprising:
5 a woven textile portion having yarns interlaced in a woven pattern;
a knitted textile portion having yarns interlooped in a knitted pattern; and
an attachment means for securing said woven and said knitted textile portions to provide a composite woven and knitted textile surface along said longitudinal length.
- 10 2. A medical device of claim 1, wherein said woven portion and said knitted portion are seamless tubular portions defining a cylindrical textile wall having an interior surface and an exterior surface and having opposed first and second textile open ends.
3. A medical device according to claim 2, wherein said composite medical
15 device is an implantable graft.
4. A graft according to claim 3, wherein portions of said cylindrical textile wall proximal to said first and said second textile open ends are said woven portions and a transitional portion of said cylindrical textile wall between the said woven portions is said
20 knitted portion.
5. A graft according to claims 3-4, further comprising
a polymeric tube or layer circumferentially disposed about portions of said interior surface or about portions of said exterior surface of said textile wall; and
25 a second attachment means for securing said polymeric tube or layer about portions of said interior surface or about portions of said exterior surface of said textile wall.
6. A graft according to claim 5, wherein said second attachment means comprise adhesive bonding of said polymeric tube or layer about portions of said interior surface or
30 about portions of said exterior surface of said textile wall.
7. A graft according to claims 5-6, wherein said polymeric tube or layer is an ePTFE tube or layer.

8. A medical device or graft according to any of the preceding claims, further comprising a generally tubular stent having openings in its wall structure and having opposed first and second stent open ends, and

5 a third attachment means for securing stent to portions of the interior or exterior surface of said textile wall to define a stent/graft prosthesis.

9. A prosthesis according to claim 8, wherein said stent is a radially distensible stent.

10 10. A prosthesis according to claims 8-9, wherein said stent is a braided wire stent.

11. A prosthesis according to claims 8-10, wherein said third attachment means comprises mechanical securement of said stent to portions of the interior or exterior surface
15 of said textile wall.

12. A prosthesis according to claims 8-10, wherein said third attachment means comprises adhesive securement of said stent to portions of the interior or exterior surface of
20 said textile wall.

13. A prosthesis according to claims 8-10, further comprising a polymeric tube or layer circumferentially disposed and securably attached by said third attachment means to the interior and/or exterior portions of said prosthesis.

25 14. A prosthesis according to claim 13, wherein said third attachment means comprises adhesive securement of said stent to portions of the interior or exterior surface of said textile wall.

30 15. A prosthesis according to claims 13-14, wherein said polymeric tube or layer is a PTFE or ePTFE tube or layer.

16. A prosthesis according to claims 8-15, wherein portions of said cylindrical textile wall proximal to said first and said second opposed textile open ends are said woven portions and a transitional portion of said cylindrical textile wall between said opposed woven portions is said knitted portion.

5

17. A prosthesis according to claims 8-15, wherein said stent has a varying diameter between said first and second stent open ends defining a transitional stent section therebetween; said textile wall has a varying diameter between said first and second textile open ends defining a transitional textile section therebetween; said transitional textile section being securable attached to said transitional stent section by said third attachment means; and said transitional textile portion is said woven textile portion.

10

18. A prosthesis according to claim 17, wherein portions of said cylindrical textile wall proximal to said first and said second opposed textile open ends are said woven portions and other portions of said cylindrical textile wall between said woven portions and said transitional textile portion are knitted portions.

15

19. A prosthesis according to claims 8-16, further comprising:
a second tubular textile wall at said second textile open end to define a multi-lumen textile portion, said multi-lumen textile portion being secured by said attachment means to a transitional portion of said cylindrical textile wall which is secured by said attachment means to a portion of said cylindrical textile wall of said first textile open end; and
a second tubular stent wall at said second stent open end to define a multi-lumen stent portion, said multi-lumen stent portion being secured to a transitional portion of said stent wall which is connected to said stent wall proximal to said first stent open end;
wherein said multi-lumen stent portion is securably attached by said third attachment means to said multi-lumen textile portion to define a multi-lumen prosthesis.

20

25

20. A multi-lumen prosthesis according to claim 19, wherein said transitional portion of said cylindrical textile wall is said woven portion.

30

21. A multi-lumen prosthesis according to claim 19, wherein said transitional portion of said cylindrical textile wall is said woven portion; and further wherein said multi-lumen textile portion and said portion of said cylindrical textile wall of said first textile open end are knitted portions.

5

22. A medical device, graft or prosthesis according to any of the preceding claims, wherein the woven pattern is selected from the group consisting of a simple weave, a basket weave, a twill weave, a satin weave, a velour weave, a double velour weave, and combinations thereof.

10

23. A medical device, graft or prosthesis according to any of the preceding claims, wherein the knitted pattern is selected from the group consisting of a locknit pattern, a reverse locknit pattern, a velour pattern, a double velour pattern, a high-stretch knit pattern having at least a two-needle underlap with a one-needle overlap, and combinations thereof.

15

24. A medical device, graft or prosthesis according to any of the preceding claims, wherein the woven pattern is selected from the group consisting of a simple weave, a basket weave, a twill weave, a satin weave, a velour weave, a double velour weave, and combinations thereof and wherein the knitted pattern is selected from the group consisting of a locknit pattern, a reverse locknit pattern, a velour pattern, a double velour pattern, a high-stretch knit pattern having at least a two-needle underlap with a one-needle overlap, and combinations thereof.

20

25. A medical device, graft or prosthesis according to any of the preceding claims, wherein said woven textile portion and said knitted textile portion are single-layered textile portions.

25



1/14

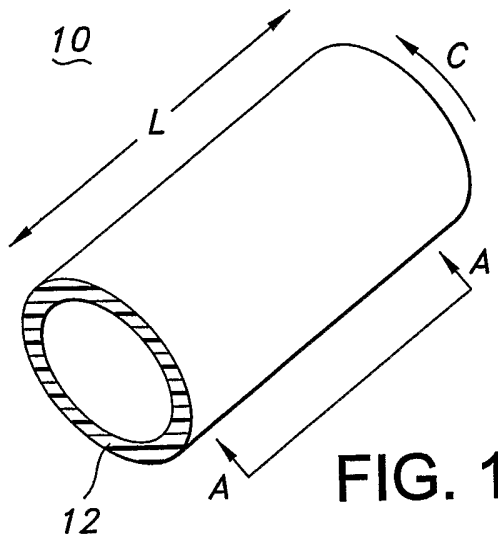


FIG. 1

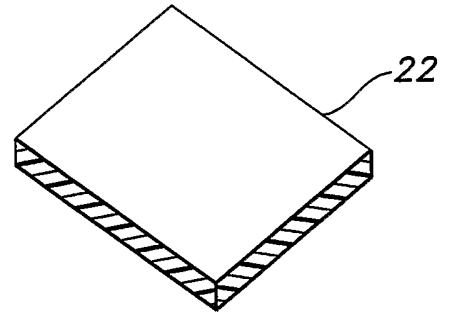


FIG. 3

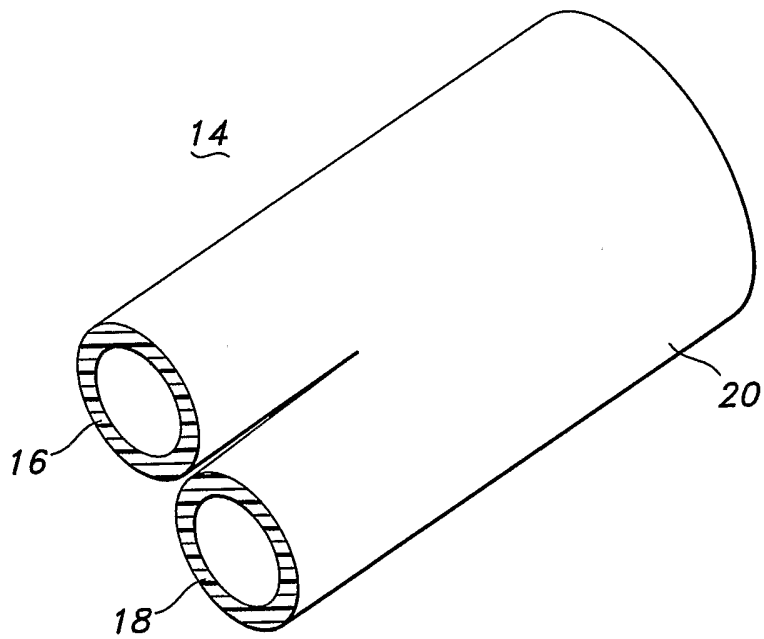


FIG. 2

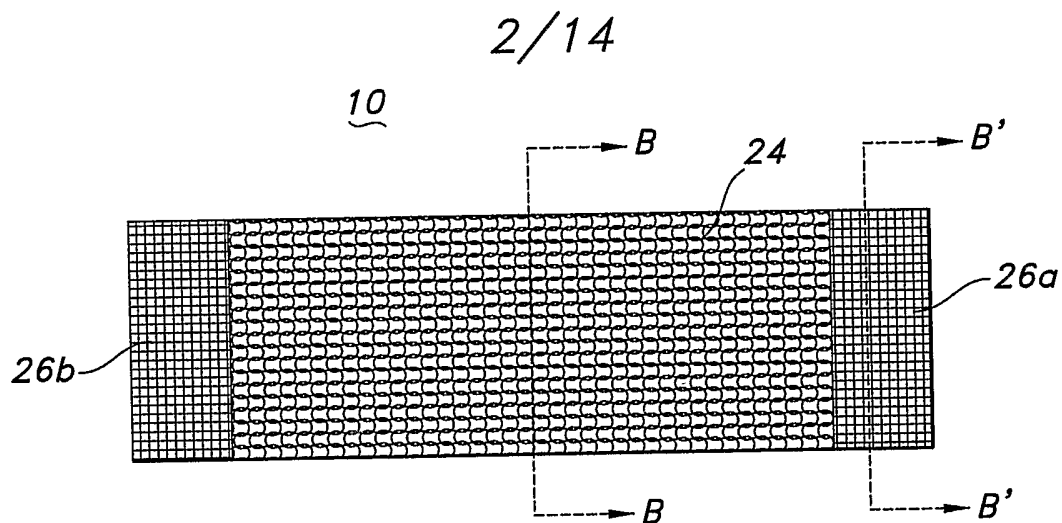


FIG. 4

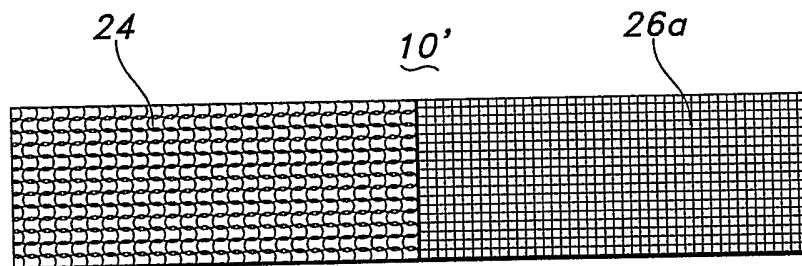


FIG. 5

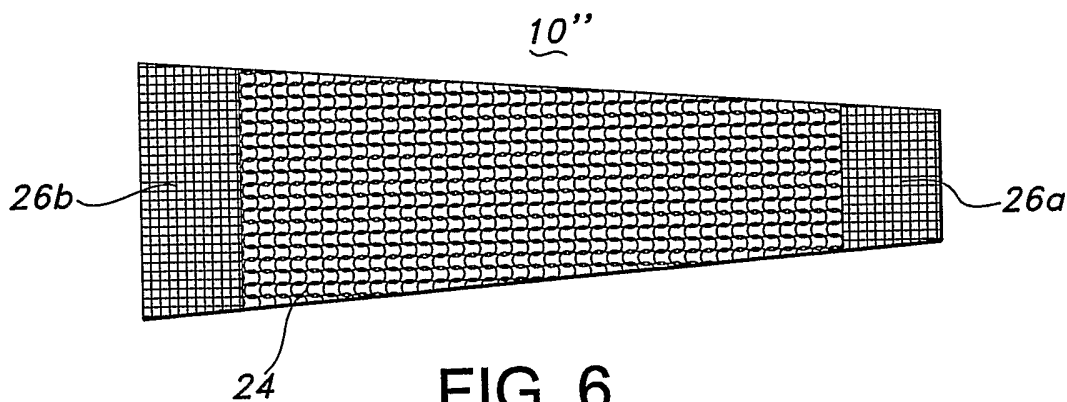


FIG. 6

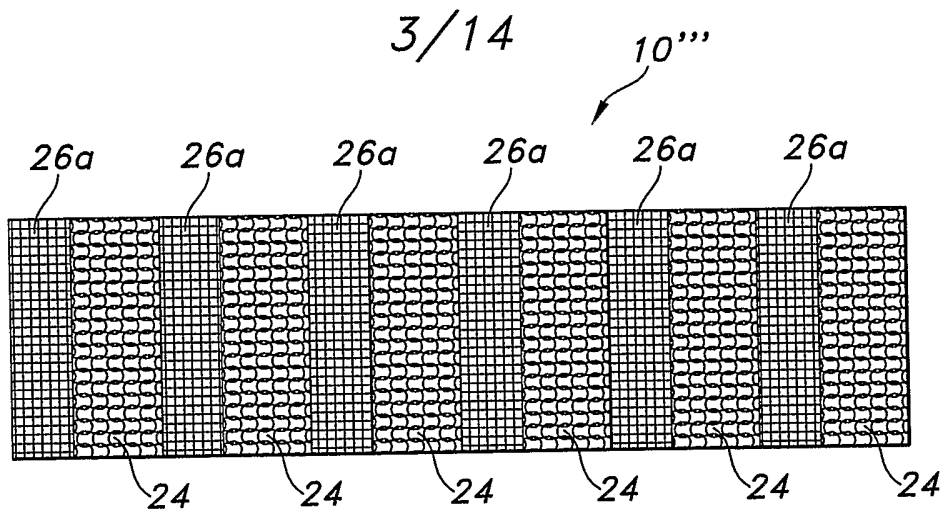


FIG. 7

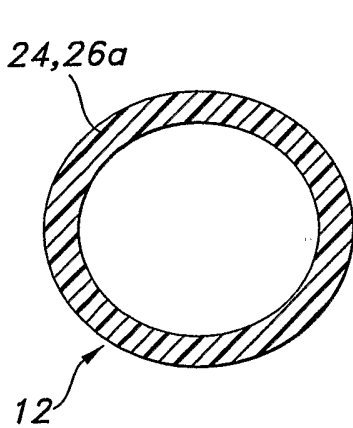


FIG. 8

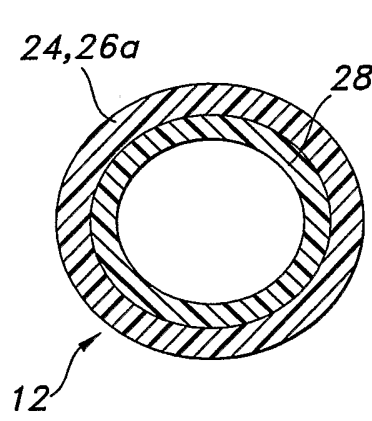


FIG. 9

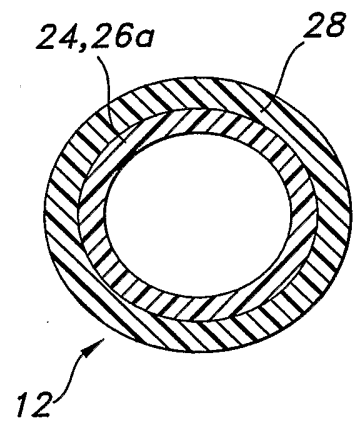


FIG. 10

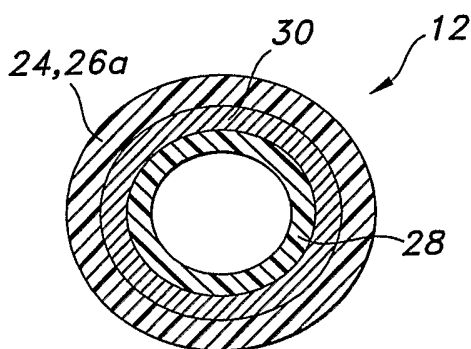


FIG. 11

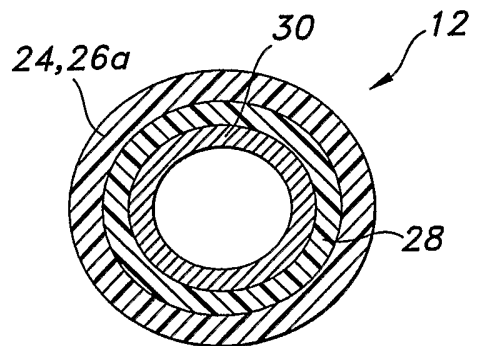


FIG. 12



4/14

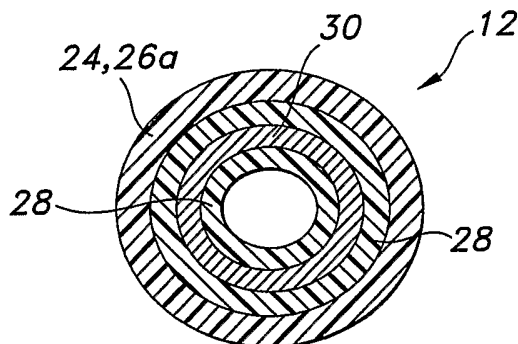


FIG. 13

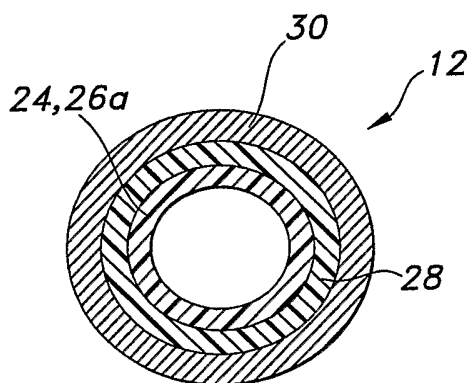


FIG. 14

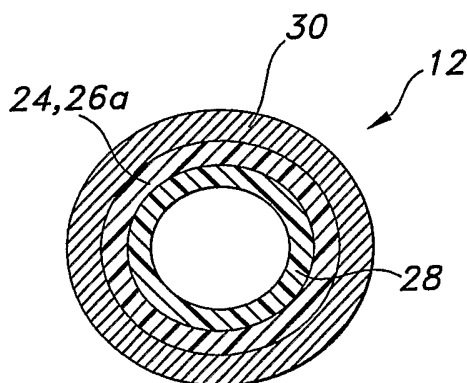


FIG. 15

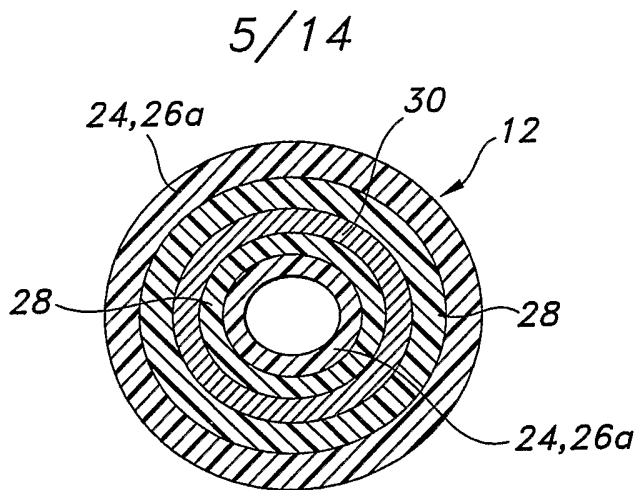


FIG. 16

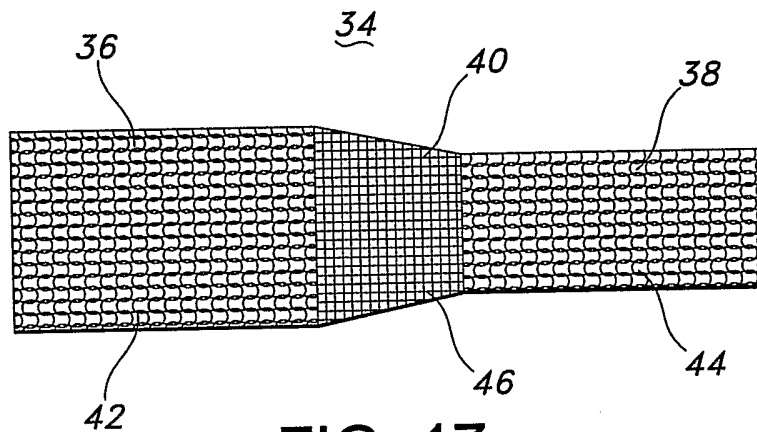


FIG. 17

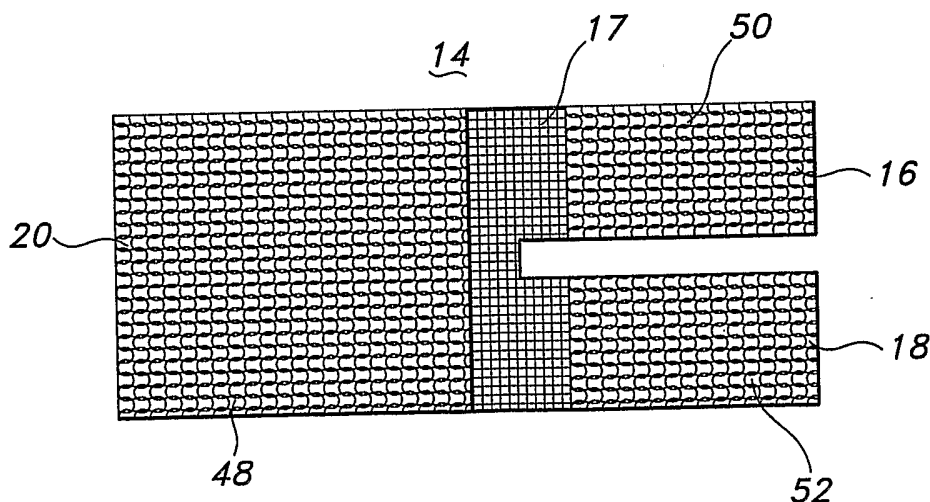
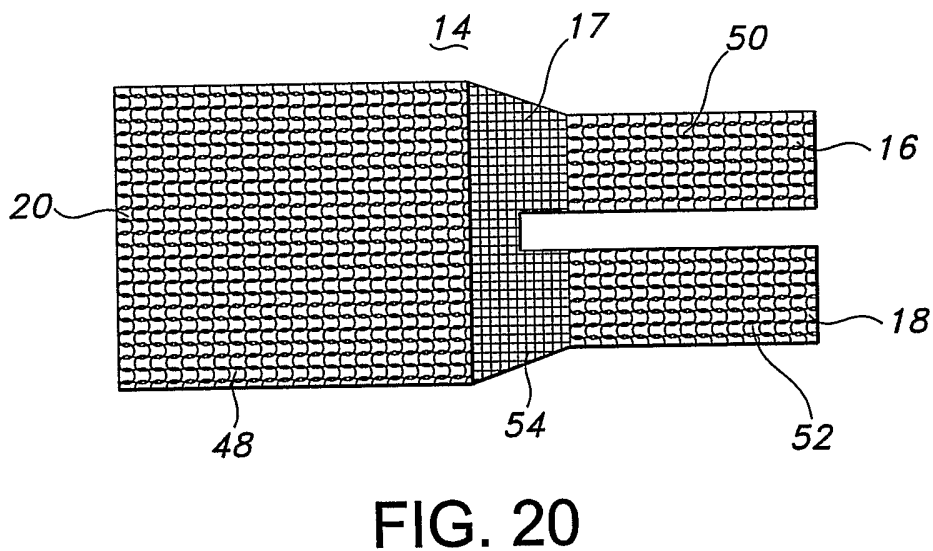
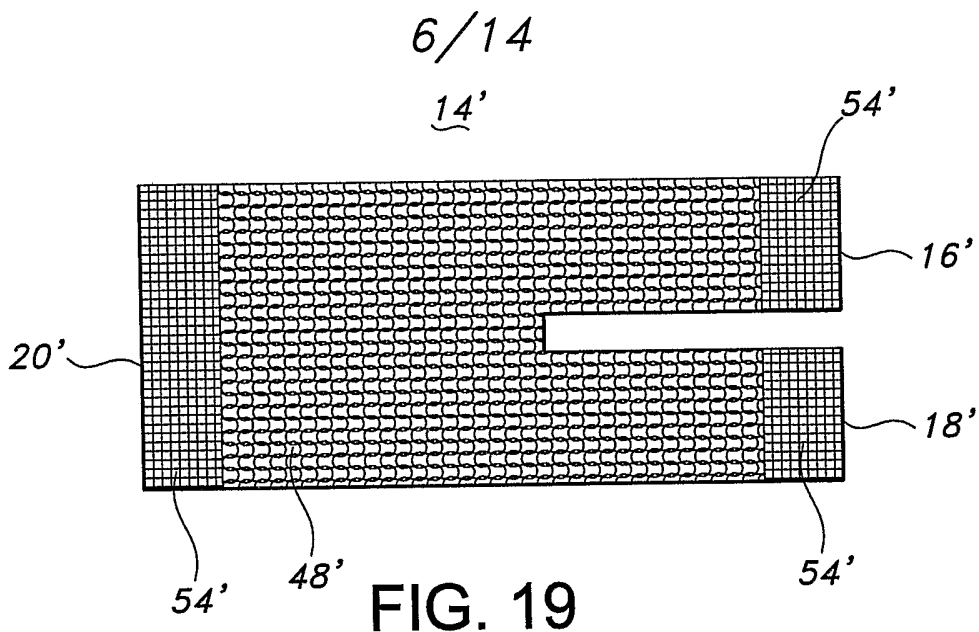


FIG. 18



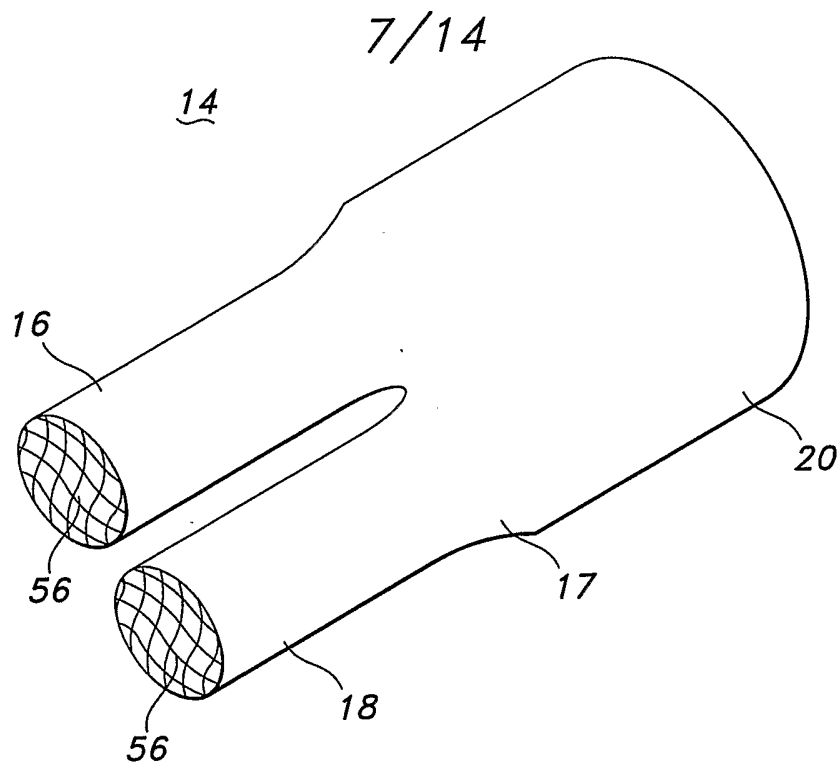


FIG. 21

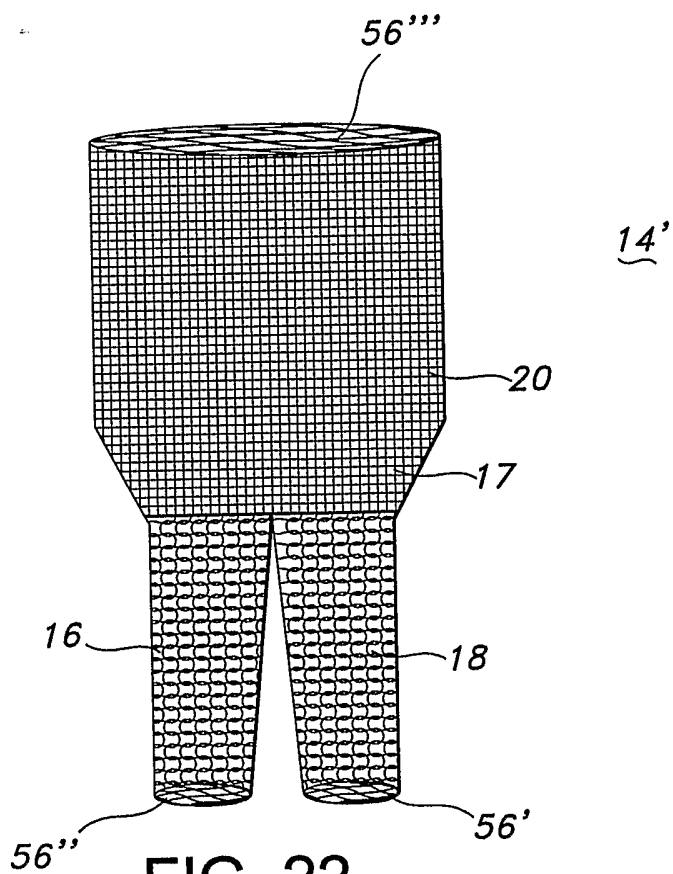


FIG. 22



8/14

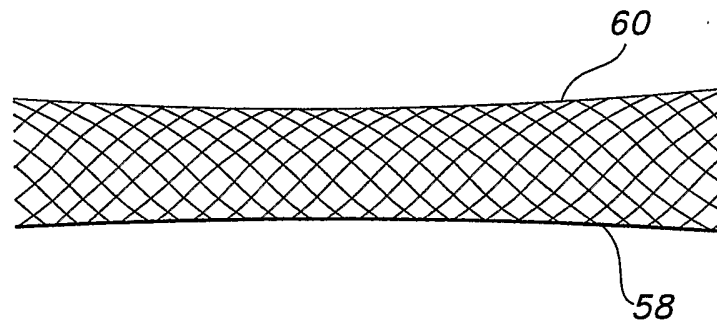


FIG. 23

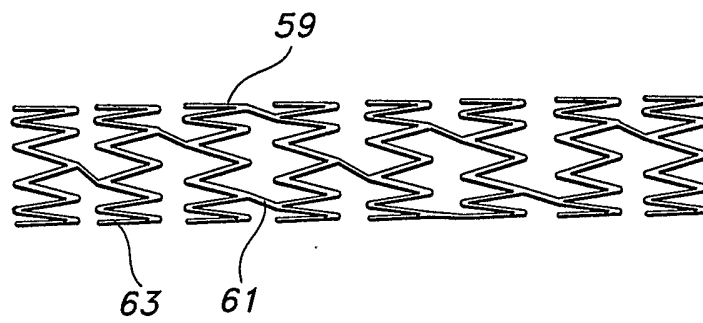


FIG. 24

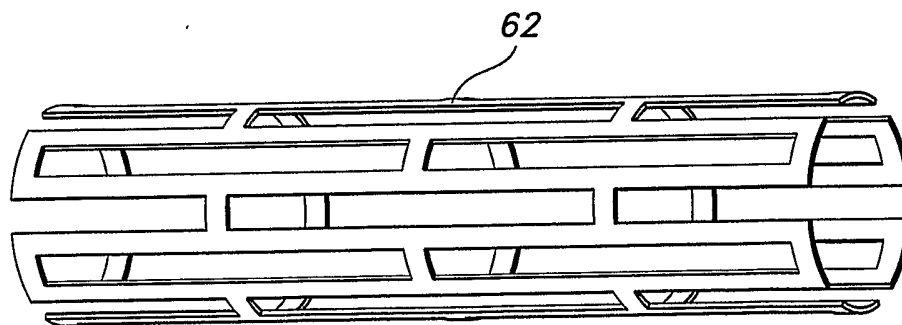


FIG. 25



9/14

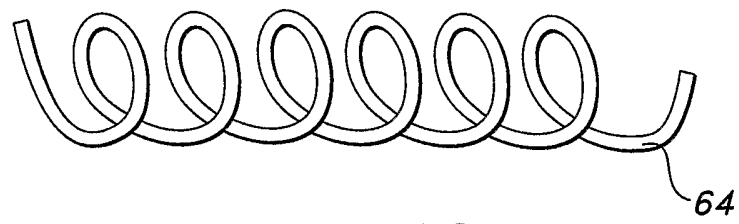


FIG. 26

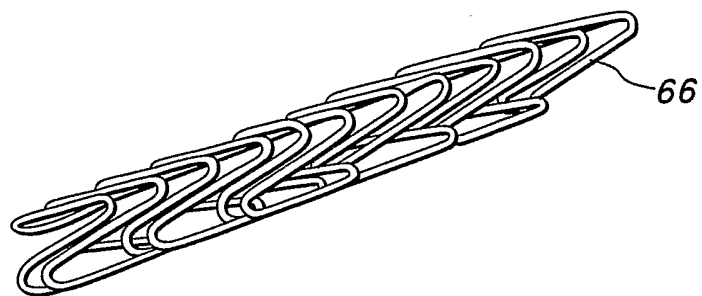


FIG. 27



10/14

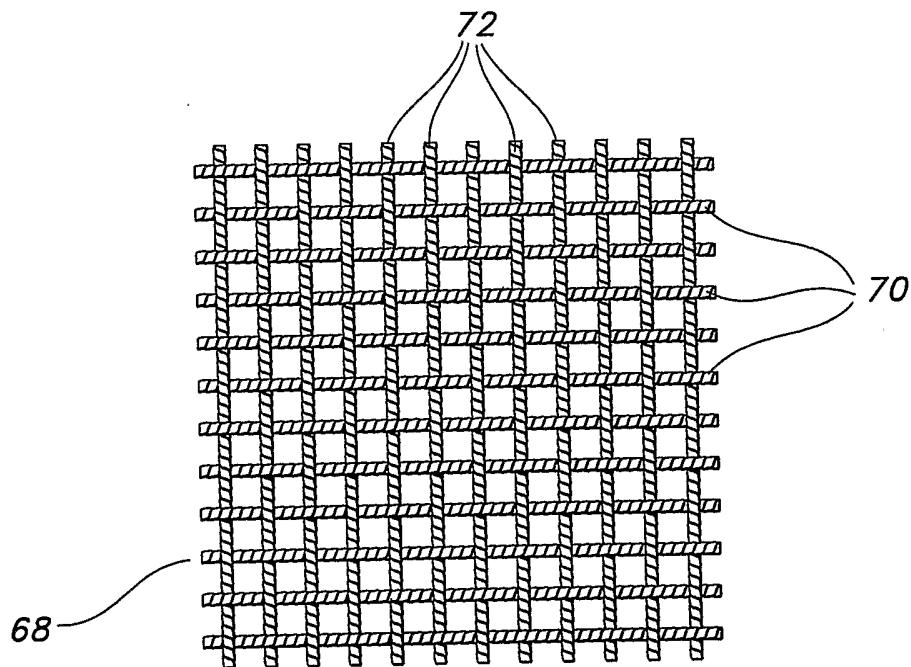


FIG. 28

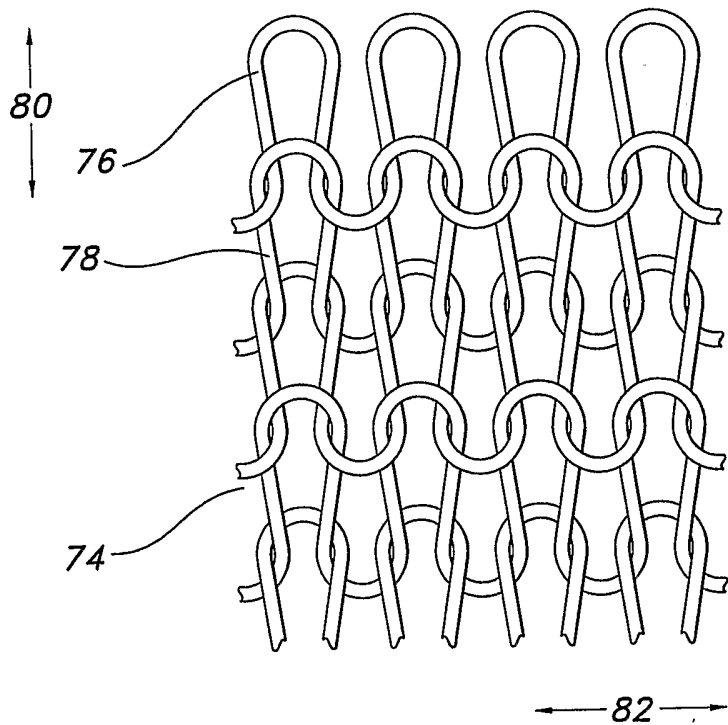


FIG. 29



11/14

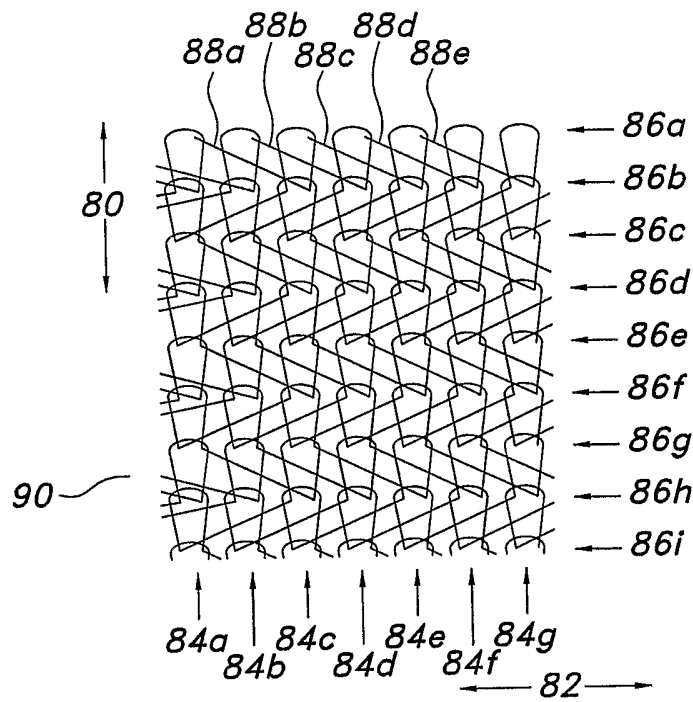


FIG. 30

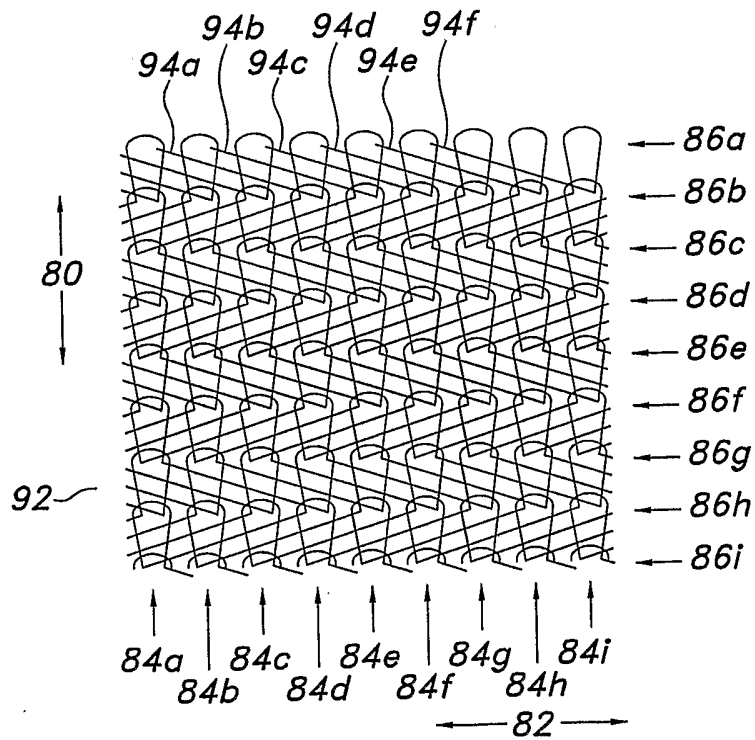


FIG. 31



12/14

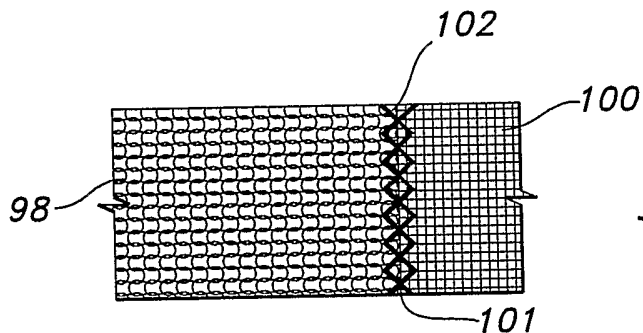


FIG. 32

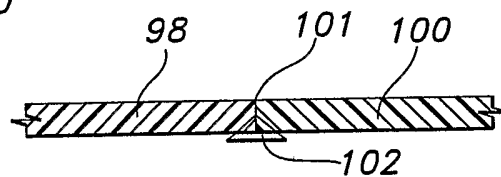


FIG. 33

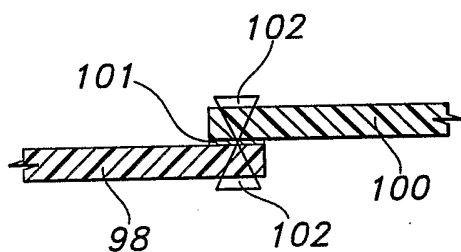


FIG. 34

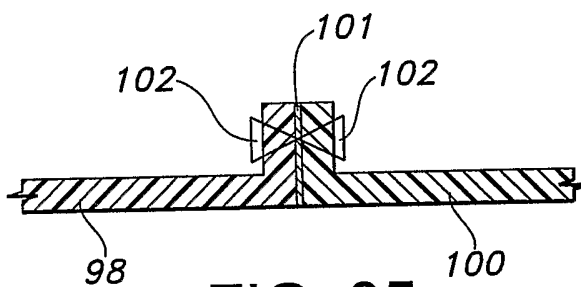


FIG. 35

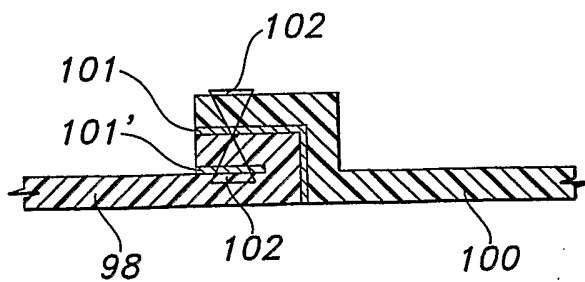


FIG. 36

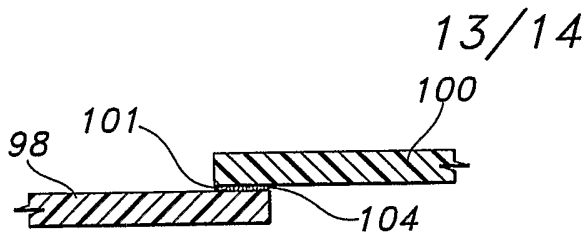


FIG. 37

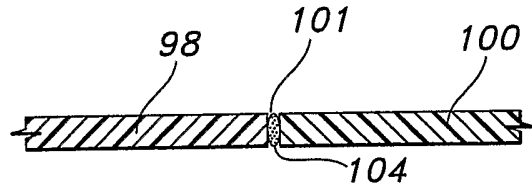


FIG. 38

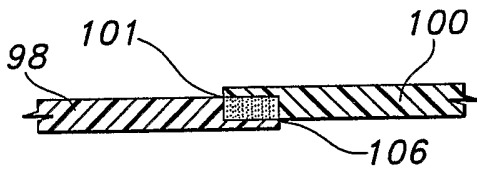


FIG. 39

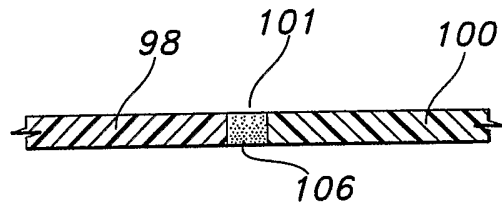


FIG. 40

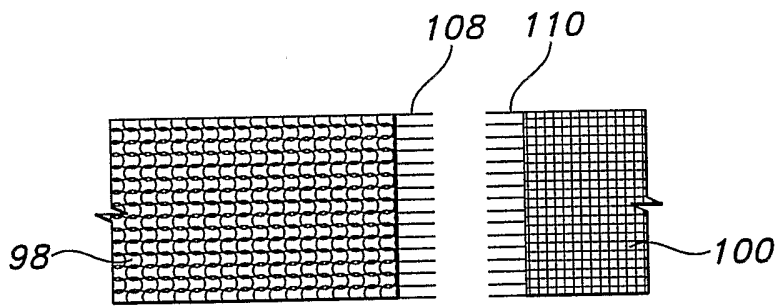


FIG. 41

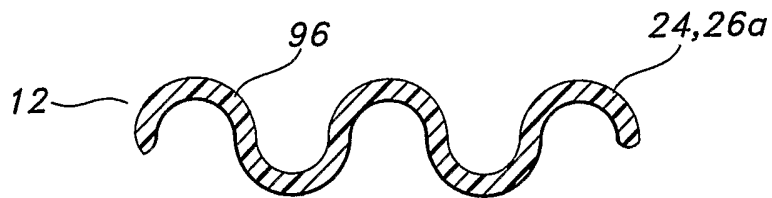


FIG. 42

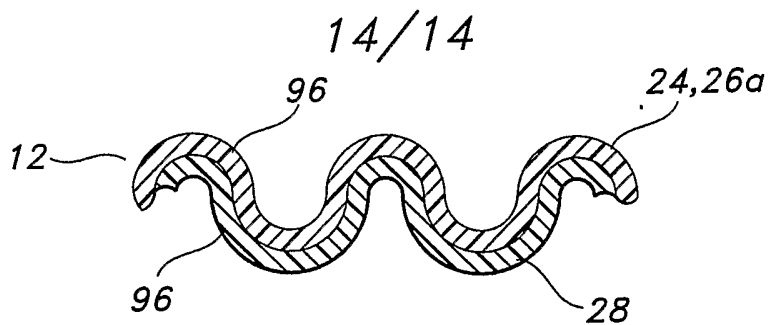


FIG. 43

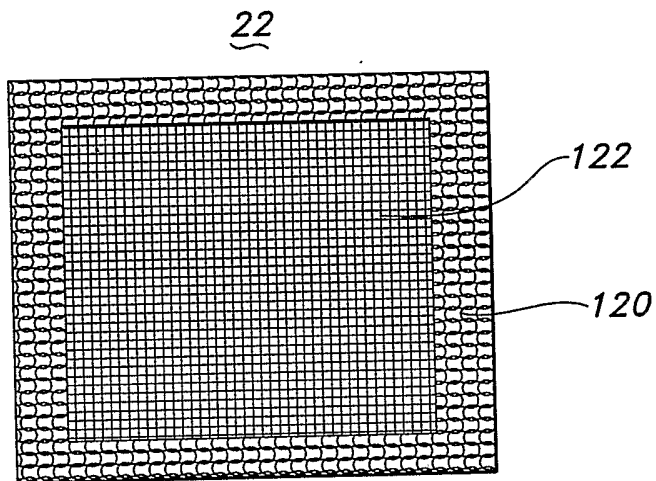


FIG. 44

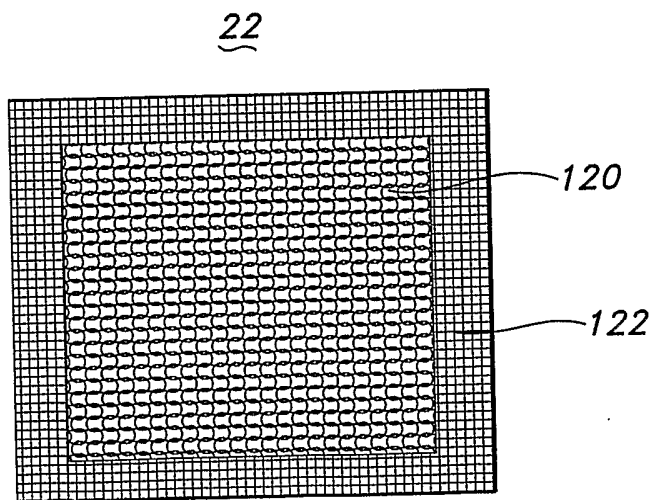


FIG. 45