



- (51) International Patent Classification:
G02B 5/28 (2006.01) *C03C 17/34* (2006.01)
C03C 17/36 (2006.01)
- (21) International Application Number:
PCT/US2016/029136
- (22) International Filing Date:
25 April 2016 (25.04.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/308,439 15 March 2016 (15.03.2016) US
- (71) Applicants: **GUARDIAN INDUSTRIES CORP.**
[US/US]; 2300 Harmon Road, Auburn Hills, MI 48326-1714 (US). **GUARDIAN EUROPE S.A.R.L.** [LU/LU];
19 Rue du Puits Romain, L-8070 Bertrange (LU).
- (72) Inventors: **LINGLE, Philip, J.**; 43 E. Temperance Road,
Temperance, MI 48182 (US). **DISTELDORF, Bernd**;
Langwiese 10, D-66693 Mettlach (DE).
- (74) Agent: **RHOA, Joseph, A.**; Nixon & Vanderhye P.C., 901
North Glebe Road, 11th Floor, Arlington, VA 22203-1808
(US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: GREY COLORED HEAT TREATABLE COATED ARTICLE HAVING LOW SOLAR FACTOR VALUE

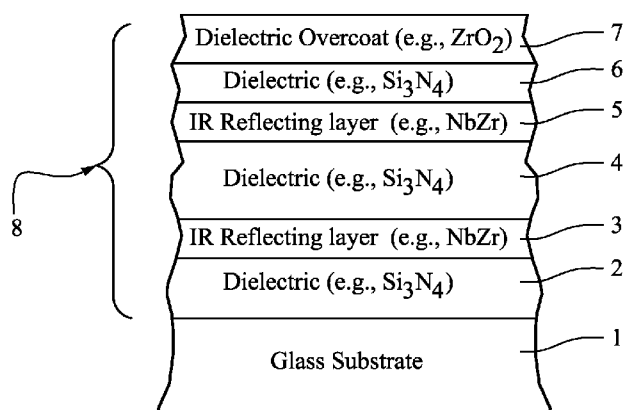


FIG. 1

(57) Abstract: There are provided coated articles that include two or more infrared (IR) reflecting layers (e.g., of or including NbZr, Nb, NiCr, NiCrMo, and/or a nitride thereof) sandwiched between at least dielectric layers, and/or a method of making the same. The coating may be designed so that the coated articles realize grey (including black) glass side reflective coloration in combination with a low solar factor (SF) and/or a low solar heat gain coefficient (SHGC). Such coated articles may be used in the context of monolithic windows, insulating glass (IG) window units, laminated windows, and/or other suitable applications, and may optionally be heat treated (e.g., thermally tempered) in certain instances.



GREY COLORED HEAT TREATABLE COATED ARTICLE HAVING LOW SOLAR FACTOR VALUE

[0001] This invention relates to coated articles that include two or more functional infrared (IR) reflecting layers sandwiched between at least dielectric layers, and/or a method of making the same. The coating may be designed so that the coated articles realize grey glass side reflective coloration in combination with a low solar factor (SF) and/or low solar heat gain coefficient (SHGC). Such coated articles may be used in the context of monolithic windows, insulating glass (IG) window units, laminated windows, and/or other suitable applications, and may optionally be heat treated (e.g., thermally tempered) in certain instances.

BACKGROUND AND SUMMARY OF THE INVENTION

[0002] Solar control coatings having a layer stack of glass/Si₃N₄/NiCr/Si₃N₄ are known in the art, where the metallic NiCr layer is the sole infrared (IR) reflecting layer in the coating. In certain instances, the NiCr layer may be nitrided. For example, see U.S. Patent No. 6,926,967, which is hereby incorporated herein by reference. See also U.S. Patent No. 5,688,585.

[0003] Unfortunately, while such layer stacks with NiCr IR reflecting layers provide efficient solar control and are overall good coatings, they are lacking in terms of being able to achieve a wider palette of available colors when desired. For example, with such a coating stack, if bluish green is desired the approach is to significantly increase the bottom dielectric thickness which unfortunately results in undesirable interference effects in that particular coating.

[0004] Grey (including black) coloration is sometimes desired in the context of monolithic windows, insulating glass (IG) window units, and/or other suitable applications. Desirable grey (including black) coloration (e.g., glass side reflective, or exterior), measured monolithically and/or in an IG window unit, may be characterized by: a* values of from -3.0 to +5.0, more preferably from -2.0 to +4.0, and most preferably -1.0 to +3.0; in combination with b* values of from -10.0 to +2.0, more preferably from -9.0 to -1.0, and most preferably from -4.0 to -8.0; in combination with

a glass side reflective/exterior L^* value of from 20-42, more preferably from 23-35, and most preferably from 25-33; in combination with a visible transmission (T_Y or T_{vis}) of no greater than 16%.

[0005] Low solar factor (SF) and solar heat gain coefficient (SHGC) values are also desired in some applications, particularly in warm weather climates. Solar factor (SF), calculated in accordance with EN standard 410, relates to a ratio between the total energy entering a room or the like through a glazing and the incident solar energy. Thus, it will be appreciated that lower SF values are indicative of good solar protection against undesirable heating of rooms or the like protected by windows/glazings. A low SF value is indicative of a coated article (e.g., IG window unit) that is capable of keeping a room fairly cool in summertime months during hot ambient conditions. Thus, low SF values are sometimes desirable in hot environments. While low SF values are sometimes desirable for coated articles such as IG window units, the achievement of lower SF values may come at the expense of sacrificing coloration. It is often desirable, but difficult, to achieve a combination of acceptable visible transmission, desirable glass side reflective coloration, and a low SF value for a coated article such as an IG window unit or the like. SF (G-Factor; EN410-673 2011) and SHGC (NFRC-2001) values are calculated from the full spectrum (T , R_g and R_f) and are typically measured with a spectrophotometer such as a Perkin Elmer 1050. The SF measurements are done on monolithic coated glass, and the calculated values can be applied to monolithic, IG and laminated applications.

[0006] U.S. Patent Document 2012/0177899 discloses several different coatings. The Examples 1, 4 and 5 on page four of US '899 in [0026] are glass/SiN/NiCrNx/SiN/NiCrNx/SiN. However, these examples have undesirable green or bronze glass side reflective coloration. Unfortunately, all Examples in US '899 suffer from undesirably high SF and SHGC values as well as high visible glass side reflectivity over 20%.

[0007] U.S. Patent No. 8,286,395 discloses numerous examples in columns 5-7, including examples of glass/SiN/NbN/SiN/NbN/SiN. Unfortunately, the examples of US '395 are unable to achieve desirable grey glass side reflective color as defined

above. For instance, all examples in US '395 have a visible transmission of at least 20%. Moreover, US '395 is silent as to SF and SHGC values, as well as L^* values. It is noted that glass side reflective color is a significant color when an IG window unit is provided with the coating on surface two, as the glass side reflective color is the color seen by those outside viewing the building on which the window is mounted.

[0008] It would be desirable if grey glass side reflective coloration could be achieved in combination with low SF and/or SHGC value(s). Note that a typical conventional IG window unit with two panes has an SHGC value around 0.70.

[0009] In certain example embodiments of this invention, it has surprisingly been found that by providing two or more IR reflecting layers (e.g., of or including NbZr and/or NbZrN_x) between respective dielectric layers, along with particular thickness parameters, desirable grey glass side reflective coloration can be achieved in combination with low SF and/or SHGC value(s). And optionally these desirable features may be achieved in combination with heat treatability and/or low visible glass side reflectivity. Such coatings provide for improved color control and/or ranges when desired, low SF values and thus the ability to keep rooms cool in warm climates, and also for good thermal stability (low ΔE^* value(s)) if desired.

[0010] Generally speaking, certain example embodiments of this invention fulfill one or more of the above listed needs by providing a coated article having grey glass side reflective coloration and including a layer system supported by a glass substrate, the layer system comprising: a first dielectric layer comprising nitrogen; a first infrared (IR) reflecting layer on the glass substrate over at least the first dielectric layer; a second dielectric layer comprising nitrogen on the glass substrate over at least the first dielectric layer and the first IR reflecting layer; a second layer IR reflecting layer on the glass substrate over at least the second dielectric layer; a third dielectric layer comprising nitrogen on the glass substrate over at least the second IR reflecting layer; wherein each of the first and second IR reflecting layers comprises one or more of: NbZr, NbZrN_x, NiCr, NiCrN_x, NiCrMo, NiCrMoN_x, NbCr, NbCrN_x, Nb and NbN_x; and wherein the coated article has: glass side/exterior reflective grey coloration comprising a glass side/exterior reflective a^* value of from -3.0 to +5.0, a glass side/exterior

reflective b^* value of from -10.0 to +2.0, a glass side/exterior reflective L^* value of from 20-42, and a visible transmission of no greater than 16%, and wherein: (i) if measured monolithically has an SF value of no greater than 0.33 and an SHGC value of no greater than 0.39, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.23 and an SHGC value of no greater than 0.27.

[0011] Certain example embodiments of this invention fulfill one or more of the above listed needs by providing a coated article having grey glass side reflective coloration and including a layer system supported by a glass substrate, the layer system comprising: a first dielectric layer comprising silicon nitride; a first infrared (IR) reflecting layer comprising NbZr on the glass substrate over at least the first dielectric layer comprising silicon nitride; a second dielectric layer comprising silicon nitride on the glass substrate over at least the first dielectric layer comprising silicon nitride and the first IR reflecting layer comprising NbZr; a second layer IR reflecting layer comprising NbZr on the glass substrate over at least the second dielectric layer comprising silicon nitride; a third dielectric layer comprising silicon nitride on the glass substrate over at least the second IR reflecting layer comprising NbZr; and wherein the coated article has: glass side/exterior reflective grey coloration comprising a glass side/exterior reflective a^* value of from -3.0 to +5.0, a glass side/exterior reflective b^* value of from -10.0 to +2.0, a glass side/exterior reflective L^* value of from 20-42, and a visible transmission of no greater than 16%, and: (i) if measured monolithically has an SF value of no greater than 0.33 and an SHGC value of no greater than 0.39, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.23 and an SHGC value of no greater than 0.27.

[0012] Thus, this invention covers monolithic window units, IG window units, laminated window units, and any other article including a glass substrate having a coating thereon as claimed. Note that monolithic measurements may be taken by removing a coated substrate from an IG window unit and/or laminated window unit, and then performing monolithic measurements. It is also noted that for a given coating the SF and SHGC values will be significantly higher for a monolithic window unit than

for an IG window unit.

[0013] In certain example embodiments of this invention, heat treated (HT) coated articles have a glass side reflective ΔE^* value due to heat treatment (e.g., thermal tempering) of no greater than 4.5, more preferably no greater than 4.0, even more preferably no greater than 3.5, and most preferably no greater than 3.0. For purposes of example, the heat treatment (HT) may be for at least about 5 minutes at a temperature(s) of at least about 580 degrees C, and is sufficient for thermal tempering. The term ΔE^* is known in the art and is indicative of thermal stability upon heat treatment, and is defined and explained for example in U.S. Patent No. 6,926,967 which is incorporated herein by reference.

IN THE DRAWINGS

[0014] Fig. 1 is a partial cross sectional view of a monolithic coated article (heat treated or not heat treated) according to an example embodiment of this invention.

[0015] Fig. 2 is a partial cross sectional view of a monolithic coated article (heat treated or not heat treated) according to another example embodiment of this invention.

[0016] Fig. 3 is a side cross sectional view of an insulating glass (IG) window unit, including the coated article of Fig. 1 or Fig. 2, according to example embodiments of this invention.

DETAILED DESCRIPTION OF CERTAIN EXAMPLE EMBODIMENTS OF THE INVENTION

[0017] Referring now more particularly to the accompanying drawings in which like reference numerals indicate like parts throughout the several views.

[0018] Coated articles according to example embodiments of this invention achieve desirable grey (including black) glass side reflective coloration in combination with low SF and/or SHGC value(s), and optionally also achieve heat treatability and/or visible glass side reflectivity of no greater than 20% (more preferably no greater than

15%, and most preferably no greater than 8%). It has surprisingly been found that by providing two or more IR reflecting layers (e.g., of or including NbZr and/or NbZrN_x) between respective dielectric layers, along with particular thickness parameters, desirable grey glass side reflective coloration can be achieved in combination with a low SF and/or SHGC value(s). And optionally these desirable features may be achieved in combination with heat treatability and/or visible glass side visible reflectivity ($R_{G[\text{or outside, or exterior}]Y}$) of no greater than 20% (more preferably no greater than 15%, and more preferably no greater than 8%). In example embodiments of this invention, the coated article: (i) if measured monolithically has an SF value of no greater than 0.33 (more preferably no greater than 0.32, and most preferably no greater than 0.31) and/or an SHGC value of no greater than 0.39, more preferably no greater than 0.37, and most preferably no greater than 0.35, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.23 (more preferably no greater than 0.22, and most preferably no greater than 0.21) and/or an SHGC value of no greater than 0.27 (more preferably no greater than 0.25, and most preferably no greater than 0.23). Thus, such coatings provide for improved color control and/or ranges when desired and low SF values indicating ability to keep rooms cool in warm environments, and may also provide for good thermal stability (low ΔE^* value(s)) when desired.

[0019] Certain embodiments of this invention provide a coating or layer system that may be used in windows such as monolithic windows (e.g., vehicle, residential, and/or architectural windows), IG window units, and/or other suitable applications. Certain example embodiments of this invention provide a layer system that is characterized by color control, low SF values, and/or color stability upon heat treatment. With respect to stability upon heat treatment (HT), this means a low value of ΔE^* ; where Δ is indicative of a^* , b^* and L^* change in view of HT such as thermal tempering, heat bending, or thermal heat strengthening, monolithically and/or in the context of dual pane environments such as IG units or laminates. In certain exemplary embodiments, the color stability with HT may result in substantial matchability between heat-treated and non-heat treated versions of the coating or layer system. In

other words, in monolithic and/or IG applications, in certain embodiments of this invention two glass substrates having the same coating system thereon (one HT after deposition and the other not HT) appear to the naked human eye to look substantially the same.

[0020] The terms "heat treatment" and "heat treating" as used herein mean heating the article to a temperature sufficient to achieve thermal tempering, heat bending, and/or heat strengthening of the glass inclusive article. This definition includes, for example, heating a coated article in an oven or furnace at a temperature of least about 580 degrees C, more preferably at least about 600 degrees C, for a sufficient period to allow tempering, bending, and/or heat strengthening. In certain instances, the HT may be for at least about 4 or 5 minutes. The coated article may or may not be heat treated in different embodiments of this invention.

[0021] Figures 1-2 are side cross sectional views of coated articles according to different example embodiments of this invention. In the Fig. 1 embodiment the solar control coating 8 includes two IR reflecting layers 3 and 5, whereas in Fig. 2 the solar control coating 8' includes three IR reflecting layers 3, 5 and 15. An additional dielectric layer 16 is also provided in the Fig. 2 embodiment. Fig. 3 illustrates an IG window unit, with the coating (8 or 8') on surface two, showing that the IG window unit can use the coating (8 or 8') of either the Fig. 1 embodiment or the Fig. 2 embodiment.

[0022] Referring to Fig. 1, the coated article includes at least glass substrate 1 (e.g., clear, green, bronze, grey, blue, or blue-green glass substrate from about 1.0 to 12.0 mm thick), dielectric layers 2, 4, 6 (e.g., of or including silicon nitride (e.g., Si_3N_4), silicon oxynitride, tin oxide, or some other suitable dielectric), IR reflecting layers 3, 5 which may be of or include substantially metallic or metallic material such as NbZr, NbZrN_x, NiCr, NiCrN_x, NiCrMo, NiCrMoN_x, NbCr, NbCrN_x, Nb and/or NbN_x. It will be appreciated that the IR reflecting layers 3 and/or 5 may optionally be nitrided in certain example embodiments of this invention. While the IR reflecting layers may include some small amount of oxygen in certain instances, it is preferable that these layers 3 and 5 are substantially free of oxygen such as no more than 5%

oxygen, more preferably no more than about 3% or 2% oxygen in certain embodiments (atomic %). The coated article further includes dielectric overcoat layer 7 of or including a protective material such as zirconium oxide (e.g., ZrO_2) or silicon oxynitride. Optionally, a dielectric layer of or including silicon oxynitride and/or zirconium silicon oxynitride of any suitable stoichiometry may be located between and contacting layers 6 and 7 in the upper part of the layer stack. In certain example embodiments of this invention, coating 8 does not include any metallic IR blocking or reflecting layer of or based on Ag or Au. In certain example embodiments of this invention, IR reflecting layers 3 and 5 reflect at least some IR radiation, and do not contact any other metal IR reflecting layer. In certain example embodiments, it is possible for each of the layers to include other materials such as dopants. It will be appreciated of course that other layers may also be provided, or certain layers may be omitted, and different materials may be used, in certain alternative embodiments of this invention.

[0023] Referring to the Fig. 2 embodiment, the coated article includes at least glass substrate 1 (e.g., clear, green, bronze, grey, blue, or blue-green glass substrate from about 1.0 to 12.0 mm thick), dielectric layers 2, 4, 6, 16 (e.g., of or including silicon nitride (e.g., Si_3N_4), silicon oxynitride, tin oxide, or some other suitable dielectric), IR reflecting layers 3, 5, 15 which may be of or include substantially metallic or metallic material such as NbZr, NbZrN_x, NiCr, NiCrN_x, NiCrMo, NiCrMoN_x, NbCr, NbCrN_x, Nb and/or NbN_x. It will be appreciated that the IR reflecting layers 3, 5 and/or 15 may optionally be nitrided in certain example embodiments of this invention. Optionally, a dielectric layer of or including silicon oxynitride and/or zirconium silicon oxynitride of any suitable stoichiometry may be located between and contacting layers 16 and 7 in the upper part of the layer stack in the Fig. 2 embodiment. While the IR reflecting layers may include some small amount of oxygen in certain instances, it is preferable that these layers 3, 5, 15 are substantially free of oxygen such as no more than 5% oxygen, more preferably no more than about 3% or 2% oxygen in certain embodiments. The coated article in Fig. 2 further includes dielectric overcoat layer 7 of or including a protective material such as zirconium oxide

(e.g., ZrO_2) or silicon oxynitride. For example, when the IR reflecting layers are of or include NbZr, they may be sputter deposited using NbZr targets, and with a gas flow of from about 200-300 ml Ar and from about 0.8-2.5 ml/kW N_2 and/or O_2 .

[0024] In certain example embodiments of this invention, coating 8' of the Fig. 2 embodiment does not include any metallic IR blocking or reflecting layer of or based on Ag or Au. In certain example embodiments of this invention, IR reflecting layers 3, 5 and 15 reflect at least some IR radiation, and do not contact any other metal IR reflecting layer. In certain example embodiments, it is possible for each of the layers to include other materials such as dopants. It will be appreciated of course that other layers may also be provided, or certain layers may be omitted, and different materials may be used, in certain alternative embodiments of this invention.

[0025] The overall coatings (8, 8') of Figs. 1-2 include at least the illustrated layers. It is noted that the terms "oxide" and "nitride" as used herein include various stoichiometries. For example, the term silicon nitride (for one or more of layers 2, 4, 6, 16) includes stoichiometric Si_3N_4 , as well as non-stoichiometric silicon nitride. Likewise, various stoichiometries may be used. For instance, when NbZr is used for IR reflecting layers 3, 5, 15, various ratios of Nb to Zr may be used including but not limited to a 50/50 ratio, an 85/15 ratio, or a 90/10 ratio. In certain example embodiments of this invention, the Nb/Zr ratio in layers 3, 5, and 15 may be from 1/1 to 9.5/1 in various example embodiments of this invention, such that these layers preferably contain more Nb than Zr. The illustrated layers may be deposited on glass substrate 1 via magnetron sputtering, any other type of sputtering, or via any other suitable technique in different embodiments of this invention. It is noted that other layer(s) may be provided in the stacks shown in Figs. 1-2 such as between layers 2 and 3, or between layers 3 and 4, or between the substrate 1 and layer 2, or the like. Generally, other layer(s) may also be provided in other locations of the coating. Thus, while the coating 8, 8' or layers thereof is/are "on" or "supported by" substrate 1 (directly or indirectly), other layer(s) may be provided therebetween. Thus, for example, the layer systems 8, 8' and layers thereof shown in Figs. 1-2 are considered "on" the substrate 1 even when other layer(s) may be provided therebetween (i.e., the

terms "on" and "supported by" as used herein are not limited to directly contacting). However, there may be the direct contacts shown in Figs. 1-2 in preferred embodiments.

[0026] In certain example embodiments of this invention, dielectric layers 2, 4, 6, and 16 may each have an index of refraction "n" of from 1.7 to 2.7 (at 550 nm), more preferably from 1.9 to 2.5 in certain embodiments, and most preferably from about 2.0 to 2.06 in preferred embodiments of this invention. One, two, three, or all of these layers 2, 4, 6, 16 may be of or include silicon nitride and/or silicon oxynitride in certain example embodiments of this invention. In such embodiments of this invention where layers 2, 4, 6 and/or 16 comprise silicon nitride (e.g., Si_3N_4), sputtering targets including Si employed to form these layers may or may not be admixed with up to 1-20% (e.g., 8%) by weight aluminum or stainless steel (e.g. SS#316), with about this amount then appearing in the layers so formed. Even with this amount(s) of aluminum and/or stainless steel, such layers are still considered dielectric layers.

[0027] While Figs. 1-2 illustrate a coated article according to an embodiment of this invention in monolithic form, coated articles according to other embodiments of this invention may comprise IG (insulating glass) window units such as shown in Fig. 3. In IG window embodiments, coating 8 or 8' from Figs. 1-2 may be provided on the inner wall of the outer substrate of the IG unit as shown in Fig. 3 (surface two), and/or on the inner wall of the inner substrate, or in any other suitable location in other embodiments of this invention. As shown in Fig. 3, an example IG window unit may comprise a pair of spaced apart glass substrates 1, 30 each about 3-19 mm thick, at least one of which is coated with a coating 8, 8' herein in certain example instances, where the insulating gap 34 between the substrates may be from about 5 to 30 mm, more preferably from about 10 to 20 mm, and most preferably about 16 mm. Spacer(s) 32 may be provided around the periphery to space the glass substrates from each other and maintain gap 34. In certain preferred embodiments, the glass substrate 1 shown in Figs. 1-2 may be the outer glass substrate 1 of an IG window unit as shown in Fig. 3 and the coating 8, 8' may be provided on the interior surface of the outer glass substrate 1 (i.e., surface two of the IG window unit). The gap between substrates in an IG unit may be

filed with air and/or argon gas in certain example embodiments. IG window units having three glass substrates/panes may also be used.

[0028] Turning back to the Fig. 1 embodiment, various thicknesses may be used consistent with one or more of the needs discussed herein. According to certain example embodiments of this invention, example thicknesses (in angstroms) and materials for the respective layers of the Fig. 1 embodiment on the glass substrate 1 are as follows in certain example embodiments for achieving desired grey glass side reflective coloration in combination with a low SF and/or SHGC value(s) (layers are listed in order moving away from the glass substrate 1):

Table 1 (Thicknesses for grey color and low SF/SHGC in Fig. 1 embodiment)

Layer	Example Range (Å)	Preferred (Å)	Best (Å)
silicon nitride (layer 2):	400-1,000 Å	550-850 Å	600-750 Å
IR reflector (e.g., NbZr) (layer 3):	50-140 Å	70-120 Å	80-100 Å
silicon nitride (layer 4):	300-800 Å	500-700 Å	550-650 Å
IR reflector (e.g., NbZr) (layer 5):	50-140 Å	70-120 Å	80-100 Å
silicon nitride (layer 6):	150-450 Å	250-400 Å	270-310 Å
overcoat (e.g., ZrO ₂) (layer 7):	10-500 Å	10-60 Å	20-40 Å

[0029] Table 1 above relates to, for example, embodiments where glass side reflective generally grey coloration and a low SF and/or SHGC value(s) are desirable for the Fig. 1 embodiment (or Fig. 1 embodiment used in an IG window unit as shown in Fig. 3). It has been surprisingly found that in the Fig. 1 embodiment desirable grey glass side reflective coloration can be achieved in combination with low SF and low SHGC values and low glass side visible reflection ($R_{G/outside/exteriorY}$) using the thicknesses discussed in Table 1 above and when designing the Fig. 1 coating 8 so that: (i) IR reflecting layers 3 and 5 (e.g., of or including NbZr, or a nitride thereof) are of

substantially the same thickness, which means that they are the same thickness plus/minus 15 Å, (ii) a thickness ratio of layer 2/layer 6 is at least 1.5, more preferably at least 2.0, and (iii) a thickness ratio of layer 4/layer 6 is at least 1.4, more preferably at least 1.7. It is noted that desirable grey (which includes black herein) coloration (e.g., glass side/exterior reflective), measured monolithically and/or in an IG window unit, may be characterized by: a^* values of from -3.0 to +5.0, more preferably from -2.0 to +4.0, and most preferably -1.0 to +3.0; in combination with b^* values of from -10.0 to +2.0, more preferably from -9.0 to -1.0, and most preferably from -8.0 to -4.0; in combination with a glass side reflective/exterior L^* value of from 20-42, more preferably from 23-35, and most preferably from 25-33; in combination with a visible transmission (T_Y or T_{vis}) of no greater than 16% (e.g., 7-16%).

[0030] In certain example embodiments, the IR reflecting layers 3 and 5 may be of the same or substantially the same materials as indicated above (e.g., NbZr and/or a nitride thereof). In certain example embodiments, the layers 3 and/or 5 are metallic, or substantially metallic, and are provided between nitride layers (e.g., silicon nitride based layers 2, 4, 6) in order to reduce or prevent oxidation of the IR reflecting layers during possible heat treatment (e.g., thermal tempering, heat bending, and/or heat strengthening) thereby permitting predictable coloration to be achieved following the heat treatment at multiple viewing angles.

[0031] In certain exemplary embodiments, the color stability with HT may result in substantial matchability between heat-treated and non-heat treated versions of the coating or layer system. In other words, in monolithic and/or IG applications, in certain embodiments of this invention two glass substrates having the same coating system thereon (one HT after deposition and the other not HT) appear to the naked human eye to look substantially the same.

[0032] Before and/or after any optional heat treatment (HT) such as thermal tempering, in certain example embodiments of this invention coated articles according to the Fig. 1 (or Fig. 1, 3) embodiment have color/optical characteristics as follows in Table 2 (measured monolithic and/or in an IG unit). It is noted that subscript "G" stands for glass side reflective, subscript "T" stands for transmissive, and subscript "F"

stands for film side reflective. As is known in the art, glass side (G) means when viewed from the glass side (as opposed to the layer/film side) of the coated article. Film side (F) means when viewed from the side of the coated article on which the coating is provided. Table 3 set forth below illustrates certain characteristics of coated articles according to certain example embodiments of this invention after HT such as thermal tempering (monolithically measured for Table 3) for all colors. The characteristics below in Table 2 are applicable to HT and non-HT coated articles herein, except that the thermal stability data in Table 3 relates to HT coated articles and demonstrates the stability upon HT.

Table 2: Color/Optical Characteristics (Fig. 1 embodiment monolithic or in IG)

	General	Preferred	Most Preferred
T_{vis} (TY):	$\leq 16\%$	6-16%	$\leq 7-14\%$
L^*_T	25-60	35-55	40-50
a^*_T	-8 to +8	-5 to +5	-2 to +2
b^*_T	-15 to +15	-10 to +10	-5 to +5
R_{GY} (glass side):	$\leq 20\%$	$\leq 15\%$	$\leq 8\%$
L^*_G	20-42	23-35	25-33
a^*_G	-3 to +5	-2 to +4	-1 to +3
b^*_G	-10 to +2	-9 to -1	-8 to -4
R_{FY} (film side):	$\leq 35\%$	$\leq 20\%$	$\leq 15\%$
a^*_F	-15 to +15	-8 to +8	-4 to +4
b^*_F	-30 to +30	-22 to +22	-15 to +15
R_s (Ω/sq):	< 140	< 100	30-75

14

SF [Monolithic]:	≤ 0.33	≤ 0.32	≤ 0.31
SHGC [Monolithic]:	≤ 0.39	≤ 0.37	≤ 0.35
SF [IG]:	≤ 0.23	≤ 0.22	≤ 0.21
SHGC [IG]:	≤ 0.27	≤ 0.25	≤ 0.23

Table 3: Thermal Stability (Fig. 1 after HT; in addition to Table 2)

	General	Preferred	Most Preferred
ΔE^*_G	≤ 4.0	≤ 3.5	≤ 3.0

[0033] Regarding the Fig. 2 embodiment, various thicknesses may be used consistent with one or more of the needs discussed herein. According to certain example embodiments of this invention, example thicknesses (in angstroms) and materials for the respective layers of coating 8' in the Fig. 2 embodiment on the glass substrate 1 are as follows in certain example embodiments for achieving desired grey glass side reflective coloration in combination with a low SF and/or SHGC value(s) (layers are listed in order moving away from the glass substrate 1):

Table 4 (Thicknesses for grey color and low SF/SHGC in Fig. 2 embodiment)

Layer	Example Range (Å)	Preferred (Å)	Best (Å)
silicon nitride (layer 2):	20-250 Å	40-160 Å	60-140 Å
IR reflector (e.g., NbZr) (layer 3):	10-90 Å	10-50 Å	15-40 Å
silicon nitride (layer 4):	150-800 Å	300-600 Å	350-500 Å
IR reflector (e.g., NbZr) (layer 5):	20-150 Å	30-100 Å	40-90 Å
silicon nitride (layer 6):	300-900 Å	400-750 Å	500-650 Å

IR reflector (e.g., NbZr) (layer 15):	14-150 Å	20-100 Å	30-90 Å
silicon nitride (layer 16):	100-700 Å	200-570 Å	300-470 Å
overcoat (e.g., ZrO ₂) (layer 7):	10-500 Å	10-60 Å	20-40 Å

[0034] Table 4 above relates to, for example, embodiments where glass side reflective generally grey coloration and a low SF and/or SHGC value(s) are desirable for the Fig. 2 embodiment (or Fig. 2 embodiment used in an IG window unit as shown in Fig. 3). It has been surprisingly found that in the Fig. 2 embodiment desirable grey glass side reflective coloration can be achieved in combination with low SF and low SHGC values, and low glass side visible reflection ($R_{G/outside/exterior Y}$) using the thicknesses discussed in Table 4 above and when designing the Fig. 2 coating 8' so that one or more of the following are satisfied: (i) IR reflecting layers 5 and 15 (e.g., of or including NbZr, or a nitride thereof) are of substantially the same thickness, which means that they are the same thickness plus/minus 15 Å, (ii) dielectric layers 4 and 16 are of substantially the same thickness, which means that they are the same thickness plus/minus 10%, (iii) a thickness ratio of layer 6/layer 4 is at least 1.1, and (iv) a thickness ratio of layer 6/layer 2 is at least 2, more preferably at least 3.

[0035] In certain example embodiments, the IR reflecting layers 3, 5 and 15 may be of the same or substantially the same materials as indicated above (e.g., NbZr and/or a nitride thereof). In certain example embodiments, the layers 3, 5 and/or 15 are metallic, or substantially metallic, and are provided between nitride layers (e.g., silicon nitride based layers 2, 4, 6, 16) in order to reduce or prevent oxidation of the IR reflecting layers during possible heat treatment (e.g., thermal tempering, heat bending, and/or heat strengthening) thereby permitting predictable coloration to be achieved following the heat treatment at multiple viewing angles.

[0036] Before and/or after any optional heat treatment (HT) such as thermal tempering, in certain example embodiments of this invention coated articles according to the Fig. 2 (or Fig. 2, 3) embodiment have color/optical characteristics as follows in Table 5 (measured monolithic and/or in an IG unit). Table 6 set forth below illustrates

certain characteristics of coated articles according to certain example embodiments of this invention after HT such as thermal tempering (monolithically measured for Table 6) for all colors. The characteristics below in Table 5 are applicable to HT and non-HT coated articles herein according to the Fig. 2 (or Fig. 2-3) embodiment, except that the thermal stability data in Table 6 relates to HT coated articles and demonstrates the stability upon HT.

Table 5: Color/Optical Characteristics (Fig. 2 embodiment monolithic or in IG)

	General	Preferred	Most Preferred
T_{vis} (TY):	$\leq 16\%$	6-16%	7-14%
L^*_T	25-60	35-55	40-50
a^*_T	-8 to +8	-5 to +5	-2 to +2
b^*_T	-15 to +15	-10 to +10	-5 to +5
$R_{G/outside}Y$ (glass side): $\leq 20\%$		$\leq 15\%$	≤ 8
L^*_G	20-42	23-35	25-33
a^*_G	-3 to +5	-2 to +4	-1 to +3
b^*_G	-10 to +2	-9 to -1	-8 to -4
$R_{F/inside}Y$ (film side): $\leq 35\%$		$\leq 20\%$	$\leq 15\%$
a^*_F	-15 to +15	-8 to +8	-4 to +4
b^*_F	-30 to +30	-22 to +22	-15 to +15
R_s (Ω/sq):	< 160	< 100	30-75
SF [Monolithic]: ≤ 0.33		≤ 0.32	≤ 0.31

SHGC [Monolithic]:	≤ 0.39	≤ 0.37	≤ 0.35
SF [IG]:	≤ 0.23	≤ 0.22	≤ 0.21
SHGC [IG]:	≤ 0.27	≤ 0.25	≤ 0.23

Table 6: Thermal Stability (Fig. 2 after HT; in addition to Table 5)

	General	Preferred	Most Preferred
ΔE^*_G	≤ 4.0	≤ 3.5	≤ 3.0

[0037] For purposes of example only, Examples 1-3 representing different example embodiments of this invention, as well we Comparative Examples (CEs) 1-2, are set forth below.

EXAMPLES

[0038] Examples 1 and 3 were layer stacks on a clear glass substrate as shown in Fig. 1, and Example 2 was a layer stack on a clear glass substrate as shown in Fig. 2. All were measured monolithically, heat treated and measured again. They were also put into IG window units as shown in Fig. 3. The silicon nitride layers in each example were deposited by sputtering a silicon target (doped with about 8% Al) in an atmosphere including argon and nitrogen gas. The glass substrates 1 and 30 were clear and 6 mm thick, and the air gap 34 in the IG window unit was 12 mm thick. The NbZr layers in each example were deposited by sputtering approximately 90/10 Nb/Zr magnetron sputtering targets in an atmosphere including argon and a small amount of nitrogen gas. Comparative Examples (CEs) 1-2 were provided for purposes of comparison. Layer thicknesses were in angstroms (Å).

Table 7: Layer Stacks of Examples

Layer	Ex. 1	Ex. 2	Ex. 3	CE 1	CE 2
-------	-------	-------	-------	------	------

18

silicon nitride (layer 2):	736 Å	79 Å	647 Å	600 Å	1310 Å
NbZr (layer 3):	91 Å	30 Å	89 Å	68 Å	107 Å
silicon nitride (layer 4):	588 Å	397 Å	611 Å	314 Å	236 Å
NbZr (layer 5):	88 Å	74 Å	84 Å	136 Å	n/a
silicon nitride (layer 6):	298 Å	570 Å	283 Å	388 Å	n/a
NbZr (layer 15):	n/a	72 Å	n/a	n/a	n/a
silicon nitride (layer 16):	n/a	382 Å	n/a	n/a	n/a
ZrO ₂ (layer 7):	30 Å	30 Å	30 Å	40 Å	40 Å

[0039] Measured monolithically before tempering (HT), Examples 1-3 according to embodiments of this invention and Comparative Examples (CEs) 1-2 had the following characteristics (annealed and non-HT, monolithic) (Ill. C, 2 degree observer). Note that “R_GY(at angle of 45°)” indicates visible glass side reflection at an angle of forty-five degrees from normal.

Table 8: Measured Monolithic, annealed (before tempering)

Parameter	Ex. 1	Ex. 2	Ex. 3	CE 1	CE 2
T _{vis} (TY)(transmission):	13.3%	13.4%	13.6%	19.0%	34.0%
a* _T	0.9	0.6	1.8	-0.5	2.5
b* _T	-2.1	-1.4	-1.0	6.5	-8.0
R _G Y(glass side refl. %):	6.9%	6.3%	5.1%	10.5%	26.0%
L* _G :	31.6	30.2	27.1	38.7	58.0
a* _G :	0.7	1.2	1.9	-2.0	-10.0

19

b^*_G :	-5.0	-6.5	-6.4	-6.5	3.0
Glass side refl. color:	grey	grey	grey	grey	green
R_{GY} (at angle of 45°):	7.5%	7.3%	6.4	n/a	n/a
R_{FY} (film side refl. %):	11.4%	7.4%	14.1%	6.0%	15.0%
a^*_F :	-0.2	-1.7	-1.1	15.0	0.0
b^*_F :	-5.9	1.3	-6.8	35.0	9.0
SF (EN410-673 2011):	0.296	0.301	0.317	0.352	0.513
SHGC (NFRC-2001):	0.340	0.344	0.360	0.405	0.590

[0040] It can be seen from Table 8 above that measured monolithically prior to any optional thermal tempering only Examples 1-3 had a combination of (i) desirable grey glass side reflective visible color, (ii) a low SF/SHGC value(s), and (iii) low glass side visible reflectivity (R_{GY}). It can be seen above that Comparative Example 2 (CE 2) was undesirable at least because it could not achieve grey glass side reflective coloration as defined herein (e.g., note the -10 value for a^*_G , the high L^*_G value, and the high visible transmission value of CE 2), and because it had a high glass side reflectivity. And the only CE that could arguably achieve grey glass side reflective a^* and b^* values was CE 1, but CE 1 was problematic in that its SF and SHGC values are too high and its visible transmission is rather high at 19%, and its glass side reflectivity (R_{GY}) was also higher than those of Examples 1-2. Moreover, the a^*_F value of CE 1 was rather high. The SF and SHGC values of CE 2 are also too high. It can be seen from Table 8 that the SF and SHGC values of Examples 1-3 were improved (lower) compared to those of CEs 1-2. Thus, it can be seen that by providing two or more IR reflecting layers (e.g., of or including NbZr and/or NbZrN_x) between respective dielectric layers, along with particular thickness parameters, desirable grey glass side reflective coloration can be achieved together with a low SF/SHGC value(s). And optionally these desirable features may be achieved in combination with low glass side

reflectivity. Thus, such coatings provide for improved color control and/or ranges when desired and low SF/SHGC values indicating ability to keep rooms cool in warm environments.

[0041] Measured monolithically after tempering (HT), Examples 1-3 according to embodiments of this invention had the following characteristics (HT, monolithic) (Ill. C, 2 degree observer). The pre-HT data is provided in Table 9 for CEs 1-2, as it would not have significantly changed due to HT.

Table 9: Measured Monolithic, after thermal tempering (HT) for Exs. 1-3

Parameter	Ex. 1	Ex. 2	Ex. 3	CE 1	CE 2
T _{vis} (TY)(transmission):	12.9%	12.9%	12.6%	19.0%	34.0%
a* _T	1.3	1.0	1.8	-0.5	2.5
b* _T	0.1	0.4	-1.9	6.5	-8.0
R _G Y(glass side refl. %):	5.8%	6.8%	5.2%	10.5%	26.0%
L* _G :	28.9	31.3	27.4	38.7	58.0
a* _G :	2.2	0.9	1.9	-2.0	-10.0
b* _G :	-5.9	-5.5	-4.5	-6.5	3.0
Glass side refl. color:	grey	grey	grey	grey	green
R _G Y(at angle of 45°):	6.8%	7.8%	6.5%	n/a	n/a
R _F Y(film side refl. %):	13.0%	8.5%	13.8%	6.0%	15.0%
a* _F :	-0.8	-1.7	0.1	15.0	0.0
b* _F :	-4.8	3.9	-5.5	35.0	9.0
SF (EN410-673 2011):	0.308	0.300	0.301	0.352	0.513

SHGC (NFRC-2001): 0.352 0.345 0.344 0.405 0.590

[0042] It can be seen from Table 9 above that following thermal tempering (HT) only Examples 1-3 had a combination of (i) desirable grey glass side reflective visible color, (ii) a low SF/SHGC value(s), and (iii) low glass side visible reflectivity (R_{GY}). See the discussion above under Table 8 comparing Examples 1-3 with CEs 1-2, which points are applicable here also.

[0043] Measured in an IG window unit as shown in Fig. 3 (with the coating on surface two) before tempering, Examples 1-3 according to embodiments of this invention and Comparative Examples (CEs) 1-2 had the following characteristics (annealed and non-HT, IG unit) (Ill. C, 2 degree observer).

Table 10: IG Window Unit, annealed (before optional tempering)

Parameter	Ex. 1	Ex. 2	Ex. 3	CE 1	CE 2
T_{vis} (TY)(transmission):	12.2%	12.2%	12.8%	17.5%	30.0%
a^*_T	0.3	0.1	1.7	-1.0	2.0
b^*_T	-1.3	-0.6	-1.3	6.5	-7.5
$R_{G/out}Y$ (glass side refl. %):	6.9%	6.6%	5.3%	11.0%	27.0%
L^*_G :	31.6	30.9	27.6	39.6	59.0
a^*_G :	0.7	1.6	2.0	-2.0	-10.0
b^*_G :	-5.2	-6.9	-6.5	-6.0	2.0
Glass side refl. color:	grey	grey	grey	grey	green
R_{GY} (at angle of 45°):	7.7%	7.5%	6.5%	n/a	n/a
$R_{F/interior}Y$ (film side refl. %):	17.0%	13.7%	19.3%	12.0%	20.0%

22

a^*_F :	-1.9	-2.2	-1.8	6.0	-1.0
b^*_F :	-3.4	0.7	-4.3	10.0	5.0
SF (EN410-673 2011):	0.197	0.200	0.216	0.240	0.350
SHGC (NFRC-2001):	0.228	0.231	0.250	0.276	0.403

[0044] It can again be seen from Table 10 above that measured in an IG window unit as shown in Fig. 3 prior to any optional thermal tempering only Examples 1-3 had a combination of (i) desirable grey glass side reflective visible color, (ii) a low SF/SHGC value, and (iii) low glass side visible reflectivity (R_{GY}). It can be seen above that Comparative Example 2 (CE 2) was undesirable at least because it could not achieve grey glass side reflective coloration as defined herein (e.g., note the -10 value for a^*_G , the high L^*_G value, and the high visible transmission value of CE 2), and because it had a high glass side reflectivity. And the only CE that could arguably achieve grey glass side reflective a^* and b^* values was CE 1, but CE 1 was problematic in that its SF and SHGC values are too high and its visible transmission is rather high, and its glass side reflectivity (R_{GY}) was also higher than those of Examples 1-2. Moreover, the a^*_F value of CE 1 was rather high. The SF and SHGC values of CE 2 are also too high. It can be seen from Table 8 that the SF and SHGC values of Examples 1-3 were improved (lower) compared to those of CEs 1-2. Thus, it can be seen that by providing two or more IR reflecting layers (e.g., of or including NbZr and/or NbZrN_x) between respective dielectric layers, along with particular thickness parameters, desirable grey glass side reflective coloration can be achieved together with a low SF/SHGC value(s). And optionally these desirable features may be achieved in combination with low glass side reflectivity and/or desirable film side coloration. Thus, such coatings provide for improved color control and/or ranges when desired and low SF/SHGC values indicating ability to keep rooms cool in warm environments.

[0045] Measured in an IG window unit after tempering (HT), Examples 1-3 according to embodiments of this invention had the following characteristics (HT, IG unit) (Ill. C, 2 degree observer). The pre-HT IG unit data is provided in Table 11 for

CEs 1-2, as it would not have significantly changed due to HT.

Table 11: IG Window Unit, after thermal tempering (HT) for Exs. 1-3

Parameter	Ex. 1	Ex. 2	Ex. 3	CE 1	CE 2
T_{vis} (TY)(transmission):	11.5%	11.8%	12.0%	17.5%	30.0%
a^*_T	0.1	0.3	1.0	-1.0	2.0
b^*_T	-0.2	-0.3	-1.0	6.5	-7.5
$R_{G/out}Y$ (glass side refl. %):	5.9%	7.0%	5.0%	11.0%	27.0%
L^*_G :	29.2	31.8	26.7	39.6	59.0
a^*_G :	2.6	1.2	2.5	-2.0	-10.0
b^*_G :	-7.1	-5.9	-7.0	-6.0	2.0
Glass side refl. color:	grey	grey	grey	grey	green
R_GY (at angle of 45°):	7.0%	7.9%	6.6%	n/a	n/a
$R_{F/interior}Y$ (film side refl. %):	18.9%	14.5%	19.0%	12.0%	20.0%
a^*_F :	-2.1	-2.4	-2.0	6.0	-1.0
b^*_F :	-2.2	1.8	-5.5	10.0	5.0
SF (EN410-673 2011):	0.215	0.211	0.216	0.240	0.350
SHGC (NFRC-2001):	0.251	0.243	0.249	0.276	0.403

[0046] It can again be seen from Table 11 above that following thermal tempering (HT) in an IG window unit only Examples 1-3 had a combination of (i) desirable grey glass side reflective visible color, (ii) a low SF/SHGC value(s), and (iii) low glass side visible reflectivity (R_GY). See the discussions above under Tables 8 and

10 comparing Examples 1-3 with CEs 1-2, which points are applicable here also.

Example 4

[0047] Example 4 was similar to Example 2 with respect to the layer stack, as shown in Fig. 2. Example 4 was as follows: glass(5.8 mm clear)/Si₃N_x(13 nm)/NbZr(1.8 nm)/Si₃N_x(47.8 nm)/NbZr(4.1 nm)/Si₃N_x(55.5 nm)/NbZr(3.4 nm)/Si₃N_x(44.7 nm)/ZrO_x(3 nm). Example 4 has SF and SHGC values similar to Example 2 above, realized glass side reflective grey color, and had the following optical characteristics as coated (prior to thermal tempering): TY 12.5%; a*_T 1.0; b*_T 1.0; R_{G/out}Y 7.0%; a*_G -1.8; b*_G -3.0; R_{F/interior} 8.0%; a*_F -3.5; and b*_F 4.0. Example 4 following thermal tempering (heat treatment) had the following optical characteristics: TY 11.5%; a*_T 1.0; b*_T -1.0; R_{G/out}Y 6.5%; a*_G -1.3; b*_G -4.5; R_{F/interior} 8.0%; a*_F -3.0; and b*_F 4.0.

[0048] It is noted above that one, two or all of IR reflecting layers 3, 5, 15 may be of or include NiCrMo and/or NiCrMoN_x in certain example embodiments of this invention. In such embodiments one, two or all of the IR reflecting layers 3, 5, 15 may, for example, be of or include C22 or an oxide and/or nitride thereof. Table 12 below shows an example composition of the NiCrMo-based alloy C22.

Table 12: NiCrMo based alloy C22 (wt. %)

Element	Preferred	More Preferred	Example
Ni	40-70%	50-60%	54-58% (e.g., 56%)
Cr	5-40%	10-30%	20-22.5%
Mo	5-30%	10-20%	12.5-14.5%
Fe	0-15%	0-10%	1-5% (e.g., 3%)
W	0-15%	0-10%	1-5% (e.g., 3%)
Co	0-15%	0-10%	1-5% (e.g., 3%)
Si	0-2%	0-1%	=<0.2% (e.g., .08%)
Mn	0-3%	0-2%	=<1% (e.g., 0.5%)

25

C	0-1%	0-0.5%	=<0.1% (e.g., .01%)
V	0-2%	0-1%	=<1% (e.g., 0.35%)

[0049] Once given the above disclosure many other features, modifications and improvements will become apparent to the skilled artisan. Such other features, modifications and improvements are therefore considered to be a part of this invention, the scope of which is to be determined by the following claims:

WHAT IS CLAIMED IS:

1. A coated article having grey glass side reflective coloration and including a layer system supported by a glass substrate, the layer system comprising:

a first dielectric layer comprising silicon nitride;

a first infrared (IR) reflecting layer comprising NbZr on the glass substrate over at least the first dielectric layer comprising silicon nitride;

a second dielectric layer comprising silicon nitride on the glass substrate over at least the first dielectric layer comprising silicon nitride and the first IR reflecting layer comprising NbZr;

a second layer IR reflecting layer comprising NbZr on the glass substrate over at least the second dielectric layer comprising silicon nitride;

a third dielectric layer comprising silicon nitride on the glass substrate over at least the second IR reflecting layer comprising NbZr;

wherein the coated article has: glass side/exterior reflective grey coloration comprising a glass side/exterior reflective a^* value of from -3.0 to +5.0, a glass side/exterior reflective b^* value of from -10.0 to +2.0, a glass side/exterior reflective L^* value of from 20-42, and a visible transmission of no greater than 16%, and

wherein the coated article (i) if measured monolithically has an SF value of no greater than 0.33 and an SHGC value of no greater than 0.39, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.23 and an SHGC value of no greater than 0.27.

2. The coated article of claim 1, wherein the coated article has a glass

side/exterior a^* value of from -2.0 to +4.0.

3. The coated article of any preceding claim, wherein the coated article has a glass side/exterior b^* value of from -9.0 to -1.0.

4. The coated article of any preceding claim, wherein the coated article has a glass side/exterior b^* value of from -8.0 to -4.0.

5. The coated article of any preceding claim, wherein the second dielectric layer comprising silicon nitride is located directly between and contacting the first and second IR reflecting layers comprising NbZr.

6. The coated article of any preceding claim, wherein at least one of the first and second IR reflecting layers comprising NbZr are nitrided.

7. The coated article of any preceding claim, wherein each of the first and second IR reflecting layers comprising NbZr comprise NbZrN_x .

8. The coated article of any preceding claim, wherein each of the first and second IR reflecting layers comprising NbZr includes more Nb than Zr based on an atomic percentage.

9. The coated article of any preceding claim, wherein the coated article is heat

treated and has a ΔE^* value (glass side reflective) of no greater than 3.0 after and/or due to heat treatment.

10. The coated article of any preceding claim, wherein the coated article has a visible transmission of from 6-16%.

11. The coated article of any preceding claim, wherein the coated article has a visible transmission of from 7-14%.

12. The coated article of any preceding claim, wherein the coated article has no metallic infrared (IR) reflecting layer based on Ag and/or Au.

13. The coated article of any preceding claim, wherein the coated article comprises an IG window unit.

14. The coated article of any of claims 1-11, wherein the coated article comprises a monolithic window unit.

15. The coated article of any preceding claim, wherein at least one of the first and second layers IR reflecting layers is/are substantially free of oxygen.

16. The coated article of any preceding claim, wherein the coating further comprising an overcoat layer comprising an oxide of zirconium.

17. The coated article of any preceding claim, wherein the coated article has a glass side visible reflection of no greater than 20%.

18. The coated article of any preceding claim, wherein the coated article has a glass side visible reflection of no greater than 8%.

19. The coated article of any preceding claim, wherein the coated article has a glass side reflective L* value of from 23-35, more preferably from 25-33.

20. The coated article of any preceding claim, wherein the coated article has a film side/interior reflective a* value of from -4.0 to +4.0.

21. The coated article of any preceding claim, wherein the coating includes only two IR reflecting layers and consists essentially of the first dielectric layer comprising silicon nitride, the first infrared (IR) reflecting layer comprising NbZr, the second dielectric layer comprising silicon nitride, the second layer IR reflecting layer comprising NbZr, and third dielectric layer comprising silicon nitride, and optionally an overcoat layer comprising an oxide of zirconium.

22. The coated article of any preceding claim, wherein the first and second IR reflecting layers are of substantially the same thickness, which means that they are the same thickness plus/minus 15 Å.

23. The coated article of any preceding claim, wherein a thickness ratio of the first dielectric layer/third dielectric layer is at least 1.5, more preferably at least 2.0.

24. The coated article of any preceding claim, wherein a thickness ratio of the second dielectric layer/third dielectric layer 6 is at least 1.4, more preferably at least 1.7.

25. The coated article of any of claims 1-20, wherein the coating further comprises:

a third IR reflecting layer comprising NbZr on the glass substrate over at least the third dielectric layer comprising silicon nitride; and

a fourth dielectric layer comprising silicon nitride on the glass substrate over at least the third IR reflecting layer comprising NbZr.

26. The coated article of any of claims 1-20 or 25, wherein the second and third IR reflecting layers are of substantially the same thickness, which means that they are the same thickness plus/minus 15 Å.

27. The coated article of any of claims 25-26, wherein a thickness ratio of the third dielectric layer/first dielectric layer is at least 2, more preferably at least 4.

28. The coated article of any preceding claim, wherein at least one of the IR

reflecting layers comprising NbZr further comprises oxygen.

29. The coated article of any of claims 1-5 or 8-27, wherein at least one of the IR reflecting layers comprising NbZr is metallic.

30. The coated article of any preceding claim, wherein the coating comprises an overcoat layer comprising an oxide of zirconium, and wherein a layer comprising silicon oxynitride is located under and contacting the overcoat comprising an oxide of zirconium.

31. The coated article of any preceding claim, wherein the coating comprises an overcoat layer comprising an oxide of zirconium, and wherein a layer comprising zirconium silicon oxynitride is located under and contacting the overcoat comprising an oxide of zirconium.

32. The coated article of any preceding claim, wherein the coated article (i) if measured monolithically has an SF value of no greater than 0.32 and an SHGC value of no greater than 0.37, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.22 and an SHGC value of no greater than 0.25.

33. A coated article having grey glass side reflective coloration and including a layer system supported by a glass substrate, the layer system comprising:

a first dielectric layer comprising nitrogen;

a first infrared (IR) reflecting layer on the glass substrate over at least the first dielectric layer;

a second dielectric layer comprising nitrogen on the glass substrate over at least the first dielectric layer and the first IR reflecting layer;

a second layer IR reflecting layer on the glass substrate over at least the second dielectric layer;

a third dielectric layer comprising nitrogen on the glass substrate over at least the second IR reflecting layer;

wherein each of the first and second IR reflecting layers comprises one or more of: NbZr, NbZrN_x, NiCr, NiCrN_x, NiCrMo, NiCrMoN_x, NbCr, NbCrN_x, Nb and NbN_x;

wherein the coated article has: glass side/exterior reflective grey coloration comprising a glass side/exterior reflective a* value of from -3.0 to +5.0, a glass side/exterior reflective b* value of from -10.0 to +2.0, a glass side/exterior reflective L* value of from 20-42, and a visible transmission of no greater than 16%, and

wherein the coated article (i) if measured monolithically has an SF value of no greater than 0.33 and an SHGC value of no greater than 0.39, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.23 and an SHGC value of no greater than 0.27.

34. The coated article of claim 33, wherein each of the first, second and third dielectric layers comprises silicon nitride.

35. The coated article of any of claims 33-34, wherein the IR reflecting layers comprise NbZr.

36. The coated article of any of claims 33-35, wherein the IR reflecting layers comprise a nitride of NbZr.

37. The coated article of any of claims 33-34, wherein the IR reflecting layers comprise NiCrMo.

38. The coated article of any of claims 33-34, wherein the IR reflecting layers comprise a nitride of NiCrMo.

39. The coated article of any of claims 33-34 or 37-38, wherein a metal content of one or more of the IR reflecting layers comprises, by % metal, 54-58 wt. % Ni, 20-22.5 wt. % Cr, and 12.5-14.5 wt. % Mo.

40. The coated article of any of claims 33-39, wherein the IR reflecting layers do not physically contact any other metallic or substantially metallic IR reflecting or blocking layer.

41. The coated article of claims 33-40, wherein the coated article has a glass side/exterior a^* value of from -2.0 to +4.0.

42. The coated article of any of claims 33-41, wherein the coated article has a glass side/exterior b^* value of from -9.0 to -1.0, more preferably from -8.0 to -4.0.

43. The coated article of any of claims 33-42, wherein the second dielectric layer is located directly between and contacting the first and second IR reflecting layers.

44. The coated article of any of claims 33-43, wherein the coated article is heat treated and has a ΔE^* value (glass side reflective) of no greater than 3.0 after and/or due to heat treatment.

45. The coated article of any of claims 33-44, wherein the coated article has a visible transmission of from 6-16%, more preferably from 7-14%.

46. The coated article of any of claims 33-45, wherein the coated article has no metallic infrared (IR) reflecting layer based on Ag and/or Au.

47. The coated article of any of claims 33-46, wherein the coated article comprises an IG window unit or a monolithic window unit.

48. The coated article of any of claims 33-47, wherein the IR reflecting layers are substantially free of oxygen.

49. The coated article of any of claims 33-48, wherein the coating further comprising an overcoat layer comprising an oxide of zirconium.

50. The coated article of any of claims 33-49, wherein the coated article has a glass side visible reflection of no greater than 20%, more preferably no greater than 8%.

51. The coated article of any of claims 33-50, wherein the coated article has a glass side reflective L* value of from 23-35, more preferably from 25-33.

52. The coated article of any of claims 33-51, wherein the coated article has a film side/interior reflective a* value of from -4.0 to +4.0.

53. The coated article of any of claims 33-52, wherein the coating includes only two IR reflecting layers and consists essentially of the first dielectric layer comprising silicon nitride, the first infrared (IR) reflecting layer comprising NbZr, the second dielectric layer comprising silicon nitride, the second layer IR reflecting layer comprising NbZr, and third dielectric layer comprising silicon nitride, and optionally an overcoat layer comprising an oxide of zirconium.

54. The coated article of any of claims 33-53, wherein the first and second IR reflecting layers are of substantially the same thickness, which means that they are the same thickness plus/minus 15 Å.

55. The coated article of any of claims 33-54, wherein the coating has one or more of the following features: (a) a thickness ratio of the first dielectric layer/third dielectric layer is at least 1.5, more preferably at least 2.0; and/or (b) a thickness ratio of the second dielectric layer/third dielectric layer 6 is at least 1.4, more preferably at least 1.7.

56. The coated article of any of claims 33-52, wherein the coating further comprises a third IR reflecting layer over at least the second IR reflecting layer and the third dielectric layer; and a fourth dielectric layer over at least the third IR reflecting layer.

57. The coated article of any of claims 33-52 or 56, wherein the second and third IR reflecting layers are of substantially the same thickness, which means that they are the same thickness plus/minus 15 Å.

58. The coated article of any of claims 33-52 or 56-57, wherein a thickness ratio of the third dielectric layer/first dielectric layer is at least 2, more preferably at least 4.

59. The coated article of any of claims 33-58, wherein the coating comprises an overcoat layer comprising an oxide of zirconium, and wherein a layer comprising silicon oxynitride is located under and contacting the overcoat comprising an oxide of zirconium.

60. The coated article of any of claims 33-59, wherein the coating comprises an overcoat layer comprising an oxide of zirconium, and wherein a layer comprising zirconium silicon oxynitride is located under and contacting the overcoat comprising an oxide of zirconium.

61. The coated article of any of claims 33-60, wherein the coated article (i) if measured monolithically has an SF value of no greater than 0.32 and an SHGC value of no greater than 0.37, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.22 and an SHGC value of no greater than 0.25.

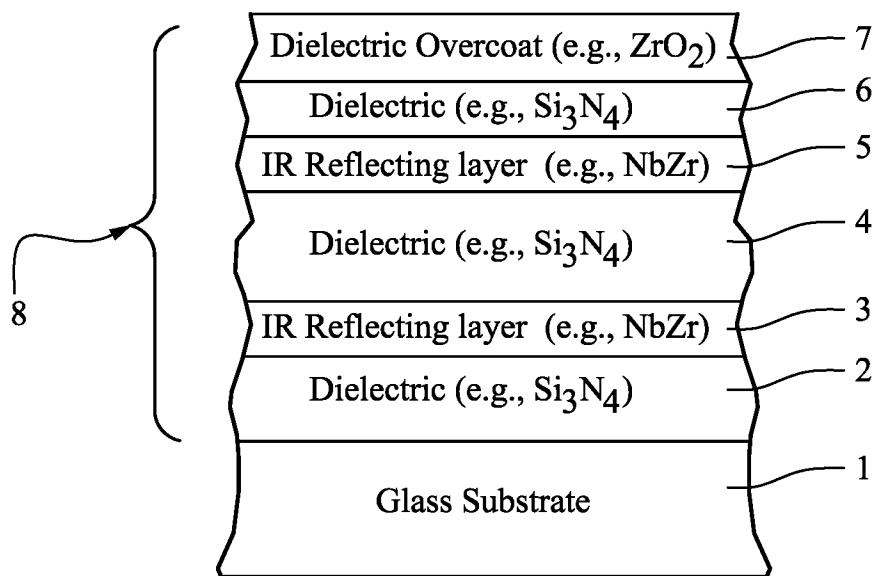


FIG. 1

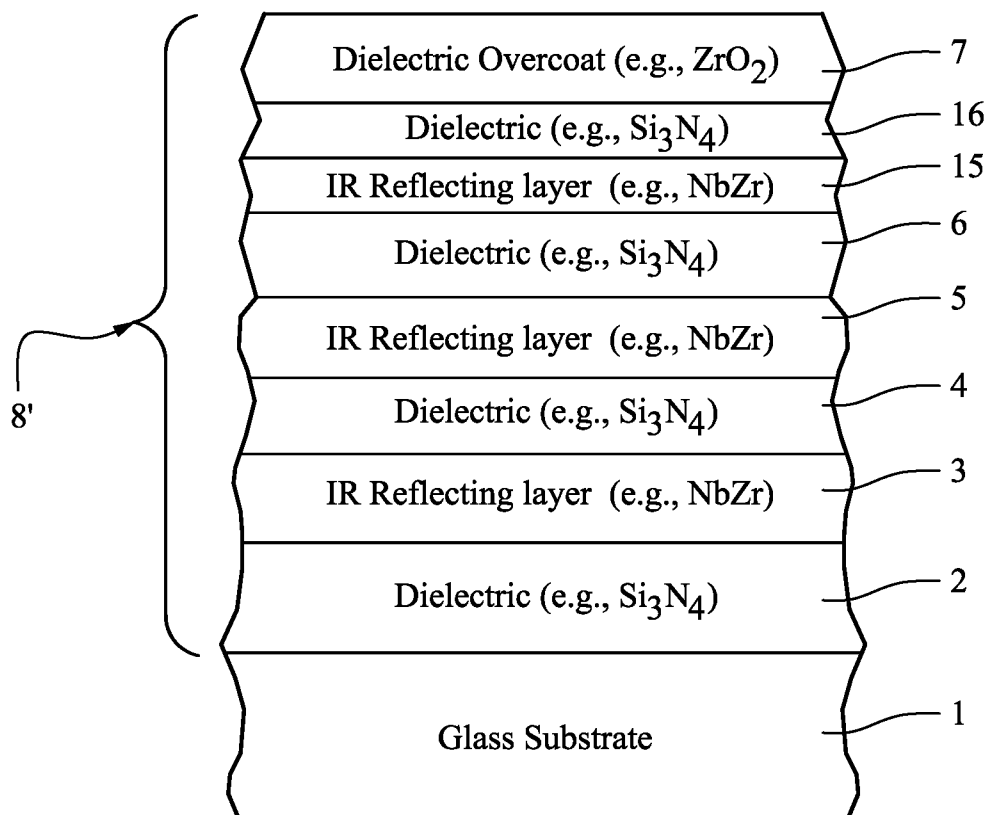


FIG. 2

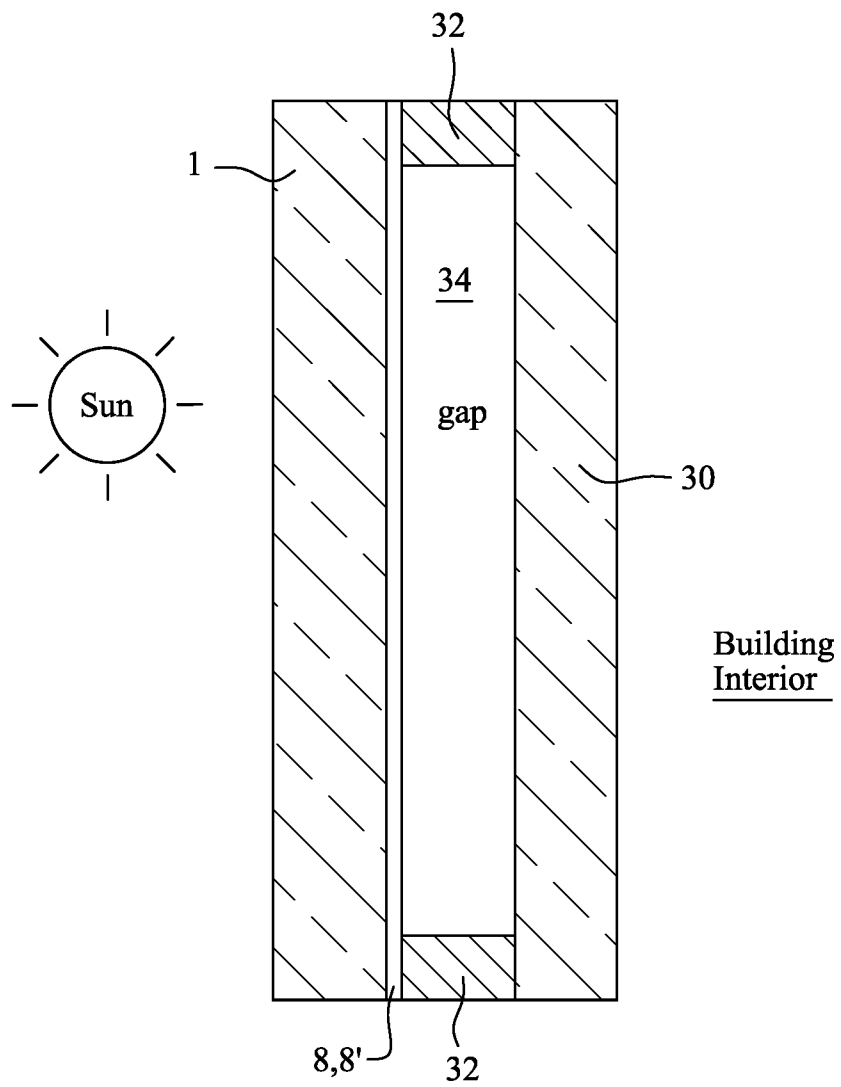


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/029136

A. CLASSIFICATION OF SUBJECT MATTER
INV. G02B5/28 C03C17/36 C03C17/34
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G02B C03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2015/023303 A1 (GUARDIAN INDUSTRIES [US]; CT LUXEMBOURGEOIS RECH VERRE [LU]) 19 February 2015 (2015-02-19) paragraphs [0001], [0006], [0009] - [0011], [0016], [0017]; figure 1 -----	33,34, 43,47,48
X	US 2012/177899 A1 (UNQUERA JAVIER [ES] ET AL) 12 July 2012 (2012-07-12) cited in the application paragraphs [0007], [0015], [0015]; figures 1,2; table 3 -----	33
A	US 8 286 395 B2 (MAUVERNAY BRUNO [FR] ET AL) 16 October 2012 (2012-10-16) cited in the application columns 5-7 ----- -/-	1-61



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 November 2016

Date of mailing of the international search report

01/12/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Mollenhauer, Ralf

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/029136

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 262 749 A (GLAVERBEL [BE]) 30 June 1993 (1993-06-30) page 6, last paragraph -----	1,33
A	WO 2014/045141 A2 (SWISSINSO SA [CH]) 27 March 2014 (2014-03-27) page 9, paragraph 3; tables 5-9 -----	1,33
A	EP 2 243 753 A2 (GUARDIAN INDUSTRIES [US]) 27 October 2010 (2010-10-27) figure 1; table 2 -----	1,33
A	WO 02/062717 A1 (GUARDIAN INDUSTRIES [US]; STACHOWIAK GRZEGORZ [US]) 15 August 2002 (2002-08-15) page 6, line 20 - page 7, line 18 -----	1,33

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/029136

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2015023303 A1	19-02-2015	CN 105814002 A EP 3033312 A1 EP 3033641 A1 JP 2016532626 A JP 2016534969 A KR 20160043991 A KR 20160043993 A US 2016185660 A1 WO 2015023292 A1 WO 2015023303 A1	27-07-2016 22-06-2016 22-06-2016 20-10-2016 10-11-2016 22-04-2016 22-04-2016 30-06-2016 19-02-2015 19-02-2015
US 2012177899 A1	12-07-2012	AU 2011354610 A1 BR 112013017617 A2 CN 103429548 A EP 2663536 A1 EP 3100987 A1 RU 2013137243 A US 2012177899 A1 WO 2012096771 A1	22-08-2013 18-10-2016 04-12-2013 20-11-2013 07-12-2016 20-02-2015 12-07-2012 19-07-2012
US 8286395 B2	16-10-2012	BR PI0912796 A2 CA 2724745 A1 CN 102046554 A EA 201071330 A1 EP 2280913 A2 FR 2931147 A1 JP 5681100 B2 JP 2011520755 A US 2011146172 A1 WO 2009150343 A2	13-10-2015 17-12-2009 04-05-2011 29-04-2011 09-02-2011 20-11-2009 04-03-2015 21-07-2011 23-06-2011 17-12-2009
GB 2262749 A	30-06-1993	BE 1006854 A3 CH 684888 A5 DE 4243930 A1 FR 2685318 A1 GB 2262749 A IT 1257932 B LU 88206 A1 NL 9202186 A	10-01-1995 31-01-1995 24-06-1993 25-06-1993 30-06-1993 19-02-1996 15-04-1993 16-07-1993
WO 2014045141 A2	27-03-2014	AU 2013319925 A1 CN 104736338 A EP 2897795 A2 HK 1208844 A1 JP 2016500799 A US 2015249424 A1 WO 2014045141 A2	02-04-2015 24-06-2015 29-07-2015 18-03-2016 14-01-2016 03-09-2015 27-03-2014
EP 2243753 A2	27-10-2010	CA 2521952 A1 EP 1633683 A2 EP 2243753 A2 US 2004214012 A1 WO 2004096722 A2	11-11-2004 15-03-2006 27-10-2010 28-10-2004 11-11-2004
WO 02062717 A1	15-08-2002	AT 378299 T CA 2435083 A1 DE 60223497 T2 EP 1362015 A1	15-11-2007 15-08-2002 02-10-2008 19-11-2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/029136

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 1961712 A1	27-08-2008
		ES 2296916 T3	01-05-2008
		PL 363377 A1	15-11-2004
		WO 02062717 A1	15-08-2002
