W. Arrowquier.

Scaffold.

No. 58,571. Patented Oct. 9, 1866.

Fig. 2.


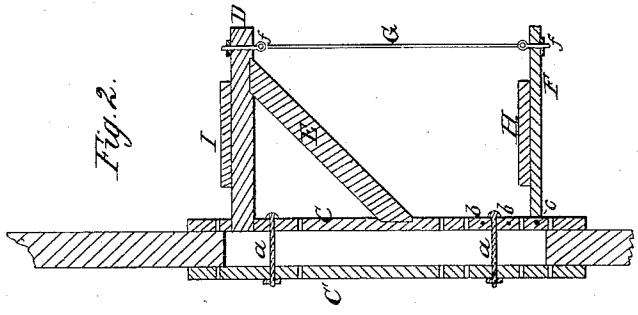


Fig. 1.

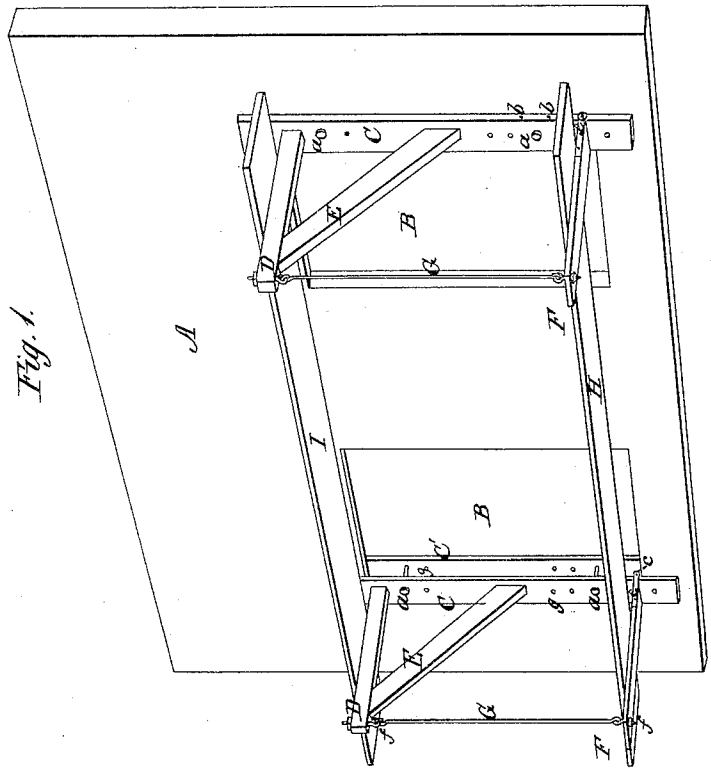

Witnesses:
Thos. H. Dodge
D. L. Miller.

Inventor:
Wm. Arrowquier

THE GRAPHIC CO. PHOTO-LITH. 39 & 41 PARK PLACE, N.Y.

UNITED STATES PATENT OFFICE.

WM. ARROUQUIER, OF WORCESTER, MASSACHUSETTS.

IMPROVED STAGING.

Specification forming part of Letters Patent No. **58,571**, dated October 9, 1866.

To all whom it may concern:

Be it known that I, WM. ARROUQUIER, of the city and county of Worcester, and Commonwealth of Massachusetts, have invented certain new and useful Improvements in Staging; and I do hereby declare that the following is a full, clear, and exact description of the same, reference being had to the accompanying drawings, forming a part of this specification, in which—

Figure 1 represents a prespective view of my improved staging when applied to the side of a building, and Fig. 2 represents a section through one end of the staging.

In the drawings, A represents the side of a building, in which are windows B B. C C′ are supporting-pieces, which are fastened to the side of the building by means of bolts which pass through both, as shown in the drawings.

Piece C′ is placed upon the inside of the window, while piece C is placed upon the outside. Piece C has a projecting arm, D, at the top, which is supported by a brace, E, as fully shown in the drawings.

The lower ends of pieces C have a series of holes, *b*, through which bolts *c* can be passed to hold the piece F at any desired distance from the bottoms of pieces C C′. The inner ends of pieces F F are provided with ears *e*, which pass by the edges of pieces C and have holes to receive bolts *c*. The outer ends of pieces F are supported by rods G and screw-bolt eyes *f f*. Pieces C C′ are provided with holes *g g*, so that they can be fastened to windows of different sizes.

It will be seen that the foot-board H can be supported at different elevations by raising the pieces F F. Rods G G can be made adjustable to support the ends of pieces F F, or rods of different lengths may be employed.

Having described my improved staging, what I claim as new and of my invention, and desire to secure by Letters Patent, is—

The combination and arrangement, with pieces C C′, of the supporting-pieces D D, braces E E, and adjustable bottom pieces, F F, with their rods G, for supporting the foot-boards H I from the window of a building, as shown and described.

WM. ARROUQUIER.

Witnesses:

THOS. H. DODGE,

D. L. MILLER.