

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2017224946 B2**

(54) Title
Medical gas delivery system

(51) International Patent Classification(s)
A61B 1/015 (2006.01) **A61M 16/04** (2006.01)
A61B 1/267 (2006.01)

(21) Application No: **2017224946** (22) Date of Filing: **2017.02.24**

(87) WIPO No: **WO17/144916**

(30) Priority Data

(31) Number	(32) Date	(33) Country
1608473.3	2016.05.13	GB
1603234.4	2016.02.24	GB

(43) Publication Date: **2017.08.31**

(44) Accepted Journal Date: **2020.09.17**

(71) Applicant(s)
Indian Ocean Medical Inc.

(72) Inventor(s)
Young, Peter Jeffrey

(74) Agent / Attorney
Spruson & Ferguson, GPO Box 3898, Sydney, NSW, 2001, AU

(56) Related Art
US 2015/0099934 A1
US 7608040 B1



(43) International Publication Date
31 August 2017 (31.08.2017)

- (51) International Patent Classification:
A61B 1/015 (2006.01) A61M 16/04 (2006.01)
A61B 1/267 (2006.01)
- (21) International Application Number:
PCT/GB2017/050506
- (22) International Filing Date:
24 February 2017 (24.02.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1603234.4 24 February 2016 (24.02.2016) GB
1608473.3 13 May 2016 (13.05.2016) GB
- (71) Applicant: INDIAN OCEAN MEDICAL INC. [SC/SC];
PO Box 18, Revolution Avenue, Mahe (SC).
- (72) Inventor; and
- (71) Applicant : YOUNG, Peter Jeffrey [GB/GB]; The Old
Parsonage, Church Lane, Roydon, King's Lynn Norfolk
PE32 1AR (GB).

- (74) Agent: JACOB, Reuben E.; Maucher Jenkins, 26 Caxton
Street, London Greater London SW1H 0RJ (GB).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MEDICAL GAS DELIVERY SYSTEM

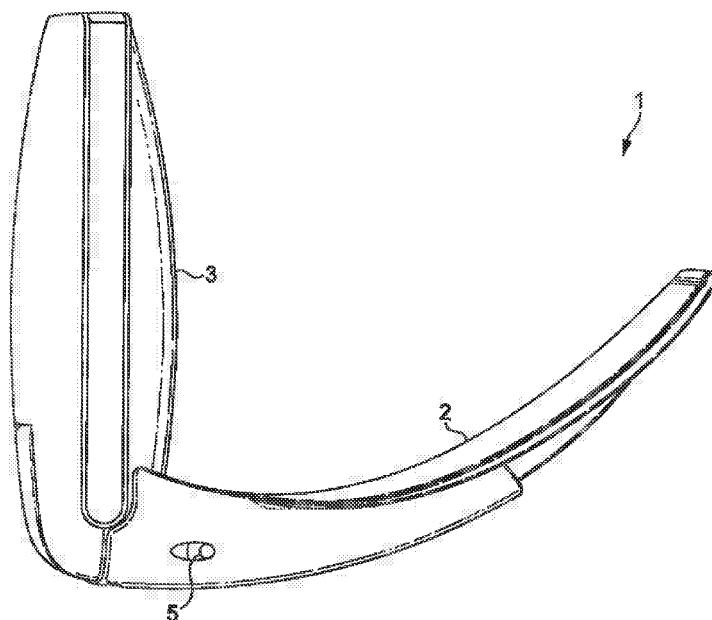


FIG. 1b

(57) Abstract: Apparatus (1) for performing laryngoscopy is provided, the apparatus comprising a blade (2), a handle (3) and a medical gas supply device (4) for provision of gas to a patient during laryngoscopy, wherein the medical gas supply device (4) includes an outlet (5) disposed on or in the handle of the device, or within the proximal half of the blade. A gas supply conduit (6) supplies gas from a proximal aperture (8) to outlet (5).

WO 2017/144916 A1



Published:

— *with international search report (Art. 21(3))*

Medical gas delivery system

During oral laryngoscopy a patient is normally not breathing, but gas from the oral cavity and pharynx may be drawn into the trachea and to the lungs by a number of physiological processes, most importantly, apnoeic oxygenation and mass flow. Apnoeic oxygenation occurs because mammals normally absorb greater volumes of oxygen than the volumes of carbon dioxide gas that they excrete. This means that there is a net drawing in of gas from the mouth even if the mammal is not breathing. The two conditions for apnoeic oxygenation to occur are firstly the provision of oxygen in the upper airway and secondly an open airway or an open channel from the mouth to the lungs. During oral direct or indirect laryngoscopy this channel is normally kept substantially open and gas is therefore drawn into the mouth and towards the lungs. If oxygen enrichment is not used then this gas rapidly becomes mixed with air at 21% oxygen concentration.

To address this problem, oxygenation during laryngoscopy has been improved by allowing a continuous flow of oxygen at or into the mouth or directed to the pharynx or larynx at sufficient flows to replace the air with oxygen or to prevent air being drawn into the mouth. The delivery of oxygen to the oral cavity, pharynx, larynx and trachea is useful during laryngoscopy prior to tracheal intubation to improve both oxygenation and to extend the time available for placement of an endotracheal tube before the patient suffers an arterial oxygen desaturation. To achieve this, laryngoscope blades have included channels in their design to allow jetting or insufflation of gas or to allow suction to be applied. These have had narrow channels because they open to the patient's airway on the distal portion of the blade. A wide bore channel opening distally on the blade would risk impairing the view of the

laryngoscopist or making the blade unduly bulky thereby impairing its insertion and function.

Thus, in the prior art, May describes in US4126127(A) a laryngoscope blade with an integral channel to supply oxygen to the larynx. The channel is at the distal tip of the blade and therefore necessarily has a small cross-sectional area.

Bentt describes in WO2007081558(A2) an oxygenating laryngoscope wherein the straight blade includes a conduit for attaching detachable tubing for delivery of oxygen to the airway during laryngoscopy. The tubing in this device extends to the distal end of the blade, requiring it to have a narrow bore and impeding laryngoscopic view and instrumentation.

An alternative approach to the problem of apnoeic oxygenation during laryngoscopy is that of replacing pharyngeal gases with oxygen by external nasal prongs using high flow gas delivery systems such as those described by Patel in the journal of the Association of Anaesthetists of Great Britain and Ireland, Anaesthesia (Anaesthesia, 2015 vol. 70(3) pp. 323-9). Although effective, this has the disadvantage of high costs, the requirement for very high oxygen flows and if the nasal passages are narrow or occluded it can become less effective.

It is therefore an object of the invention to seek to mitigate the problems of the prior art.

According to a first aspect of the invention there is provided apparatus for performing laryngoscopy, the apparatus comprising a blade, a handle and a medical gas supply device for provision of gas to a patient during laryngoscopy, wherein the medical gas supply device

includes an outlet disposed on or in the handle of the device, or disposed at or adjacent the proximal end of the blade.

As will be appreciated, the proximal end of the apparatus is the end that is nearest the user when the apparatus is in use in a patient. Advantageously, , surprisingly that embodiments of the invention provide effective apnoeic oxygenation without obscuring the view of the anatomy even though the outlet is positioned, specially, away from the area of required gas delivery.

In an alternative, the outlet may be disposed in or on the distal half of the handle, the distal half being the half that is nearest the patient. It is most preferred that, the outlet is disposed at or adjacent the distal end of the handle. Advantageously, these configurations result in minimal visual and physical, obstruction whilst still providing effective apnoeic oxygenation,

It is preferred that the medical gas supply device is adapted to provide gas flow therefrom with substantially no entrainment of ambient air.

In one embodiment the medical, gas supply device may be adapted to provide gas flow therefrom with substantially no entrainment of ambient air, by the outlet comprising a bore including a cross sectional area that is sufficiently large to substantially prevent the occurrence of a Venturi effect at or adjacent the blade. It is further preferred that the outlet comprises a bore including a cross sectional area that is sufficiently large to substantially prevent the occurrence of a Venturi effect at or adjacent the blade at medical gas flow rates of about 10 to 80L/min, preferably up to 15L/min.

In a further embodiment the medical gas supply device may be adapted to provide gas flow therefrom with substantially no entrainment of ambient air, by the outlet comprising a

bore having a cross sectional area of from > about 3mm sq. to about 50 mm sq, preferably from about 3.5 mm sq to about 20 mm sq, most preferably from about 4mm sq to about about 12.5 mm sq. Although an outlet with a small cross sectional area and/or fine bore gas supply tubing has an advantage of not impeding laryngoscopic view unduly and not making the apparatus bulky there is a disadvantage that at high gas flow velocity, a small cross sectional area outlet will cause ambient air to be entrained alongside the medical gas being delivered by a mechanism related to the Venturi effect, thereby diluting the concentration of medical gas being delivered considerably. Experimentally and from the principles of physics it can be determined that at typical medical gas flow rates a larger cross sectional area outlet placed, for example, on the proximal portion of the blade (near the mouth opening during a laryngoscopy) will not impair the laryngoscopic view, nor make the blade unduly bulky in the middle or distal portion so as not to impede placement into the patient's airway, whilst minimising the Venturi effect, thereby flooding the airway with high concentrations of oxygen for the purpose of optimising apnoeic oxygenation.

In a further embodiment the medical gas supply device may be adapted to provide gas flow therefrom with substantially no entrainment of ambient air, by the apparatus comprising a plurality of outlets.

Thus it can be seen that the invention is a gas delivery device that allows the delivery of a medical gas to the laryngeal and pharyngeal airway. The device may comprise a hollow tube or conduit with a proximal end for attachment to a pressurised medical gas supply source, such as a medical oxygen flowmeter, and a distal end for release of the gas substantially at the mouth of a patient or, in another embodiment, it extends inside the mouth or pharynx to release gas at these locations. The aperture of the distal tubing in the invention

is preferably on the proximal half of the laryngoscope blade and/or at or adjacent the distal end of a laryngoscope handle such that it does not impair vision during laryngoscopy. Blade designs allowing the aperture opening more distally are possible but the lumen must be sufficiently large to prevent a significant Venturi effect. As the distal aperture is located at the proximal end of a laryngoscope blade or at the distal end of a laryngoscope handle, it is possible to use a much wider aperture bore than is possible for gas delivery apertures located at the distal tip of the laryngoscope blade. This is advantageous as it provides a greater oxygen flow to a patient's laryngeal and pharyngeal airway without blocking the view of the distal tip of a laryngoscope blade.

Preferably, the gas delivery device comprises an attachment element adapted to reversibly attach the gas delivery device to the laryngoscope blade or handle. This is advantageous in situations where an intubation proves to be complex and difficult. In this situation, a gas delivery device can be attached to a laryngoscope to ensure a flow of medical gas during the procedure, particularly if the procedure has taken a long period of time. The gas delivery device being reversibly detachable may also be advantageous in that it allows ease of cleaning and sterilisation of the laryngoscope and the gas delivery device.

Preferably, the gas delivery device is permanently connected to the proximal end of the laryngoscope blade or the distal end of the laryngoscope handle. This is advantageous in situations where it is known that a medical gas flow will be required during a laryngoscopy. The permanently connected gas delivery device may preferably be integral to the laryngoscope blade or the laryngoscope handle.

According to a second aspect of the invention there is provided a method of conducting a laryngoscopy, the method comprising the step of using apparatus as defined hereinabove.

5 The present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figures 1a and 1b are schematic side views of apparatus according to the invention;

Figure 1c is a schematic side view of a part of the apparatus of Figure 1b;

10 Figure 2 shows a graph of the difference between the airway FiO₂ concentration during laryngoscopy when performed using a conventional laryngoscope blade (no oxygen insufflation) and when performed using a laryngoscope blade with a gas delivery aperture positioned at the proximal end of the blade;

15 Figure 3 shows a graph of the difference between the airway FiO₂ concentration during laryngoscopy when performed using a laryngoscope blade with a gas delivery aperture positioned at the proximal end of the blade and when performed using a laryngoscope blade with a gas delivery aperture positioned at the distal end of the blade;

20 Figure 4 shows a graph of the difference between FiO₂ concentration during laryngoscopy after the application of pharyngeal suctioning when performed using a conventional laryngoscope blade, with no oxygen insufflation, and when performed using a laryngoscope blade fitted with a gas delivery aperture positioned at the proximal end of the blade;

25 Figure 5 shows a graph of the difference between FiO₂ during laryngoscopy with and without 10 seconds of suction when performed using a conventional laryngoscope blade, with no oxygen insufflation; and

Figure 6 shows a graph of the difference between FiO₂ during laryngoscopy with and without 10 seconds of suction when performed using a laryngoscope blade fitted with a gas delivery aperture positioned at the proximal end of the blade.

5 Referring to the Figures and in particular Figures 1a to 1c, there is illustrated apparatus 1 for performing laryngoscopy, the apparatus comprising a blade 2, a handle 3 and a medical gas supply device 4 for provision of gas to a patient during laryngoscopy, wherein the medical gas supply device 4 includes an outlet 5 disposed on or in the handle of the device, or within the proximal half of the blade. A gas supply conduit 6 supplies gas from a
10 proximal aperture 8 to outlet 5.

In Figure 1c, proximal aperture 8 is designed to attach securely on a standard oxygen flowmeter outlet. Wide (for example 3mm-10mm internal diameter) tubing carries oxygen in a low resistance pathway, conduit 6. Reference numeral 7 represents an artificial break as
15 the proximal portion will be long (for example over 1 meter long) to reach an oxygen source conveniently. This section of the conduit 6 represented by reference numeral 7 may be reversibly coiled for convenient storage and use.

An attachment element or a permanent attachment means is preferably at the proximal
20 third of the laryngoscope blade 2.

The cross-sectional lumen area at outlet 5 and proximal to the distal aperture is a wide bore aperture to prevent high gas velocity at the aperture and resulting entrainment of air into the patient's distal airway at the tip of the blade 2.

As can be appreciated from Figures 1a to 1c, line of sight and instrumentation are not substantially impeded by the outlet 5 or conduit 6. Locating the outlet 5 at the proximal end of a laryngoscope blade or at the distal end of a laryngoscope handle 3 does not obstruct the view of the distal tip of the laryngoscope blade 2. Therefore, the wider bore of outlet 5 and conduit 6 makes it possible to deliver medical gas much more effectively than for gas delivery apertures placed in the distal tip of a laryngoscope blade.

In one embodiment, the outlet 5 for gas delivery may be disposed on the lower, in use, surface of the laryngoscope blade 2, the lower surface of the laryngoscope blade being the surface not in contact with the tongue during a laryngoscopy procedure.

The outlet 5 of the gas delivery device is adapted to direct a jet of gas into the pharynx or larynx. In one embodiment, the outlet 5 for gas delivery may be positioned on the apparatus such that it is positioned outside of the patient's mouth in normal usage but, when in use, directs gas into the mouth. The gas delivery device 4 may be attached to the laryngoscope blade or the handle of the laryngoscope but positioned such that it sits outside of but substantially proximate the opening of the mouth.

In a preferred embodiment, the outlet 5 of the gas delivery device 4 is located in the proximal third of the laryngoscope blade 2 so as to not impair vision or instrumentation of the airway distally. In one embodiment of the invention the outlet 5 is greater than 7 mm sq. in cross-sectional area. In another embodiment, the outlet 5 is circular in cross-sectional shape and in one embodiment it is non-circular in cross-sectional shape. In yet another embodiment, the cross-sectional area of the outlet 5 is 20 square millimetres. Other embodiments of the invention have an outlet 5 of cross-sectional area greater than 20 square millimetres.

In one embodiment, the gas delivery device 4 may include multiple outlets 5 with aperture sizes and resistances to allow flow in multiple directional streams of gas. In another embodiment, the gas delivery device has a narrow cross sectional bore tubing but the distal portion is designed with multiple apertures or directional apertures so as to reduce jet like flow and reduce the Venturi effect.

In one embodiment, the invention comprises a conduit 6 with a resistance to flow such that at a pressure of approximately 4 atmospheres at the proximal end, flow is restricted to a known safe rate. Four atmospheres is conventionally the oxygen pressure in hospital piped oxygen systems and in full oxygen cylinders. For example, the resistance to flow could be manufactured to be such that at a pressure of 4 atmospheres a rate of 60 L/min is achieved or in another embodiment 30 L/min would be achieved or in another embodiment 15 L/min would be achieved. This would allow a user to open up a flowmeter completely and be prevented from applying unduly and potentially dangerous flow rates.

In one embodiment, the gas delivery device 4 includes a port in the conduit 6 with a one way valve to allow injection of fluid, for example local anaesthetic solution, to facilitate application to the airway.

In one embodiment, the invention comprises delivery tubing (conduit 6) being curled like a spring or coil such that when the laryngoscope blade 2 is moved distant from the proximal connection to the oxygen source tidy extension of the tube is facilitated and when the laryngoscope blade is moved closer to the oxygen source the coil reforms thereby preventing tangling or the tubing getting in the way of the laryngoscopist or assistants.

In one embodiment, the gas delivery device 4 reversibly attaches to either the laryngoscope blade or laryngoscope handle 2. The mechanism of attachment can be of many types including a slip which wedges onto and grips the blade edge. It is desirable for the slip to be secure but non-traumatic to the tongue. In another embodiment, the attachment mechanism uses a piece of adhesive tape attached to the distal end of the tubing near the outlet 5 to tape the invention to a laryngoscope blade 2 at or near conduit 6. Many laryngoscope blades have a convenient flat surface on the back (opposite end to the tip) of the blade to which a sleeve or adhesive tape may conveniently and securely reversibly fasten. In yet another embodiment, the gas delivery device 4 comprises one or more magnet or ferromagnetic element in the handle or blade or a combination of the two to allow reversible attachment of a magnetic or ferromagnetic element on the invention. In a further embodiment, the gas delivery device comprises an element near the distal aperture that reversibly or irreversibly connects to a paired fixation element on a laryngoscope blade 2.

In one embodiment, the gas delivery device 4 has the supply conduit 6 and outlet 5 permanently connected to the proximal half of the laryngoscope blade and preferably the proximal third of the laryngoscope blade 2.

One embodiment of the device may be combined with a laryngoscope handle or blade covering.

The gas delivery device 4 may comprise a proximal portion and a distal portion. In one embodiment, the gas delivery device 4 is flexible in the distal portion. In another embodiment, the gas delivery device 4 is rigid in the distal portion. In yet another

embodiment, the gas delivery device 4 has flexible elements and rigid elements. One embodiment having a flexible element connecting the device to the oxygen source, a rigid element adjacent to the laryngoscope handle and a rigid or flexible element near or adjacent to the laryngoscope blade surface.

5

A preferred embodiment of the invention is single use and disposable so cleaning for reuse is not an issue.

Experiment A

10

Figure 2 shows the results of an experiment in which the fraction of inspired oxygen (FiO₂) was monitored during laryngoscopy from preintubation to 600 seconds. The experiment was performed using a conventional laryngoscope blade, with no oxygen insufflation, and a laryngoscope blade with a gas delivery outlet 5 at the proximal end of the blade.

15

	PreO ₂	FiO ₂ @ 30s	FiO ₂ @ 60s	FiO ₂ @ 90s	FiO ₂ @ 120s	FiO ₂ @ 180s	FiO ₂ @ 300s	FiO ₂ @ 600s
Conventional Laryngoscope Blade, no oxygen insufflation	0.923	0.616	0.394	0.289	0.246	0.23		
Laryngoscope blade with a gas delivery aperture positioned at the proximal end of the blade	0.955	0.786	0.812	0.813	0.814	0.816	0.826	0.815

Table 1: Changes in FiO₂ over a 10 minute period during laryngoscopy using a conventional laryngoscope blade, with no oxygen insufflation, and a laryngoscope blade fitted with a gas delivery aperture positioned at the proximal end of the blade.

20

As is shown in Table 1 and Figure 2, when compared to a conventional laryngoscope blade, the laryngoscope blade with a gas delivery outlet 5 located at the proximal end of the blade shows a markedly increased concentration of FiO₂ during the entire period of monitoring.

5

Experiment B

Figure 3 shows the results of an experiment in which a gas delivery device was attached to either the proximal end or distal end of a laryngoscope blade. For the version of the laryngoscope blade in which the outlet 5 was located at the proximal end of the laryngoscope blade, the gas delivery device comprised a wide bore distal aperture. For the 10 laryngoscope blade, the gas delivery device comprised the widest bore of tubing that could be used without obstructing the view of the distal tip of the laryngoscope blade. FiO₂ was monitored during laryngoscopy from preintubation to 600 seconds.

Experiment Number	FiO ₂ after preO ₂	FiO ₂ @30s	FiO ₂ @60s	FiO ₂ @90s	FiO ₂ @120s	FiO ₂ @3min	FiO ₂ @5min	FiO ₂ @10min
1	95	76	77	77	77	77	77	81
2	95	80	84	83	84	82	88	83
3	95	74	74	76	79	78	78	78
4	95	80	84	82	83	86	85	82
5	96	74	81	83	81	83	80	80
6	95	81	84	82	81	83	81	80
7	98	77	82	82	79	80	84	80
8	96	81	80	79	80	80	80	82
9	95	81	83	83	85	82	87	86
10	95	82	83	86	85	85	86	83
Average Value	95.5	78.6	81.2	81.3	81.4	81.6	82.6	81.5

15 Table 2: Changes in FiO₂ over a 10 minute period during laryngoscopy using a laryngoscope blade with gas delivery aperture located at the proximal end of the blade.

Experiment Number	FiO2 after preO2	FiO2 @30s	FiO2 @60s	FiO2 @90s	FiO2 @120s	FiO2 @3min	FiO2 @5min	FiO2 @10min
1	96	35	34	35	36	35	34	36
2	96	36	36	35	35	34	34	34
3	96	32	33	34	33	34	35	34
4	96	32	33	32	33	32	35	37
5	96	36	36	36	34	35	34	37
6	97	38	36	36	35	37	34	38
7	97	38	37	34	34	36	36	34
8	96	34	33	34	35	38	34	37
9	95	40	40	34	35	36	37	37
10	96	40	39	34	36	36	36	37
Average Value	96.1	36.1	35.7	34.4	34.6	35.3	34.9	36.1

Table 3: Changes in FiO2 over a 10 minute period during laryngoscopy using a laryngoscope blade with gas delivery aperture located at the distal end of the blade.

5 Table 2 shows the results from 10 intubations using the laryngoscope blade with a gas outlet 5 at the proximal end of the blade and Table 3 shows the results from 10 intubations using the laryngoscope blade with a gas outlet 5 at the distal end of the blade. As is shown in Figure 3, the laryngoscope blade with a gas outlet 5 at the proximal end of the blade shows a markedly increased concentration of FiO2 during the entire period of monitoring.

10

Experiment C

Figure 4 shows the results of an experiment in which the FiO2 concentration was monitored over 60 seconds during laryngoscopy where pharyngeal suctioning was applied during the procedure. Pharyngeal suctioning may be required during a laryngoscopy to enable
 15 a clear view of the laryngeal and pharyngeal airway such that the medical professional can accurately insert an endotracheal tube. Pharyngeal suctioning can be of vital importance during a laryngoscopy if there has been trauma and blood and vomitus are obscuring the

laryngeal and pharyngeal airways. As will be appreciated, ensuring as high a FiO₂ concentration during such difficult intubations is critical. Laryngoscopy was performed using either a conventional laryngoscope blade, with no oxygen insufflation, or a laryngoscope blade fitted with a gas outlet 5 at the proximal end of the laryngoscope blade.

5

	PreO ₂	15s	20s	25s	30s	35s	40s	45s	50s	55s	60s
Conventional Blade, no oxygen insufflation	0.972	0.658	0.481	0.391	0.346	0.322	0.307	0.295	0.286	0.276	0.27
Laryngoscope blade with a gas delivery aperture positioned at the proximal end of the blade	0.966	0.775	0.681	0.636	0.716	0.762	0.785	0.807	0.82	0.825	0.826

Table 4: Changes in FiO₂ during laryngoscopy after the application of pharyngeal suctioning using a conventional laryngoscope blade, with no oxygen insufflation, and a laryngoscope blade fitted with a gas delivery aperture located at the proximal end of the blade.

10 Table 4 and Figure 4 show that the FiO₂ concentration of the laryngoscope blade with a gas outlet 5 at the proximal end of the laryngoscope blade was far higher than when using a conventional laryngoscope blade and actually rebounded to a level close to the FiO₂ concentration prior to pharyngeal suctioning.

15 Experiment D

Figures 5 and 6 show the results of an experiment to determine the effects of suction verses no suction on FiO₂ concentration when using a conventional laryngoscope blade, with no oxygen insufflation, and a laryngoscope blade fitted with a gas outlet 5 located at the proximal end of the laryngoscope blade. Where suction was applied, pharyngeal suctioning

20 was applied for 10 seconds.

	PreO2	30s	60s
Conventional Blade, no suction	0.923	0.616	0.394
Conventional blade, suction	0.972	0.346	0.27
	PreO2	30s	60s
Laryngoscope blade with a gas delivery aperture positioned at the proximal end of the blade, no suction	0.955	0.786	0.812
Laryngoscope blade with a gas delivery aperture positioned at the proximal end of the blade, suction	0.966	0.716	0.826

Table 5: Changes in FiO₂ over a 60 second period during laryngoscopy with and without 10 seconds of suction using a conventional laryngoscope blade, with no oxygen insufflation, and during laryngoscopy with and without suction using a laryngoscope blade fitted with a gas delivery aperture positioned at the proximal end of the blade.

5

As shown by Table 5 and Figures 5 and 6, pharyngeal suctioning dramatically reduced the FiO₂ concentration for the conventional laryngoscope blade but overall FiO₂ concentration decreased substantially over time as previously shown in Experiments A and C. However, while suctioning decreased the FiO₂ concentration for the laryngoscope blade fitted with a gas outlet 5 at the proximal end of the laryngoscope blade, the FiO₂ concentration rebounded to the same concentration that was seen when no suction was applied during laryngoscopy.

15

CLAIMS

1. Apparatus for performing laryngoscopy, the apparatus comprising a blade, a handle and a medical gas supply device for provision of gas to a patient during laryngoscopy, wherein the medical gas supply device includes an outlet disposed on or in the handle of the device, or disposed at or adjacent the proximal end of the blade.
2. Apparatus according to claim 1, wherein the outlet is disposed in or on the distal half of the handle.
3. Apparatus according to claim 2, wherein the outlet is disposed at or adjacent the distal end of the handle.
4. Apparatus according to any preceding claim, wherein the medical gas supply device is adapted to provide gas flow therefrom with substantially no entrainment of ambient air.
5. Apparatus according to claim 4, wherein the medical gas supply device is adapted to provide gas flow therefrom with substantially no entrainment of ambient air by the outlet comprising a bore including a cross sectional area that is sufficiently large to substantially prevent the occurrence of a Venturi effect at or adjacent the blade.
6. Apparatus according to claim 5, wherein the outlet comprises a bore including a cross sectional area that is sufficiently large to substantially prevent the occurrence of a Venturi effect at or adjacent the blade at oxygen flow rates of about 10 to 80L/min, preferably up to 15L/min.
7. Apparatus according to claim 4, wherein the medical gas supply device is adapted to provide gas flow therefrom with substantially no entrainment of ambient air by the outlet comprising a bore having a cross sectional area of from > about 3mm sq. to about 50mm sq, preferably from about 3.5mm sq to about 20mm sq, most preferably from about 4mm sq to about 12.5mm sq.
8. Apparatus according to any preceding claim, wherein the outlet is non-circular in cross-sectional shape.

9. Apparatus according to any preceding claim, wherein the medical gas supply device includes a gas supply conduit and the outlet includes a one way valve.
10. Apparatus according to any one of claims 1 to 9, wherein the medical gas supply device and laryngoscope blade include one or more magnet or ferromagnetic element or combination of elements such that the gas supply device is reversibly attachable to the laryngoscope blade.
11. Apparatus according to any one of claims 1 to 10, wherein the outlet is disposed on or in a lower, in use, surface of the laryngoscope blade.
12. A method of conducting a laryngoscopy, the method comprising the step of supplying oxygen to the patient via the laryngoscope according to any of the preceding claims with substantially no entrainment of ambient air.

Indian Ocean Medical Inc.

Patent Attorneys for the Applicant/Nominated Person

SPRUSON & FERGUSON

1/7

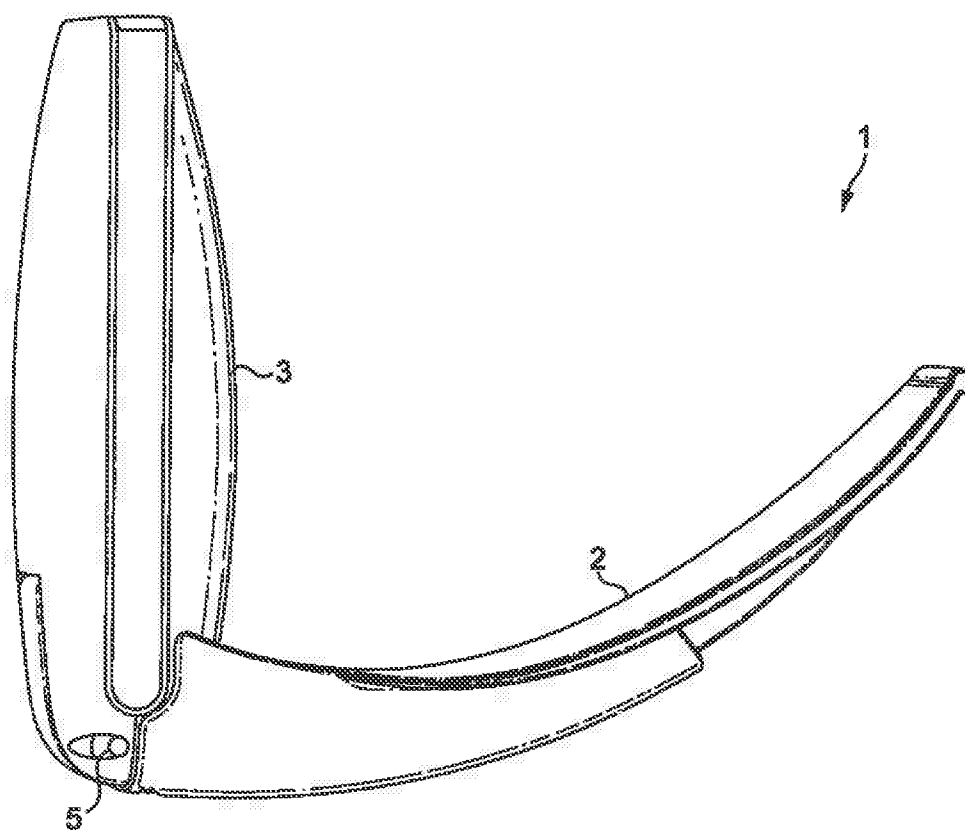


FIG. 1a

2/7

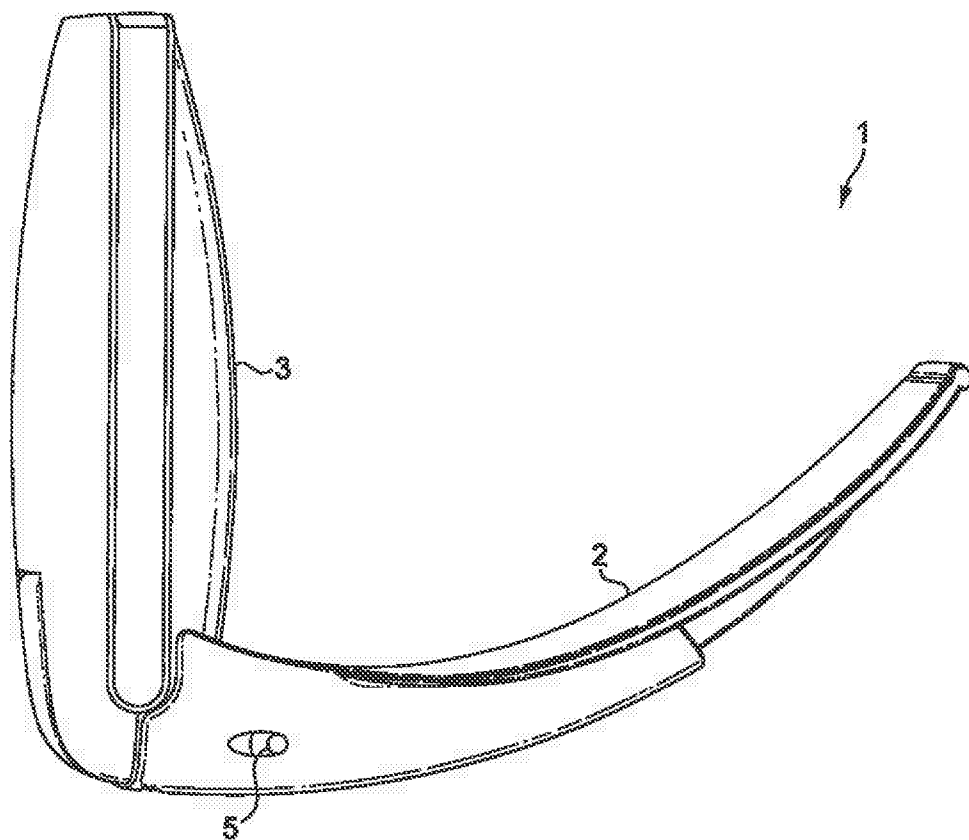


FIG. 1b

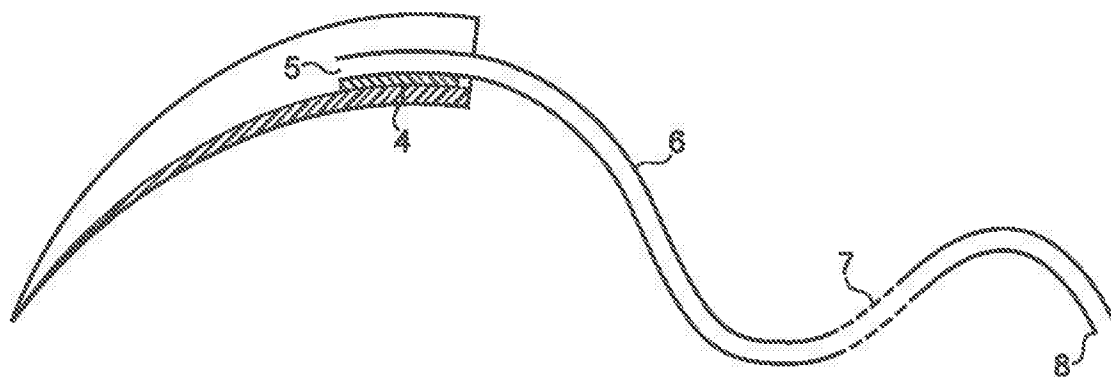


FIG. 1c

3 / 7

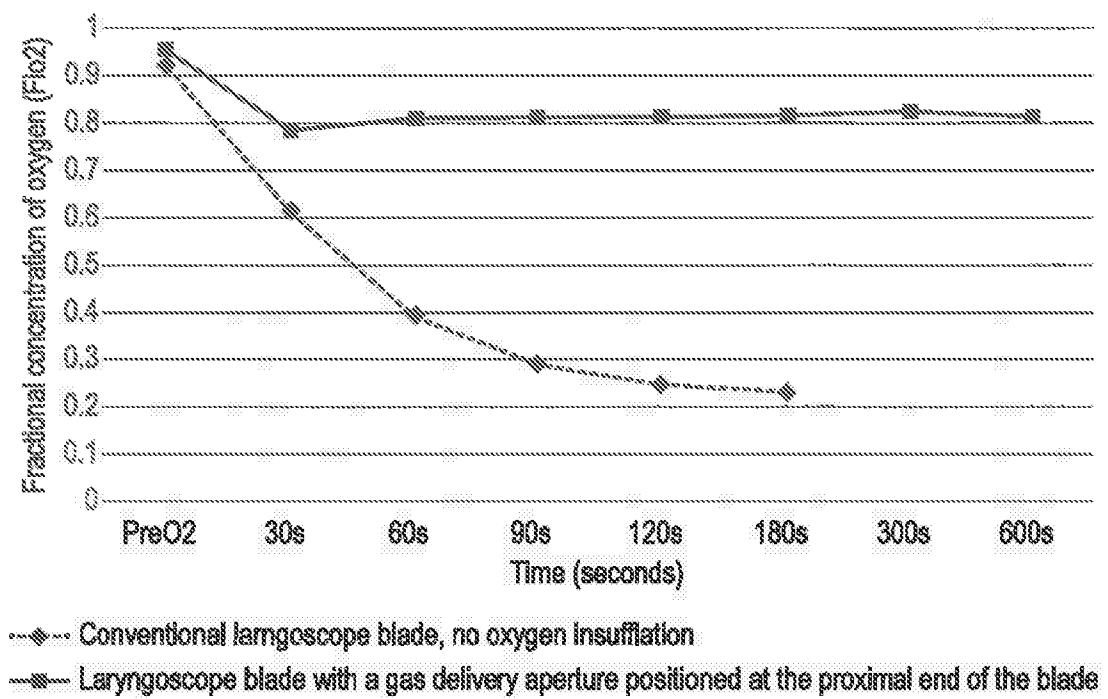


FIG. 2

4/7

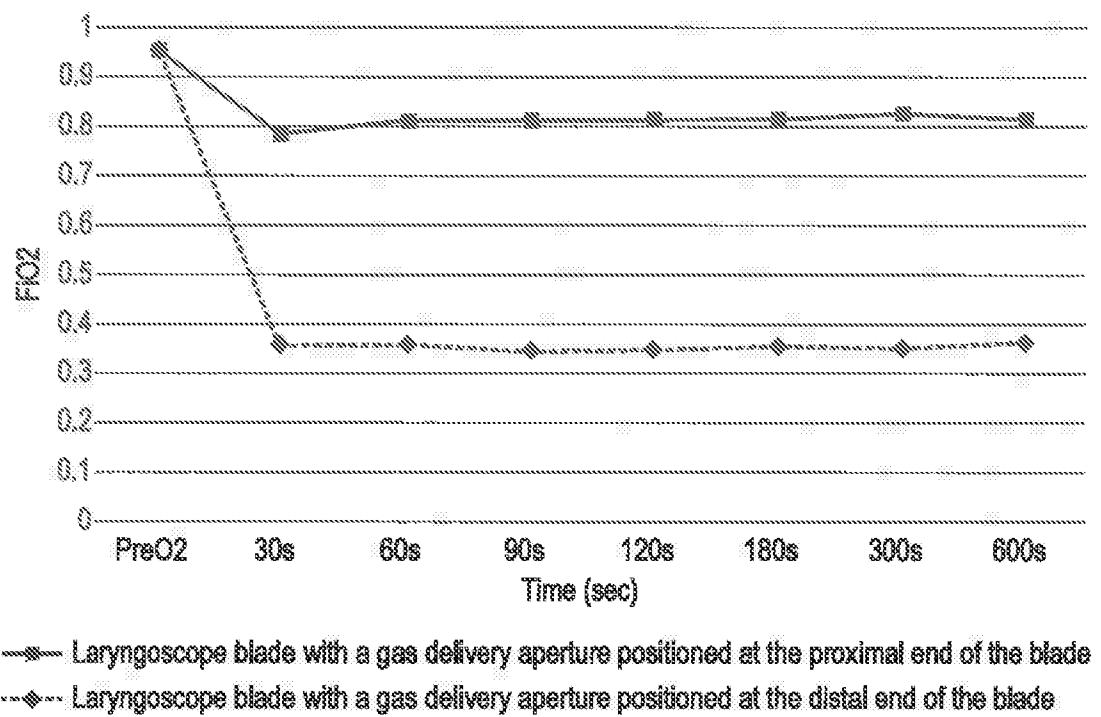


FIG. 3

5 / 7

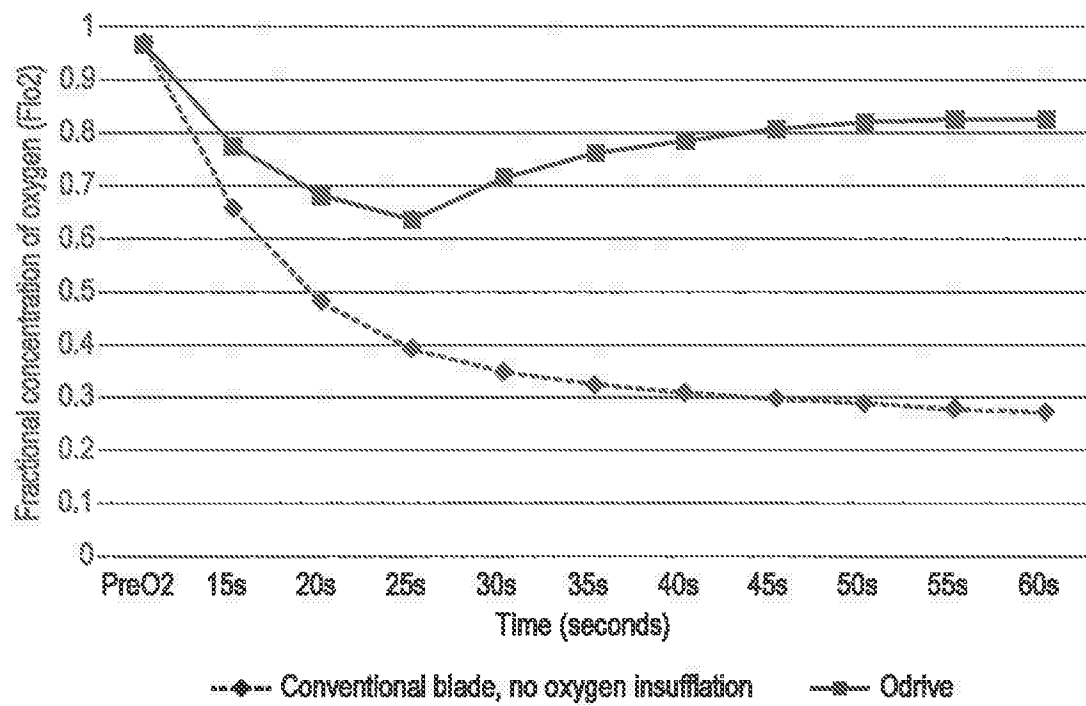


FIG. 4

6 / 7

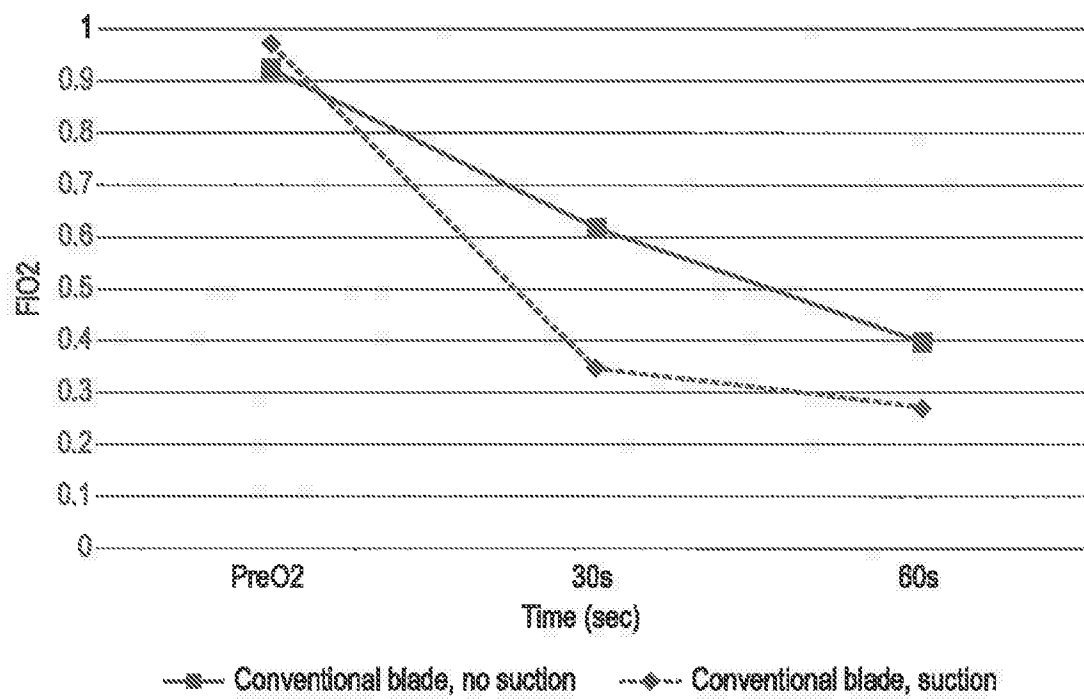


FIG. 5

717

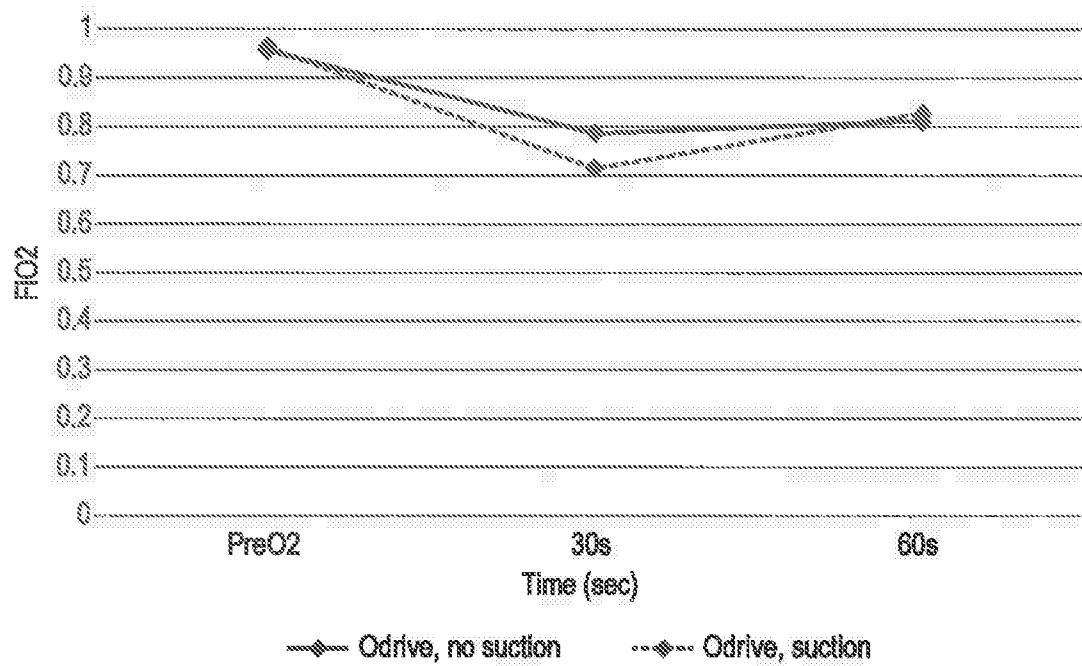


FIG. 6