

Aug. 9, 1938.

W. H. BOND, JR

2,125,985

CHAIR

Filed Jan. 25, 1937

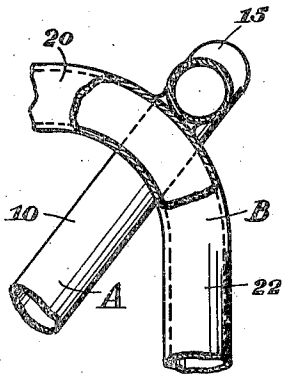


Fig. 2




Fig. 4




Fig. 5

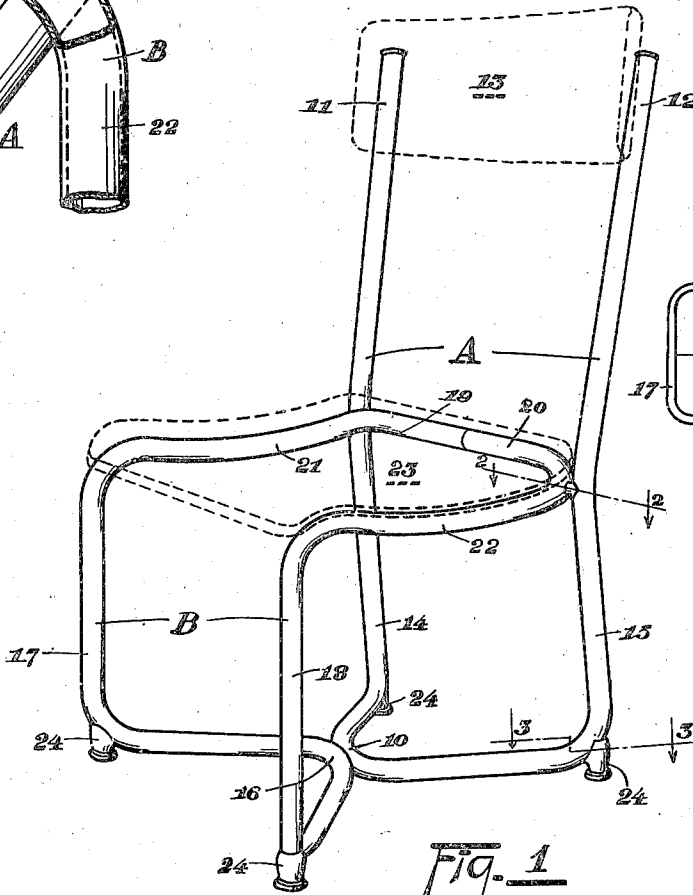


Fig. 1

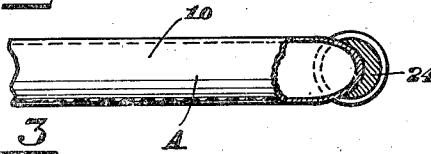


Fig. 3

Witness:
Geo. L. Chapel

INVENTOR.
Willard H. Bond, Jr.
BY *Rice and Rice*
ATTORNEYS.

UNITED STATES PATENT OFFICE

2,125,985

CHAIR

Willard H. Bond, Jr., East Grand Rapids, Mich.,
 assignor to American Seating Company, Grand
 Rapids, Mich., a corporation of New Jersey

Application January 25, 1937, Serial No. 122,110

1 Claim. (Cl. 155—194)

The present invention relates to chairs and more particularly to seat and back supporting frames therefor.

The primary objects of the instant invention are to provide a chair whose frame is preferably fabricated from tubular stock; to provide such a chair which is readily portable because of its weight; to provide such a chair which is rugged and sturdy in construction; to provide such a chair which is attractive in appearance and serviceable in use; and, to provide such a chair which is economical in manufacture. An illustrative embodiment of the invention is shown in the accompanying drawing, wherein:

Figure 1 is a perspective view of the chair, the seat and back supporting frame thereof being shown in full lines and the seat and back portions thereof being shown in dotted lines;

Figure 2 is an enlarged sectional view thereof partly broken away and on line 2—2 of Figure 1;

Figure 3 is an enlarged sectional view partly broken away and on line 3—3 of Figure 1;

Figure 4 is a perspective view of the back supporting frame portion of the chair which likewise forms the rear legs thereof; and

Figure 5 is a perspective view of the seat supporting frame portion of the chair which likewise forms the front legs of the chair.

Referring then to the drawing wherein like parts of the structure there shown are designated by the same numerals in the several views, a seat and back supporting chair frame comprises the members generally designated A and B and which members are preferably fabricated from sheet metal tubular stock.

The generally vertically disposed member A is provided with a forwardly turned V-shaped medial portion 10. The upper opposite lengths 11, 12 of the member A form a support for a back 13 of any suitable material secured therebetween in any convenient and conventional manner and the lower lengths 14, 15 thereof form spaced rear legs.

The member B has a V-shaped medial portion 16 in secured meeting engagement with the medial portion 10 of the member A and whose opposite lengths 17, 18 are upwardly and substantially vertically turned, thence rearwardly and substantially horizontally turned and finally inwardly turned at their respective opposite ends 19, 20 in secured meeting engagement with each other as by welding.

The lower ends of the upwardly turned lengths 17, 18 of the member B form spaced front legs for the chair and the rearwardly turned lengths 21, 22 and the inwardly turned lengths 19, 20 thereof form a support for the seat 23 of any suitable material which is secured thereto in any convenient and conventional manner.

The spaced rear legs 14, 15 forming a portion of the member A and the spaced front legs 17, 18 forming a portion of the member B, are preferably provided with tubular feet 24 secured thereto in any suitable manner as by spot welding and as best shown in Figure 3 whereas the rear ends of the lengths 21, 22 of the member B are secured intermediate the vertical lengths 11, 14 and 12, 15 respectively of the member A in any suitable manner as by spot welding and as best shown in Figure 2.

It will thus be seen that the tubular metal seat and back supporting chair frame herein shown and described is readily portable because of its weight, is rugged and sturdy in construction, is attractive in appearance and serviceable in use, and that the frame is economical in manufacture.

While but one specific embodiment of the invention has been herein shown and described, it will be understood that certain details of the construction shown may be altered or omitted without departing from the spirit of the invention as the same is defined by the following claim.

I claim:

A chair frame comprising a V-shaped substantially horizontally disposed base whose opposite ends are upwardly turned in spaced substantially parallel relation to form rear legs and a back support, and a second V-shaped substantially horizontally disposed base whose medial portion is in secured meeting engagement with the medial portion of the other V-shaped base and whose opposite ends are first upwardly turned to form front legs and thence rearwardly turned and finally inwardly turned at their respective ends in secured meeting engagement with each other to form a seat support, said seat support being secured interjacent said rear legs and back support in meeting engagement therewith.

WILLARD H. BOND, Jr.