

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 September 2006 (28.09.2006)

PCT


(10) International Publication Number  
**WO 2006/100620 A1**

- (51) **International Patent Classification:**  
H04L 29/08 (2006.01) G06F 19/00 (2006.01)  
A61B 5/00 (2006.01)
- (21) **International Application Number:**  
PCT/IB2006/050781
- (22) **International Filing Date:** 13 March 2006 (13.03.2006)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
60/664,103 22 March 2005 (22.03.2005) US
- (71) **Applicant (for all designated States except US):** KONINKLIJKE PHILIPS ELECTRONICS, N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (71) **Applicant (for AE only):** U.S. PHILIPS CORPORATION [US/US]; 1251 Avenue of the Americas, New York, NY 10020 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** FALCK, Thomas [DE/DE]; Weisshausstr. 2, D-52066 Aachen (DE). MASEGOSA DE MIGUEL, Pedro [ES/ES]; Residencia, 3 5-4 A, E-08030 Barcelona (ES).
- (74) **Common Representative:** KONINKLIJKE PHILIPS ELECTRONICS, N.V.; C/o Lundin, Thomas, M., 595 Miner Road, Cleveland, OH 44143 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**  
— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) **Title:** ADDRESSING SCHEME FOR SMART WIRELESS MEDICAL SENSOR NETWORKS

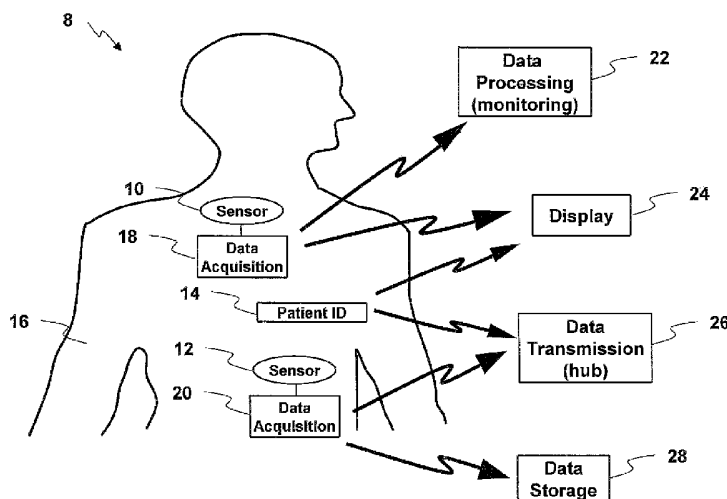

(57) **Abstract:** A wireless body network (8) for monitoring a patient (16, 32), the wireless body network (8) includes at least one wireless unit (10, 12, 14, 34, 36, 38, 40) coupled to the patient (16, 32) configured to collect and transmit data to the wireless body network related to one physiological function of the patient. The wireless unit (10, 12, 14, 34, 36, 38, 40) employs an addressing scheme (80), including a patient identification field (82) that contains a patient identification number that is unique to the wireless body network; at least one of a service type field (84) that contains a service type and a point type field (86) that indicates whether the wireless unit (10, 12, 14, 34, 36, 38, 40) provides a service or consumes a service; and a point identification field (88) that distinguishes one wireless unit (10, 12, 14, 34, 36, 38, 40) from another when the patient identification field (82), the service type field (84) and the point type field (88) are identical. A physical device (22, 24, 26, 28) is configured to communicate with the wireless unit (10, 12, 14, 34, 36, 38, 40) utilizing the addressing scheme (80).

WO 2006/100620 A1



**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## ADDRESSING SCHEME FOR SMART WIRELESS MEDICAL SENSOR NETWORKS

### DESCRIPTION

The following relates to wireless body networks. It finds particular application with addressing schemes associated with smart wireless medical sensor networks for patient monitoring applications and treatment controlling applications, and will be described with particular reference thereto. However, it is to be appreciated that the invention may also find application in providing addressing schemes to wireless sensors associated with monitoring a multiplicity of real time events such as location tracking, medication dosing and the like.

Patients typically require monitoring of one or more physiological functions when they receive medical attention. For example, it may be desirable to monitor heart function, pulse, blood pressure, blood oxygen level and the like. Conventionally, such monitoring is accomplished utilizing sensors wired to various output devices that can notify medical personnel of one or more conditions. Alternatively, wireless sensors can be employed with wireless networks to transmit such data to one or more receiving elements such as a display, a monitor, memory, central terminal and the like.

Typically, wireless sensors have a unique address, hard coded address, *e.g.* a fixed number. Although these addresses are unique, there is no particular meaning associated with such addresses. Instead, the addresses simply provide a unique identifier to facilitate communication from one party to another, when sending information through a network.

Today's devices have IP addresses that are based on network topology and are not related to device capabilities. To find a device offering a particular service, an application must employ name resolution protocols such as domain name servers (DNS), for example. In this manner, the DNS can map meaningful high-level names to IP addresses or service directory protocols such as universal plug and play (UPnP). However, such protocols are not suited for resource constrained wireless sensor networks.

The present invention contemplates an improved apparatus and method that overcomes the aforementioned limitations and others.

According to one aspect, a wireless body network (8) for monitoring a patient (16, 32), the wireless body network (8) includes at least one wireless unit (10, 12, 14, 34, 36, 38, 40) coupled to the patient (16, 32) configured to collect and transmit data to the wireless body network related to one physiological function of the patient. The wireless unit (10, 12, 34, 36, 38, 40) employs an addressing scheme (80), including a patient identification field (82) that contains a patient identification number that is unique to the wireless body network; at least one of a service type field (84) that contains a service type and a point type field (86) that indicates whether the wireless unit (10, 12, 14, 34, 36, 38, 40) provides a service or consumes a service; and a point identification field (88) that distinguishes one wireless unit (10, 12, 14, 34, 36, 38, 40) from another when the patient identification field (82), the service type field (84) and the point type field (88) are identical. A physical device (22, 24, 26, 28) is configured to communicate with the wireless unit (10, 12, 14, 34, 36, 38, 40) utilizing the addressing scheme (80).

According to another aspect, a method for communicating within a wireless medical sensor network (8) includes a plurality of wireless units (10, 12, 14, 34, 36, 38, 40), comprising broadcasting to at least one of the wireless units (10, 12, 14, 34, 36, 38, 40) employing an addressing scheme. The addressing scheme includes a patient identification field (82) that contains a patient identification number that is unique to the wireless body network (8); at least one of a service type field (84) that contains the service type value and a point type field (86) that contains the point value indicative of whether the wireless unit (10, 12, 14, 34, 36, 38, 40) provides a service or consumes a service; and a point identification field (88) that contains the point identification value to distinguish one wireless unit (10, 12, 14, 34, 36, 38, 40) from a disparate wireless unit (10, 12, 14, 34, 36, 38, 40) when the patient identification field (82), the service type field (84) and the point type field (86) are identical.

One advantage of the present invention is that it facilitates transmission of information related to physical devices across a smart wireless medical sensor network.

Another advantage of the present invention is that addressing of physical devices in the network can be autonomously addressed.

Another advantage is that the addressing scheme related to the physical devices is based on functionality of the device and not location within the network.

Numerous additional advantages and benefits will become apparent to those of ordinary skill in the art upon reading the following detailed description of the preferred embodiments.

5

The invention may take form in various components and arrangements of components, and in various steps and arrangements of steps. The drawings are only for purposes of illustrating the preferred embodiments and are not to be construed as limiting the invention.

10           FIGURE 1 illustrates a wireless body network with wireless sensors communicating with various physical devices.

FIGURE 2 illustrates a wireless network in which information is transmitted from service points associated with a patient to a plurality of control points.

15           FIGURE 3 illustrates a node that contains several service points and control points in accordance with the present invention.

FIGURE 4 shows an addressing schema employed with either a service point or control point to provide information relating to the functionality of the device instead of location within a network topology.

20           FIGURE 5 shows an addressing schema that allows multicasting to predetermined fields within the address.

A wireless body network **8** for patient monitoring is shown that includes a plurality of nodes, such as a first wireless sensor **10**, a second wireless sensor **12**, and a patient ID module **14**. The nodes transmit information related to various aspects of a patient **16**. As used herein, "sensor" also can connote a controlled device, such as a medication dosing unit, a drip feeder control, an electrotherapy device, and the like. The patient ID module **14** transmits a signal unique to the patient **16** for patient identification purposes. The wireless sensors **10**, **12** are coupled to data acquisition components **18** and **20**, respectively. Each data acquisition component **18**, **20** acquires data related to the physiological function of a patient monitored by the corresponding wireless sensor **10**, **12** and transmits the information to one or consuming devices. Typical consuming devices

include a data processing component 22, a display device 24, a data transmission component 26, and a data storage component 28. Nodes directly communicate with each other *via* a wireless body network 8. Rather than routing of packets, the wireless body network 8 is preferably a one hop peer-to-peer network over which devices within a range of five to ten meters can communicate. Other routing schemes are also contemplated. For example, the data acquisition units of each sensor associated communicate with the patient ID node which channels the data from that patient to a local off-patient transmission hub for further distribution.

The wireless sensors 10, 12 can acquire patient data utilizing an electrocardiograph (ECG) sensor, a pulse oximetry (SpO<sub>2</sub>) sensor, a non-invasive blood pressure (NIBP) sensor, a temperature sensor and the like. The wireless sensors 10, 12, the patient ID module 14, the data processing component 22, the display device 24, the data transmission component 26, and the data storage component 28 are all points that provide and/or consume data. Points that provide data are service points and points that consume data are control points. A service point provides one service and a control point consumes one service. A node can host any combination of service and control points. As illustrated, the wireless sensors 10, 12 and patient ID module 14 are service points since they provide data to the wireless *ad hoc* network. In contrast, the data processing component 22, the display device 24, the data transmission component 26, the data storage component 28, medication dosing devices, and the like consume data are control points. Each point is autonomously assigned a network-wide unique address composed of patient ID, service type, point type, and point ID.

The sensors 10, 12 that communicate with the nodes in the wireless body network 8 are autonomously addressed. No central entity is required to assign addresses. The service type and point type is typically built into each sensor and is known prior to connection to the network. Each patient has their own ID node 14 that transmits a unique patient ID. When a patient has only one type of sensor on his or her body (*e.g.*, SpO<sub>2</sub>, temperature, ECG, NIBP, *etc.*), conflicts between different sensor types are mitigated. However, conflicts may arise when the patient has a plurality of sensors of the same service type and point or a plurality of different sensors.

The node addresses are independent of network topology and are based instead on capabilities that are relevant to applications. The present addressing scheme

provides the basis for simple and efficient automatic assignment of network addresses, service discovery and eventing protocols. Lightweight protocols are important for wireless sensors, since they are resource-constrained with regard to bandwidth, memory, processor, and power.

5           The data processing component **22** manipulates received data. In one example, the data processing component is programmed to trigger an alarm when particular data falls outside of predetermined thresholds. In another example, the processing component averages a plurality of received measurements, logs data to memory, provides statistical analyses, and derives time dependent metrics and so on.

10           The display device **24** receives wireless signals and presents data in a variety of formats. In one approach, bar graphs, pie charts, logarithmic graphs, and the like are employed to present data. In another approach, the data is presented in an audio format such as voice emulation, alarm signals and the like. In another approach, the display presents data in one or more remote locations (*e.g.*, *via* a wireless network, LAN, WAN,  
15 *etc.*) Additionally, a user interface (not shown) can be employed to change the type and manner in which data is presented.

          The data transmission component **26** routes data from the patient **16** to substantially any disparate receiving component. For example, data can be routed to a remote display device, remote data storage, and the like. Also, the data transmission  
20 component can allow a plurality of components to access data at substantially the same time.

          The data storage component **28** stores data for access by one or more components. Stored data is organized and indexed to facilitate retrieval by one or more applications that have specific data organization and/or formatting requirements.  
25 Additionally, data storage is optimized so as to store data on a periodic basis, when a particular condition is met, and the like.

          As noted, some nodes (*e.g.*, an ECG sensor) provide data; some consume data (*e.g.*, a display); and some nodes both consume and provide data (*e.g.*, a monitoring unit). Services can be distinguished by data source (*e.g.*, sensor, storing unit, processing  
30 unit, patient identifier, *etc.*) and data type (*e.g.*, ECG, SpO<sub>2</sub>, temperature, NIBP, patient data, *etc.*). This leads to the identification of different service types as shown, for example, in Table 1 below:

	Data Types				
Data Sources	ECG	SpO <sub>2</sub>	Temperature	NIBP	Patient data
Sensor	ECG Sensor data	SpO <sub>2</sub> Sensor data	Temperature Sensor data	NIBP Sensor data	
Storing Unit	ECG Stored data	SpO <sub>2</sub> Stored data	Temperature Stored data	NIBP Stored data	
Processing Unit	ECG Processed data	SpO <sub>2</sub> Processed data	Temperature Processed data	NIBP Processed data	
Hub	ECG Hub data	SpO <sub>2</sub> Hub data	Temperature Hub data	NIBP Hub data	
Patient ID					Patient data

Table 1

FIGURE 2 shows another example of the wireless sensor network 8 containing the above-referenced service types. Each arrow in the picture depicts the interest of service consumers in the services offered by service providers. The patient 32 is coupled to service points including an ECG sensor 34, a SpO<sub>2</sub> sensor 36, a NIBP sensor 38, a temperature sensor 40 and the patient identifier module 14. The service points broadcast information to a plurality of devices within the wireless sensor network 8. Several physical devices nodes receive and/or transmit data received from the service points. A first processing unit 22a, a second processing unit 22b and the storage unit 28 accept and process and/or store data received from the service points. Data is transmitted outside the wireless sensor network via a Bluetooth hub 26a and/or an 802.11b/LAN hub 26b utilizing wireless protocols well known in the art. The display device 24 receives data from the physical devices for presentation and/or transmission to one or more other control points.

As illustrated in FIGURE 3, a node 60 located within a wireless network can contain one or more service points 62, 64, 66, 68 and/or control points 70, 72. In one example, the node 60 is a monitoring unit and each point has a network-wide unique address. Addressing is based on the properties of a point and not on network topology. In one approach, a physical device and each associated node host combinations of control points and/or service points.



One physical device can utilize more than one address. If two or more addresses are employed with one physical device, the physical device is shared and receives all packets sent throughout a wireless *ad hoc* network. The physical device determines if the packet address matches the physical device and if so, processes the information contained in the packet. In one example, a physical device is a control point to receive data sent from a temperature sensor with a particular point ID.

FIGURE 4 illustrates a point address **80** that includes four fields **82**, **84**, **86**, **88** related to the device type, functionality, and associated patient from which the data is delivered. The point address **80** is employed by one or more service points and/or control points. A patient identification field **82** contains the hospital wide unique patient identifier number. A service type field **84** contains the service type. As noted, typical service types include ECG, NIBP, SpO<sub>2</sub>, temperature, and the like. A point type field **86** indicates whether the point is a service point or a control point. A point identification field **88** enables points that have the same patient identification, service type and pointing type to be distinguished from one another. In addition, the point address allows sending or multicasting to a group of points. Each field reserves one value for multicast addressing as shown in FIGURE 5.

The service type field **84** and point type field **86** have fixed values that are inherent based on the associated physical device. For example, if an ECG sensor provides data to one or more control points in a wireless network, then the service type is "ECG" and the point type is "service." In contrast, the patient ID field **82** and the point ID field **88** are dynamic and are assigned in one of a plurality of ways. In one approach, for assigning the patient ID is the patient ID module 14 queries all other patient ID modules in the network to ascertain a unique patient ID. Alternatively, the patient ID can be the same as the ID which the hospital assigned the patient.

It is to be appreciated that the sequence of the fields **82-88** can be in any order. When a packet is received, all fields **82-88** are read to gather the information transmitted from a particular service point and/or consumed by a control point. Additional fields (not shown) can be added to the point address to transmit various pieces of information such as building a hierarchy of networks, for example. In one example, the additional fields relate to the location of the wireless sensors such as a floor, a medical center, a ward and so on.

In another approach, the point type field and the service type field are combined. Different point IDs are employed with a particular sensor. In addition, the field length can vary to transmit any type of information. In one approach, a field can be two bits in length with the first bit indicating a service point and a second bit indicating a control point.

In practice, after a physical device (*e.g.*, ECG wireless sensor) is powered on, a point ID number is autonomously assigned to the device when introduced to a wireless *ad hoc* network. The assigned point ID number is compared against all other point IDs from other physical devices on the network. If there is a conflict, a new point ID is assigned to the newly introduced physical device. If there is no conflict, the originally assigned point ID is utilized.

FIGURE 5 illustrates four multicast addresses **90**, **100**, **110**, **120** wherein a plurality of entities can be addressed at substantially the same time. Each of the multicast addresses **90**, **100**, **110**, **120** provides at least one field **92**, **94**, **96**, **98**, **104**, **106**, **108**, **116**, **118**, **128** that can be utilized with a multicast. In one mode **90**, all four fields **92-98** of multicast address **90** are employed. In another mode **120**, the point ID field **128** is employed to multicast information to all points on a given patient with a given service type and point type. For example, all pulse sensors on the patient are sensed. In another example **100**, all points that relate to one patient are read and/or written to at one time. In another mode **110**, all addresses of a given service type on a given patient are addressed. For example, all points of the patient that generate or receive data relating to blood oxygen are addressed. Analogously, other point groups can be addressed: single service points, single control points, all points, all points belonging to the same patient, all points with the same service type regardless of patient, all service points providing the same service type, and/or all control points of a patient consuming the same service type. Based on this addressing schema, a suite of protocols is provided that enables auto addressing of points, discovery and description of service points, control and eventing within a system. As another example, different sensors may use batteries at different rates and have different maintenance schedules. A multi-cast to all ECG sensors can be used to check for low battery responses.

The addressing schema described herein provides several advantages over conventional addressing schemas. The subject addressing schema is more efficient,

employing fewer levels of naming indirections with no name resolution required. Addresses are independent of topological location and based on capabilities that are relevant to applications. Assignment of addresses to service and/or control points is simplified by employing automatic autonomous addressing techniques described herein.

- 5 Address collisions are only possible between points of the same patient and with the same point type and service type. Simple and efficient service discovery and eventing protocols are enabled. The points are self-describing and the multicast groups are built in. In this manner, applications do not have to define and join multicast groups. Instead, messages can be sent to particular locations throughout a network utilizing specific control and/or
- 10 service point addresses without performing a prior service discovery.

- The invention has been described with reference to the preferred embodiments. Modifications and alterations may occur to others upon reading and understanding the preceding detailed description. It is intended that the invention be construed as including all such modifications and alterations insofar as they come within
- 15 the scope of the appended claims or the equivalents thereof.

### CLAIMS

Having thus described the preferred embodiments, the invention is now claimed to be:

1. A wireless body network **(8)** for monitoring a patient **(16, 32)**, the wireless body network **(8)** comprising:

at least one wireless unit **(10, 12, 14, 34, 36, 38, 40)** coupled to the patient **(16, 32)** configured to collect and transmit data to the wireless body network related to one physiological function of the patient, the wireless unit **(10, 12, 14, 34, 36, 38, 40)** employing an addressing scheme **(80)**, including:

at least one of a service type field that identifies a service and a point type field that identifies whether the service is provided or consumed;

a patient identification field **(82)** that contains a patient identification number that is unique to the wireless body network;

a point identification field **(88)** that distinguishes one wireless unit **(10, 12, 14, 34, 36, 38, 40)** from another when the patient identification field **(82)**, the service type field **(84)** and the point type field **(88)** are identical; and

a physical device **(22, 24, 26, 28)** configured to communicate with the wireless unit **(10, 12, 14, 34, 36, 38, 40)** utilizing the addressing scheme **(80)**.

2. The system according to claim 1, wherein the at least one wireless unit includes:

a patient identification module **(14)** coupled to the patient **(16, 32)** configured to transmit the unique patient identification number to the wireless body network **(8)**;

a physical device which is one of a data processing component **(22)**, a display device **(24)**, a data storage unit **(28)** and a data transmission component **(26, 26a, 26b)**.

3. The system according to claim 1, wherein the addressing scheme further includes:

both the service type field (84) to indicate the service and the point type field (86) to indicate whether the wireless unit (10, 12, 14, 34, 36, 38, 40) provides the service or consumes the service.

4. The system of claim 3, wherein at least one of the patient identification field (82), the service type field (84), the point type field (86) and the point identification field (88) are designatable as multicast address fields.

5. The system according to claim 3, wherein wireless unit (10, 12, 14, 34, 36, 38, 40) includes both a service point (64, 66, 68, 72) and a control point (62, 70).

6. The system according to claim 1, wherein the point identification value is autonomously assigned to the wireless unit (10, 12, 14, 34, 36, 38, 40).

7. The system according to claim 5, wherein the autonomously assigned point identification value is modified by the wireless body network (8) if its address is not unique to avoid a conflict with another physical device (22, 24, 26, 28).

8. The system according to claim 1, wherein the service type of the wireless unit (10, 12, 14, 34, 36, 38, 40) is one of an electrocardiograph (ECG) sensor (34), a pulse oximetry (SpO<sub>2</sub>) sensor (36), a non-invasive blood pressure (NIBP) sensor (38), and a temperature sensor (40).

9. The system according to claim 1, wherein the point type field (86) identifies one of:

a service point (64, 66, 68, 72) which provides a service to the wireless body network (8) and;

a control point (62, 70) which consumes a service provided by another service point (64, 66, 68, 72).

10. The system according to claim 1, wherein the addressing scheme **(80)** further includes:

a location field that designates a particular location of one of the physical device and the patient.

11. A method for communicating within a wireless medical sensor network **(8)**, the method including a plurality of wireless units **(10, 12, 14, 34, 36, 38, 40)**, comprising:

broadcasting to at least one of the wireless units **(10, 12, 14, 34, 36, 38, 40)** employing an addressing scheme including:

a patient identification field **(82)** that contains a patient identification number that is unique to the wireless body network **(8)**; and

at least one of a service type field that identifies a service and a point type field that identifies whether the service is provided or consumed;

a point identification field **(88)** that contains the point identification value to distinguish one wireless unit **(10, 12, 14, 34, 36, 38, 40)** from a disparate wireless unit **(10, 12, 14, 34, 36, 38, 40)** when the patient identification field **(82)**, the service type field **(84)** and the point type field **(86)** are identical.

12. The method of claim 11, the addressing scheme further including:

both the service type field **(84)** to identify the service type value and the point type field **(86)** that contains the point value to indicate whether the wireless unit **(10, 12, 14, 34, 36, 38, 40)** provides a service or consumes a service.

13. The method according to claim 11, further including:

coupling one of the wireless units **(10, 12, 14, 34, 36, 38, 40)** to a patient **(16, 32)** to monitor and transmit information related to a characteristic of the patient to the smart wireless sensor network **(8)**.

14. The method according to claim 13, further including:  
coupling a patient identification module (14) to the patient (16, 32), the patient identification module (14) having a unique patient identification number in the patient identification field (82) to the smart wireless sensor network (8).

15. The method according to claim 13, further including:  
after coupling the wireless unit (10, 12, 14, 34, 36, 38, 40) to the patient (16, 32), polling other network devices to determine if its address is unique;  
if the coupled wireless unit (10, 12, 14, 34, 36, 38, 40) address is not unique, selecting another assigned point identification value.

16. The method according to claim 13, wherein monitoring a characteristic of the patient includes monitoring at least one of an electrocardiograph (ECG) value, a pulse oximetry (SpO<sub>2</sub>) value, a non-invasive blood pressure (NIBP) value, and a temperature value.

17. The method according to claim 11, wherein the point type field contains one of a service point (64, 66, 68, 72) which provides a service to the wireless body network (8) and a control point (62, 70) which consumes a service provided by the service point (64, 66, 68, 72).

18. The method according to claim 11, wherein the addressing scheme (80) further includes:  
a location field that designates a particular location related to one of the wireless unit (10, 12, 14, 34, 36, 38, 40) and the patient (16, 32).

19. The method according to claim 11, further including designating at least one of the patient identification field (82), the service type field (84), the point type field (86) and the point identification field (88) as a multicast address field.

20. The method according to claim 11, further including multicasting addressing one of:

- all units with a common service point,
- all units with a common control point,
- all units belonging to a selected patient,
- all units of a selected patient providing the same service type,
- all units belonging to a selected patient consuming the same service type,
- all units.

21. An addressing scheme for a wireless sensor network **(8)**, comprising:

a patient identification field **(82)** that contains a patient identification number that is unique to the wireless body network **(8)**;

at least one of a service type field **(84)** that contains the service type value that indicates a type of service and a point type field **(86)** that contains the point value that indicates whether the wireless unit **(10, 12, 14, 34, 36, 38, 40)** provides the service or consumes the service; and

a point identification field **(88)** that contains the point identification value to distinguish one wireless unit **(10, 12, 14, 34, 36, 38, 40)** from a disparate wireless unit **(10, 12, 14, 34, 36, 38, 40)** when the patient identification field **(82)**, the service type field **(84)** and the point type field **(86)** are identical.



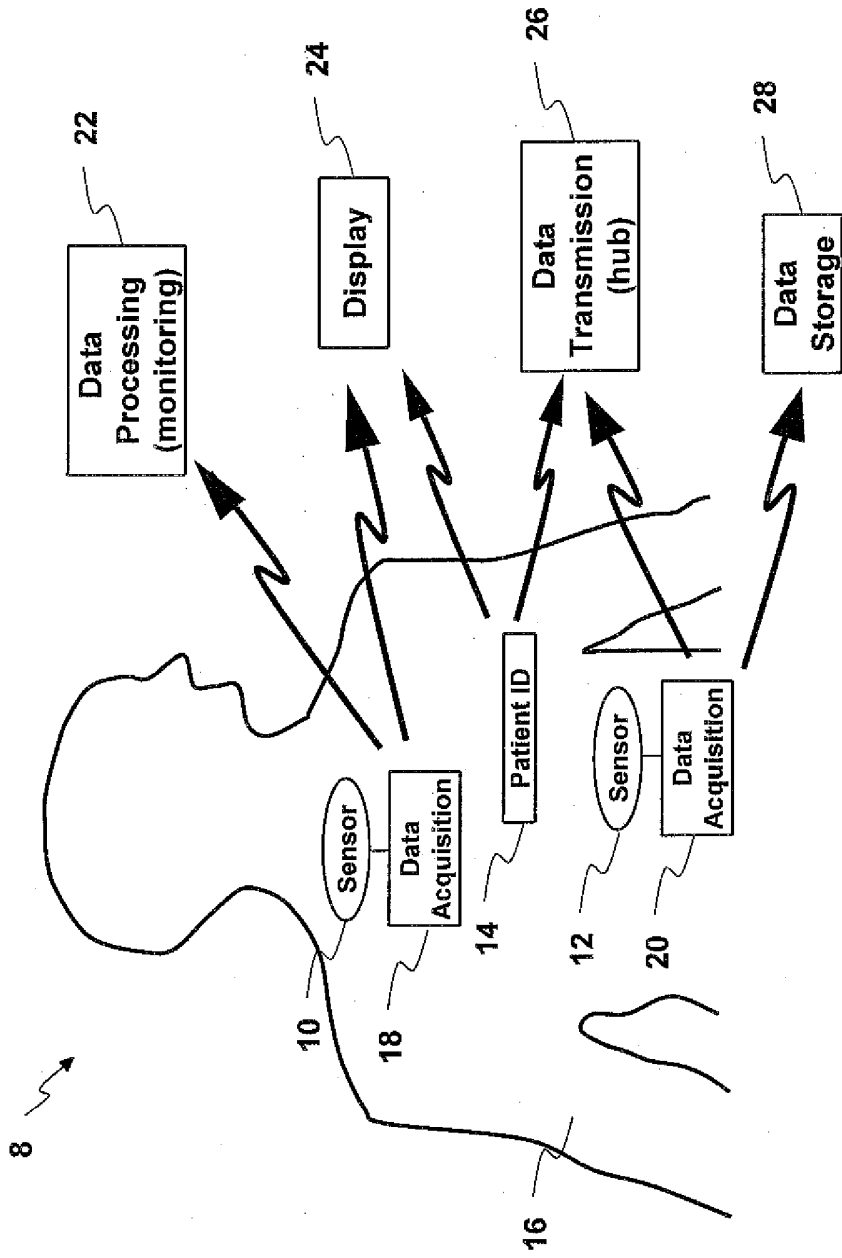


Fig. 1


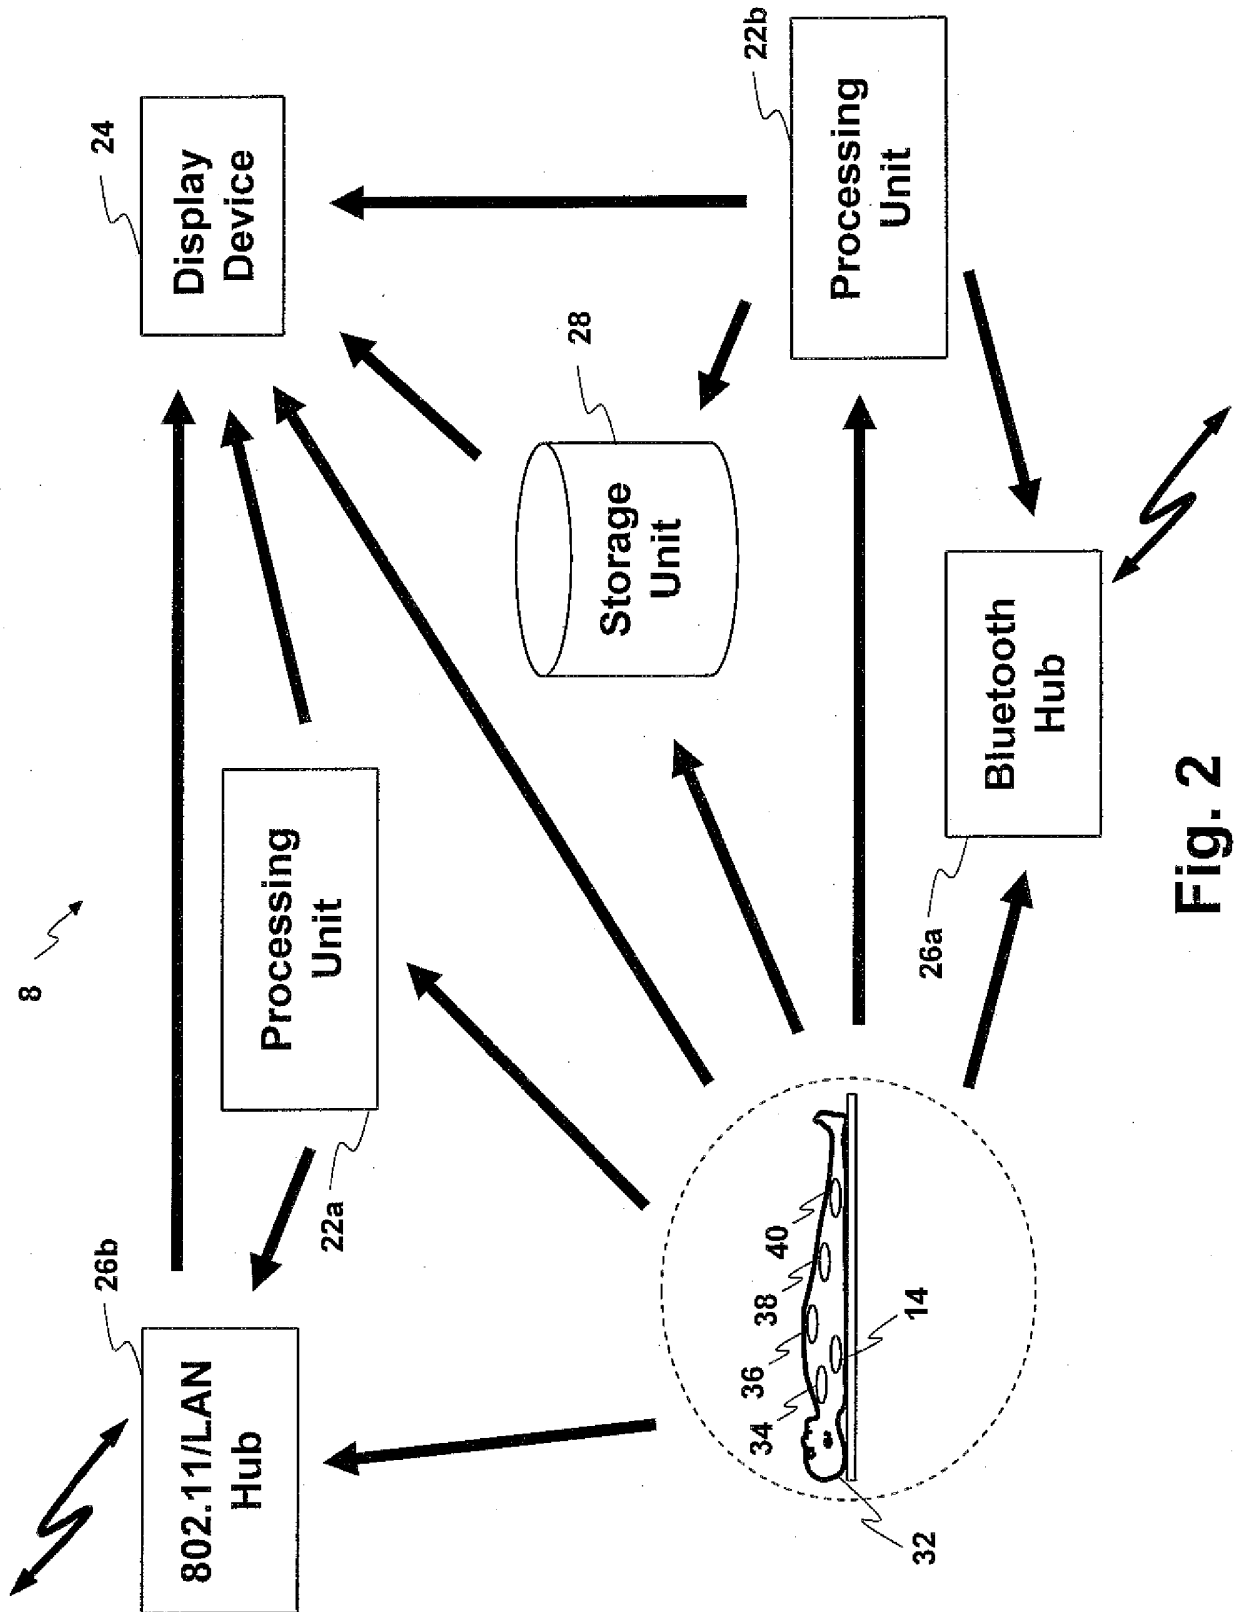


Fig. 2

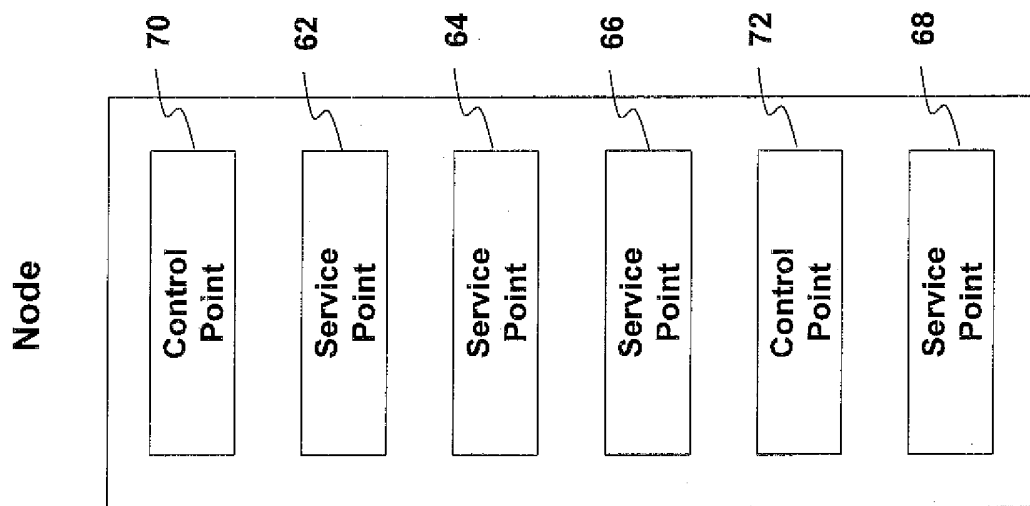

60 ↗

Fig. 3

80 ↗

Patient ID	Service Type	Point Type	Point ID
------------	--------------	------------	----------

82      84      86      88

Fig. 4

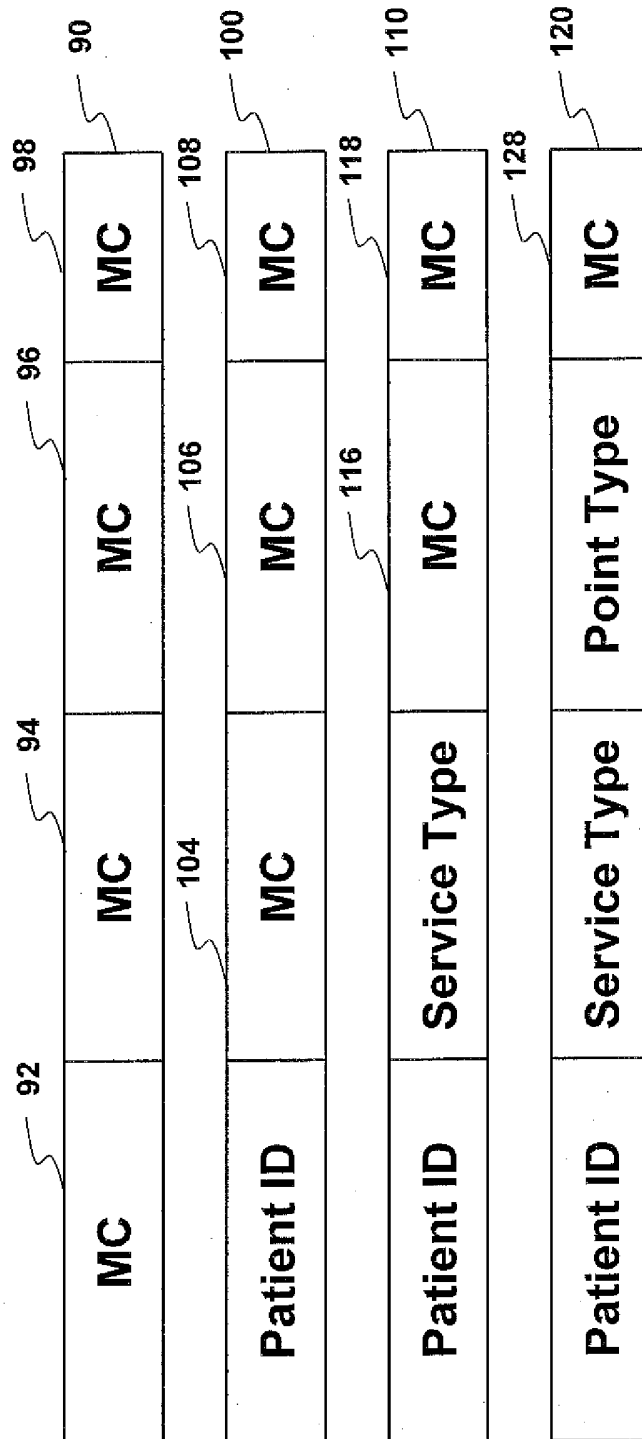


Fig. 5

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/IB2006/050781

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> INV. H04L29/08      A61B5/00      G06F19/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) G06F A61B H04L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004/078219 A1 (KAYLOR ROSANN ET AL) 22 April 2004 (2004-04-22) abstract paragraphs [0003] - [0019], [0028] - [0031] paragraphs [0058] - [0075], [0119] - [0128]; figures 1-5 paragraphs [0244] - [0254]	1-21
A	LAMPINOS I E ET AL: "A low power medium access control protocol for wireless medical sensor networks" SAN FRANCISCO, CA, USA 1-5 SEPT. 2004, PISCATAWAY, NJ, USA, IEEE, US, vol. 3, 1 September 2004 (2004-09-01), pages 2129-2132Vo13, XP010775395 ISBN: 0-7803-8439-3 the whole document	1-21
----- -/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :		
*A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*I* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family	
Date of the actual completion of the international search  <p style="text-align: center; font-weight: bold;">11 August 2006</p>	Date of mailing of the international search report  <p style="text-align: center; font-weight: bold;">22/08/2006</p>	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer  <p style="text-align: center; font-weight: bold;">Gavrilu, B-A</p>	

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/IB2006/050781

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/109621 A1 (KHAIR MOHAMMAD ET AL) 15 August 2002 (2002-08-15) abstract paragraphs [0009], [0050], [0051]; figure 3 paragraphs [0059], [0076] - [0089]; figures 6-8 paragraphs [0117] - [0119] -----	1-21

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2006/050781

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
US 2004078219	A1	22-04-2004	AU 2002348223 A1	17-06-2003
			WO 03048998 A2	12-06-2003
US 2002109621	A1	15-08-2002	AU 5708301 A	30-10-2001
			CA 2405861 A1	25-10-2001
			EP 1290658 A2	12-03-2003
			JP 2004503266 T	05-02-2004
			MX PA02010273 A	25-04-2003
			WO 0178831 A2	25-10-2001
			US 6441747 B1	27-08-2002