

- [54] **BOX OR PACKET**
- [75] Inventors: **Austin L. Fox; William A. A. Jones,**
both of London, England
- [73] Assignee: **Molins Limited,** London, England
- [22] Filed: **June 21, 1973**
- [21] Appl. No.: **372,367**

2,975,890 3/1961 Block..... 229/44 CB

FOREIGN PATENTS OR APPLICATIONS

819,206 9/1959 United Kingdom..... 229/44 CB
2,161,065 6/1973 Germany..... 229/44 CB

Primary Examiner—Leonard D. Christian
Attorney, Agent, or Firm—Markva & Smith

- [30] **Foreign Application Priority Data**
June 30, 1972 United Kingdom..... 30629/72
- [52] **U.S. Cl.**..... 229/44 CB
- [51] **Int. Cl.**..... B65d 5/66
- [58] **Field of Search**..... 229/44 R, 44 CB

- [56] **References Cited**
UNITED STATES PATENTS
2,396,150 3/1946 Bonville..... 229/44 CB

[57] ABSTRACT

A hinged lid packet for cigarettes has an integral inner frame consisting of an inwardly recessed panel extending from the front wall. A pair of side flaps extends perpendicularly from the sides of the recessed panel, and the lower portions of the side flaps are partly sandwiched between the inner and outer flaps which form the side walls of the packet.

7 Claims, 2 Drawing Figures

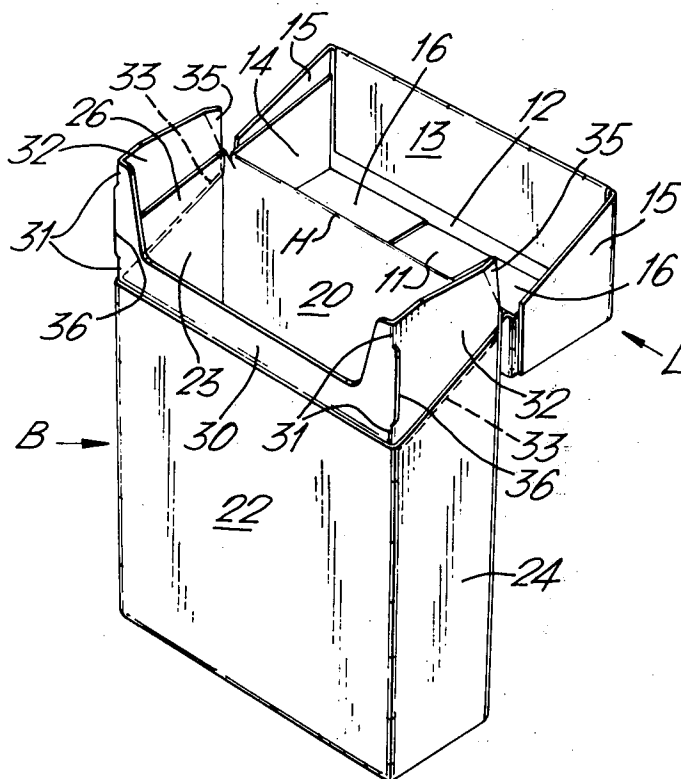


FIG. 1.


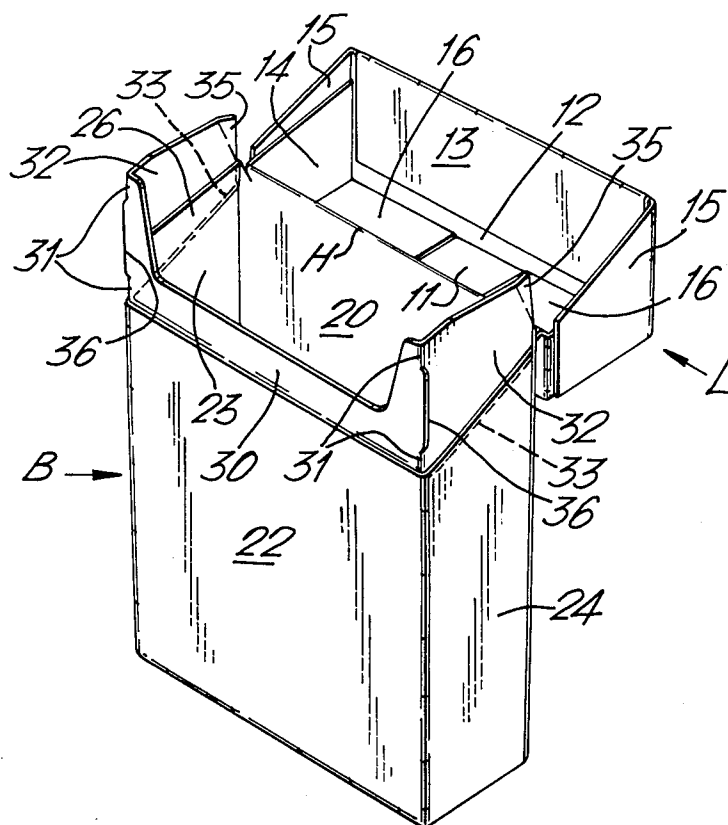


FIG. 2.

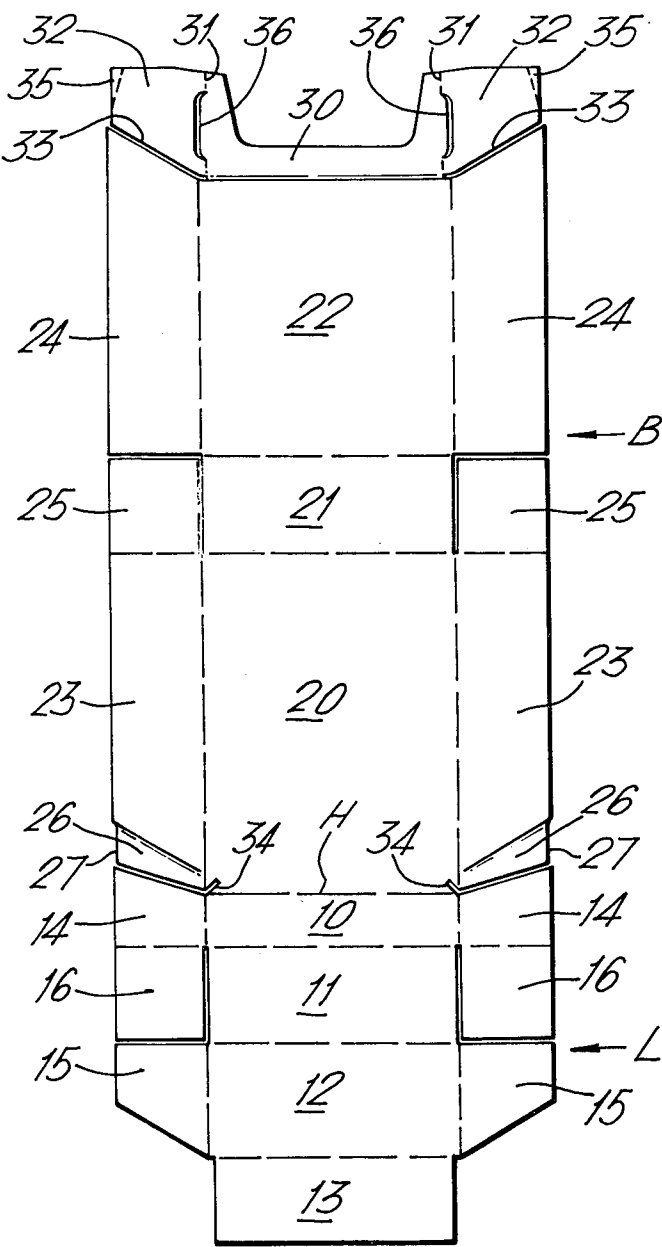

BOX OR PACKET

This invention relates to packets, for example for cigarettes or the like, and is particularly concerned with packets known as hinged lid packets.

Hinged lid packets are conventionally made from two cardboard blanks, one blank for forming the body and lid which are joined by an integral hinge, and another blank for forming an insert or inner frame which is assembled to the inside of the front and side walls of the body and projects above these walls. The insert forms a seal between the lid and body when the packet is closed and, more importantly, it retains the packet closed by frictionally engaging the inside of the front wall of the lid. However unless the insert is made substantially of the full depth of the packet, which would consume an unnecessary amount of cardboard, it is difficult to secure the insert to the body at the correct height to achieve a satisfactory engagement with the lid. A further disadvantage is that additional machinery is required for making a separate blank for the insert, and for assembling the insert in the body of the packet.

Proposals have been made to produce a packet having an insert integral with, and made from the same blank as, the body and lid.

According to the present invention there is provided a hinged lid packet with a lid portion hinged to a body portion, the body portion comprising a front wall, a rear wall, a pair of side walls each formed by an inner flap extending from the rear wall and by an outer flap extending from the front wall, a recessed panel extending upwardly from the front wall, the panel being narrower than the front wall and being deformed inwardly parallel thereto so that when the packet is closed the panel lies wholly within the lid portion, and a pair of side flaps extending from the sides of the panel, each side flap being partly sandwiched between the inner and outer flaps of the side walls.

The inner flap may be higher than the outer flap, the top portion of the inner flap being deformed inwardly parallel to its bottom portion so that the side flaps are sandwiched substantially in alignment with said bottom position of the inner flaps. The sandwiched parts of the side flaps are preferably secured to the inner and outer flaps by adhesive.

The invention will now be described, by way of example, with reference to the accompanying drawings in which:

FIG. 1 in a perspective view which shows a packet according to the invention, and

FIG. 2 is a plan view, to a smaller scale, of the blank from which the packet is made.

The packet shown in FIG. 1 is produced from the single cardboard blank shown in FIG. 2 and comprises a lid L integrally hinged along a line H to a body B.

The lid L includes a rear wall 10 extending from the hinged line H, a top panel 11, a front wall 12, and a reinforcing panel 13 which is folded back and secured by adhesive to the inside surface of the front wall 12. Inner and outer flaps 14 and 15 extend from each side of rear wall 10 and the front wall 12 respectively, and are secured together to form the side walls of the lid. A further flap 16 extends from each of the flaps 14 and is secured inside the top panel 11.

The body B comprises a rear wall 20, a base 21, and a front wall 22. The side walls of the body are formed by inner flaps 23 extending from each side of the rear

wall 20 and by outer flaps 24 extending from each side of the front wall 22. A flap 25 extending from each inner flap 23 is secured to the inside of the base 21. The top portion 26 of each inner flap 23, as viewed in the upright packet of FIG. 1, is deformed inwardly parallel to the bottom portion by an amount corresponding to the thickness of the cardboard blank. Small cut-outs 27 are provided at the outer edges of the deformed portions 26.

A recessed panel 30 extends upwards from the front wall 22, and is likewise deformed inwardly parallel to the wall 22 by the thickness of the blank. The width of the recessed panel 30, defined by lines 31, is smaller than that of the front wall 22 and is shown slightly exaggerated in the drawings.

Joined to each side of panel 30 along corner 31 is a side flap 32, which is approximately of the same width as the inner and outer flaps 23 and 24. As a result of the recessing of panel 30 and the inclination of the lower edges 33 of the flap 32, the lower edges 33 come below the upper edges of the outer flaps 24 in the erect packet.

The insides of the lower edges rest against the deformed portions 26 so that the flaps 32 are in alignment with the bottom portions of inner flaps 23. Thus the flaps 32 are partly sandwich between the upper portions of the inner and outer flaps 23 and 24 to which they are secured by adhesive. The cut-outs 27 serve to accommodate the inside corners of the recessed panel 30 at the lower ends of the lines 31.

By having the recessed panel 30 integral with the body, the corners above the lines 31 (which serve to engage the inside of the front wall of the lid to keep the packet closed) can be produced more accurately to the correct height.

Certain other features shown in FIGS. 1 and 2 are conventional and will therefore only be described briefly.

Short inclined slits 34 are provided at the ends of the hinge line H, to facilitate opening of the lid L; the corners 35 of the flaps 32 are inwardly bent to guide the sides 14 and 15 over the flaps 32 when closing the lid L; and ears 36 are formed at the corner edges 31 to frictionally engage the sides of the lid and thus assist in maintaining the packet closed.

The shape of the cut-out in the recessed panel 30 is also conventional, and provides access to cigarettes (not shown) which are contained in the packet.

It will be understood that the reinforcing panel 13 need not be rectangular, but may instead be shaped to coincide with the cut-out in the panel 30, so that less material is wasted in the production of the blanks.

We claim:

1. A hinged lid packet with a lid portion hinged to a body portion, the body portion comprising a front wall including an integral recessed panel extending upwardly from the front wall, a rear wall, a pair of side walls each formed by an inner flap and by an outer flap, one of said flaps extending from the rear wall and the other of said flaps extending from the front wall, the recessed panel being narrower than the front wall and being recessed towards the interior of the packet and disposed substantially parallel to said front wall so that when the packet is closed the panel lies wholly within the lid portion, and a pair of side flaps extending from the sides of the recessed panel in a direction parallel to the respective side walls, the lower part of each side

ap being sandwiched between the inner and outer
aps of the respective side walls.

2. A hinged lid packet as claimed in claim 1 in which
ie inner flaps are higher than the outer flaps, and in
hich the top portion of each inner flap is recessed in- 5
ardly parallel to its bottom portion so that the side
aps are sandwiched substantially in alignment with
id bottom portion of the inner flaps.

3. A hinged lid packet as claimed in claim 1 in which
ie lower sandwiched parts of the side flaps are secured 10
o the inner and outer flaps by adhesive.

4. A one-piece blank for forming a hinged lid packet
s claimed in claim 1.

5. A hinged lid packet as claimed in claim 1 in which
ie upper edges of the side walls are inclined so that the 15
eight of the side walls is greater at the rear wall than
t the front wall.

6. A hinged lid packet as claimed in claim 1 wherein
t least said body portion is constructed from a one-

piece blank.

7. A hinged lid packet with a lid portion hinged to a
body portion, the body portion comprising a front wall;
a rear wall; a pair of side walls each formed by an inner
flap extending from the rear wall and by an outer flap
extending from the front wall; a recessed panel extend-
ing upwardly from the front wall, the panel being nar-
rower than the front wall and being recessed inwardly
parallel thereto so that when the packet is closed the
panel lies wholly within the lid portion; and a pair of
side flaps extending from the sides of the panel, each
side flap being partly sandwiched between the inner
and outer flaps of the side walls, the inner flaps being
higher than the outer flaps, and the top portion of each
inner flap being deformed inwardly parallel to its bot-
tom portion so that the side flaps are sandwiched sub-
stantially in alignment with said bottom portion of the
inner flaps.

* * * * *

20

25

30

35

40

45

50

55

60

65