



US 20010005165A1

(19) **United States**

(12) **Patent Application Publication**  
**Laskaris et al.**

(10) **Pub. No.: US 2001/0005165 A1**

(43) **Pub. Date: Jun. 28, 2001**

(54) **MOLD FOR BONDING MRI POLE PIECE  
TILES AND METHOD OF MAKING THE  
MOLD**

(76) Inventors: **Evangelos T. Laskaris**, Niskayuna, NY  
(US); **William D. Barber**, Ballsto  
Lake, NY (US); **Johannes M. van  
Oort**, Niskayuna, NY (US); **Bulent  
Aksel**, Clifton Park, NY (US); **Paul S.  
Thompson**, Stephentown, NY (US);  
**Michele D. Ogle**, Burnt Hills, NY (US)

Correspondence Address:

**Jack L. Lahr**  
**FOLEY & LARDNER**  
**Washington Harbour**  
**3000 K Street, N.W., Suite 500**  
**Washington, DC 20007-5109 (US)**

(21) Appl. No.: **09/738,838**

(22) Filed: **Dec. 18, 2000**

**Related U.S. Application Data**

(62) Division of application No. 09/198,507, filed on Nov.  
24, 1998.

**Publication Classification**


(51) **Int. Cl.<sup>7</sup>** ..... **H01F 5/00**

(52) **U.S. Cl.** ..... **335/299**

(57) **ABSTRACT**


A laminate tile pole piece for an MRI, a method and a mold for manufacturing laminate tile metal pole pieces for an MRI. Each laminate tile has a trapezoidal or annular sector shape. The trapezoidal shape allows the tiles to be attached side by side to form a multiple concentric annular array pole piece without using oddly shaped edge filler tiles needed to fill a circular pole piece with square tiles. The pole piece is made by placing a plurality of tiles into a mold and filling the mold with an adhesive substance to bind the plurality of tiles into a unitary tile body. The unitary tile body is then removed from the mold and attached to a pole piece base to form the pole piece. The mold cavity surface preferably has a non-uniform contour. The bottom surface of the unitary tile body forms a substantially inverse contour of the mold cavity surface contour.

Fig. 1A

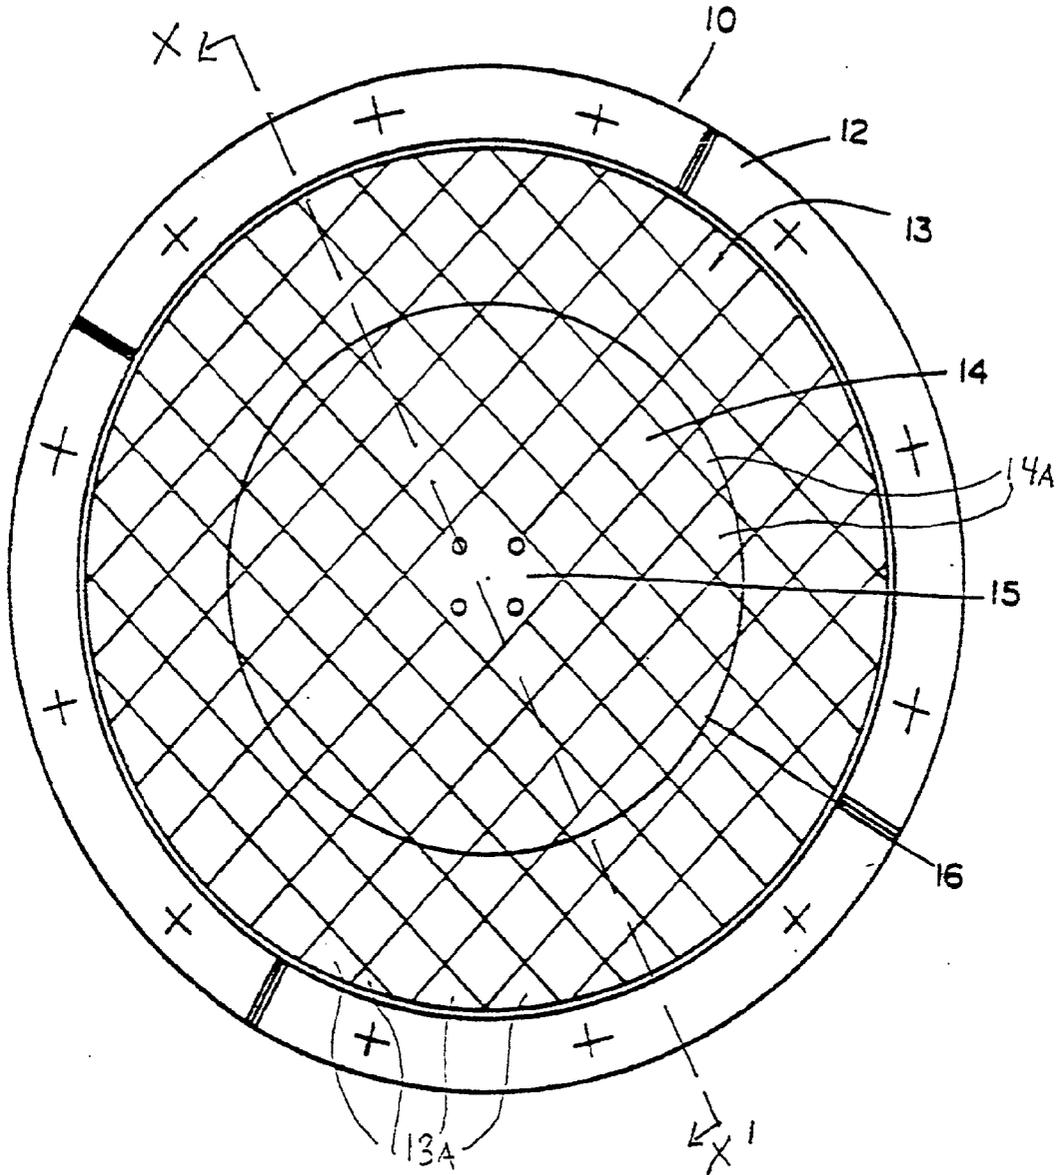

PRIOR ART

Fig. 13

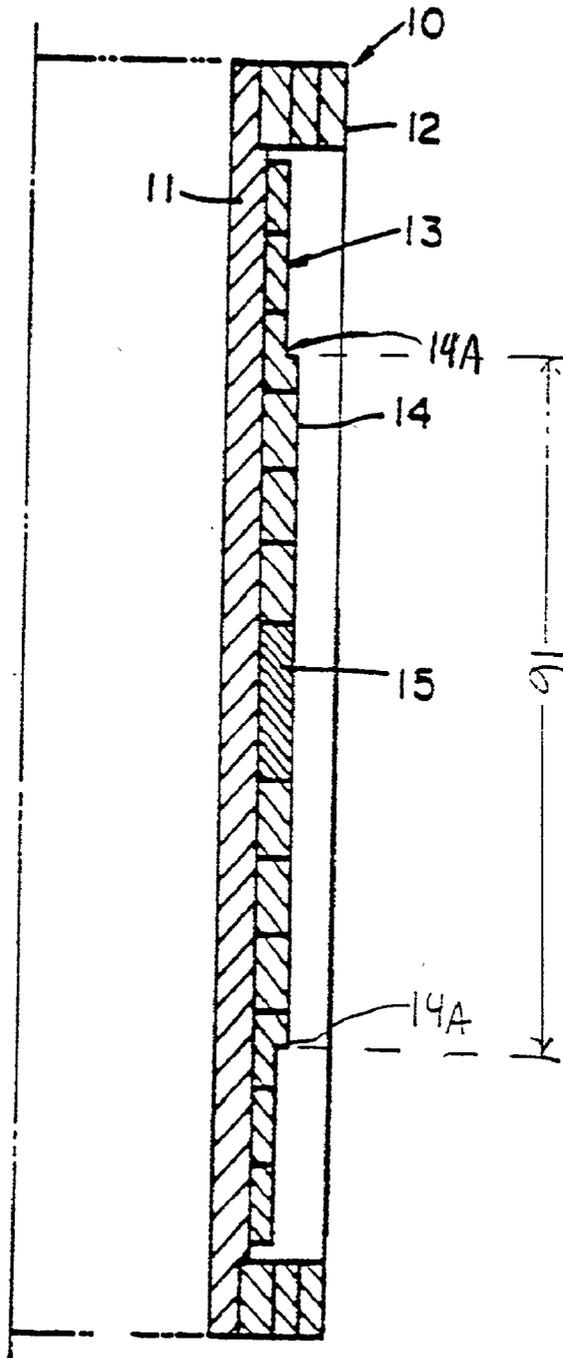

PRIOR ART

50

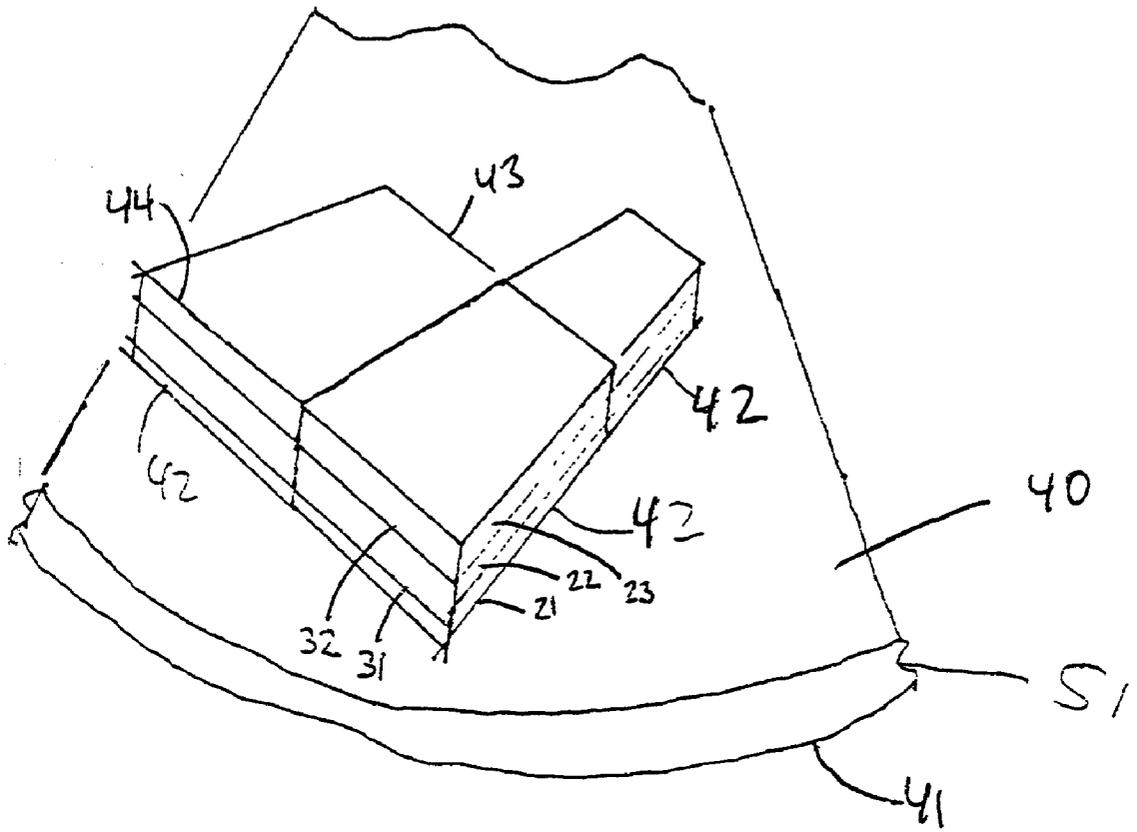


FIGURE 2A

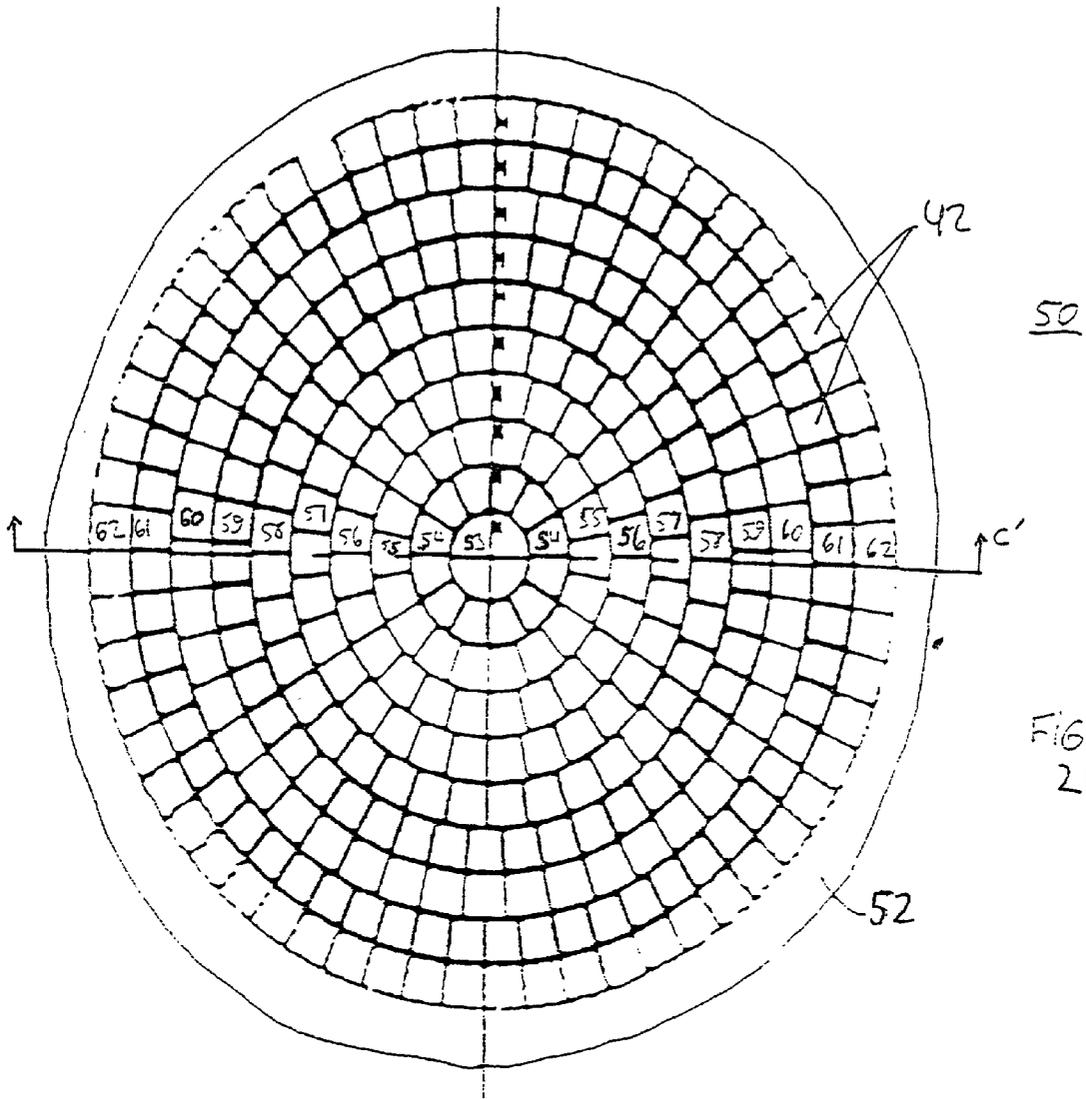


FIGURE 2B

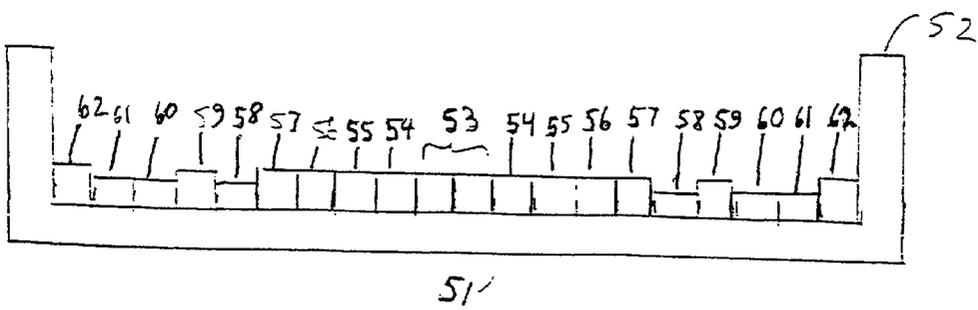


FIGURE 2C

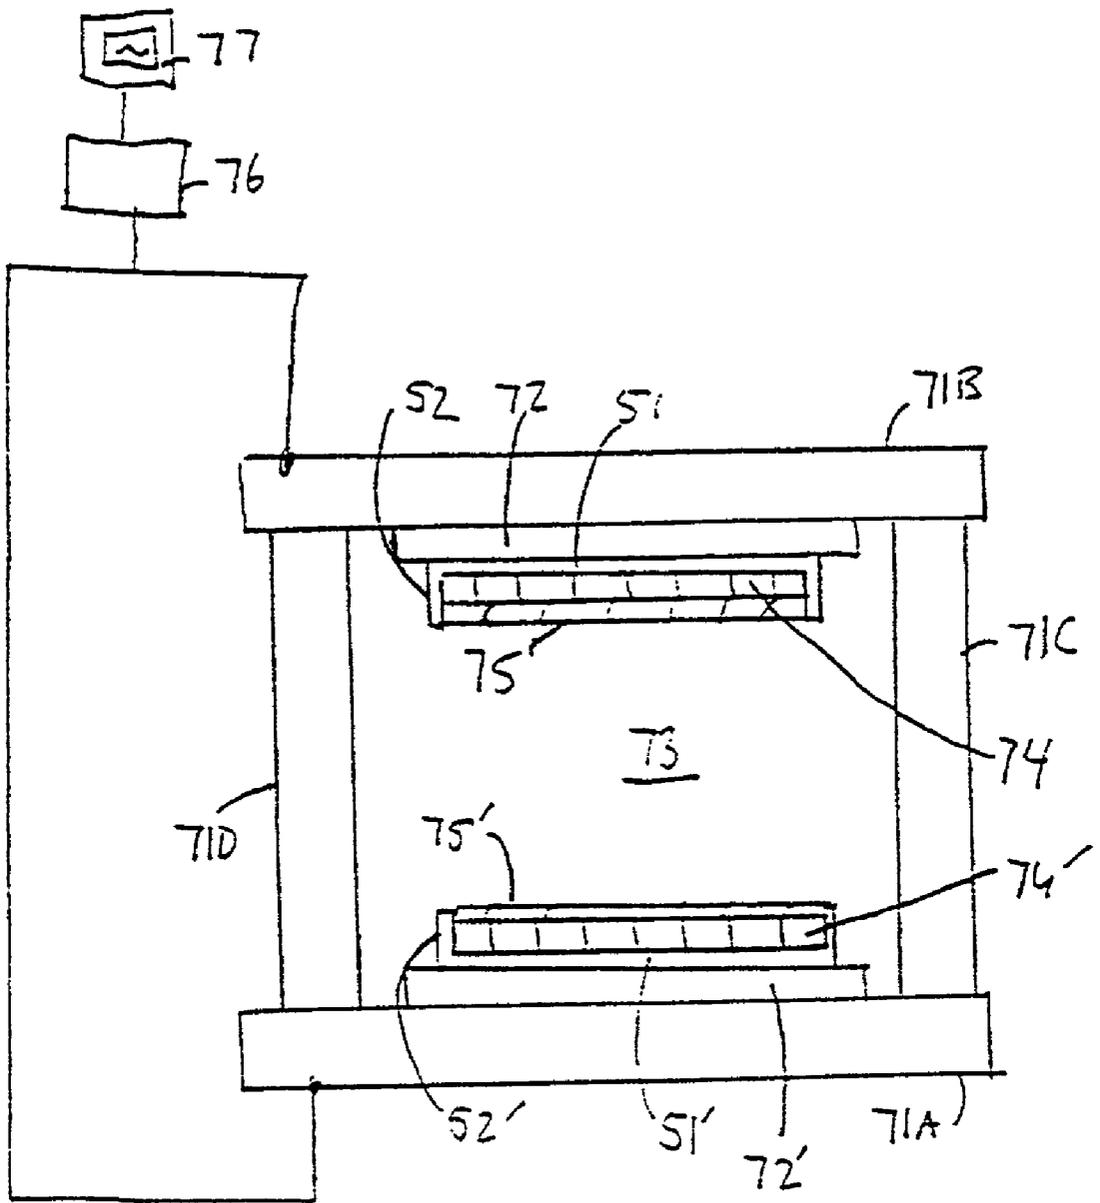


Figure 3A

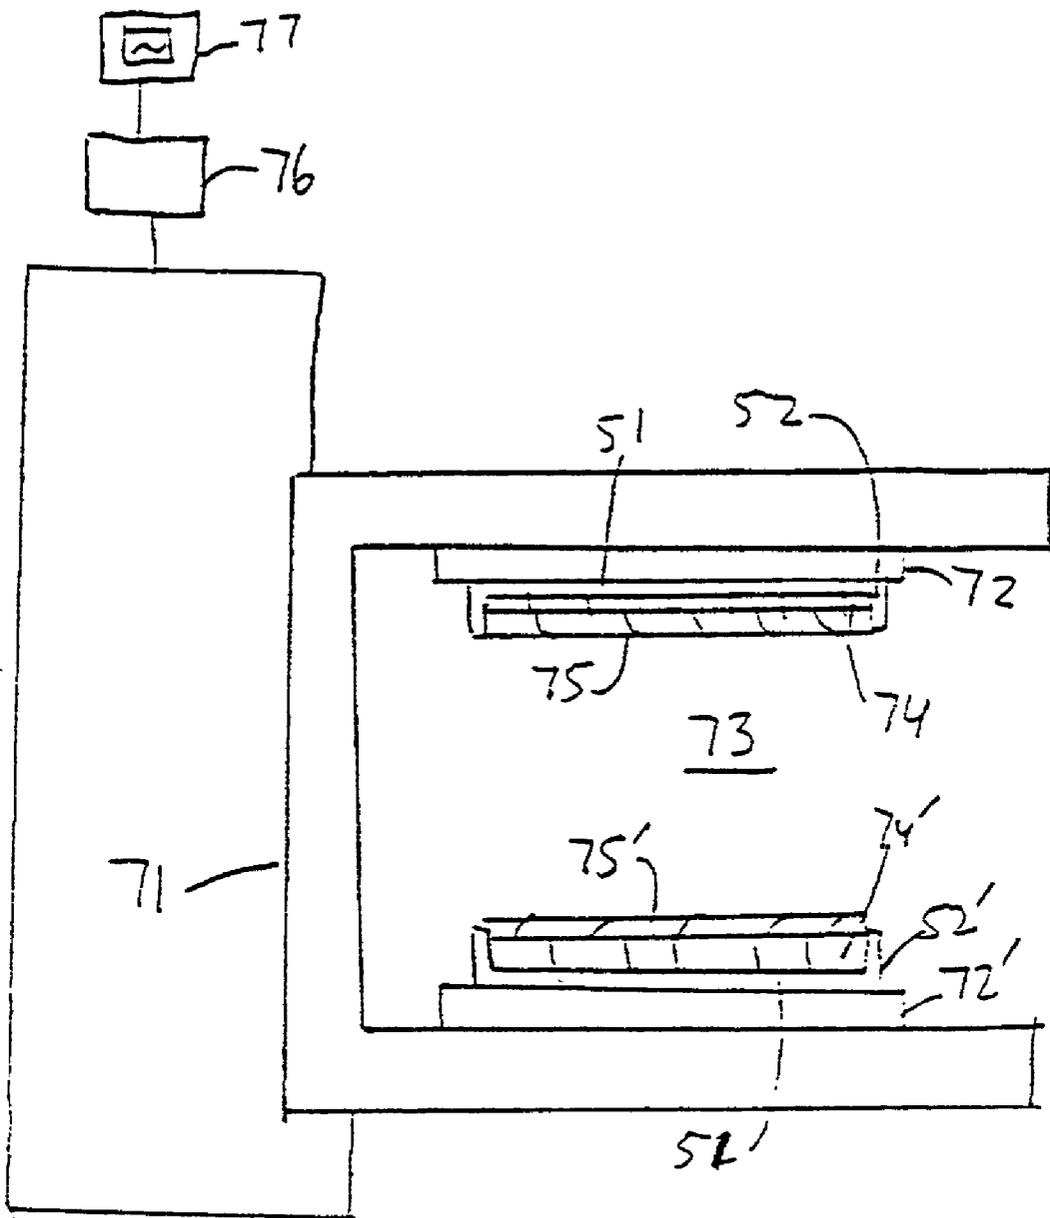


FIGURE 3B

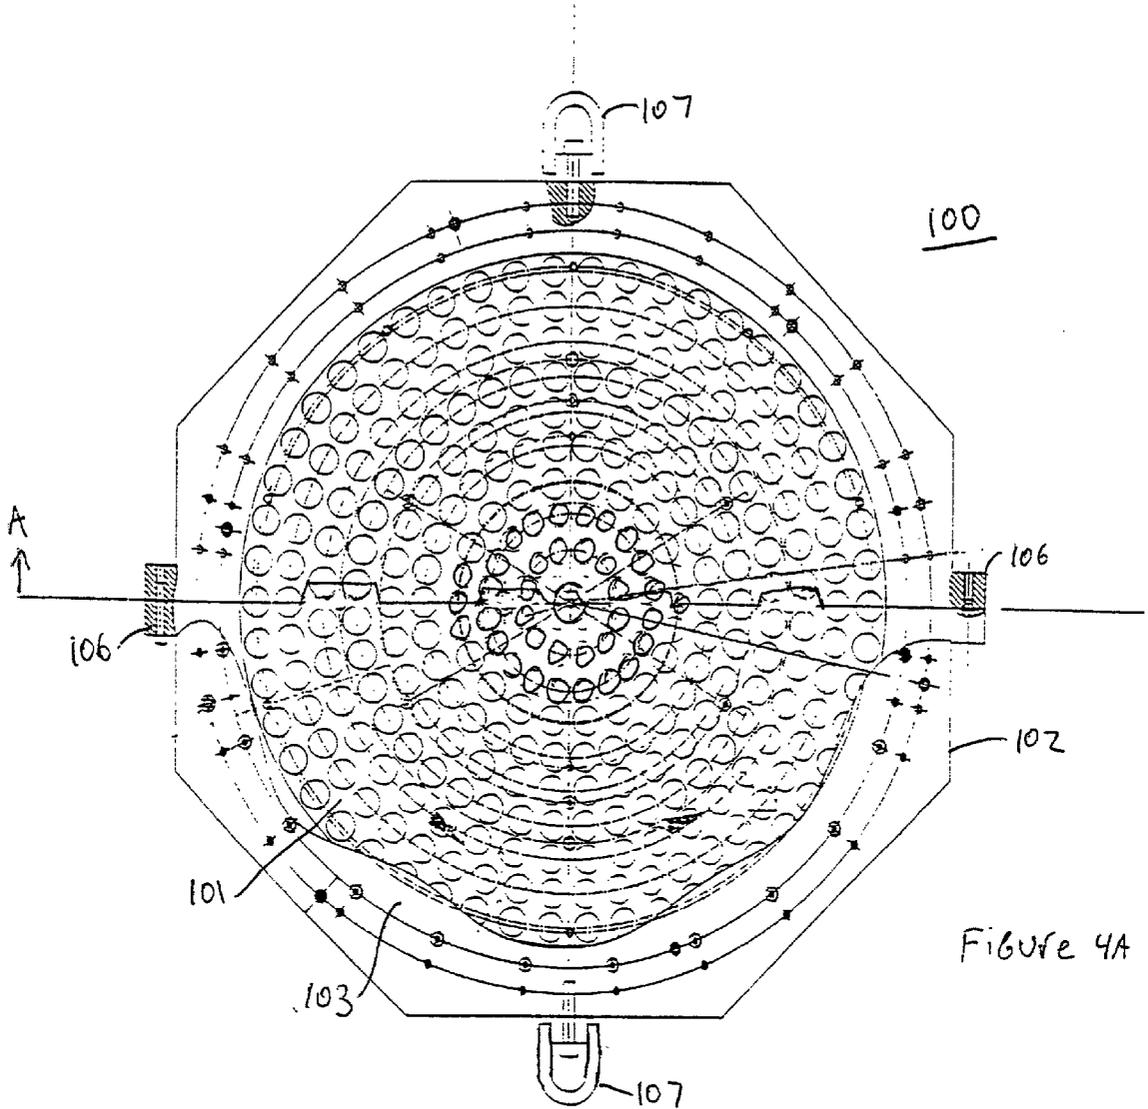


Figure 4A

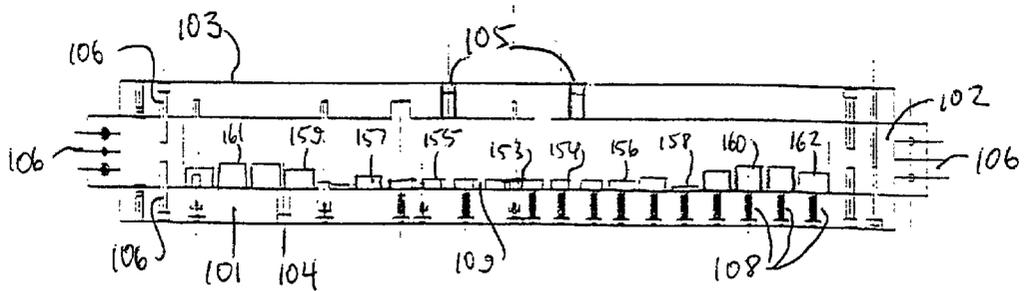


Figure 4B



Figure 4C

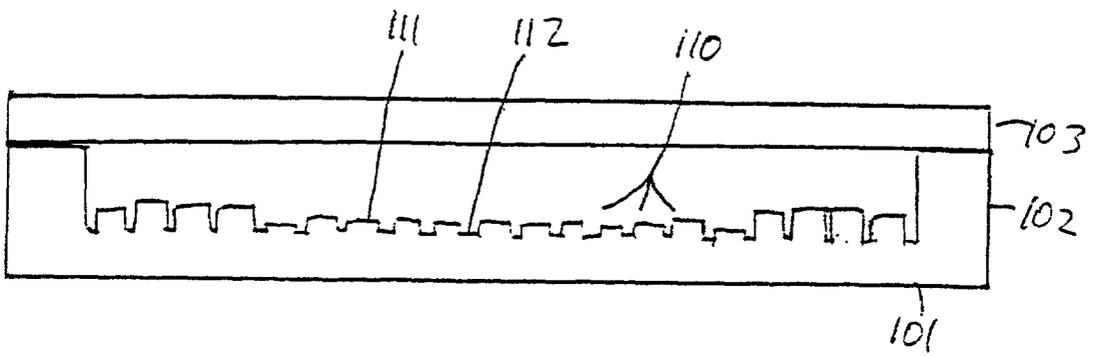
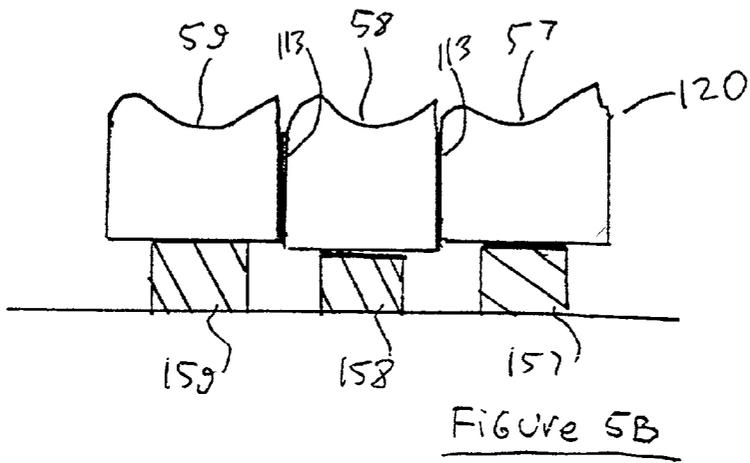
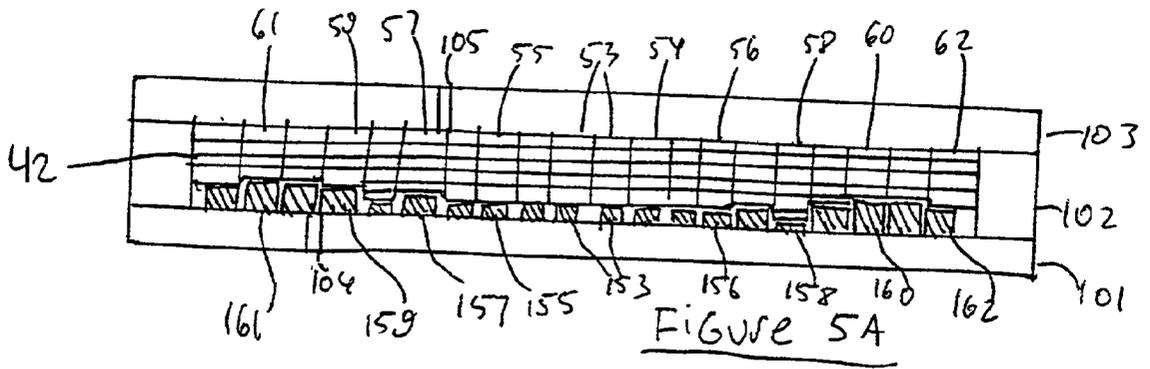


Figure 4D



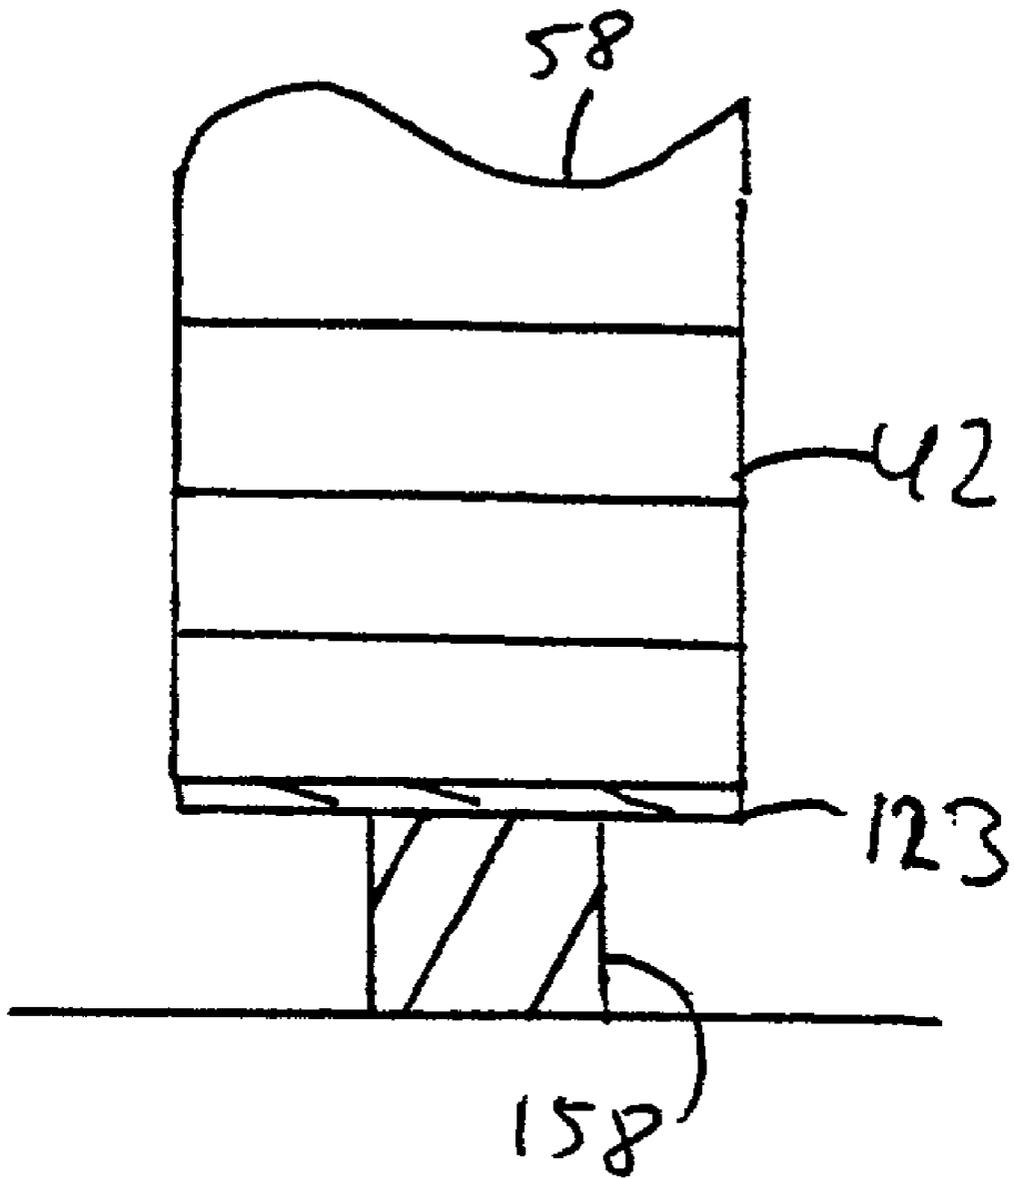


Figure 5C

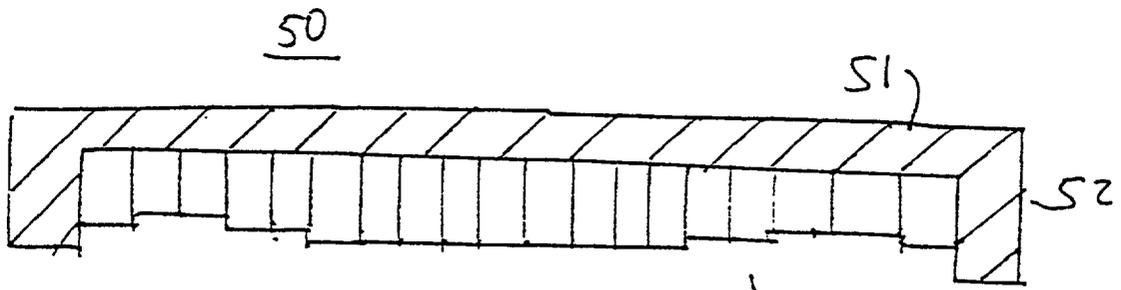


Figure 6A 120

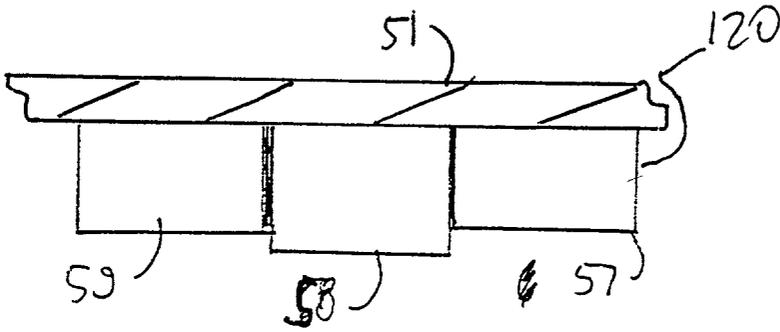


FIGURE 6B

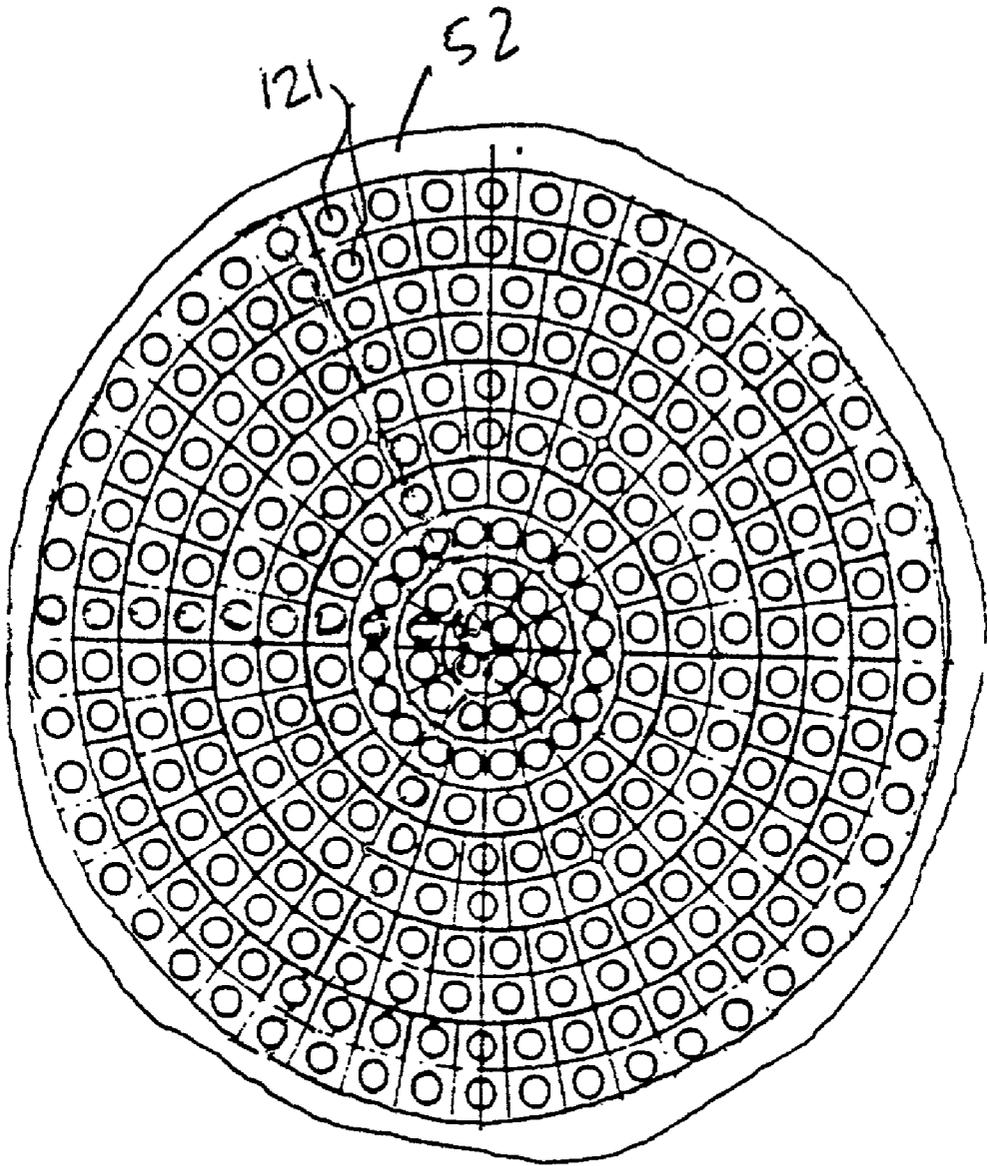


Figure 7A

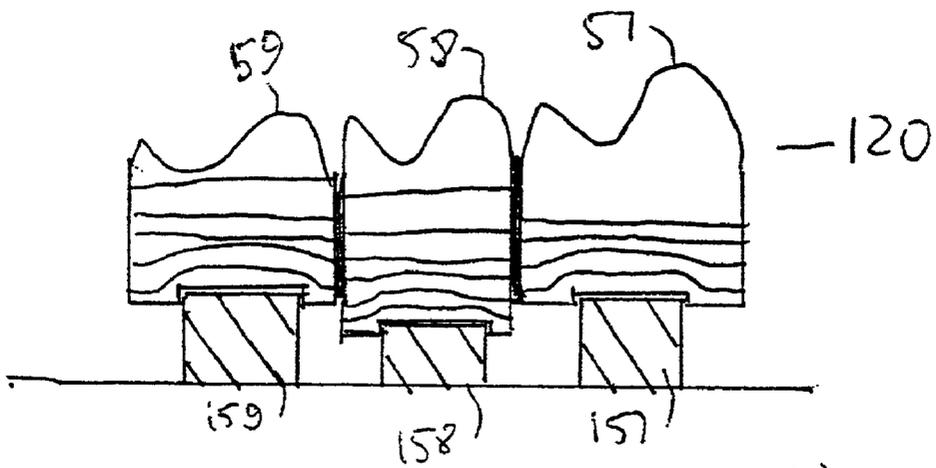


FIGURE 7B

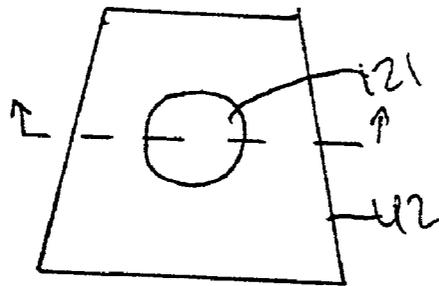


FIGURE 7C

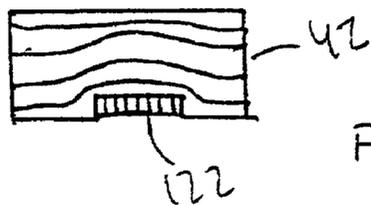


FIGURE 7D

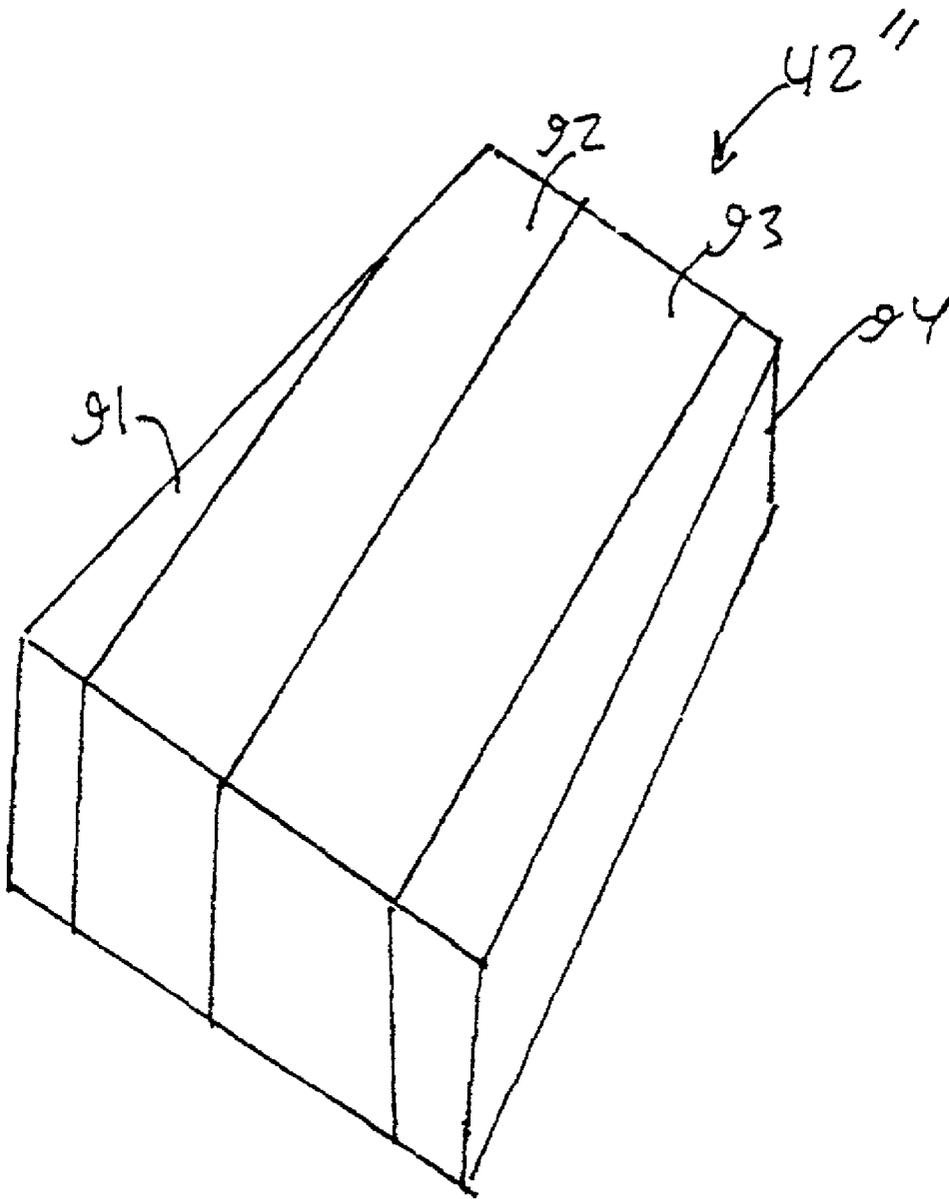


Figure 8

FIGURE 9A

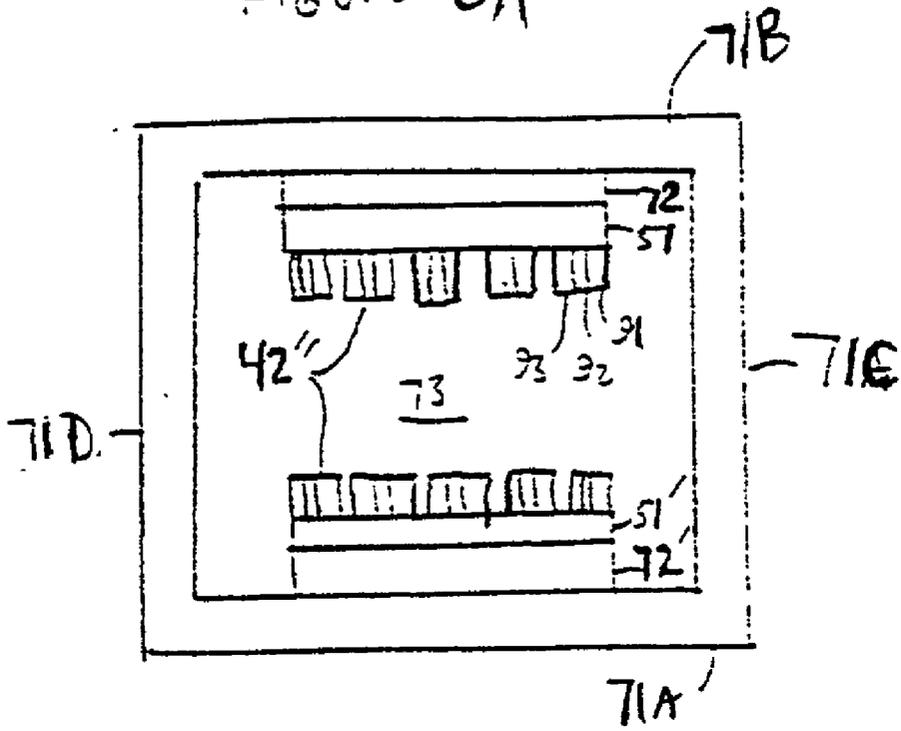


FIGURE 9B

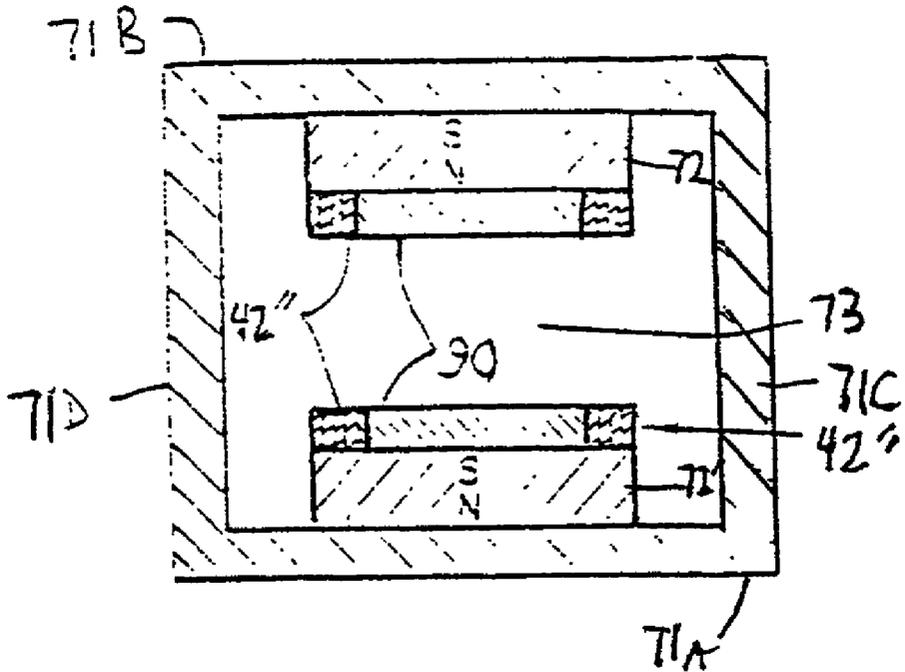


Figure 10A


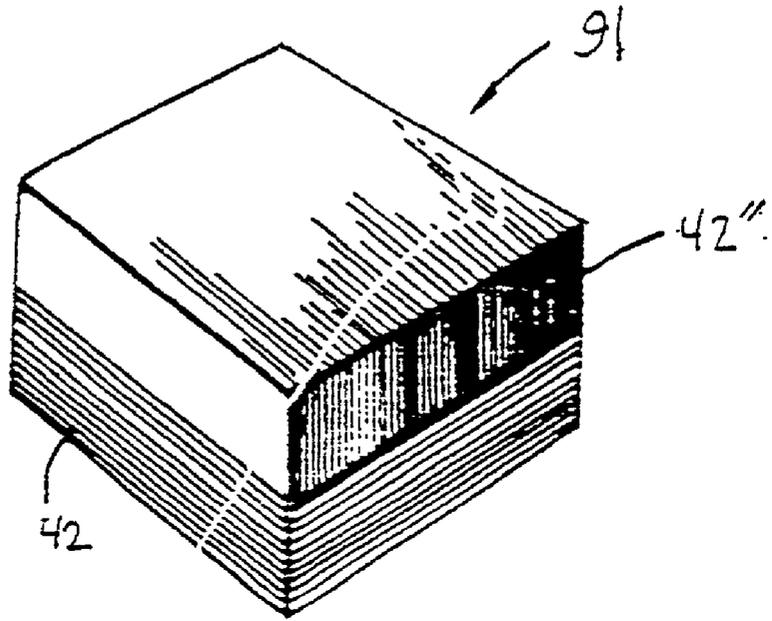


Figure 10B

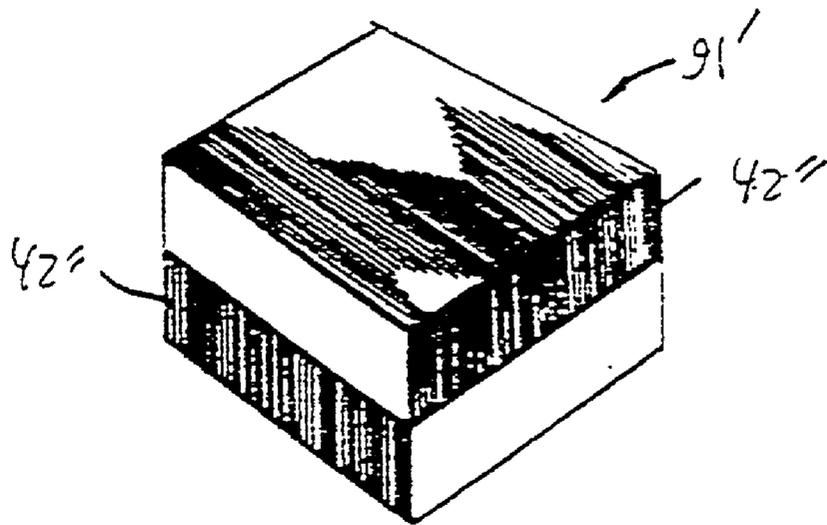

## MOLD FOR BONDING MRI POLE PIECE TILES AND METHOD OF MAKING THE MOLD

### FIELD OF THE INVENTION

[0001] The present invention is directed to a laminate tile pole piece for an MRI system, a method manufacturing the pole piece and a mold used for bonding a pole piece tiles.

### BACKGROUND OF THE INVENTION

[0002] In recent years, a so-called laminate tile pole piece has been developed for an MRI. In view of such development, a plan view of the laminate tile pole piece is shown in **FIG. 1A** and a side view is shown in **FIG. 1B**. The pole piece **10** comprises a soft iron circular base plate **11**, a soft iron ring **12** around the circumference of the base **11** for directing the magnetic flux into the gap between magnets, soft ferrite laminate tiles **13** and **14** and a soft iron core **15** for mounting a gradient magnetic coil. The laminate tiles **13**, **14** and the core **15** comprise the pole piece face. The laminate tiles **14** in the center of the base plate **11** have a greater thickness than laminate tiles **13** at the periphery of the base plate **11** to form a convex protrusion **16**. The convex protrusion **16** improves the uniformity of the magnetic field.

[0003] However, the prior art laminate tile pole piece has several disadvantages. First, most laminate tiles **13**, **14** have a square or rectangular shape. However, the base **11** and the ring **12** have a circular shape. Therefore, in order to fit square or rectangular tiles into a circular opening, edge filler tiles **13A** are required. As shown in **FIG. 1A**, each edge filler tile **13A** has a unique, odd shape to allow the peripheral tiles **13** to completely fill the circular base **11** and ring **12**. Each edge filler tile **13A** must be formed separately from other tiles **13** to create its unique shape. This increases process costs and complexity.

[0004] Second, the protrusion **16** also has a circular shape, as shown in **FIG. 1A**. Therefore, in order to arrange the square or rectangular central tiles **14** in a circle, edge filler tiles **14A** are required, as shown in **FIGS. 1A and 1B**. The edge filler tiles **14A** also have a unique, odd shape to allow central tiles **14** to form a circular protrusion **16**. Furthermore, in order to allow central tiles **14** to fit with the peripheral tiles **13** without leaving gaps, edge filler tiles **14A** also must have two different thicknesses, as shown in **FIG. 1B**. Each uniquely shaped edge filler tile **14A** must also be formed separately from other central tiles **14**. This further increases process costs.

[0005] Third, the prior art methods of attaching individual laminate tiles **13**, **14** to the base **11** involve placing the individual tiles onto the base and then poring epoxy over the tiles. However, the epoxy may flow out of the base and coat portions of the pole piece not intended to be coated by epoxy. Some tiles may also be insufficiently coated with the epoxy because the epoxy is not supplied under pressure. These tiles may become delaminated during MRI use. Furthermore, it becomes very difficult to achieve the optimum height for the protrusion **16** by manually stacking tiles **14** onto a base **11** because of human error. Therefore, different pole pieces manufactured by the prior art method suffer from poor reproducibility and have different performance characteristics due to a variance in the height of the protrusion.

### SUMMARY OF THE INVENTION

[0006] In view of the foregoing, it would be desirable to decrease the manufacturing process cost and complexity by forming a laminated tile pole piece that does not contain oddly shaped edge filler tiles. The present invention provides a pole piece for a magnetic resonance imaging (MRI) system. The pole piece comprises a plurality of trapezoid or annular sector shaped tiles arranged in a plurality of concentric annular arrays.

[0007] It would also be desirable to obtain a reproducible and accurate laminate tile pole piece manufacturing process. The present invention provides a method of making a pole piece. The method comprises placing a plurality of tiles into a mold cavity, filling the mold cavity with an adhesive substance to bind the plurality of tiles into a unitary body, removing the unitary body from the mold cavity and attaching a second surface of the unitary body to a pole piece base to form a first pole.

[0008] The present invention also provides a mold containing a non-uniform cavity surface for forming a laminate tile pole piece for an MRI system. The mold is made by performing a simulation of magnetic flux density between a first magnet of the MRI system and a second magnet of the MRI system, determining an optimum contour of a first surface of the pole piece based on an optimum value of the magnetic flux density between the first magnet and the second magnet and forming the mold cavity surface contour as a substantial inverse of the optimum contour of the first surface of the pole piece.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0009] **FIG. 1A** is a plan view of a prior art pole piece.

[0010] **FIG. 1B** is a side cross sectional view of a prior art pole piece across line X-X' in **FIG. 1A**.

[0011] **FIG. 2A** is a perspective view of a laminate tile arrangement according to the first embodiment of the current invention.

[0012] **FIG. 2B** is a plan view of a laminate tile arrangement according to the first embodiment of the current invention.

[0013] **FIG. 2C** is a side cross sectional view taken along line C-C' in **FIG. 2B** of a laminate tile arrangement according to the first embodiment of the current invention.

[0014] **FIGS. 3A and 3B** are side cross sectional views of MRI systems.

[0015] **FIG. 4A** is a plan view of a mold according to the present invention.

[0016] **FIG. 4B** is a side cross sectional view of the mold along line A-A' in **FIG. 4B**.

[0017] **FIG. 4C** is a schematic of the pole piece and mold cavity surface contours.

[0018] **FIG. 4D** is a side cross sectional view of a mold according to an alternative embodiment of the present invention.

[0019] **FIG. 5A** is a side cross sectional view of the mold filled with laminate tiles according to the present invention.

[0020] FIG. 5B is a close up side cross sectional view of a section of FIG. 5A.

[0021] FIG. 5C is a side cross sectional view of a laminate tile according to another embodiment of the present invention.

[0022] FIG. 6A is side cross sectional view of a laminate tile pole piece according to the present invention.

[0023] FIG. 6B is a close up side cross sectional view of a section of FIG. 6A.

[0024] FIG. 7A is a plan view of a laminate tile arrangement according to the second embodiment of the current invention.

[0025] FIG. 7B is a side cross sectional view of a section of FIG. 7A.

[0026] FIG. 7C is a plan view of a laminate tile according to the second embodiment of the current invention.

[0027] FIG. 7D is a side cross sectional view of a laminate tile according to the second embodiment of the current invention.

[0028] FIG. 8 is a perspective view of a laminate tile according to the third embodiment of the current invention.

[0029] FIGS. 9A and 9B are side cross sectional views of MRI systems according the third embodiment of the current invention.

[0030] FIGS. 10A and 10B are perspective views of laminate tiles according to the fourth embodiment of the current invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0031] FIG. 2A shows a perspective view of a cut away portion of a pole piece 50 comprising a pole piece base 51 having a first surface 40 and a second surface 41. Pole piece laminate tiles 42 are attached to the first surface 40 of the base 51. The tiles 42 may be attached to the base 51 by epoxy, glue and/or bolts. Each laminate tile comprises interposed plural metal layers, shown as 21, 22, 23, and adhesive layers, shown as 31, 32. Each laminate tile 42 actually contains 100 to 10,000 metal layers, where each metal layer is preferably less than  $5 \times 10^{-3}$  inches thick (i.e. less than 5 mils thick). Each tile is 0.1 to 10 inches thick and 1 to 30 inches wide. For example, each tile is about 8 inches wide in its middle and 1 inch thick, and contains 1000 1 mil thick metal layers. However, the tiles and the metal layers may have other dimensions based on the required end use. Furthermore, each tile may alternatively comprise a solid metal block or bar instead of metal layer laminates.

[0032] The laminate tiles 42 are preferably fabricated from amorphous metal layers. However, the metal does not have to be amorphous and may have a crystalline structure. The metal may comprise steel, iron, silicon steel or iron (i.e. non-oriented silicon steel), nickel steel or iron, permendur (FeCoV), nickel chromium steel or iron, aluminum steel or iron, aluminum chromium steel or iron or any other low coercivity material. Furthermore, the pole pieces 50 according to the current invention may comprise laminate tiles 42 made from different metals listed above. In other words, adjacent tiles may comprise different metals.

[0033] The laminate tiles 42 preferably have a trapezoidal shape. However, laminate tiles may have an annular sector shape. An annular sector is a trapezoid that has a concave top or short side 43 and a convex bottom or long side 44. The trapezoidal laminate tiles 42 may be manufactured by adhering plural metal sheets with an adhesive and subsequently cutting the laminate sheets into trapezoidal tiles. Another method of making laminate tiles 42 is disclosed in a copending application Ser. No. 09/\_\_\_\_\_ (GERD 26570, Attorney Docket Number 70191/139) to E. Trifon Laskaris et al., filed on the same date the current application, and incorporated herein in its entirety. This method comprises unwinding a metal ribbon, guiding the ribbon through an adhesive bath, winding the ribbon on a polygonal bobbin, such as a rectangular bobbin, to form a coil with at least one flat side, removing the coil from the bobbin, cutting the coil into laminate bars and shaping the laminate bars into trapezoidal or annular sector shaped laminate tiles.

[0034] As shown in FIGS. 2B and 2C, the circular pole piece base 51 contains a support ring 52 for containing laminate tiles 42 and for directing the magnetic flux into a gap between magnets. The entire circular base 51 and the ring 52 are filled in with trapezoidal laminate tiles 42. The base 51 and ring 52 are sometimes called a "pole shoe." Alternatively, the ring 52 is sometimes called an "edge shim." FIG. 2B shows a plan view of the pole piece 50, while FIG. 2C shows a cross sectional view taken along line C-C' in FIG. 2B. The laminate tiles are arranged in concentric annular arrays or rings 53 to 62. The advantage of the trapezoidal or annular sector shape of the laminate tiles 42 becomes apparent from FIG. 2B. All laminate tiles may have the same size and shape. Therefore, no oddly shaped edge filler tiles are necessary to fill the base 51 and the ring 52. The cost and complexity of the method of assembling the laminate tile pole piece is thus reduced.

[0035] For example, the concentric tile annular arrays 53-57 near the center of the base 51 may have a larger thickness (i.e. height as measured from the base 51) than concentric tile annular arrays 58, 60 and 61 near the periphery of the base 51 to form a protrusion near the center of the base 51. The protrusion also does not require oddly shaped edge filler tiles. Optionally, the peripheral concentric annular arrays 59 and 62 may also have a larger thickness than peripheral annular arrays 58, 60 and 61. Of course other annular array thickness and configurations are possible. For example, there may be more or less than 10 concentric annular arrays. All the annular arrays may have the same thickness or different thickness. The number of annular arrays and the particular annular array thickness should be determined by a computer simulation of magnetic field flow between MRI system magnets through the pole piece 50. Alternatively, the central annular array 53 may be an iron core for mounting a gradient magnetic coil.

[0036] Furthermore, the annular arrays may be formed by stacking plural laminate tiles 42 on each other. The thicker concentric annular arrays may comprise more stacked laminate tiles than the thinner annular arrays. The space between the top of the pole piece support ring 52 and the laminate tiles may optionally be filled by passive shims.

[0037] Embodiments of magnetic field generating devices used for magnetic resonance imaging, MRI, ("MRI system") according to the present invention are shown in FIGS. 3A

**and 3B.** The MRI system shown in **FIG. 3A** has two plate yokes **71A** and **71B** and at least two, and preferably four columnar yokes **71C** and **71D**. Alternatively, an MRI system with a single "C" shaped yoke **71** may be used as shown in **FIG. 3B**. The MRI systems contain magnets **72**, **72'** secured to yoke surfaces, pole piece bases **51**, **51'** and support rings **52**, **52'** secured to the magnets **72**, **72'** and laminate tile pole pieces **74**, **74'** secured to the pole piece bases and support rings. A gap **73** is formed between the pole pieces. A body part to be imaged is inserted into the gap **73**.

[0038] The magnets **72**, **72'** may comprise permanent magnets such as RFeB, RCoFeB or SmCo magnets, or electromagnetic magnets, such as a conductive or superconductive coil wrapped around a core. The MRI systems may also optionally contain gradient coils or shims shown as **75**, **75'** in **FIGS. 6A** and **6B**. Furthermore, the MRI systems may optionally contain an insulating, low magnetic permeability layer, such as Bakelite, synthetic resin, wood, or ceramic, between the base and the laminate tiles to reduce the remnant magnetism in the pole pieces.

[0039] The MRI systems also may contain electronics **76** and a display **77**. The electronics **76** may comprise a control system, a transmitter, a receiver, an imager and/or a memory.

[0040] The optimum contour of the laminate tile pole pieces is determined by a simulation of the magnetic flux between the top magnet **72** and bottom magnet **73**. For example, the simulation may comprise a conventional finite element analysis method. The optimum height for each concentric annular array pole piece array **53-62** is determined from the simulation.

[0041] The laminate tile pole piece **50** containing the concentric annular arrays is preferably manufactured using a mold and a molding method of the present invention. An embodiment of the mold **100** is shown in **FIGS. 4A** and **4B**. **FIG. 4B** is a cross sectional view taken along line A-A' in **FIG. 4A**. The mold contains a bottom surface **101**, a side surface **102** and a cover plate **103**. The mold further contains one or more epoxy inlet openings **104** and one or more air outlet openings **105**. The opening(s) **104** is preferably made in the bottom mold surface **101** and the opening(s) **105** is preferably made in the cover plate **103**. The bottom mold surface **101** and cover plate **103** are preferably attached to the side wall **102** by bolts **106**. However, the bottom surface **101** and the side surface **102** may alternatively comprise a unitary body and the cover plate **103** may be attached to the side wall **102** by other ways, such as a latch. The mold **100** has optional handles **107**.

[0042] The mold preferably contains a non-uniform cavity surface contour. Preferably, the non-uniform contour is established by attaching spacers to the mold cavity bottom surface **101**. Preferably, the spacers form a plurality of concentric annular arrays **153-162** around the circular bottom mold surface **101**. The spacers **153-162** may be attached to the mold cavity surface **101** by screws **108** or by glue. Preferably the spacers have a cylindrical shape. However, the spacers may have any other shape.

[0043] As shown in **FIG. 4B**, spacers in different concentric annular arrays **153-162** have a different height or thickness. Preferably there are as many spacers **153-162** as there are laminate tiles **42** in the pole piece. Each spacer corresponds to a particular pole piece tile. The spacer surface in

the mold forms a substantially inverse contour of the pole piece concentric annular tile array contour. In other words, if the pole piece annular array, such as tile array **62**, has a large height or thickness, then the corresponding spacer array in the mold, such as spacer array **162** has a small height or thickness. If the pole piece annular array, such as tile array **61**, has a small height or thickness, then the corresponding spacer array in the mold, such as spacer array **161** has a large height or thickness. "Substantially inverse" means that the spacer contour may differ from the tile contour. For example, the tiles are attached to each other by an epoxy adhesive, while there may be gaps **109** between the spacers. Thus, the spacer contour also contains the gaps **109**, while the tile contour does not contain the thin protrusions that would correspond to the gaps. Furthermore, there may be other slight vertical and horizontal variations in the contours.

[0044] Therefore, the contour of the non-uniform mold cavity surface **110** is an inverse of a laminate tile pole piece contour **114**, as shown in **FIG. 4C**. The contour of the laminate tile pole piece is determined by performing simulation of a magnetic flux density between the MRI system magnets for different tile contours and then choosing the tile contour **114** which produces the optimum magnetic flux between the MRI system magnets. The magnetic flux lines from a finite element simulation of a field between two hypothetical MRI magnets are superimposed on the plan view of the mold in **FIG. 4A**.

[0045] Alternatively, the non-uniform mold cavity surface contour may be made without using spacers **153-162**, as shown in **FIG. 4D**. In **FIG. 4D**, the mold cavity surface itself is irregularly shaped to form a non-uniform contour **110**. The contour **110** comprises protrusions **111** and recesses **112**. The protrusions **111** form plural concentric annular arrays whose contour is the substantial inverse of the pole piece tile contour. As with the mold shown in **FIG. 4B**, each protrusion **111** should correspond to an individual tile **42** of the pole piece.

[0046] A method of making the laminate tile pole piece according to the present invention is shown in **FIGS. 5** and **6**. The mold cavity and the spacers are first coated with a release agent. Laminate tiles **42** are then placed into the mold cavity in concentric annular tile arrays **53-62**, as shown in **FIG. 5A**. The tiles are stacked on top of the corresponding concentric annular spacer arrays **153-162**. Of course, the spacers may be replaced by the protrusions of **FIG. 4C**. Each tile should overlie one spacer, as shown in **FIG. 5B**. The height of each tile and spacer stack should equal to the height of the mold cavity, such that the top surface of the tile arrays **53-62** is level with the top of the mold cavity. All variations as a result of tile height tolerances are taken as a small gap near the top of the mold cover plate **103**. Alternatively, each tile may be attached to its respective spacer with adhesive tape **123**, as shown in **FIG. 5C**.

[0047] The mold is then covered with the cover plate **103** and an adhesive substance is introduced into the mold through the inlet opening **104**. The adhesive substance is preferably a synthetic epoxy resin. The epoxy does not become attached to the mold cavity and the spacers because they are coated with the release agent. The epoxy permeates between the individual tiles and forces out any air trapped in the mold through outlet opening(s) **105**. The epoxy **113** binds the individual tiles into a unitary body **120** comprising

concentric annular tile arrays 53-62 of different height. Alternatively, the epoxy may be introduced through the top opening 105 or through both top and bottom openings.

[0048] The mold cover plate 103 is taken off the mold and the unitary tile body 120 is removed from the mold 100. The unitary body 120 is then attached with its flat (top) side to the pole piece base 51 and ring 52, as shown in FIGS. 6A and 6B. The base 51, ring 52 and the unitary tile body comprise the pole piece 50. The unitary tile body 120 may be attached to the base 51 by epoxy, glue and/or bolts.

[0049] The second embodiment of the present invention is shown in FIGS. 7A to 7D. In the second embodiment, at least one tile 42 contains a cavity 121 in its face, as shown in FIGS. 7A and 7C. The cavity may be formed by introducing the epoxy 113 into the mold 110 at high pressure. The high pressure epoxy flows over the concentric annular tile arrays 53-62 and presses the tile arrays against the cylindrical spacers 153-162 or protrusions 111 in the mold cavity. Each spacer or protrusion has a smaller surface area than the area of the corresponding tile. Therefore, pressure of the comparably softer tiles against the spacers or protrusions forms cavities 121 in the tiles, as shown in FIGS. 7A-7B. The cavities may be filled by passive shims or small permanent magnets 122 as shown in FIG. 7D and described in copending application as disclosed in application Ser. No. 09/\_\_\_\_ (GE RD 26,591) to Johannes M. van Oort, filed Oct. 23, 1998, hereby incorporated by reference in its entirety.

[0050] In FIG. 2A, the laminate layers are laminated along the height or thickness direction of the laminate tile 42. However, in a third embodiment of the present invention, the laminate layers 91, 92, 93, 94 are stacked or laminated along the width of the laminate tile 42", as shown in FIG. 8. Laminate tile 42" may be produced by forming a thick stack or coil of epoxy bound metal layers, cutting a tile from the stack or coil and turning the tile on its side.

[0051] Laminate tile 42" is mounted on the pole piece base 51 with the laminating direction perpendicular to the direction of the magnetic flux (i.e. perpendicular to an imaginary line between the bottom magnet 72' and the top magnet 72) as shown in FIG. 9A. In other words, the laminating direction is parallel to the plane of the concentric annular tile arrays. The advantage of the this embodiment is increased stability of the magnetic field and a decrease in eddy currents and hysteresis effects. Alternatively, the laminate tile 42" may be mounted on the edge of another pole piece member 90 to reduce sideways magnetic flux leakage, as shown in FIG. 9B. Member 90 may itself comprise multiple laminate tiles 42 with layers laminated in a direction parallel to the direction of the magnetic flux. In other words, the laminating direction is perpendicular to the laminating direction of tiles 42" and perpendicular to the plane of the concentric annular tile arrays).

[0052] In a fourth embodiment of the present invention, laminate tiles whose laminating directions are different by 90 degrees may be attached to each other. Such an arrangement improves the uniformity of the magnetic field in the gap 73. For example, a laminate tile 42 may be attached to laminate tile 42" to form a combined tile 91 as shown in FIG. 10A. Alternatively, two tiles 42" may be attached to form a combined tile 91' as shown in FIG. 10B. Of course two tiles 42 may also be attached with their laminating

directions inclined by 90 degrees to each other. The combined tiles 91 and 91' may be attached to the pole piece base 51 with any surface facing the MRI system gap 73. Combined tiles 91 and 91' may also comprise individual tiles made from different metals listed above.

[0053] The laminate tiles were described as being suitable for an MRI system pole piece. However, other uses for the laminate tiles and the laminate tile fabrication method are within the scope of the current invention. The mold may also be used to manufacture unitary bodies for uses other than an MRI system pole piece. Furthermore, in some applications, it may be advantageous to use laminate bars instead of trapezoidal tiles. In this case, the laminate bars may be considered "laminate tiles" for the purposes of this invention.

[0054] While the invention has been described in detail and with reference to specific embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made therein without departing from the spirit and scope of the invention.

What is claimed is:

1. A pole piece for a magnetic resonance imaging (MRI) system, comprising a plurality of trapezoid or annular sector shaped tiles arranged in a plurality of concentric annular arrays.

2. The pole piece of claim 1, wherein the tiles comprise a plurality of laminated layers.

3. The pole piece of claim 1, wherein the height of a first concentric annular array is greater than a height of a second concentric annular array.

4. The pole piece of claim 3, wherein the surface contour of the plurality of concentric annular arrays forms a substantially inverse contour of a non-uniform mold cavity surface.

5. The pole piece of claim 1, wherein the plurality of concentric annular arrays comprise a unitary tile body.

6. The pole piece of claim 1, wherein a first tile is separated from a second tile by an adhesive layer.

7. The pole piece of claim 2, wherein the laminating direction of the tile layers is parallel to a plane of each concentric annular array.

8. The pole piece of claim 2, wherein the laminating direction of the tile layers perpendicular to a plane of each concentric annular array.

9. The pole piece of claim 2, further comprising a first tile containing laminated layers attached over a second tile containing laminated layers to form a combined laminate tile.

10. The pole piece of claim 9, wherein the layer laminating direction of the first tile is perpendicular to the layer laminating direction of the second tile.

11. The pole piece of claim 1, wherein at least one tile contains a cavity in the tile face.

12. The pole piece of claim 11, wherein at least one cavity is filled by a shim or an auxiliary magnet.

13. The pole piece of claim 1, further comprising:

a yoke;

a first magnet containing a first side attached to a first portion of the yoke and a second side attached to the laminate tile pole piece;

- a second magnet attached to a second portion of the yoke;  
and
- a second pole piece comprising a plurality of second tiles  
attached to the second magnet and facing the laminate  
tile pole piece.
- 14.** A method of making a pole piece comprising the steps  
of:
- placing a plurality of tiles into a mold cavity;
- filling the mold cavity with an adhesive substance to bind  
the plurality of tiles into a unitary body;
- removing the unitary body from the mold cavity; and
- attaching a second surface of the unitary body to a pole  
piece base to form a first pole piece.
- 15.** The method of claim 14, wherein:
- the mold contains a non-uniform cavity surface contour;  
and
- a first surface of the unitary body forms a substantially  
inverse contour of the non-uniform mold cavity sur-  
face.
- 16.** The method of claim 15, further comprising the steps  
of:
- attaching the first pole piece to a first surface of a first  
magnet;
- attaching the second surface of the first magnet to a first  
portion of a yoke;
- attaching a second surface of a second magnet to a second  
portion of the yoke; and
- attaching a second pole piece to a first surface of the  
second magnet.
- 17.** The method of claim 16, further comprising the steps  
of:
- performing a simulation of magnetic flux density between  
the first magnet and the second magnet;
- determining an optimum contour of the first surface of the  
pole piece based on an optimum value of the magnetic  
flux density between the first magnet and the second  
magnet; and
- forming the mold cavity surface contour as a substantial  
inverse of the contour of the first surface of the pole  
piece.
- 18.** The method of claim 17, wherein:
- the non-uniform mold cavity surface comprises a plurality  
of spacers of different height; and
- wherein the top surface of the spacers forms the non-  
uniform mold cavity surface contour.
- 19.** The method of claim 18, wherein the spacers comprise  
cylindrical spacers.
- 20.** The method of claim 18, further comprising the steps  
of:
- pressing the unitary body against the spacers; and
- forming a plurality of cavities in the unitary body.
- 21.** The method of claim 14, further comprising the step  
of arranging the tiles in a concentric annular array in the  
mold.
- 22.** The method of claim 21, wherein the tiles comprise  
laminate tiles.
- 23.** The method of claim 14, further comprising the step  
of covering the mold with a cover plate prior to filling the  
mold with adhesive.
- 24.** The method of claim 23, further comprising the step  
of placing a plurality of tiles into the mold until a top surface  
of the tiles is substantially even with a top of the mold prior  
to covering the mold with the cover plate.
- 25.** The method of claim 14, further comprising the steps  
of:
- placing a first side of an adhesive tape in contact with a  
portion of a first tile; and
- placing a second side of the adhesive tape in contact with  
the mold cavity surface.
- 26.** The method of claim 14, wherein the adhesive sub-  
stance comprises epoxy.
- 27.** A mold containing a non-uniform cavity surface for  
forming a laminate tile pole piece for an MRI system, made  
by the method of:
- performing a simulation of magnetic flux density between  
a first magnet of the MRI system and a second magnet  
of the MRI system;
- determining an optimum contour of a first surface of the  
pole piece based on an optimum value of the magnetic  
flux density between the first magnet and the second  
magnet; and
- forming the mold cavity surface contour as a substantial  
inverse of the optimum contour of the first surface of  
the pole piece.
- 28.** The mold of claim 27, wherein the non-uniform cavity  
surface comprises a plurality of cylindrical spacers of non-  
uniform height.
- 29.** A method of making a mold containing a non-  
uniform cavity surface, for forming a laminate tile pole piece  
for an MRI system, comprising:
- performing a simulation of magnetic flux density between  
a first magnet of the MRI system and a second magnet  
of the MRI system;
- determining an optimum contour of a first surface of the  
pole piece based on an optimum value of the magnetic  
flux density between the first magnet and the second  
magnet; and
- forming the mold cavity surface contour as a substantial  
inverse of the optimum contour of the first surface of  
the pole piece.
- 30.** The mold of claim 29, wherein forming the bottom  
mold surface comprises placing a plurality of cylindrical  
spacers of non-uniform height into the mold.