



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2606302 C 2016/01/26

(11)(21) **2 606 302**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(22) **Date de dépôt/Filing Date:** 2007/10/11

(41) **Mise à la disp. pub./Open to Public Insp.:** 2008/04/27

(45) **Date de délivrance/Issue Date:** 2016/01/26

(30) **Priorité/Priority:** 2006/10/27 (US11/553,979)

(51) **Cl.Int./Int.Cl.** **C10M 145/24** (2006.01),
C10M 145/02 (2006.01), **C10M 169/04** (2006.01)

(72) **Inventeurs/Inventors:**
STOKES, CASSEY D., US;
RUHE, WILLIAM R., JR., US

(73) **Propriétaire/Owner:**
CHEVRON ORONITE COMPANY LLC, US

(74) **Agent:** SIM & MCBURNEY

(54) **Titre :** COMPOSE D'ADDITION D'HUILE LUBRIFIANTE ET METHODE DE FABRICATION CONNEXE

(54) **Title:** A LUBRICATING OIL ADDITIVE COMPOSITION AND METHOD OF MAKING THE SAME

(57) **Abrégé/Abstract:**

An oil-soluble lubricating oil additive composition prepared by the process which comprises reacting a copolymer, with at least one ether compound, with at least one aliphatic compound, and with at least one aromatic compound.



ABSTRACT OF THE DISCLOSURE

An oil-soluble lubricating oil additive composition prepared by the process which comprises reacting a copolymer, with at least one ether compound, with at least one
5 aliphatic compound, and with at least one aromatic compound.

A LUBRICATING OIL ADDITIVE COMPOSITION AND METHOD OF MAKING THE SAME

FIELD OF THE INVENTION

5

The present invention is directed to an improved dispersant additive composition that is used in engine oils; and it is also directed to the process of making the same.

BACKGROUND OF THE INVENTION

10

It is known to employ nitrogen containing dispersants and/or detergents in the formulation of lubricating oil compositions. Many of the known dispersant/detergent compounds are based on the reaction of an alkenylsuccinic acid or anhydride with an amine or polyamine to produce an alkenylsuccinimide or an alkenyl succinamic acid as determined by selected conditions of reaction. One problem facing the lubricant manufacturer is dispersancy of particulate matter in internal combustion engines. Failure to have adequate particulate matter dispersancy may result in filter plugging, sludge accumulation, and oil thickening.

20

DESCRIPTION OF THE RELATED ART

Liu et al., U.S. Patent No. 6,117,825, discloses a lubricating oil composition that comprises a major amount of an oil of lubricating viscosity; and a minor amount of a synergistic combination of an antioxidant-dispersant additive and a dispersant additive, said combination comprising: (i) a polyisobutylene succinimide (PIBSAD) and (ii) an ethylene-propylene succinimide (LEPSAD).

Nalesnik, U.S. Patent No. 5,139,688, discloses an additive composition comprising an oxidized ethylene copolymer or terpolymer of a C₃-C₁₀ alpha-monoolefin and, optionally, a non-conjugated diene or triene which has been reacted with a formaldehyde compound and with an amino-aromatic polyamine compound.

Günther et al., U.S Patent No. 6,512,055, discloses a copolymer obtained by free radical copolymerization of at least one monoethylenically unsaturated C₄-C₆ dicarboxylic acid or anhydride thereof, an oligomer, and one monoethylenically unsaturated compound.

5

Günther et al., U.S Patent No. 6,284,716, discloses a lubricating oil composition comprising a lubricant oil and a copolymer obtained by free radical copolymerization of at least one monoethylenically unsaturated C₄-C₆ dicarboxylic acid or anhydride thereof, an oligomer, and one monoethylenically unsaturated compound, wherein the copolymer is further reacted with an amine.

10

Harrison et al., U.S. Patent No. 5,792,729, discloses a dispersant terpolymer and polysuccinimide compositions derived from the terpolymers. The terpolymer is obtained by free radical copolymerization of an unsaturated acidic reagent, a 1-olefin, and a 1,1-disubstituted olefin in the presence of a free radical initiator.

15

Barr et al., U.S. Patent No. 5,670,462, discloses a lubricating oil additive composition that is the reaction product of (i) a copolymerized olefin and unsaturated carboxylic acylating agent monomer with a free radical initiator and (ii) a succinimide prepared from an acyclic hydrocarbyl substituted succinic acylating agent and a polyamine wherein the hydrocarbyl substituted succinic acylating agent is prepared by reacting a polyolefin and an acylating agent under conditions such that at least 75 mole % of the starting polyolefin is converted to the hydrocarbyl-substituted succinic acylating agent.

25

Harrison et al., U.S. Patent No. 6,451,920, discloses copolymerizing a polyalkene and an unsaturated acidic reagent, followed by reacting any unreacted polyalkene with the unsaturated acidic reagent at elevated temperatures in the presence of a strong acid.

30

Chung et al., U.S. Patent Nos. 5,427,702 and 5,744,429, disclose a mixture of derivatized ethylene-alpha olefin copolymers, wherein functional groups are grafted onto the copolymer. The functionalized copolymer is mixed with at least one of an

amine, alcohol, including polyol, amino alcohol etc. to form multi-functional viscosity index improver additive components.

Harrison et al., U.S. Patent No. 5,112,507, discloses novel copolymers of unsaturated
 5 acidic reactants and high molecular weight olefins wherein at least 20% of the total high molecular weight olefin comprises the alkylvinylidene isomer which copolymers are useful as dispersants in lubricating oils and fuels and also may be used to prepare polysuccinimides and other post-treated additives useful in lubricating oils and fuels.

10

SUMMARY OF THE INVENTION

In its broadest embodiment, the present invention is directed to an oil-soluble lubricating oil additive composition prepared by the process which comprises reacting

15

(A) at least one of the following copolymers:

(i) a copolymer obtained by free radical copolymerization of components comprising:

20

(a) at least one monoethylenically unsaturated
 C_3 - C_{28} monocarboxylic acid or ester thereof, or
 C_4 - C_{28} dicarboxylic acid, anhydride or ester thereof;

25

(b) at least one 1-olefin comprising about 2 to 40 carbon atoms or
 at least one polyolefin comprising about 4 to 360 carbon atoms
 and having a terminal copolymerizable group in the form of a
 vinyl, vinylidene or alkyl vinylidene group or mixtures thereof;
 and

30

(c) at least one monoolefin compound which is copolymerizable
 with the monomers of (a) and (b) and is selected from the group
 consisting of:

- 5
- (1) an alkyl vinyl ether and an allyl alkyl ether where the alkyl group is hydroxyl, amino, dialkylamino or alkoxy substituted or is unsubstituted, and containing from about 1 to about 40 carbon atoms;
- 10
- (2) an alkyl amine and an N-alkylamide of a monoethylenically unsaturated mono- or dicarboxylic acid of from about 3 to about 10 carbon atoms where the alkyl substituent contains from about 1 to about 40 carbon atoms;
- (3) an N-vinylcarboxamide of carboxylic acids of from about 1 to about 8 carbon atoms;
- 15
- (4) an N-vinyl substituted nitrogen-containing heterocyclic compound; and
- 20
- (5) at least one 1-olefin comprising from about 2 to about 40 carbon atoms or at least one polyolefin comprising from about 4 to about 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof, provided that the olefin employed is not the same as the olefin employed in (i)(b);
- 25
- (ii) a copolymer obtained by reacting compound (i)(a) and compound(i)(b) in the presence of a free radical initiator;
- 30
- (iii) a copolymer obtained by (a) reacting compound (i)(a) with compound (i)(b) or (i)(c) in a non-free radical catalyzed reaction in the presence of copolymer (i) or copolymer (ii) or both; or by (b) contacting copolymer (i) or copolymer (ii) or both with the non-free radical

catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c), wherein the copolymer of (i), (ii) or (iii); with

- 5 (B) at least one ether compound capable of being reacted with at least two monocarboxylic acids, or esters, thereof, or dicarboxylic acids, anhydrides or esters thereof, or mixtures thereof; and
- (C) at least one aliphatic compound capable of reacting with at least one monocarboxylic acid or ester thereof, or dicarboxylic acid, anhydride or ester thereof;
- 10 and
- (D) at least one aromatic compound capable of reacting with at least one monocarboxylic acid or ester thereof; or dicarboxylic acid, anhydride or ester thereof.

15

The present invention is also directed to a lubricating oil composition comprising a major amount of an oil of lubricating viscosity and a minor amount of the lubricating oil additive composition prepared by the process which comprises reacting

- 20 (A) at least one of the following copolymers:
- (i) a copolymer obtained by free radical copolymerization of components comprising:
- 25 (a) at least one monoethylenically unsaturated C_3 - C_{28} monocarboxylic acid or ester thereof, or C_4 - C_{28} dicarboxylic acid, anhydride or ester thereof;
- (b) at least one 1-olefin comprising about 2 to about 40 carbon atoms or at least one polyolefin comprising from about 4 to
- 30 about 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof; and

- (c) at least one monoolefin compound which is copolymerizable with the monomers of (a) and (b) and is selected from the group consisting of:

5

- (1) an alkyl vinyl ether and an allyl alkyl ether where the alkyl group is hydroxyl, amino, dialkylamino or alkoxy substituted or is unsubstituted, and containing from about 1 to about 40 carbon atoms;

10

- (2) an alkyl amine and an N-alkylamide of a monoethylenically unsaturated mono- or dicarboxylic acid of from about 3 to about 10 carbon atoms where the alkyl substituent contains from about 1 to about 40 carbon atoms;

15

- (3) an N-vinylcarboxamide of carboxylic acids of from about 1 to about 8 carbon atoms;

20

- (4) an N-vinyl substituted nitrogen-containing heterocyclic compound; and

25

- (5) at least one 1-olefin comprising from about 2 to about 40 carbon atoms or at least one polyolefin comprising from about 4 to about 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof, provided that the olefin employed is not the same as the olefin employed in (i)(b);

30

- (ii) a copolymer obtained by reacting compound (i)(a) and compound(i)(b) in the presence of a free radical initiator;

- (iii) a copolymer obtained by (a) reacting compound (i)(a) with compound (i)(b) or (i)(c) in a non-free radical catalyzed reaction in the presence of copolymer (i) or copolymer (ii) or both; or by (b) contacting copolymer (i) or copolymer (ii) or both with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c); with
- (B) at least one ether compound capable of being reacted with at least two monocarboxylic acids, or esters, thereof, or dicarboxylic acids, anhydrides or esters thereof, or mixtures thereof; and
- (C) at least one aliphatic compound capable of reacting with at least one monocarboxylic acid or ester thereof, or dicarboxylic acid, anhydride or ester thereof; and
- (D) at least one aromatic compound capable of reacting with at least one monocarboxylic acid or ester thereof; or dicarboxylic acid, anhydride or ester thereof.
- 20 The present invention is also directed to a method of making a lubricating oil additive composition which comprises reacting
- (A) at least one of the following copolymers:
- (i) a copolymer obtained by free radical copolymerization of components comprising:
- (a) at least one monoethylenically unsaturated C₃-C₂₈ monocarboxylic acid or ester thereof, or C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof;
- (b) at least one 1-olefin comprising from about 2 to about 40 carbon atoms or at least one polyolefin comprising from

about 4 to about 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof; and

5 (c) at least one monoolefin compound which is copolymerizable with the monomers of (a) and (b) and is selected from the group consisting of:

10 (1) an alkyl vinyl ether and an allyl alkyl ether where the alkyl group is hydroxyl, amino, dialkylamino or alkoxy substituted or is unsubstituted, and containing from about 1 to about 40 carbon atoms;

15 (2) an alkyl amine and an N-alkylamide of a monoethylenically unsaturated mono- or dicarboxylic acid of from about 3 to about 10 carbon atoms where the alkyl substituent contains from about 1 to about 40 carbon atoms;

20 (3) an N-vinylcarboxamide of carboxylic acids of from about 1 to about 8 carbon atoms;

(4) an N-vinyl substituted nitrogen-containing heterocyclic compound; and

25 (5) at least one 1-olefin comprising from about 2 to about 40 carbon atoms or at least one polyolefin comprising from about 4 to about 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof, provided that the olefin employed is not the same as the olefin employed in (i)(b);

30

- (ii) a copolymer obtained by reacting compound (i)(a) and compound(i)(b) in the presence of a free radical initiator;
- (iii) a copolymer obtained by (a) reacting compound (i)(a) with compound (i)(b) or (i)(c) in a non-free radical catalyzed reaction in the presence of copolymer (i) or copolymer (ii) or both; or by (b) contacting copolymer (i) or copolymer (ii) or both with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c); with
- (B) at least one ether compound capable of being reacted with at least two monocarboxylic acids, or esters, thereof, or dicarboxylic acids, anhydrides or esters thereof, or mixtures thereof; and
- (C) at least one aliphatic compound capable of reacting with at least one monocarboxylic acid or ester thereof, or dicarboxylic acid, anhydride or ester thereof; and
- (D) at least one aromatic compound capable of reacting with at least one monocarboxylic acid or ester thereof; or dicarboxylic acid, anhydride or ester thereof.

Accordingly, the present invention relates to multi-functional lubricating oil additives which are useful as dispersants in an internal combustion engine.

According to another aspect of the invention, there is provided an oil-soluble lubricating oil additive composition prepared by the process which comprises reacting

- (A) at least one of the following copolymers:

- (i) a copolymer obtained by free radical copolymerization of components comprising:

- 5 (a) at least one monoethylenically unsaturated
C₃-C₂₈ monocarboxylic acid or ester thereof, or
C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof;
- 10 (b) at least one 1-olefin comprising 2 to 40 carbon atoms or
at least one polyolefin comprising 4 to 360 carbon
atoms and having a terminal copolymerizable group in
the form of a vinyl, vinylidene or alkyl vinylidene group
or mixtures thereof; and
- (c) at least one monoolefin compound which is
copolymerizable with the monomers of (a) and (b) and
is selected from the group consisting of:
- 15 (1) an alkyl vinyl ether and an allyl alkyl ether
where the alkyl group is hydroxyl, amino,
dialkylamino or alkoxy substituted or is
unsubstituted, and containing from 1 to 40
carbon atoms;
- 20 (2) an alkyl amine and an N-alkylamide of a
monoethylenically unsaturated mono- or
dicarboxylic acid of from 3 to 10 carbon atoms
where the alkyl substituent contains from about
25 1 to 40 carbon atoms;
- (3) an N-vinylcarboxamide of carboxylic acids of
from 1 to 8 carbon atoms;
- 30 (4) an N-vinyl substituted nitrogen-containing
heterocyclic compound; and

- 5 (5) at least one 1-olefin comprising 2 to 40 carbon atoms or at least one polyolefin comprising 4 to 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof, provided that the olefin employed is not the same as the olefin employed in (i)(b);
- 10 (ii) a copolymer obtained by reacting compound (i)(a) and compound(i)(b) in the presence of a free radical initiator; or
- 15 (iii) a copolymer obtained by (a) reacting compound (i)(a) with compound (i)(b) or (i)(c) in a non-free radical catalyzed reaction in the presence of copolymer (i) or copolymer (ii) or both; or by (b) contacting copolymer (i) or copolymer (ii) or both with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c); with
- 20 (B) at least one ether compound capable of being reacted with at least two monocarboxylic acids, or esters, thereof, or dicarboxylic acids, anhydrides or esters thereof, or mixtures thereof;and
- 25 (C) at least one aliphatic compound capable of reacting with at least one monocarboxylic acid or ester thereof, or dicarboxylic acid, anhydride or ester thereof; and
- at least one aromatic compound capable of reacting with at least one monocarboxylic acid or ester thereof; or dicarboxylic acid, anhydride or ester thereof.
- 30 According to a further aspect of the invention, there is provided a lubricating oil composition comprising a major amount of an oil of lubricating viscosity and a minor amount of the lubricating oil additive composition prepared by the process which

comprises reacting

(A) at least one of the following copolymers:

- 5 (i) a copolymer obtained by free radical copolymerization of components comprising:
 - (a) at least one monoethylenically unsaturated
 10 C₃-C₂₈ monocarboxylic acid or ester thereof, or
 C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof;
 - (b) at least one 1-olefin comprising 2 to 40 carbon atoms or
 at least one polyolefin comprising 4 to 360 carbon
 15 atoms and having a terminal copolymerizable group in
 the form of a vinyl, vinylidene or alkyl vinylidene group
 or mixtures thereof; and
 - (c) at least one monoolefin compound which is
 copolymerizable with the monomers of (a) and (b) and
 20 is selected from the group consisting of:
 - (1) an alkyl vinyl ether and an allyl alkyl ether
 where the alkyl group is hydroxyl, amino,
 dialkylamino or alkoxy substituted or is
 25 unsubstituted, and containing from 1 to 40
 carbon atoms;
 - (2) an alkyl amine and an N-alkylamide of a
 monoethylenically unsaturated mono- or
 30 dicarboxylic acid of from 3 to 10 carbon atoms
 where the alkyl substituent contains from 1 to
 40 carbon atoms;

- (3) an N-vinylcarboxamide of carboxylic acids of from 1 to 8 carbon atoms;
- 5 (4) an N-vinyl substituted nitrogen-containing heterocyclic compound; and
- 10 (5) at least one 1-olefin comprising 2 to 40 carbon atoms or at least one polyolefin comprising 4 to 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof, provided that the olefin employed is not the same as the olefin employed in (i)(b);
- 15 (ii) a copolymer obtained by reacting compound (i)(a) and compound(i)(b) in the presence of a free radical initiator; or
- 20 (iii) a copolymer obtained by (a) reacting compound (i)(a) with compound (i)(b) or (i)(c) in a non-free radical catalyzed reaction in the presence of copolymer (i) or copolymer (ii) or both; or by (b) contacting copolymer (i) or copolymer (ii) or both with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c); with
- 25 (B) at least one ether compound capable of being reacted with at least two monocarboxylic acids, or esters, thereof, or dicarboxylic acids, anhydrides or esters thereof, or mixtures thereof;and
- 30 (C) at least one aliphatic compound capable of reacting with at least one monocarboxylic acid or ester thereof, or dicarboxylic acid, anhydride or ester thereof; and

- (D) at least one aromatic compound capable of reacting with at least one monocarboxylic acid or ester thereof; or dicarboxylic acid, anhydride or ester thereof.

5 According to another aspect of the invention, there is provided a method of making a lubricating oil additive composition which comprises reacting

- (A) at least one of the following copolymers:

- 10 (i) a copolymer obtained by free radical copolymerization of components comprising:
- (a) at least one monoethylenically unsaturated
C₃-C₂₈ monocarboxylic acid or ester thereof, or a
15 C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof;
- (b) at least one 1-olefin comprising 2 to 40 carbon atoms or at least one polyolefin comprising 4 to 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group
20 or mixtures thereof; and
- (c) at least one monoolefin compound which is copolymerizable with the monomers of (a) and (b) and is selected from the group consisting of:
- 25 (1) an alkyl vinyl ether and an allyl alkyl ether where the alkyl group is hydroxyl, amino, dialkylamino or alkoxy substituted or is unsubstituted, and containing from 1 to 40
30 carbon atoms;

- 5 (2) an alkyl amine and an N-alkylamide of a
monoethylenically unsaturated mono- or
dicarboxylic acid of from 3 to 10 carbon atoms
where the alkyl substituent contains from 1 to
40 carbon atoms;
- (3) an N-vinylcarboxamide of carboxylic acids of
from 1 to 8 carbon atoms;
- 10 (4) an N-vinyl substituted nitrogen-containing
heterocyclic compound; and
- 15 (5) at least one 1-olefin comprising 2 to 40 carbon
atoms or at least one polyolefin comprising 4 to
360 carbon atoms and having a terminal
copolymerizable group in the form of a vinyl,
vinylidene or alkyl vinylidene group or mixtures
thereof, provided that the olefin employed is not
the same as the olefin employed in (i)(b);
- 20 (ii) a copolymer obtained by reacting compound (i)(a) and
compound(i)(b) in the presence of a free radical initiator; or
- 25 (iii) a copolymer obtained by (a) reacting compound (i)(a) with
compound (i)(b) or (i)(c) in a non-free radical catalyzed
reaction in the presence of copolymer (i) or copolymer (ii) or
both; or by (b) contacting copolymer (i) or copolymer (ii) or
both with the non-free radical catalyzed reaction product of
compound (i)(a) and compound (i)(b) or (i)(c); with
- 30 (B) at least one ether compound capable of being reacted with at least two
monocarboxylic acids, or esters, thereof, or dicarboxylic acids, anhydrides or

esters thereof, or mixtures thereof; and

5 (C) at least one aliphatic compound capable of reacting with at least one monocarboxylic acid or ester thereof, or dicarboxylic acid, anhydride or ester thereof; and

(D) at least one aromatic compound capable of reacting with at least one monocarboxylic acid or ester thereof; or dicarboxylic acid, anhydride or ester thereof.

10

DETAILED DESCRIPTION OF THE INVENTION

While the invention is susceptible to various modifications and alternative forms, specific embodiments thereof and are herein described in detail. It should be

15 understood, however, that the description herein of specific embodiments is not intended to limit the invention to the particular forms disclosed, but on the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the scope of the invention as defined by the appended claims.

Definitions

The following terms used with the description are defined as such:

5


The term "PIB" is an abbreviation for polyisobutene.

The term "PIBSA" is an abbreviation for polyisobutenyl or polyisobutyl succinic anhydride.

10


The term "polyPIBSA" refers to a class of copolymers employed within the scope of the present invention which are copolymers of polyisobutene and a monoethylenically unsaturated C₃-C₂₈ monocarboxylic acid or ester thereof, or a C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof which have carboxyl groups, preferably succinic groups, and polyisobutyl groups. The preferred polyPIBSA is a copolymer of polyisobutene and maleic anhydride having the general formula:

15

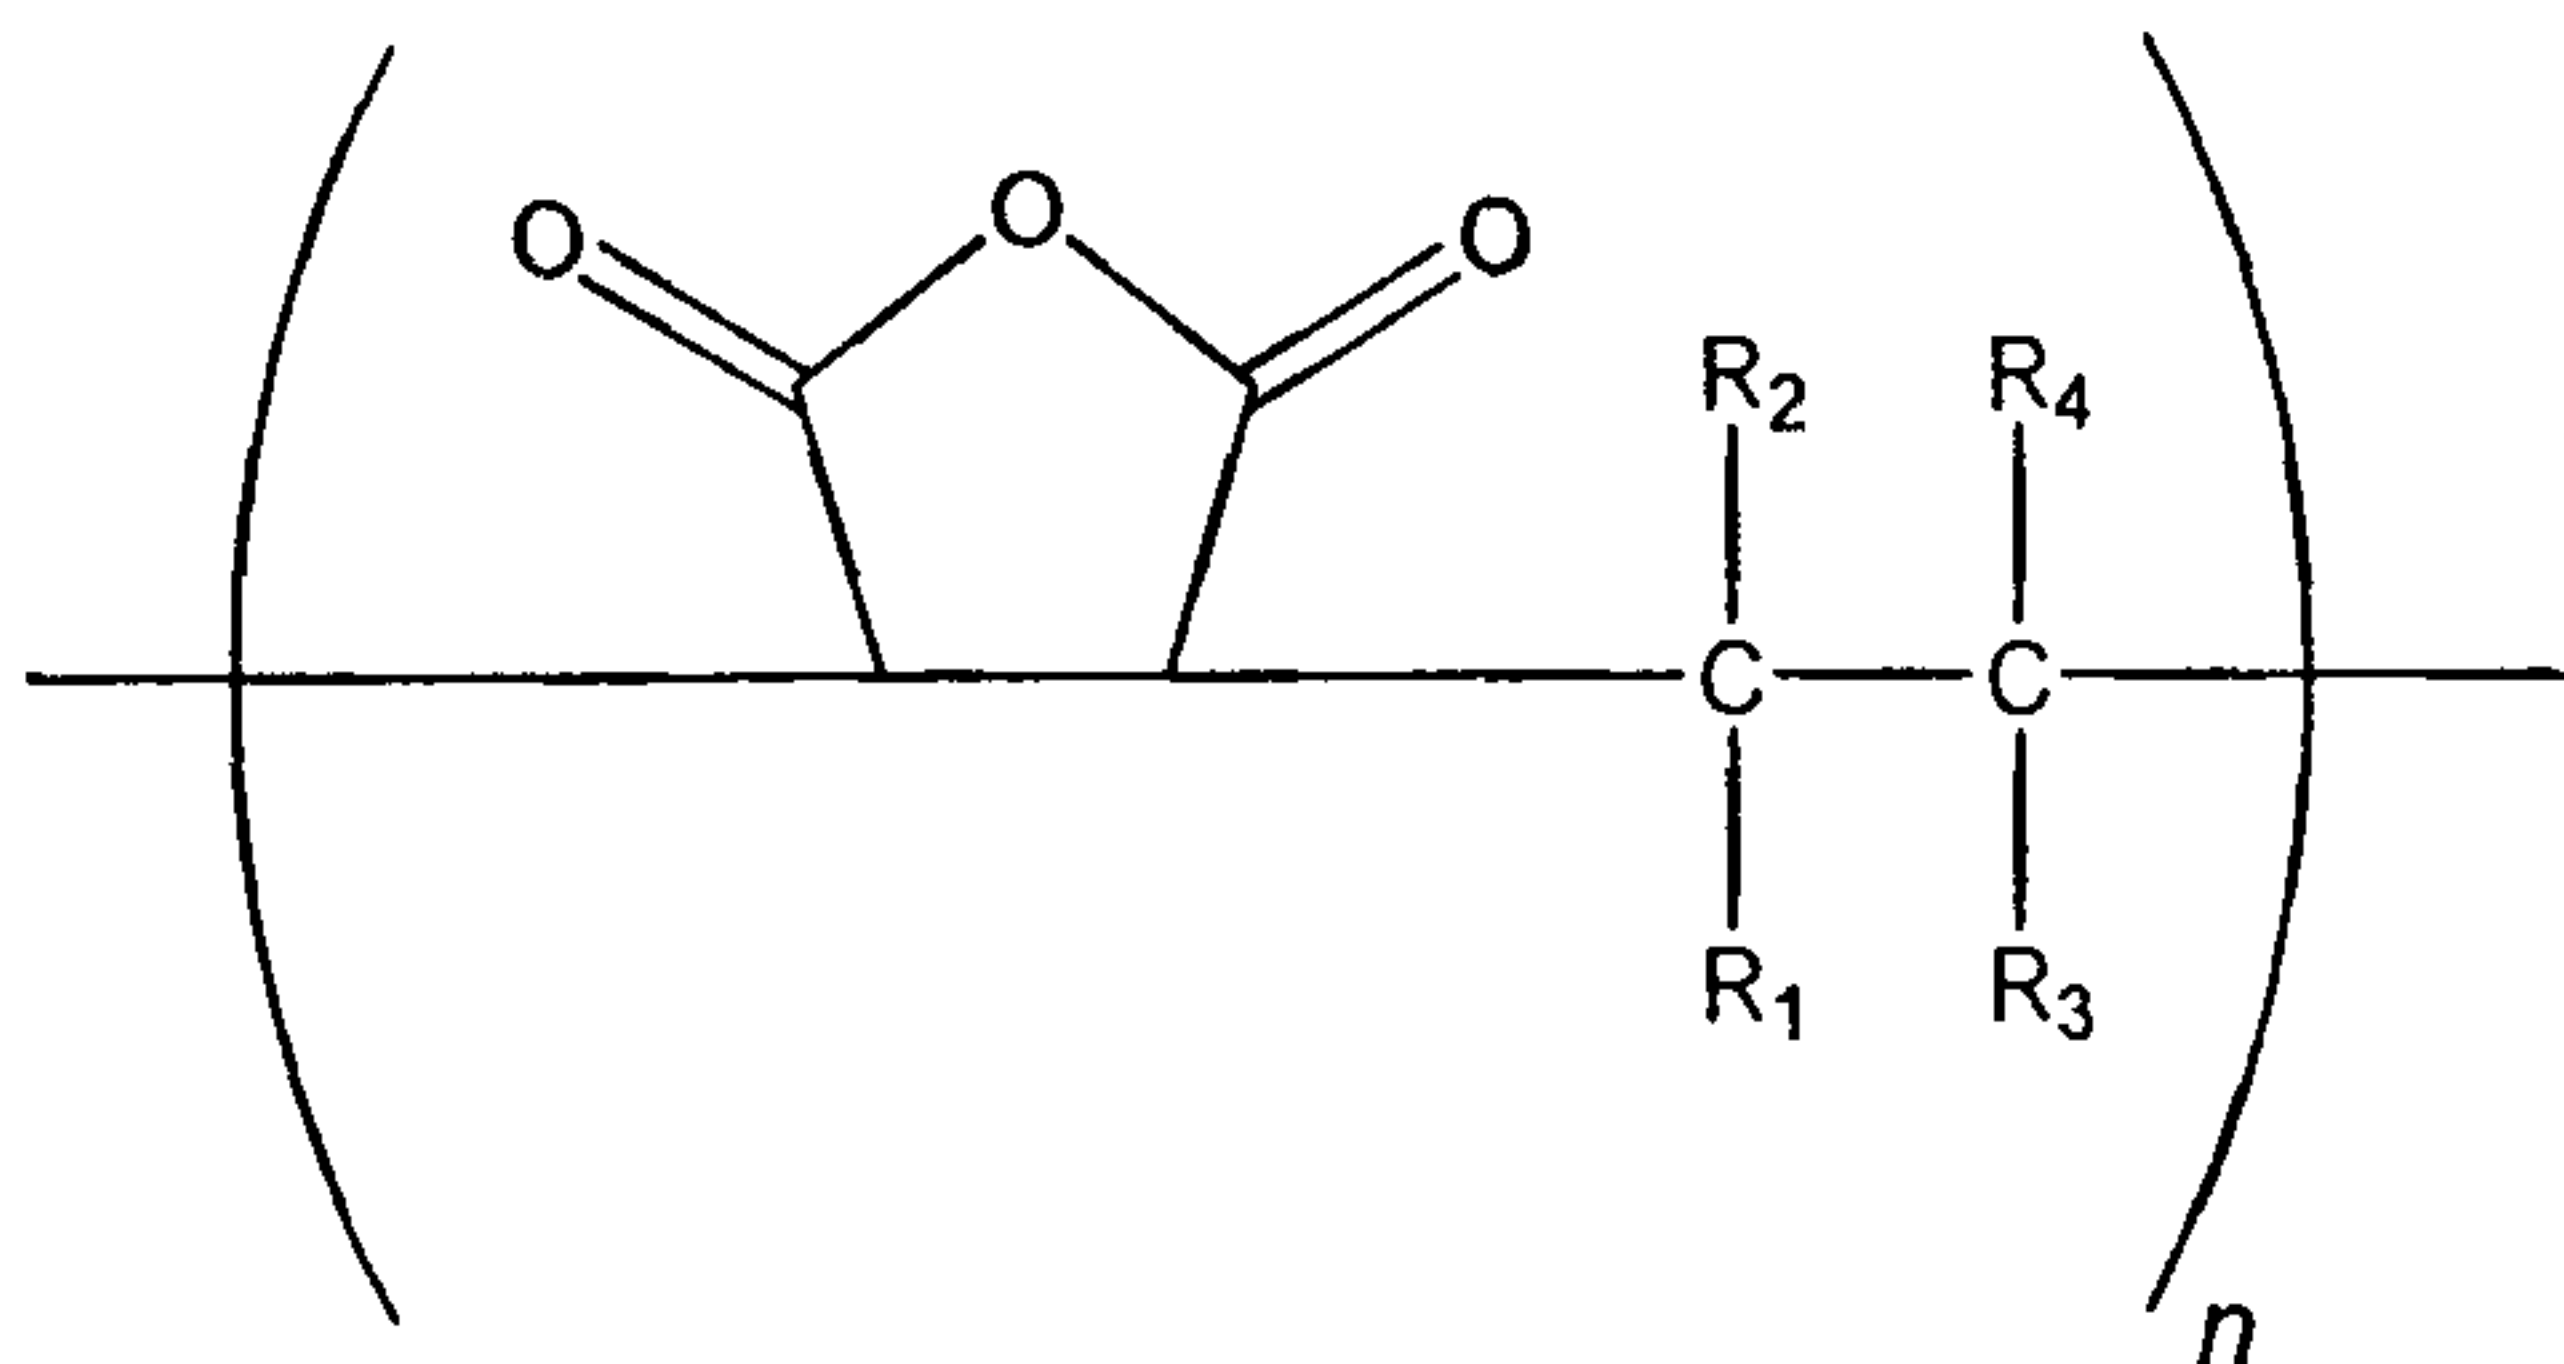

20 wherein n is one or greater; R₁, R₂, R₃ and R₄ are selected from hydrogen, methyl and polyisobutyl having at least about 8 carbon atoms, preferably at least about 30 carbon atoms and more preferably at least about 50 carbon atoms wherein either R₁ and R₂ are hydrogen and one of R₃ and R₄ is methyl and the other is polyisobutyl, or R₃ and R₄ are hydrogen and one of R₁ and R₂ is methyl and the other is polyisobutyl. The
25 polyPIBSA copolymer may be alternating, block, or random.

The term "succinic group" refers to a group having the formula:

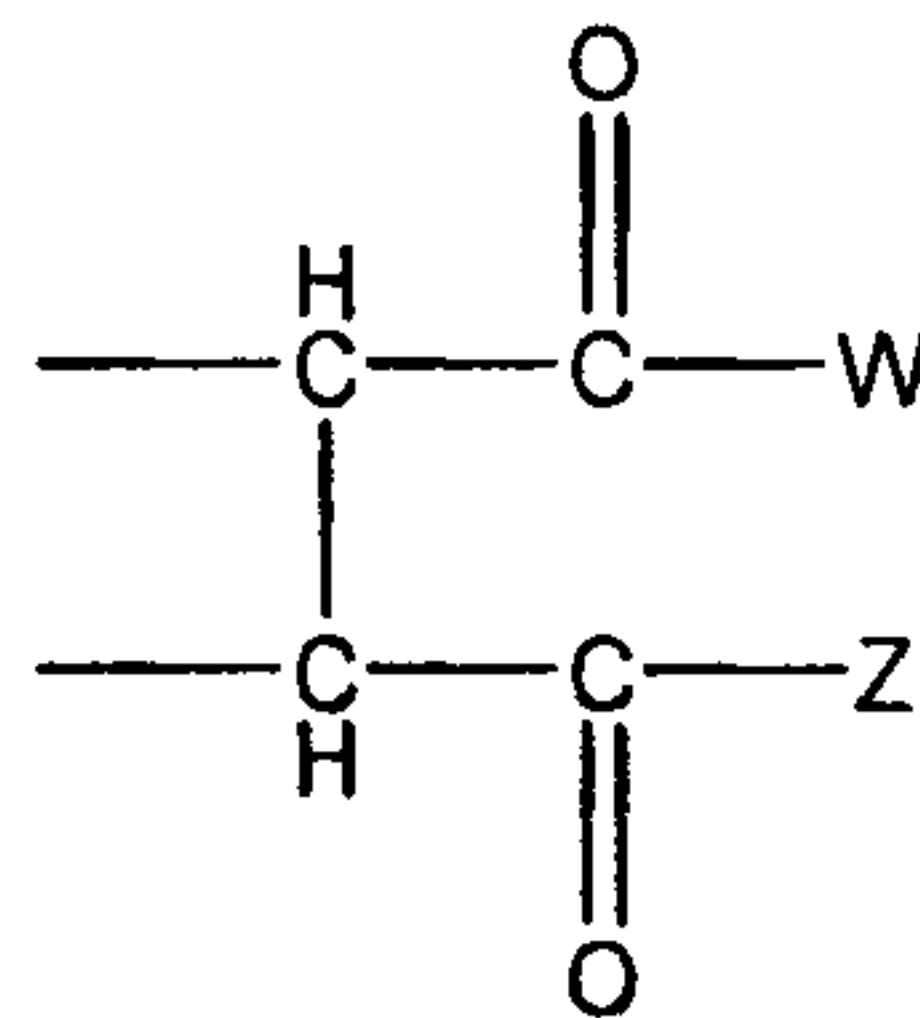

- 5 wherein W and Z are independently selected from the group consisting of --OH, --Cl, --O--alkyl or taken together are --O-- to form a succinic anhydride group. The term "--O--alkyl" is meant to include alkoxy of from about 1 to about 40 carbon atoms, preferably from about 1 to about 8 carbon atoms.
- 10 The term "degree of polymerization" refers to the average number of repeating structural units in the polymer chain.

The term "terpolymer" refers to a polymer derived from the free radical copolymerization of at least 3 monomers.

15

The term "1-olefin" refers to a monounsaturated olefin that has the double bond in the 1-position. They can also be called alpha-olefins, and have the following structure:



20

where R is the rest of the olefin molecule.

The term "1,1-disubstituted olefin" refers to a disubstituted olefin, also called a vinylidene olefin, that has the following structure:

25




wherein R_5 and R_6 are the same or different, and constitute the rest of the olefin molecule. Preferably, either R_5 or R_6 is a methyl group, and the other is not.

The term "succinimide" is understood in the art to include many of the amide, imide, etc. species which are also formed by the reaction of a succinic anhydride with an amine. The predominant product, however, is succinimide and this term has been generally accepted as meaning the product of a reaction of an alkenyl- or alkyl-substituted succinic acid or anhydride with an amine. Alkenyl or alkyl succinimides are disclosed in numerous references and are well known in the art. Certain fundamental types of succinimides and related materials encompassed by the term of art "succinimide" are taught in U.S. Patent Nos. 2,992,708; 3,018,291; 3,024,237; 3,100,673; 3,219,666; 3,172,892; and 3,272,746.


The term "polysuccinimide" refers to the reaction product of a succinic group-containing copolymer with an amine.

The term "alkenyl or alkylsuccinic acid derivative" refers to a structure having the formula:

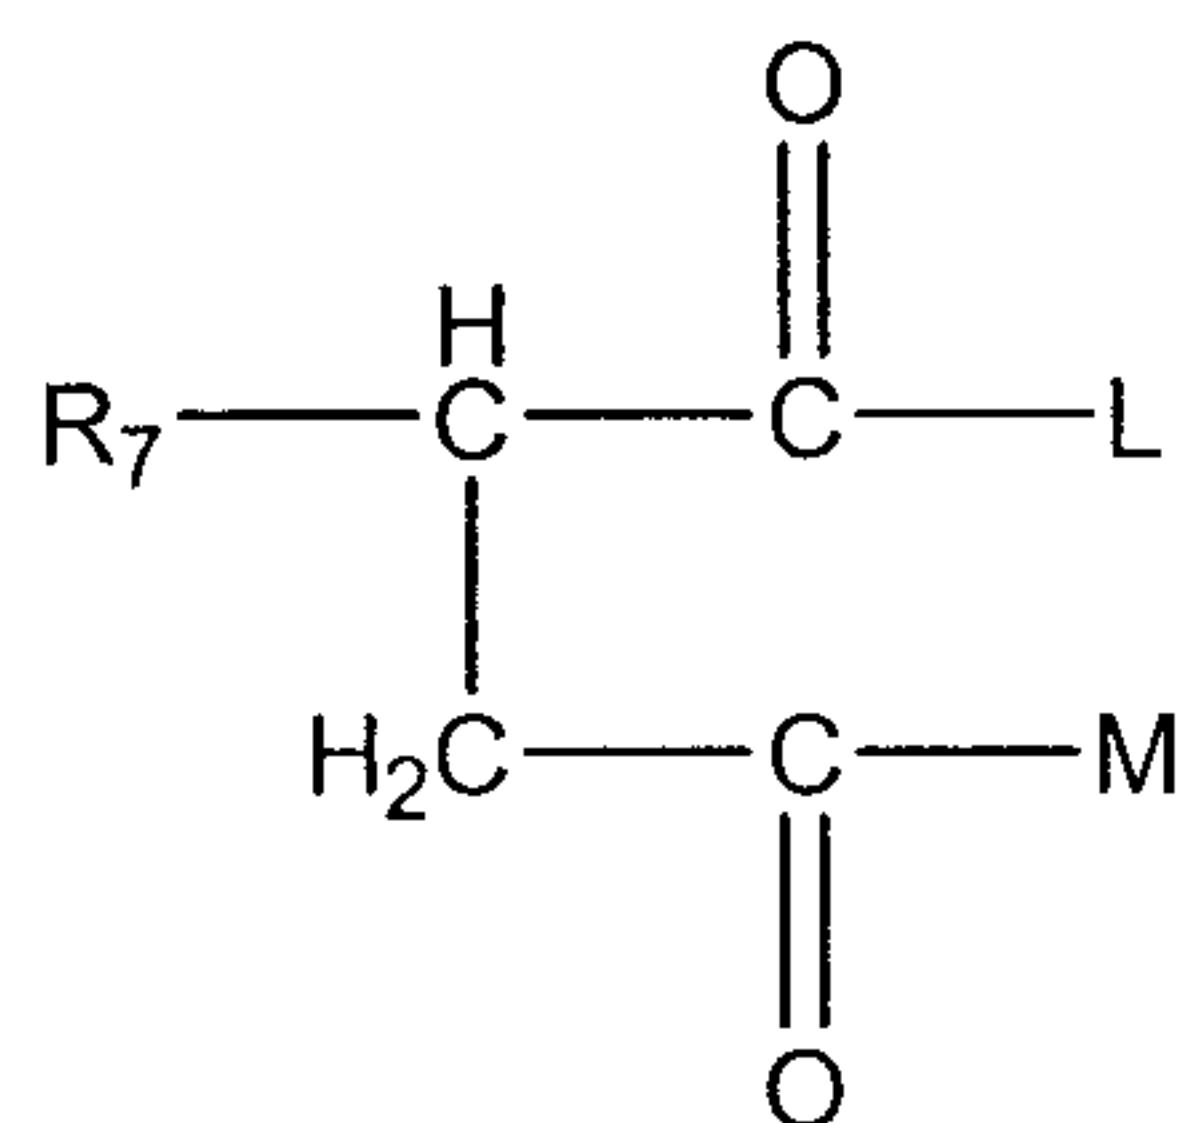

wherein R_7 is selected from hydrogen, methyl and polyisobutyl having at least about 8 carbon atoms, preferably at least about 30 carbon atoms and more preferably at least about 50 carbon atoms; wherein L and M are independently selected from the group consisting of --OH, --Cl, --O--alkyl or taken together are --O-- to form an alkenyl or alkylsuccinic anhydride group.

The term "alkylvinylidene" or "alkylvinylidene isomer" refers to an olefin having the following vinylidene structure:

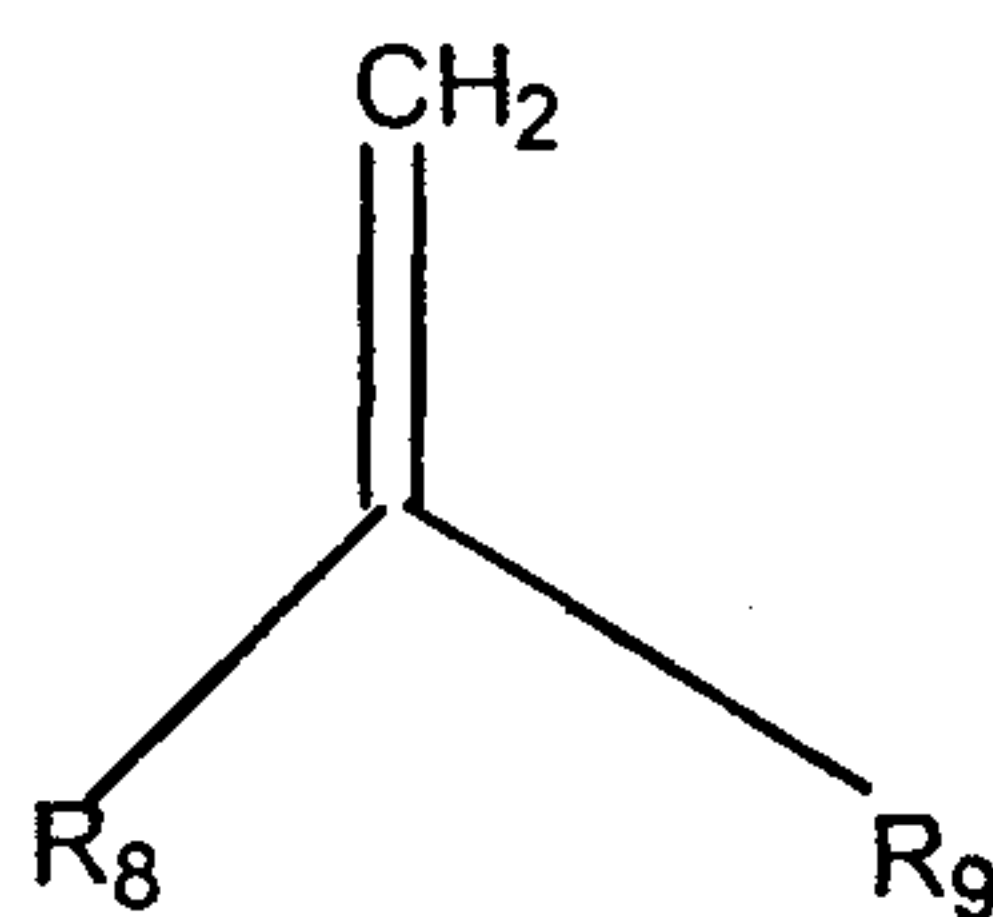

5

wherein R₈ is alkyl or substituted alkyl. R₈ generally has at least about 5 carbon atoms, preferably about 30 carbon atoms, and more preferably at least about 50 carbon atoms and R₉ is lower alkyl of from about 1 to about 6 carbon atoms.

- 10 The term "soluble in lubricating oil" refers to the ability of a material to dissolve in aliphatic and aromatic hydrocarbons such as lubricating oils or fuels in essentially all proportions.

15 The term "high molecular weight olefins" refers to olefins (including polymerized olefins having a residual unsaturation) of sufficient molecular weight and chain length to lend solubility in lubricating oil to their reaction products. Typically olefins having about 30 carbons or more suffice.

20 The term "high molecular weight polyalkyl" refers to polyalkyl groups of sufficient molecular weight such that the products prepared having such sufficient molecular weight are soluble in lubricating oil. Typically these high molecular weight polyalkyl groups have at least about 30 carbon atoms, preferably at least about 50 carbon atoms. These high molecular weight polyalkyl groups may be derived from high molecular weight polyolefins.

25

The term "amino" refers to -NR₁₀R₁₁ wherein R₁₀ and R₁₁ are independently hydrogen or a hydrocarbyl group.

The term "alkyl" refers to both straight- and branched-chain alkyl groups.

30

The term "lower alkyl" refers to alkyl groups having from about 1 to about 6 carbon atoms and includes primary, secondary and tertiary alkyl groups. Typical lower alkyl groups include, for example, methyl, ethyl, n-propyl, isopropyl, n-butyl, sec-butyl, t-butyl, n-pentyl, iso-pentyl, n-hexyl and the like.

5

The term "polyalkyl" refers to an alkyl group that is generally derived from polyolefins which are polymers or copolymers of mono-olefins, particularly 1-mono-olefins, such as ethylene, propylene, butylene, and the like. Preferably, the mono-olefin employed will have from about 2 to about 24 carbon atoms, and more preferably, from about 3 to about 12 carbon atoms. More preferred mono-olefins include propylene, butylene, particularly isobutylene, 1-octene and 1-decene. Preferred, polyolefins prepared from such mono-olefins include polypropylene, polybutene, especially polyisobutene.

15 The Lubricating Oil Additive Composition

One embodiment of the present invention is an oil-soluble lubricating oil additive composition prepared by the process which comprises reacting

20 (A) at least one of the following copolymers:

(i) a copolymer obtained by free radical copolymerization of components comprising:

25 (a) at least one monoethylenically unsaturated C₃-C₂₈ monocarboxylic acid or ester thereof, or C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof;

30 (b) at least one 1-olefin comprising about 2 to 40 carbon atoms or at least one polyolefin comprising about 4 to 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof; and

- (c) at least one monoolefin compound which is copolymerizable with the monomers of (a) and (b) and is selected from the group consisting of:
- 5
- (1) an alkyl vinyl ether and an allyl alkyl ether where the alkyl group is hydroxyl, amino, dialkylamino or alkoxy substituted or is unsubstituted, and containing 1 to 40 carbon atoms;
- 10
- (2) an alkyl amine and an N-alkylamide of a monoethylenically unsaturated mono- or dicarboxylic acid of 3 to 10 carbon atoms where the alkyl substituent contains 1 to 40 carbon atoms;
- 15
- (3) an N-vinylcarboxamide of carboxylic acids of 1 to 8 carbon atoms;
- (4) an N-vinyl substituted nitrogen-containing heterocyclic compound; and
- 20
- (5) at least one 1-olefin comprising about 2 to 40 carbon atoms or at least one polyolefin comprising about 4 to about 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof, provided that the olefin employed is not the same as the olefin employed in (i)(b);
- 25
- (ii) a copolymer obtained by reacting compound (i)(a) and compound(i)(b) in the presence of a free radical initiator;
- 30

(iii) a copolymer obtained by (a) reacting compound (i)(a) with compound (i)(b) or (i)(c) in a non-free radical catalyzed reaction in the presence of copolymer (i) or copolymer (ii) or both; or by (b) contacting copolymer (i) or copolymer (ii) or both with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c); with

(B) at least one ether compound capable of being reacted with at least two monocarboxylic acids, or esters, thereof, or dicarboxylic acids, anhydrides or esters thereof, or mixtures thereof; and

(C) at least one aliphatic compound capable of reacting with at least one monocarboxylic acid or ester thereof, or dicarboxylic acid, anhydride or ester thereof; and

(D) at least one aromatic compound capable of reacting with at least one monocarboxylic acid or ester thereof; or dicarboxylic acid, anhydride or ester thereof.

20

Copolymer (i)


(a) The Monoethylenically Unsaturated Monocarboxylic Acid or Ester Thereof or Dicarboxylic Acid, Anhydride or Ester Thereof

25

In the present invention, at least one monoethylenically unsaturated C₃-C₂₈ monocarboxylic acid or ester thereof, or C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof is used to prepare the copolymers of copolymer (i). Preferably the at least one monoethylenically unsaturated C₃-C₂₈ monocarboxylic acid or ester thereof, or C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof is a dicarboxylic acid, anhydride or ester thereof.

30

The general formula of the preferred dicarboxylic acid, anhydride or ester thereof is as follows:

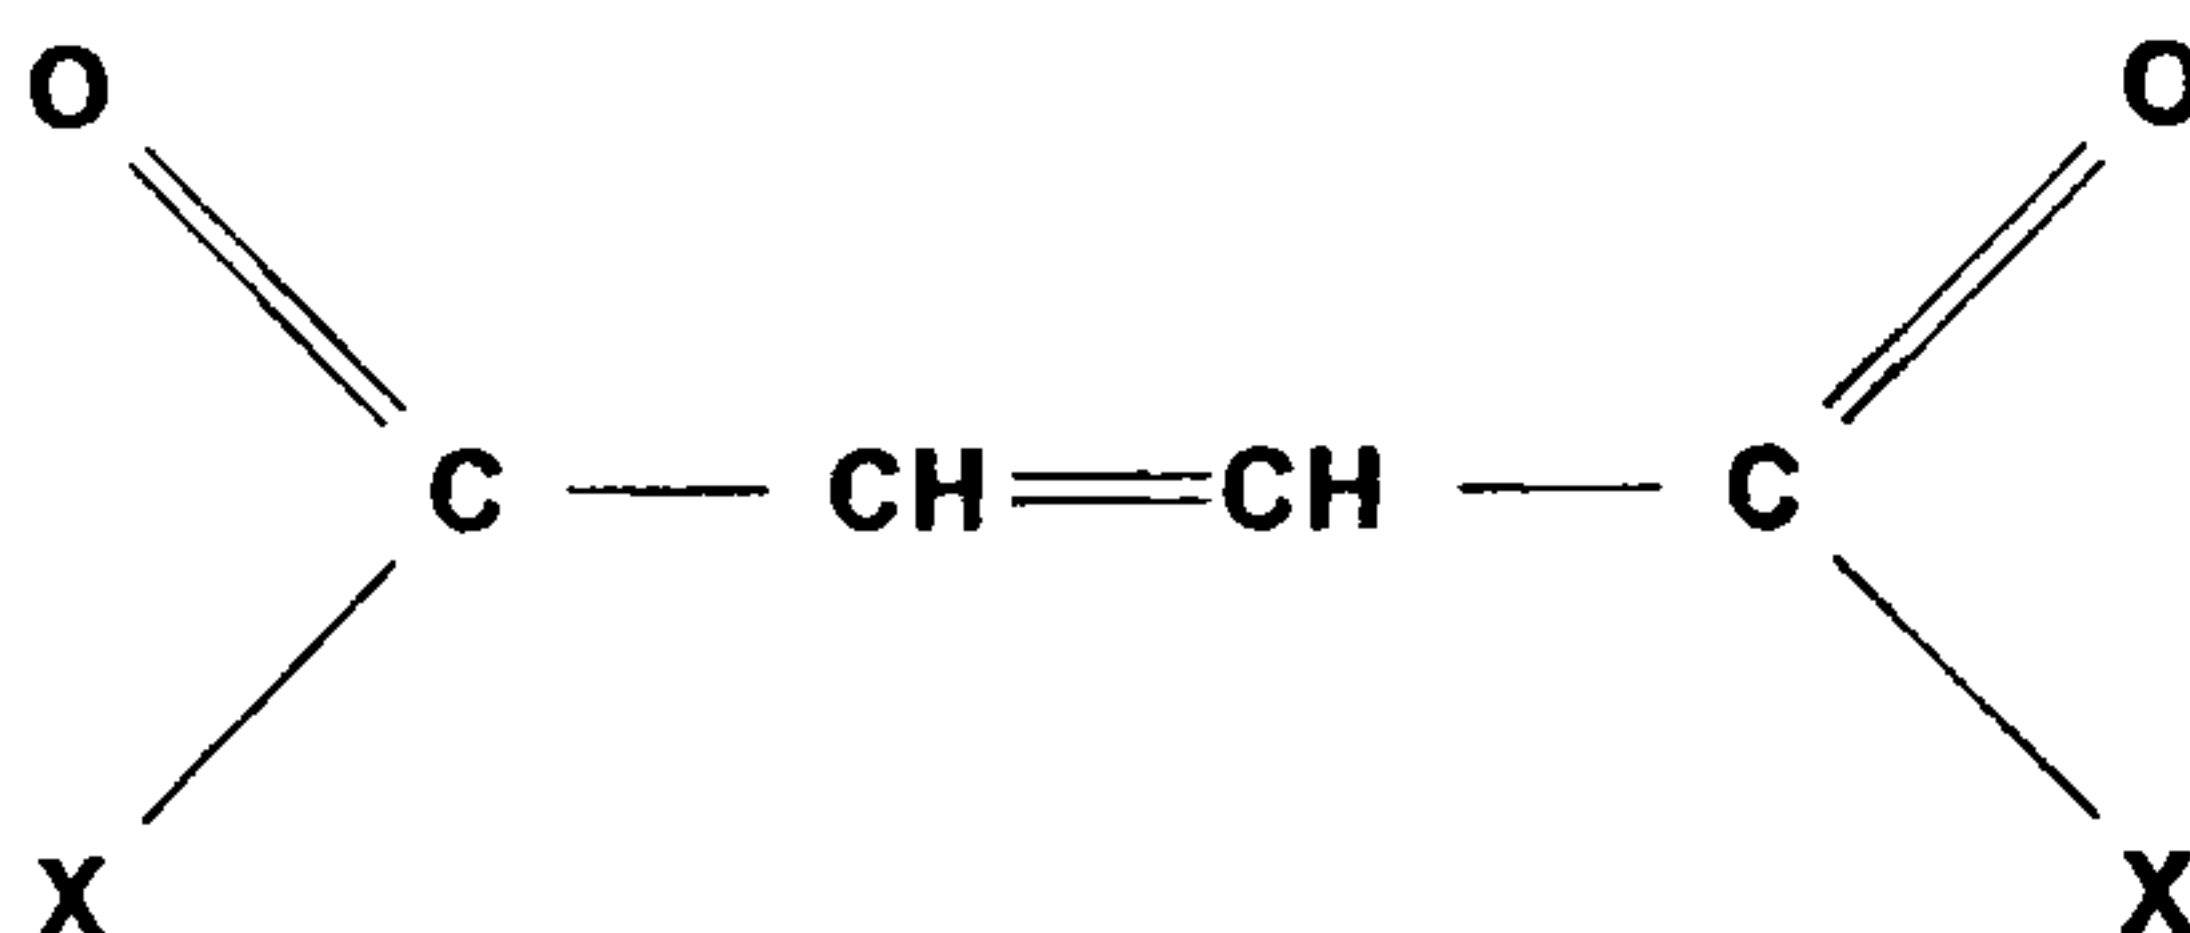

5

wherein X and X' are the same or different, provided that at least one of X and X' is a group that is capable of reacting to esterify alcohols, form amides or amine salts with ammonia or amines, form metal salts with reactive metals or basically reacting metal compounds and otherwise function as acylating agents. Typically, X and/or X' is --
 10 OH, --O-hydrocarbyl, OM⁺ where M⁺ represents one equivalent of a metal, ammonium or amine cation, --NH₂, --Cl, --Br, and taken together X and X' can be --O-- so as to form an anhydride. Preferably X and X' are such that both carboxylic functions can enter into acylation reactions. Maleic anhydride is a preferred reactant. Other suitable reactants include electron-deficient olefins such as monophenyl maleic
 15 anhydride; monomethyl, dimethyl, monochloro, monobromo, monofluoro, dichloro and difluoro maleic anhydride; N-phenylmaleimide and other substituted maleimides, isomaleimides; fumaric acid, maleic acid, alkyl hydrogen maleates and fumarates, dialkyl fumarates and maleates, fumaronilic acids and maleanic acids; and maleonitrile and fumaronitrile.

20

Suitable monomers for (a) are monoethylenically unsaturated dicarboxylic acids or anhydrides of from about 4 to 28 carbon atoms selected from the group consisting of maleic acid, fumaric acid, itaconic acid, mesaconic acid, methylenemalonic acid, citraconic acid, maleic anhydride, itaconic anhydride, citraconic anhydride and
 25 methylenemalonic anhydride and mixtures of these with one another, among which maleic anhydride is preferred.

Other suitable monomers are monoethylenically unsaturated C₃-C₂₈-monocarboxylic acids selected from the group consisting of acrylic acid, methacrylic acid,

dimethacrylic acid, ethylacrylic acid, crotonic acid, allylacetic acid and vinylacetic acid, among which acrylic and methacrylic acid are preferred.

Another group of suitable monomers is C_1 - C_{40} alkyl esters of monoethylenecially
 5 unsaturated C_3 - C_{10} mono- or C_4 - C_{10} dicarboxylic acids such as ethyl acrylate, butyl acrylate, 2-ethyl acrylate, decyl acrylate, dodecyl acrylate, octadecyl acrylate and the esters of industrial alcohol mixtures of from about 14 to 28 carbon atoms, ethyl methacrylate, 2-ethylhexyl methacrylate, decyl methacrylate, octadecyl methacrylate, monobutyl maleate, dibutyl maleate, monodecyl maleate, didodecyl maleate,
 10 monooctadecyl maleate, and dioctadecyl maleate.

(b) The 1-Olefin or Polyolefin

In the present invention at least one 1-olefin comprising about 2 to 40 carbon atoms or
 15 at least one polyolefin comprising about 4 to 360 carbon atoms and having a terminal copolymerizable group in the form of vinyl, vinylidene or alkyl vinylidene group is employed.

Suitable 1-olefins for preparing copolymer (i) comprise from about 2 to about 40
 20 carbon atoms, preferably from about 6 to about 30 carbon atoms, such as decene, dodecene, octadecene and mixtures of C_{20} - C_{24} 1-olefins and C_{24} - C_{28} 1-olefins, more preferably from about 10 to about 20 carbon atoms. Preferably 1-olefins, which are also known as alpha olefins, with number average molecular weights in the range 100-4,500 or more are preferred, with molecular weights in the range of 200-2,000
 25 being more preferred. For example, alpha olefins obtained from the thermal cracking of paraffin wax. Generally, these olefins range from about 5 to about 20 carbon atoms in length. Another source of alpha olefins is the ethylene growth process which gives even number carbon olefins. Another source of olefins is by the dimerization of alpha olefins over an appropriate catalyst such as the well known Ziegler catalyst. Internal
 30 olefins are easily obtained by the isomerization of alpha olefins over a suitable catalyst such as silica. Preferably, 1-olefins from C_6 - C_{30} are used because these materials are commercially readily available, and because they offer a desirable

balance of the length of the molecular tail, and the solubility of the terpolymer in nonpolar solvents. Mixtures of olefins may also be employed.

Suitable polyolefins for preparing copolymer (i) are polyolefins comprising about 4 to
5 about 360 carbon atoms. These polymers have a number average molecular weight (M_n) of from about 56 to about 5000 g/mol. Examples of these are oligomers of ethylene, of butene, including isobutene, and of branched isomers of pentene, hexene, octene and of decene, the copolymerizable terminal group of the oligomer being present in the form of a vinyl, vinylidene or alkylvinylidene group, oligopropenes and
10 oligopropene mixtures of from about 9 to about 200 carbon atoms and in particular oligoisobutenes, as obtainable, for example, according to DE-A 27 02 604, corresponding U.S. Patent No. 4,152,499, are preferred. Mixtures of the stated oligomers are also suitable, for example, mixtures of ethylene and other alpha olefins. Other suitable polyolefins are described in U.S. Patent No. 6,030,930. The molecular
15 weights of the oligomers may be determined in a conventional manner by gel permeation chromatography.

The copolymerizable polyolefin that is reacted with the unsaturated mono- or di-carboxylic reactant are polymers comprising a major amount of C_2 - C_8 mono-olefin,
20 e.g., ethylene, propylene, butylene, isobutylene and pentene. These polymers can be homopolymers such as polyisobutylene as well as copolymers of 2 or more such olefins such as copolymers of: ethylene and propylene, butylene, and isobutylene, etc.

The polyolefin polymer usually contains from about 4 to about 360 carbon atoms,
25 although preferably 8 to 200 carbon atoms; and more preferably from about 12 to about 175 carbon atoms.

Since the high molecular weight olefins used to prepare the copolymers of the present invention are generally mixtures of individual molecules of different molecular
30 weights, individual copolymer molecules resulting will generally contain a mixture of high molecular weight polyalkyl groups of varying molecular weight. Also, mixtures of copolymer molecules having different degrees of polymerization will be produced.

The copolymers of the present invention have an average degree of polymerization of 1 or greater, preferably from about 1.1 to about 20, and more preferably from about 1.5 to about 10.

5 (c) The Mono-olefin Compound

The present invention employs at least one monoolefin compound which is copolymerizable with the monomers of (a) and (b) and is selected from the group consisting of:

10

(1) an alkyl vinyl ether and an allyl alkyl ether where the alkyl group is hydroxyl, amino, dialkylamino or alkoxy substituted or is unsubstituted, and containing from about 1 to about 40 carbon atoms;

15 Suitable monomers include the following: vinyl and allyl alkyl ethers where the alkyl radical is of about 1 to about 40 carbon atoms are also suitable, and the alkyl radical may carry further substituents, such as hydroxyl, amino, dialkylamino or alkoxy. Examples are methyl vinyl ether, ethyl vinyl ether, propyl vinyl ether, isobutyl vinyl ether, 2-ethylhexyl vinyl ether, decylvinyl ether, dodecyl vinyl ether, octadecyl vinyl ether, 2-(diethylamino)ethyl vinyl ether, 2-(di-n-butylamino)ethyl vinyl ether, and
20 the corresponding allyl ethers.

(2) an alkyl amine and an N-alkylamide of a monoethylenically unsaturated mono- or dicarboxylic acid of from about 3 to about 10 carbon atoms where
25 the alkyl substituent contains from about 1 to about 40 carbon atoms;

Another group of monomers comprises C₁-C₄₀ alkyl amines and C₁-C₄₀ -N- alkylamides of monoethylenically unsaturated C₃ -C₁₀ -mono- or dicarboxylic acids, such as dimethylaminoethyl acrylate, diethylaminoethyl acrylate,
30 dibutylaminoethyl methacrylate, acrylamide, methacrylamide, N-tert-butylacrylamide, N-octylacrylamide, N,N' -dibutylacrylamide, N-dodecylmethacrylamide and N-octadecylmethacrylamide.

- (3) an N-vinylcarboxamide of carboxylic acids of from about 1 to about 8 carbon atoms;
- 5 Another group of monomers includes the following: N-vinylcarboxamides of carboxylic acids of from about 1 to about 8 carbon atoms, such as N-vinylformamide, N-vinyl-N-methylformamide, N-vinylacetamide, N-vinyl-N-methylacetamide, N-vinyl-N-ethylacetamide, N-vinyl-N-methylpropionamide and N-vinylpropionamide.
- 10 (4) an N-vinyl substituted nitrogen-containing heterocyclic compound; Another group of monomers includes the following: N-vinyl compounds of nitrogen-containing heterocycles, such as N-vinylimidazole, N-vinylmethylimidazole, N-vinylpyrrolidone and N-vinylcaprolactam.
- 15
- (5) at least one 1-olefin comprising about 2 to 40 carbon atoms or at least one polyolefin comprising from about 4 to about 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof, provided that the olefin employed is not
- 20 the same as the olefin employed in (i)(b);

Suitable 1-olefins comprise about 2 to 40 carbon atoms, preferably from about 8 to about 30 carbon atoms, such as decene, dodecene, octadecene and mixtures of C₂₀-C₂₄-1-olefins and C₂₄-C₂₈-1-olefins. Preferably 1-olefins, which are also known as alpha olefins, with number average molecular weights in the range of from about 28 to about 560 are preferred, with molecular weights in the range of from about 112 to about 420 being more preferred. For example, alpha olefins obtained from the thermal cracking of paraffin wax may be employed. Generally, these olefins range from about 5 to about 20 carbon atoms in length. Another source of alpha olefins is the ethylene

25 growth process which gives even number carbon olefins. Another source of olefins is by the dimerization of alpha olefins over an appropriate catalyst such as the well known Ziegler catalyst. Internal olefins are easily obtained by the isomerization of alpha olefins over a suitable catalyst such as silica. Preferably, 1-olefins from C₁₀-C₃₀

30

are used because these materials are commercially readily available, and because they offer a desirable balance of the length of the molecular tail, and the solubility of the terpolymer in nonpolar solvents. Mixtures of olefins are also suitable.

5 *Preparation of Copolymer (i)*

Copolymer reactant (i) may be prepared from well known methods which are described in the art including, but not limited to, those methods which are disclosed in the following patents: Harrison et al., U.S. Patent No. 5,792,729; Günther et al., U.S.
10 Patent No. 6,284,716; and Günther et al., U.S. Patent No. 6,512,055.

In one embodiment of the present invention the copolymer reactant is a polyalkenyl succinic anhydride terpolymer. These terpolymers are composed of at least one of monomers (a) to (c) as described herein.

15

Typically, the terpolymers of this invention contain at least one monomer from each group (a) to (c). In general, these components react to form terpolymers which can be random terpolymers or alternating terpolymers or block terpolymers and can be prepared by known procedures for making copolymers. Additionally, it is possible to
20 form a small percentage of copolymers which are composed of monomers (a) and (b) and monomers (a) and (c). Component (a), the monocarboxylic acid or ester thereof or dicarboxylic acid or anhydride or ester thereof, is selected from those disclosed above, preferably maleic anhydride. Component (b), the 1-olefin or polyolefin, is preferably polybutene. Component (c), the mono-olefin, is preferably a linear alpha
25 olefin containing from about 12 to 18 carbon atoms.

The degree of polymerization of the terpolymers can vary over a wide range. Preferably, the degree of polymerization is from about 2 to about 10. In general, terpolymer degree of polymerization decreases as the polymerization temperature
30 increases.


The terpolymerization is conducted in the presence of a suitable free radical initiator. Examples of suitable polymerization initiators are peroxide compounds, such as tertbutyl perpivalate, tertbutyl perneoccanoate, tert-butylperethylhexanoate, tertbutylperisobutyrate, di-tert-butyl peroxide, di-tert-amyl peroxide, diacetyl
5 peroxydicarbonate and dicyclohexyldicarbonate, or azo compounds, such as 2,2' - azobisisobutyronitrile. The initiators may be used alone or as a mixture with one another. Redox co-initiators may also be present. Preferably, the initiator is a peroxide type initiator, e.g., di(t-butyl) peroxide, dicumyl peroxide or azo type initiator, e.g., isobutylnitrile type initiators. Procedures for preparing poly 1-olefin copolymers are,
10 for example, described in U.S. Patent Nos. 3,560,455 and 4,240,916. Those procedures could be used to prepare terpolymers. Both patents also describe a variety of initiators.

Copolymer (i), wherein a second olefin is employed in the reaction, can be prepared
15 in the same manner as copolymer (ii) which is described below.

Copolymer (ii)

In another embodiment of the present invention, the copolymer reactant is a
20 copolymer obtained by reacting (a) at least one monoethylenically unsaturated C₃-C₂₈ monocarboxylic acid or ester thereof, or a C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof and (b) at least one copolymerizable polymer composed of at least 3 olefin molecules of propene or of a branched 1-olefin of from about 4 to about 10 carbon atoms, having a number average molecular weight M_n of from about 112 to about
25 5000, and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group in the presence of a free radical initiator.

Thus, preferred copolymers of the present invention are prepared by reacting a "reactive" high molecular weight olefin in which a high proportion of unsaturation, at
30 least about 20% is in the alkylvinylidene configuration, e.g.,

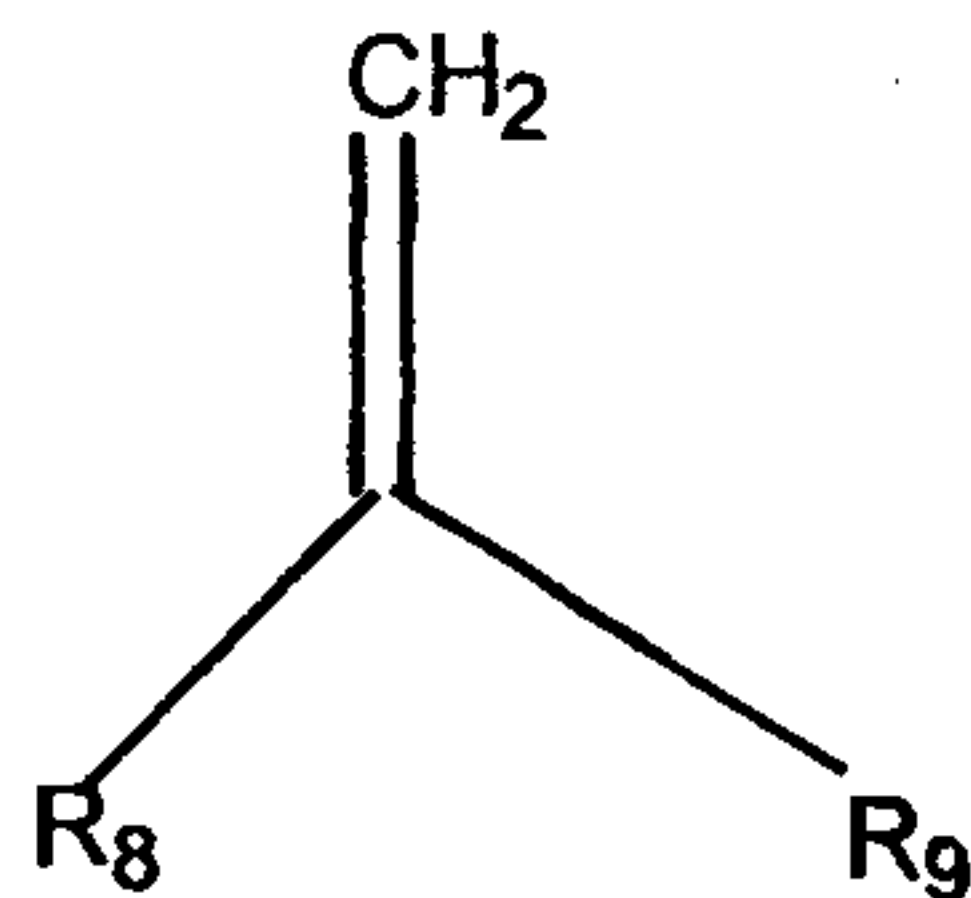


wherein R_8 and R_9 are an alkyl or substituted alkyl of sufficient chain length to give the resulting molecule stability in lubricating oils and fuels, thus R_8 generally has at least about 30 carbon atoms, preferably at least about 50 carbon atoms and R_9 is a lower alkyl of from about 1 to about 6 carbon atoms, with an unsaturated acidic reactant in the presence of a free radical initiator.

Typically, the copolymer product has alternating polyalkylene and succinic groups and has an average degree of polymerization of 1 or greater.

10

The preferred copolymers (ii) of the present invention have the general formula:

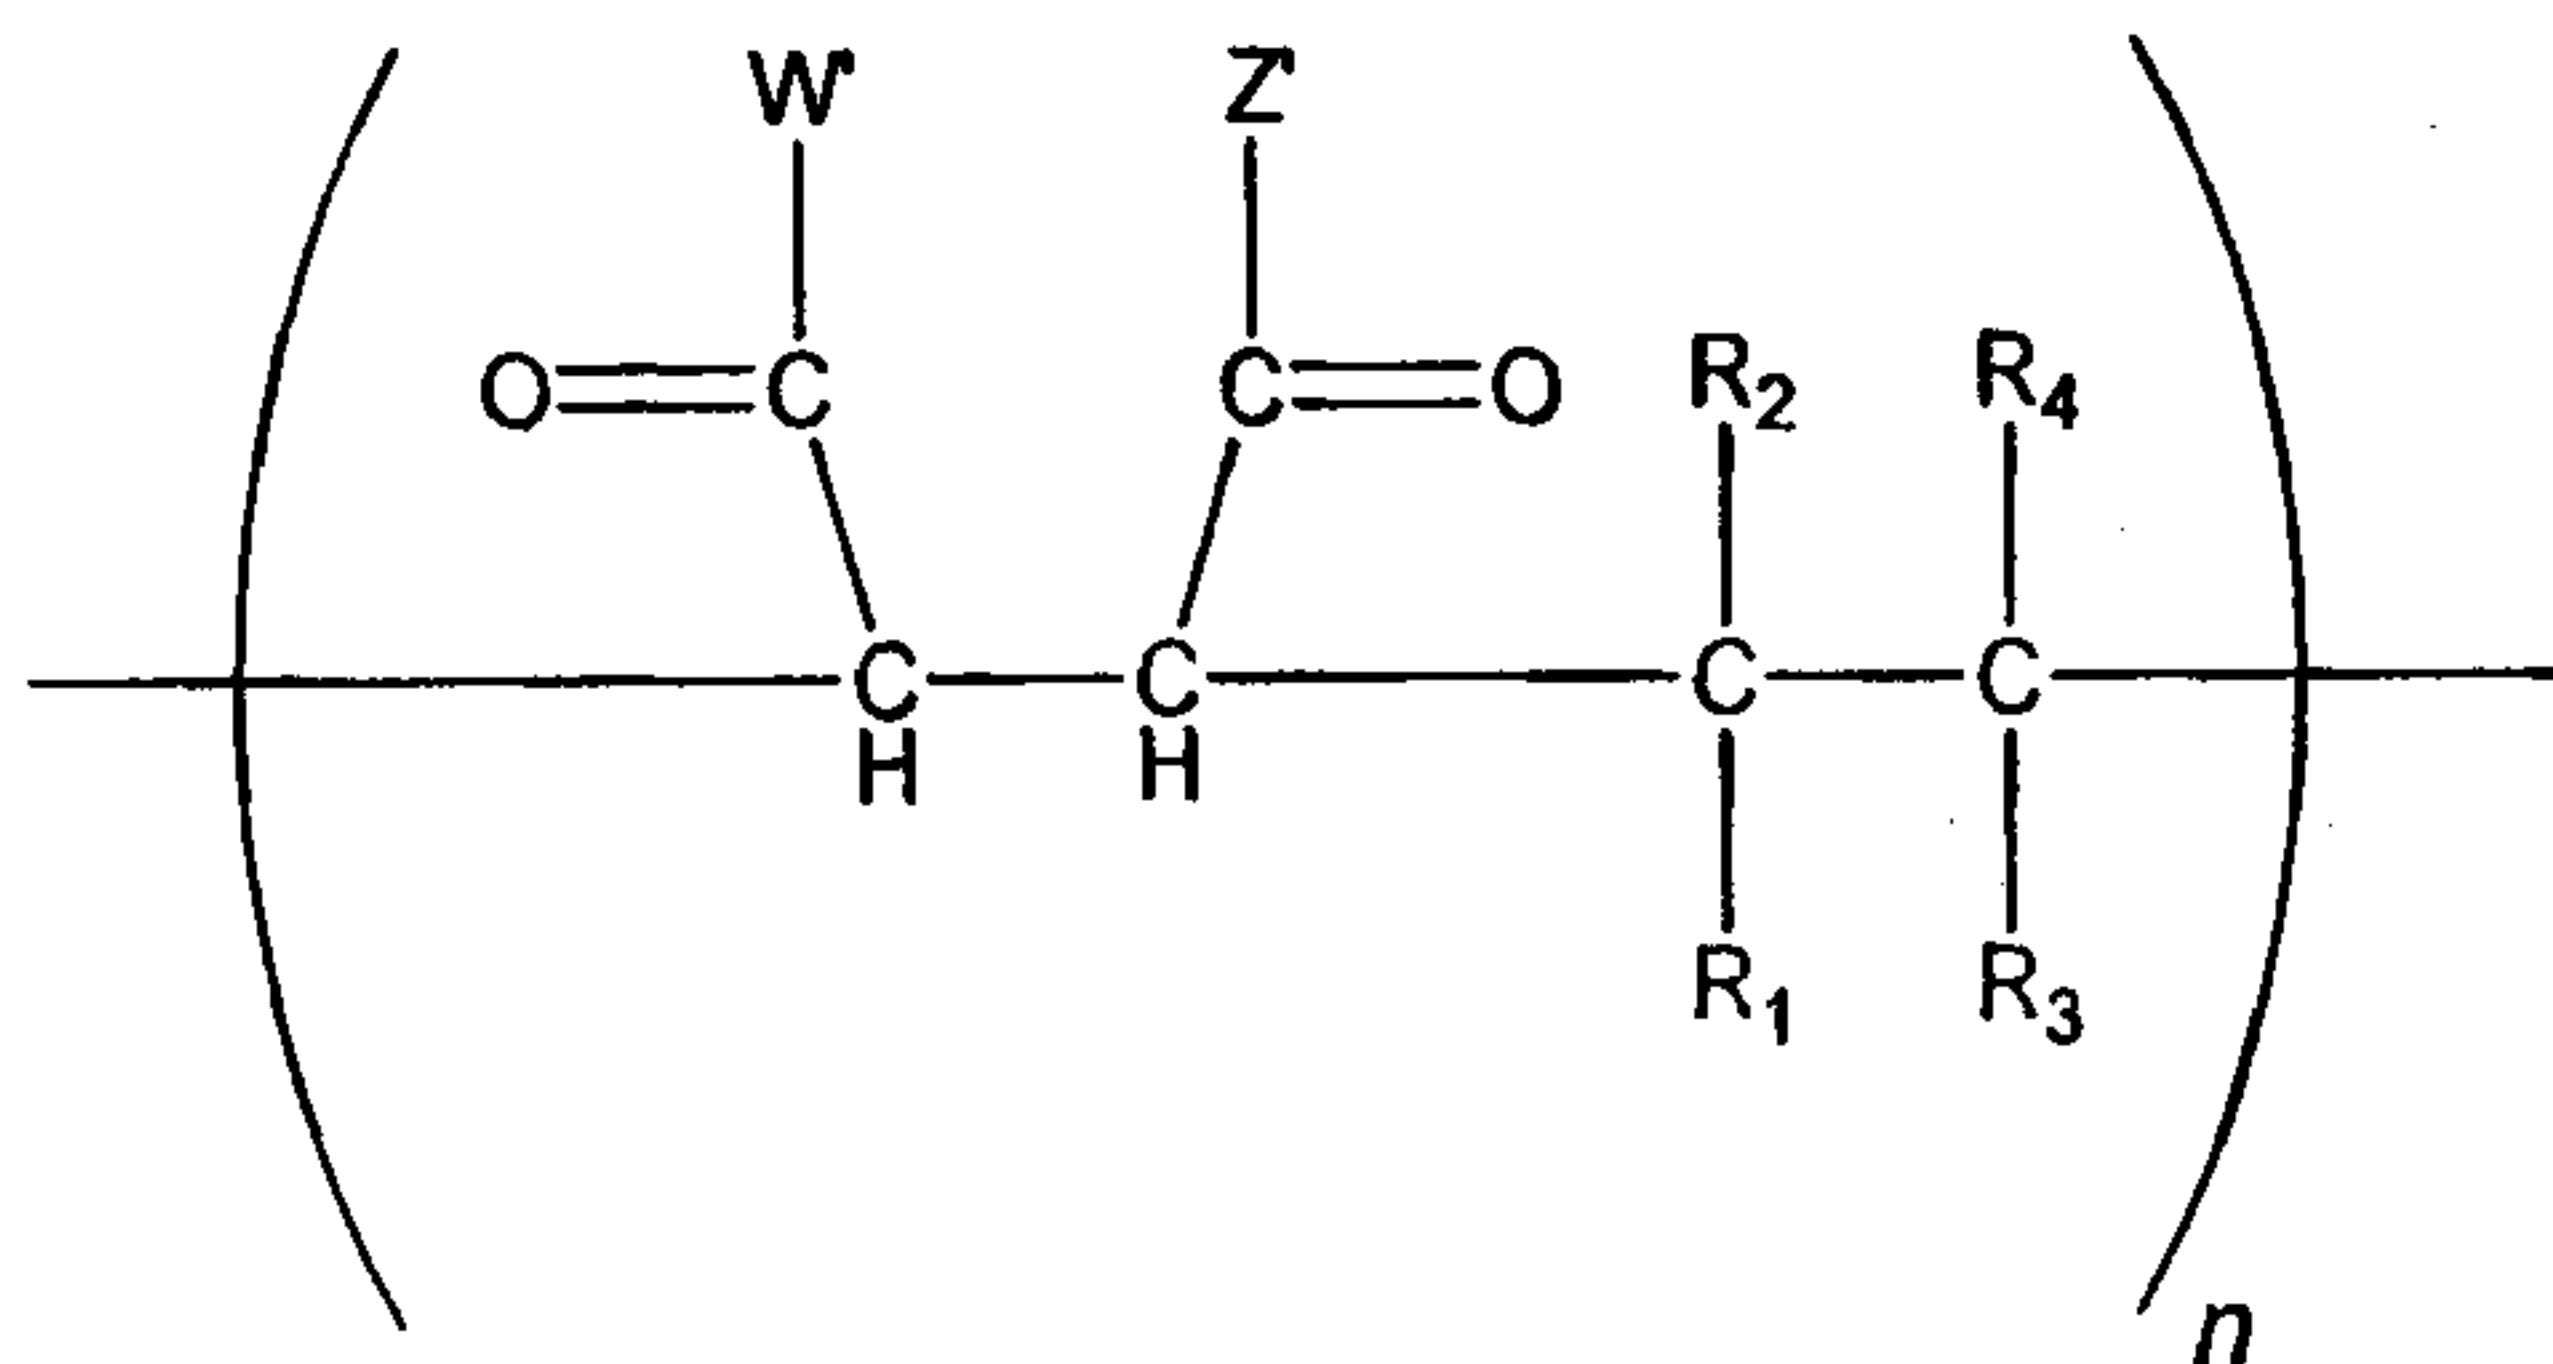

15


wherein W' and Z' are independently selected from the group consisting of $--OH$, $--O-$ -alkyl or taken together are $--O--$ to form a succinic anhydride group, n is one or greater; and R_1 , R_2 , R_3 and R_4 are selected from hydrogen, alkyl of from about 1 to about 40 carbon atoms, and high molecular weight polyalkyl wherein either R_1 and R_2 are hydrogen and one of R_3 and R_4 is lower alkyl having from about 1 to about 6 carbon atoms and the other is high molecular weight polyalkyl, or R_3 and R_4 are hydrogen and one of R_1 and R_2 is lower alkyl having from about 1 to 6 carbon atoms and the other is high molecular weight polyalkyl.

20

Copolymer (ii) may be alternating, block, or random.

In a preferred embodiment, when maleic anhydride is used as the reactant, the reaction produces copolymers predominately of the following formula:

5

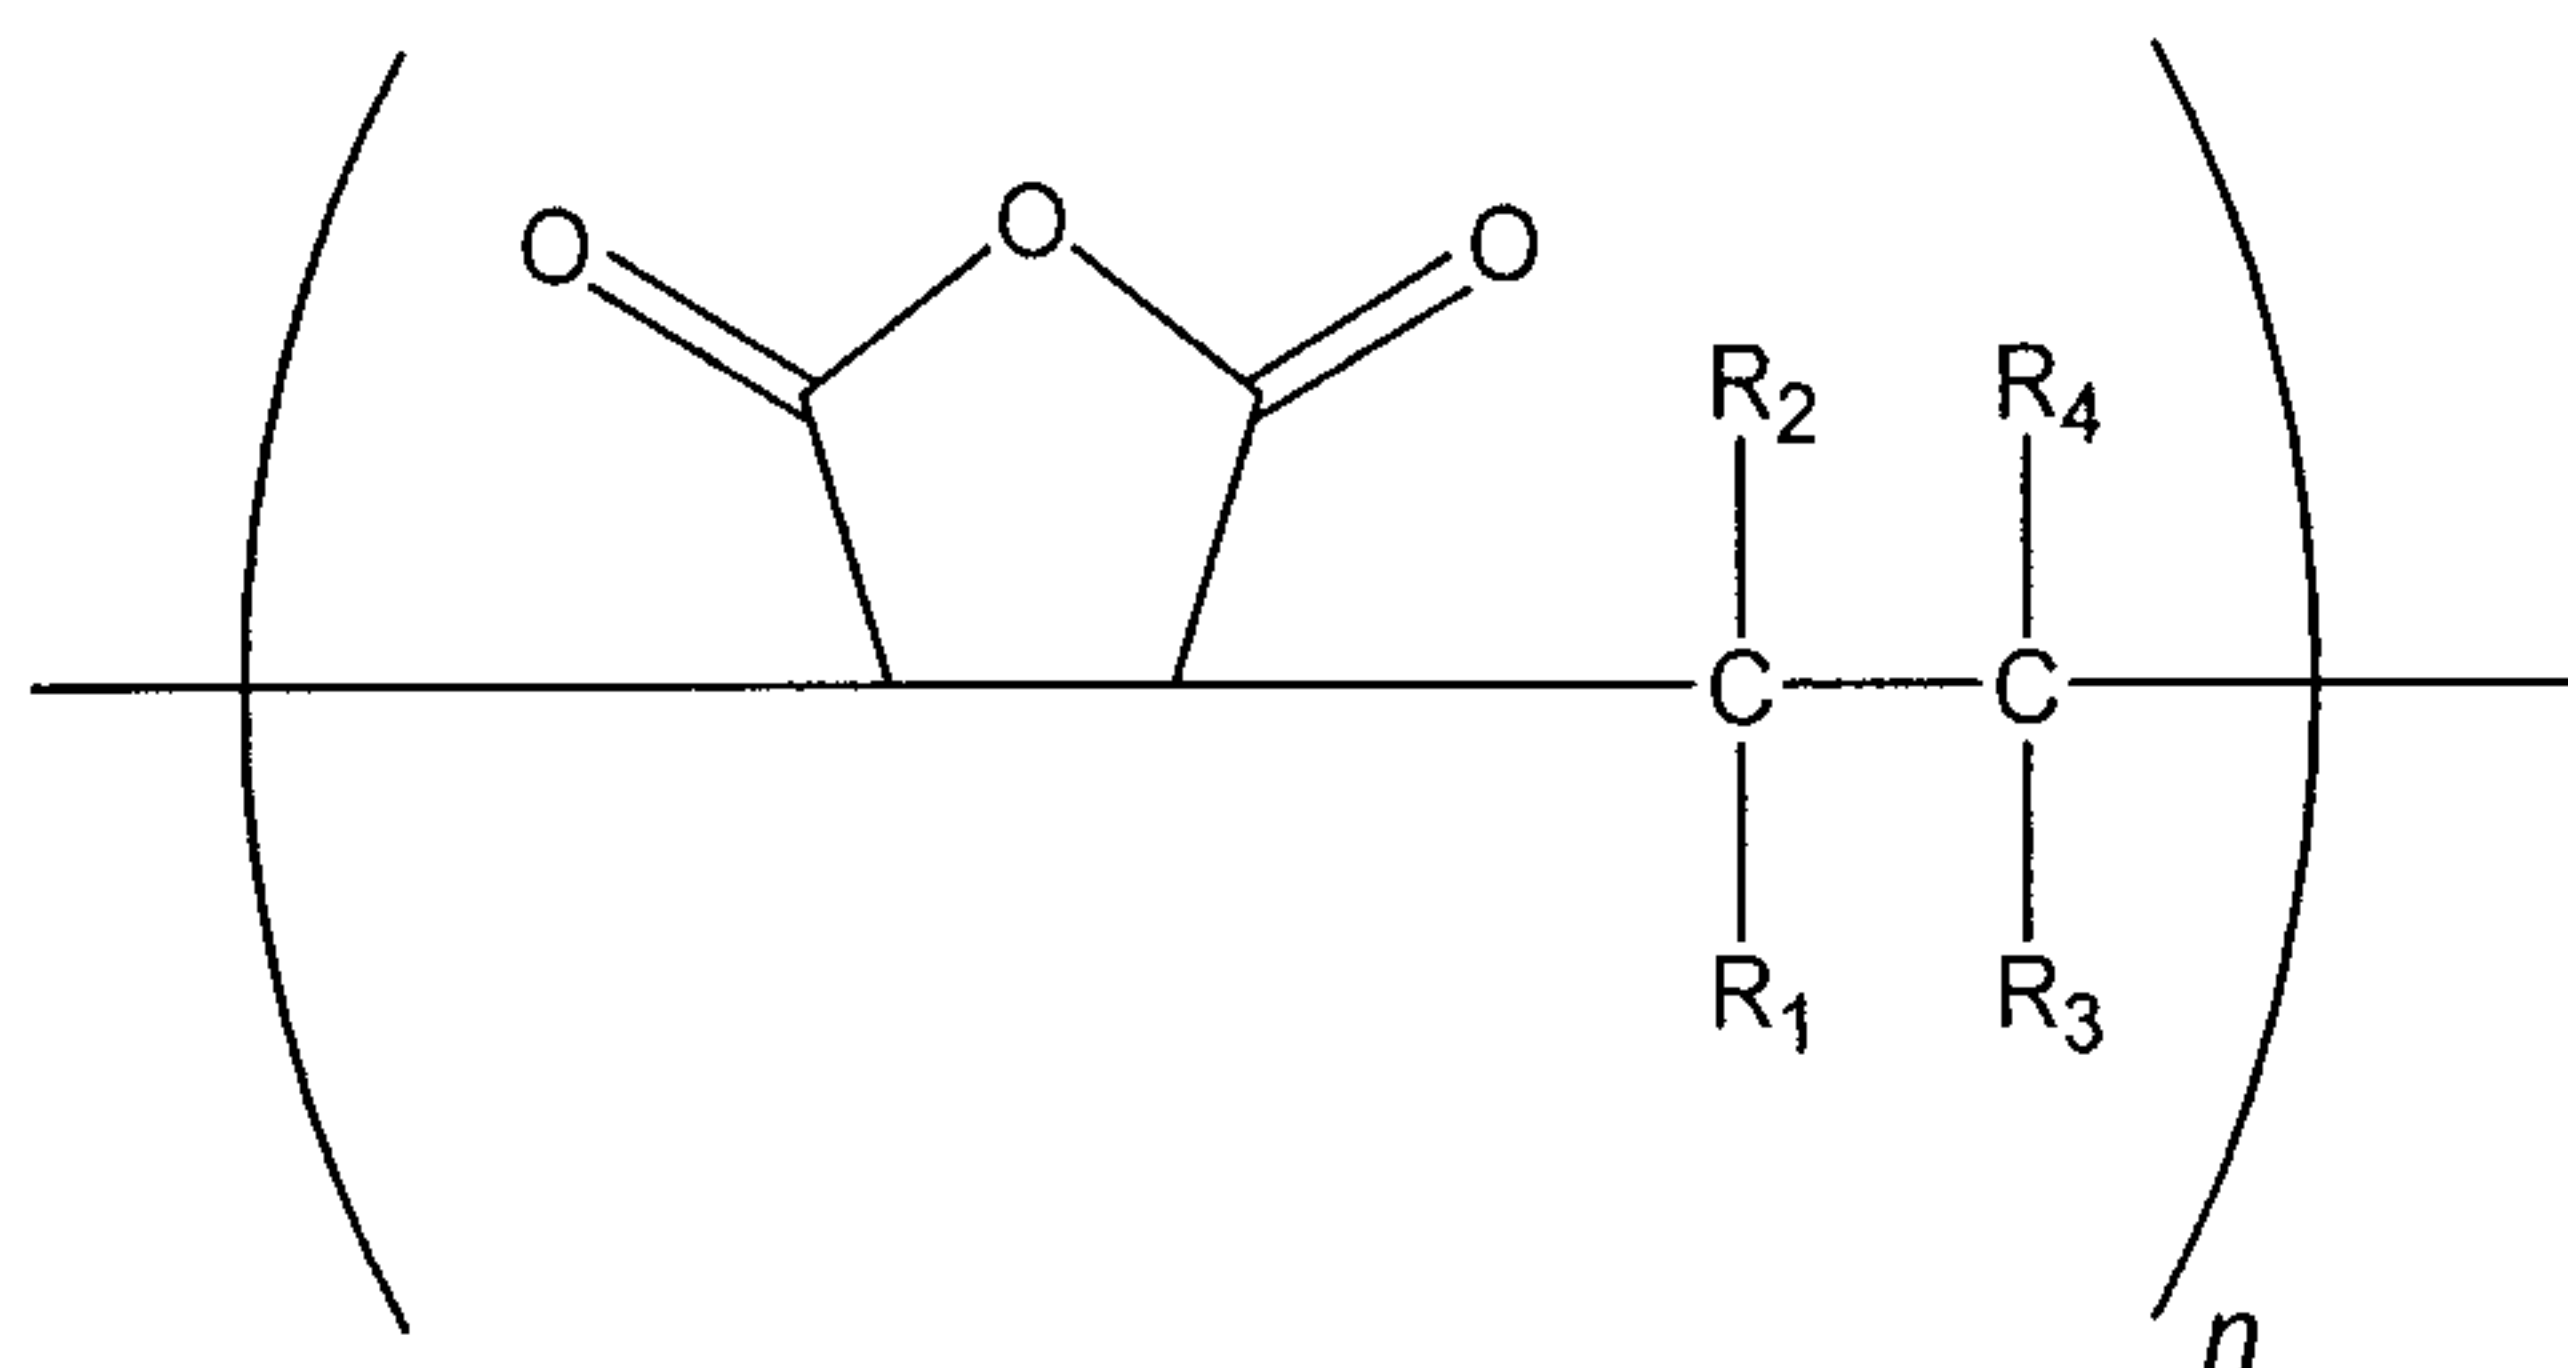

wherein n is from about 1 to about 100, preferably from about 2 to about 20, more preferably from about 2 to about 10, and R₁, R₂, R₃ and R₄ are selected from hydrogen, lower alkyl of from about 1 to about 6 carbon atoms and higher molecular weight polyalkyl, wherein either R₁ and R₂ are hydrogen and one of R₃ and R₄ is lower alkyl having from about 1 to about 6 carbon atoms and the other is high molecular weight polyalkyl or R₃ and R₄ are hydrogen and one of R₁ and R₂ is lower alkyl and the other is high molecular weight polyalkyl.

15

Preferably, the high molecular weight polyalkyl group has at least about 30 carbon atoms (more preferably at least about 50 carbon atoms). Preferred high molecular weight polyalkyl groups include polyisobutyl groups. Preferred polyisobutyl groups include those having number average molecular weights of from about 500 to about 5000, more preferably from about 900 to about 2500. Preferred lower alkyl groups include methyl and ethyl; especially preferred lower alkyl groups include methyl.

20

A particularly preferred class of olefin polymers comprises the polybutenes, which are prepared by polymerization of isobutene. These polybutenes are readily available commercial materials well known to those skilled in the art. Disclosures thereof will be found, for example, in U.S. Patent Nos. 4,152,499 and 4,605,808, for suitable polybutenes.

25

Preferably, 1,1-disubstituted olefins are used to provide a high molecular weight, oil soluble tail in the terpolymer. Preferably the 1,1-disubstituted olefin has a number average M_n of from about 500 to about 5000. One particularly useful 1,1-disubstituted olefin is a 1,1-disubstituted polyisobutylene, such as methylvinylidene polyisobutylene.

Preferably the copolymerizable polymer comprises a high molecular weight polyalkyl group which is derived from a high molecular weight olefin. The high molecular weight olefins used in the preparation of the copolymers of the present invention are of sufficiently long chain length so that the resulting composition is soluble in and compatible with mineral oils, fuels and the like; and the alkylvinylidene isomer of the high molecular weight olefin comprises at least about 20% of the total olefin composition. Preferably, the alkyl vinylidene isomer comprises at least 50%, more preferably at least 70%, of the total olefin composition.

Such high molecular weight olefins are generally mixtures of molecules having different molecular weights and can have at least one branch per 6 carbon atoms along the chain, preferably at least one branch per 4 carbon atoms along the chain, and particularly preferred that there be about one branch per 2 carbon atoms along the chain. These branched chain olefins may conveniently comprise polyalkenes prepared by the polymerization of olefins of from about 3 to about 6 carbon atoms, and preferably from olefins of from about 3 to about 4 carbon atoms, and more preferably from propylene or isobutylene. The addition-polymerizable olefins employed are normally 1-olefins. The branch may be of from about 1 to about 4 carbon atoms, more usually of from about 1 to about 2 carbon atoms and preferably methyl.

The preferred alkylvinylidene isomer comprises a methyl- or ethylvinylidene isomer, more preferably the methylvinylidene isomer.

The especially preferred high molecular weight olefins used to prepare the copolymers of the present invention are polyisobutenes which comprise at least about 20% of the more reactive methylvinylidene isomer, preferably at least about 50% and more preferably at least about 70%. Suitable polyisobutenes include those prepared

using BF_3 catalysis. The preparation of such polyisobutenes in which the methylvinylidene isomer comprises a high percentage of the total composition is described in U.S. Patent Nos. 4,152,499 and 4,605,808.

5 *Preparation of Copolymer (ii)*

As noted above, copolymer (ii) of the present invention is prepared by reacting an olefin and an unsaturated acidic reactant in the presence of a free radical initiator. The process of the preparation of copolymer (ii) is described in Harrison, U.S. Patent No.
10 5,112,507.

The reaction may be conducted at a temperature of about -30°C to about 210°C , preferably from about 40°C to about 160°C . The degree of polymerization is inversely proportional to temperature. Accordingly, for the preferred high molecular weight
15 copolymers, it is advantageous to employ lower reaction temperatures.

The reaction may be conducted neat, that is, both the high molecular weight olefin, acidic reactant and the free radical initiator are combined in the proper ratio, and then stirred at the reaction temperature.
20

Alternatively, the reaction may be conducted in a solvent. Suitable solvents include those in which the reactants and free radical initiator are soluble and include acetone, tetrahydrofuran, chloroform, methylene chloride, dichloroethane, toluene, dioxane, chlorobenzene, xylenes, or the like. After the reaction is complete, volatile
25 components may be stripped off. When a solvent is employed, it is preferably inert to the reactants and products formed and is generally used in an amount sufficient to ensure efficient mixing.

Alternatively, the reaction may be conducted in a diluent, such as mineral oil, as long
30 as the diluent does not contain constituents that interfere with the free radical polymerization, e.g., sulfur compounds, antioxidants and the like.

In general, the copolymerization can be initiated by any free radical initiator. Such initiators are well known in the art. However, the choice of free radical initiator may be influenced by the reaction temperature employed.

- 5 The preferred free-radical initiators are the peroxide-type polymerization initiators and the azo-type polymerization initiators. Radiation can also be used to initiate the reaction, if desired.

The peroxide-type free-radical initiator can be organic or inorganic, the organic
10 having the general formula: $R_{12} OOR_{13}$ where R_{12} is any organic radical and R_{13} is selected from the group consisting of hydrogen and any organic radical. Both R_{12} and R_{13} can be organic radicals, preferably hydrocarbon, aryl, and acyl radicals, carrying, if desired, substituents such as halogens, etc. Preferred peroxides include di-tert-butyl peroxide, dicumyl peroxide, and di-tert-amyl peroxide.

15 Examples of other suitable peroxides, which in no way are limiting, include benzoyl peroxide; lauroyl peroxide; other tertiary butyl peroxides; 2,4-dichlorobenzoyl peroxide; tertiary butyl hydroperoxide; cumene hydroperoxide; diacetyl peroxide; acetyl hydroperoxide; diethylperoxycarbonate; tertiary butyl perbenzoate; and the
20 like.

The azo-type compounds, typified by alpha,alpha'-azobisisobutyronitrile, are also well-known free-radical promoting materials. These azo compounds can be defined as those having present in the molecule group $--N=N--$ wherein the balances are satisfied
25 by organic radicals, at least one of which is preferably attached to a tertiary carbon. Other suitable azo compounds include, but are not limited to, p-bromobenzenediazonium fluoroborate; p-tolyldiazoaminobenzene; p-bromobenzenediazonium hydroxide; azomethane and phenyldiazonium halides. A suitable list of azo-type compounds can be found in U.S. Patent No. 2,551,813, issued
30 May 8, 1951 to Paul Pinkney.

The amount of initiator to employ, exclusive of radiation, of course, depends to a large extent on the particular initiator chosen, the high molecular olefin used and the

reaction conditions. The usual concentrations of initiator are between 0.001:1 and 0.2:1 moles of initiator per mole of acidic reactant, with preferred amounts between 0.005:1 and 0.10:1.

- 5 The polymerization temperature must be sufficiently high to break down the initiator to produce the desired free-radicals. For example, using benzoyl peroxide as the initiator, the reaction temperature can be between about 75°C and about 90°C, preferably between about 80°C and about 85°C higher and lower temperatures can be employed, a suitable broad range of temperatures being between about 20°C and
10 about 200°C, with preferred temperatures between about 50°C and about 150°C.

The reaction pressure should be sufficient to maintain the solvent in the liquid phase. Pressures can therefore vary between about atmospheric and 100 psig or higher.

- 15 The reaction time is usually sufficient to result in the substantially complete conversion of the acidic reactant and high molecular weight olefin to copolymer. The reaction time is suitable between one and 24 hours, with preferred reaction times between 2 and 10 hours.
- 20 As noted above, the subject reaction is a solution-type polymerization reaction. The high molecular weight olefin, acidic reactant, solvent and initiator can be brought together in any suitable manner. The important factors are intimate contact of the high molecular weight olefin and acidic reactant in the presence of a free-radical producing material. The reaction, for example, can be conducted in a batch system where the
25 high molecular weight olefin is added all initially to a mixture of acidic reactant, initiator and solvent or the high molecular weight olefin can be added intermittently or continuously to the reactor. Alternatively, the reactants may be combined in other orders; for example, acidic reactant and initiator may be added to high molecular weight olefin in the reactor. In another manner, the components in the reaction
30 mixture can be added continuously to a stirred reactor with continuous removal of a portion of the product to a recovery train or to other reactors in series. In yet another manner, the reaction may be carried out in a batch process, wherein the high molecular weight olefin is added initially to the reactor, and then the acidic reactant

and the initiator are added gradually over time. The reaction can also suitably take place in a tubular-type reactor where the components are added at one or more points along the tube.

5 Copolymer (iii)

In one embodiment, copolymer reactant (iii) is obtained by a copolymer obtained by (a) reacting compound (i)(a) with compound (i)(b) or (i)(c) in a non-free radical catalyzed reaction in the presence of copolymer (i) or copolymer (ii) or both; or by (b) 10 contacting copolymer (i) or copolymer (ii) or both with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c).

Preparation of Copolymer (iii)

15 A process for the preparation of copolymer (iii) is described, for example, in Harrison, et al., U.S. Patent No. 6,451,920.

In process step (a) above, any unreacted olefin, generally the more hindered olefins, i.e., the beta-vinylidene, that do not react readily with the monoethylenically 20 unsaturated C₃-C₂₈ monocarboxylic acid or ester thereof, or C₄-C₂₈ dicarboxylic acid or an anhydride or ester thereof, under free radical conditions, are reacted with monoethylenically unsaturated C₃-C₂₈ monocarboxylic acid or ester thereof, or C₄-C₂₈ dicarboxylic acid or an anhydride or ester thereof, under thermal conditions, i.e., at temperatures of from about 180°C to about 280°C. These conditions are similar to 25 those used for preparing thermal process PIBSA. Optionally, this reaction takes place in the presence of a strong acid, such as sulfonic acid. See for example U.S. Patent No. 6,156,850.

Optionally, a solvent may be used to dissolve the reactants. The reaction solvent must 30 be one which dissolves both the acidic reactant and the high molecular weight olefin. It is necessary to dissolve the acidic reactant and high molecular weight olefin so as to

bring them into intimate contact in the solution polymerization reaction. It has been found that the solvent must also be one in which the resultant copolymers are soluble.

Suitable solvents include liquid saturated or aromatic hydrocarbons having from about 5 6 to about 20 carbon atoms; ketones having from about 3 to about 5 carbon atoms; and liquid saturated aliphatic dihalogenated hydrocarbons having from about 1 to about 5 carbon atoms per molecule, preferably from about 1 to about 3 carbon atoms per molecule. By "liquid" is meant liquid under the conditions of polymerization. In the dihalogenated hydrocarbons, the halogens are preferably on adjacent carbon 10 atoms. By "halogen" is meant F, Cl and Br. The amount of solvent must be such that it can dissolve the acidic reactant and high molecular weight olefin in addition to the resulting copolymers. The volume ratio of solvent to high molecular weight olefin is suitably between 1:1 and 100:1 and is preferably between 1.5:1 and 4:1.

15 Suitable solvents include the ketones having from about 3 to about 6 carbon atoms and the saturated dichlorinated hydrocarbons having from about 1 to about 5, more preferably from about 1 to about 3, carbon atoms.

Examples of suitable solvents include, but are not limited to:

20

1. ketones, such as: acetone; methylethylketone; diethylketone; and methylisobutylketone;

2. aromatic hydrocarbons, such as: benzene; xylene; and toluene;

25

3. saturated dihalogenated hydrocarbons, such as: dichloromethane; dibromomethane; 1-bromo-2-chloroethane; 1,1-dibromoethane; 1,1-dichloroethane; 1,2-dichloroethane; 1,3-dibromopropane; 1,2-dibromopropane; 1,2-dibromo-2-methylpropane; 1,2-dichloropropane; 1,1-dichloropropane; 1,3-dichloropropane; 1-bromo-2-chloropropane; 1,2- 30 dichlorobutane; 1,5-dibromopentane; and 1,5-dichloropentane; or

4. mixtures of the above, such as: benzenemethylethylketone.

The copolymer is conveniently separated from solvent and any unreacted acidic reactant by conventional procedures such as phase separation, solvent distillation, precipitation and the like. If desired, dispersing agents and/or co-solvents may be used
5 during the reaction.

The polyisobutenyl succinic anhydride (PIBSA), which may be directly added to copolymer reactant (i) or (ii), is generally prepared by a number of well-known processes including the method disclosed within. For example, there is a well-known
10 thermal process (see, e.g., U.S. Patent No. 3,361,673), an equally well-known chlorination process (see, e.g., U.S. Patent No. 3,172,892), a combination of the thermal and chlorination processes (see, e.g., U.S. Patent No. 3,912,764), catalytic strong acid processes (see, e.g., U.S. Patent Nos. 3,819,660 and 6,156,850), and free radical processes (see, e.g., U.S. Patent Nos. 5,286,799 and 5,319,030). Such
15 compositions include one-to-one monomeric adducts (see, e.g., U.S. Patent Nos. 3,219,666 and 3,381,022), as well as high succinic ratio products, adducts having alkenyl-derived substituents adducted with at least 1.3 succinic groups per alkenyl-derived substituent (see, e.g., U.S. Patent No. 4,234,435).

20 Polyalkylene succinic anhydrides also can be produced thermally also from high methylvinylidene polybutene as disclosed in U.S. Patent No. 4,152,499. This process is further discussed in U.S. Patent No. 5,241,003 for the case where the succinic ratio is less than 1.3 and in EP 0 355 895 for the case where the succinic ratio is greater than 1.3. European Applications EP 0 602 863 and EP 0 587 381, and U.S. Patent No.
25 5,523,417 disclose a procedure for washing out the polymaleic anhydride resin from polyalkylene succinic anhydride prepared from high methylvinylidene polybutene. A polyalkylene succinic anhydride with a succinic ratio of 1.0 is disclosed. One advantage of polyalkylene succinic anhydride from high methylvinylidene polybutene is that it can be prepared essentially free of chlorine. U.S. Patent No. 4,234,435
30 teaches a preferred polyalkene-derived substituent group with a number average (M_n) in the range of from about 1500 to about 3200. For polybutenes, an especially preferred number average (M_n) range is from about 1700 to about 2400. This patent also teaches that the succinimides must have a succinic ratio of at least 1.3. That is,

there should be at least 1.3 succinic groups per equivalent weight of polyalkene-derived substituent group. Most preferably, the succinic ratio should be from 1.5 to 2.5.

- 5 Other suitable alkenyl succinic anhydrides includes those described in U.S. Patent No. 6,030,930. Typical alkenyl used in the preparation are ethylene and 1-butene copolymers.

(B) The Ether Compounds

10


In one embodiment of the present invention, the copolymer may further be reacted with an ether compound capable of linking two succinimide groups. Suitable ether compounds include, but are not limited to, the following:

15

Polyether Polyamines

Examples of suitable polyetheramines include compounds having the following structure:

20

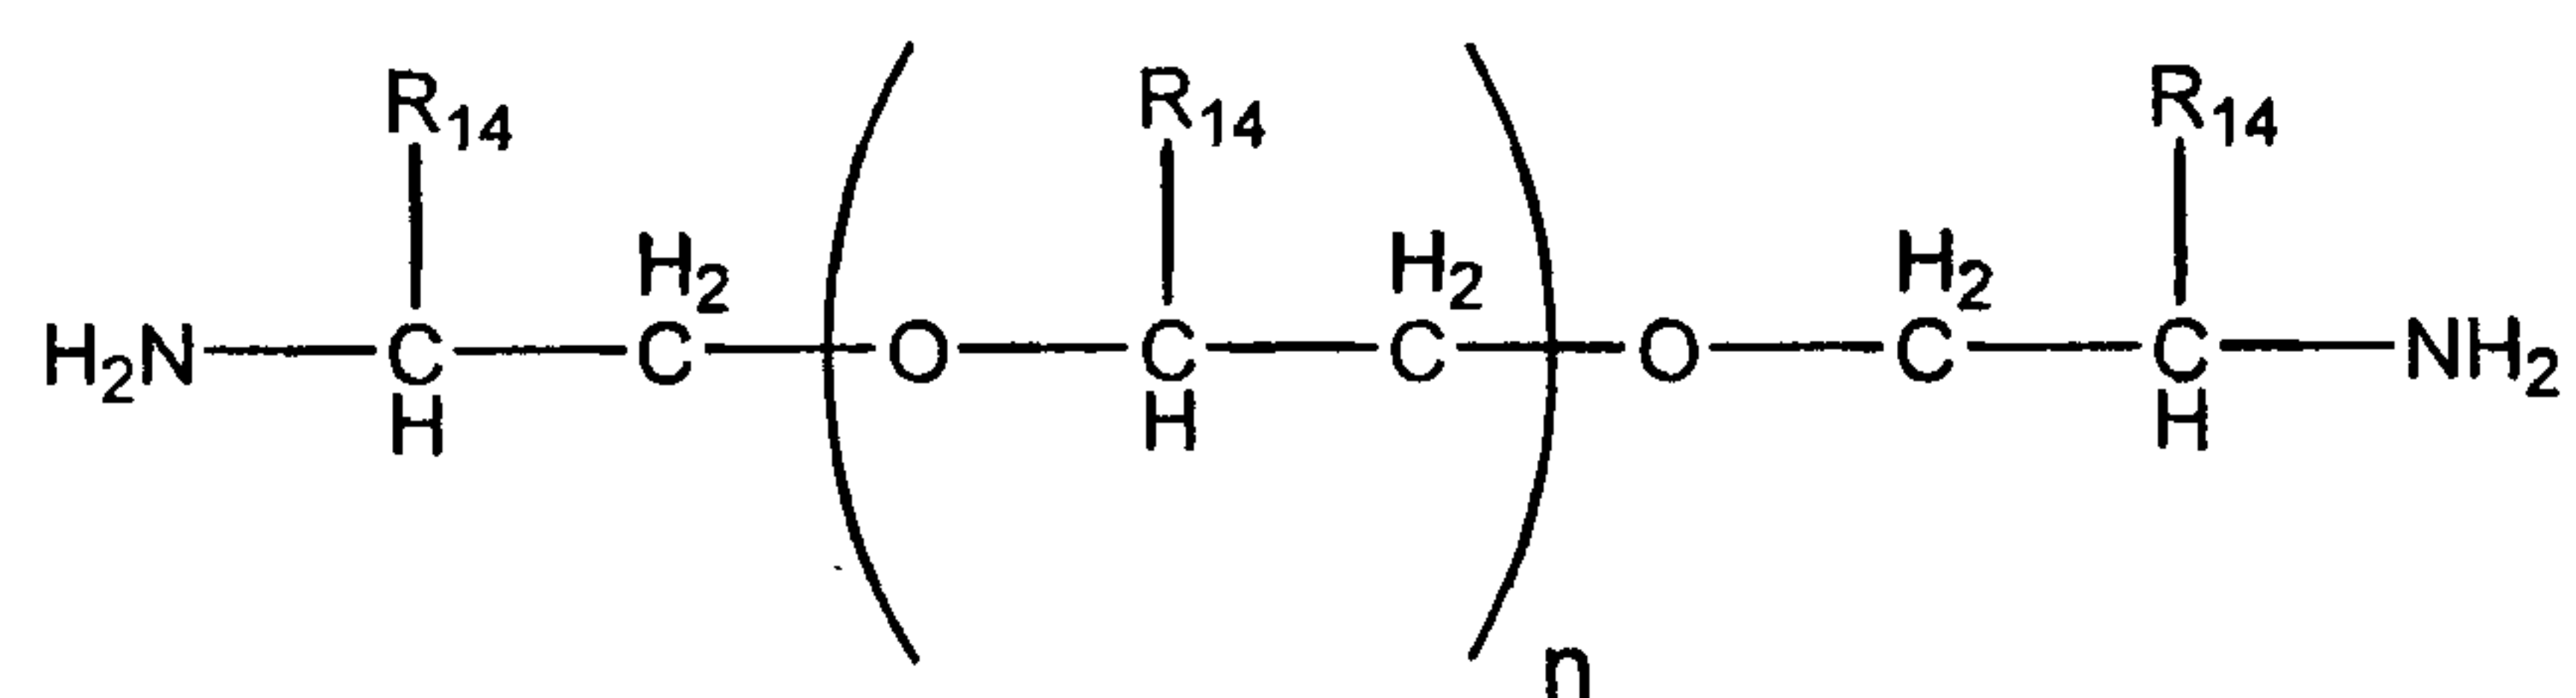


wherein R_{14} is independently hydrogen or a hydrocarbyl group having from about 1 to about 4 carbons, and n is the degree of polymerization. Generally the polyether polyamines suitable for use in the present invention will contain at least about one ether unit, preferably from about 5 to about 100, more preferably from about 10 to about 50, and even more preferably from about 15 to about 25 ether units.

The polyether polyamines can be based on polymers derived from C₂-C₆ epoxides such as ethylene oxide, propylene oxide, and butylene oxide. Examples of polyether polyamines are sold under the Jeffamine® brand and are commercially available from Hunstman Corporation located in Houston, Texas.

5

Other examples of suitable polyetheramines include polyoxytetramethylene polyamine compounds having the following structure:

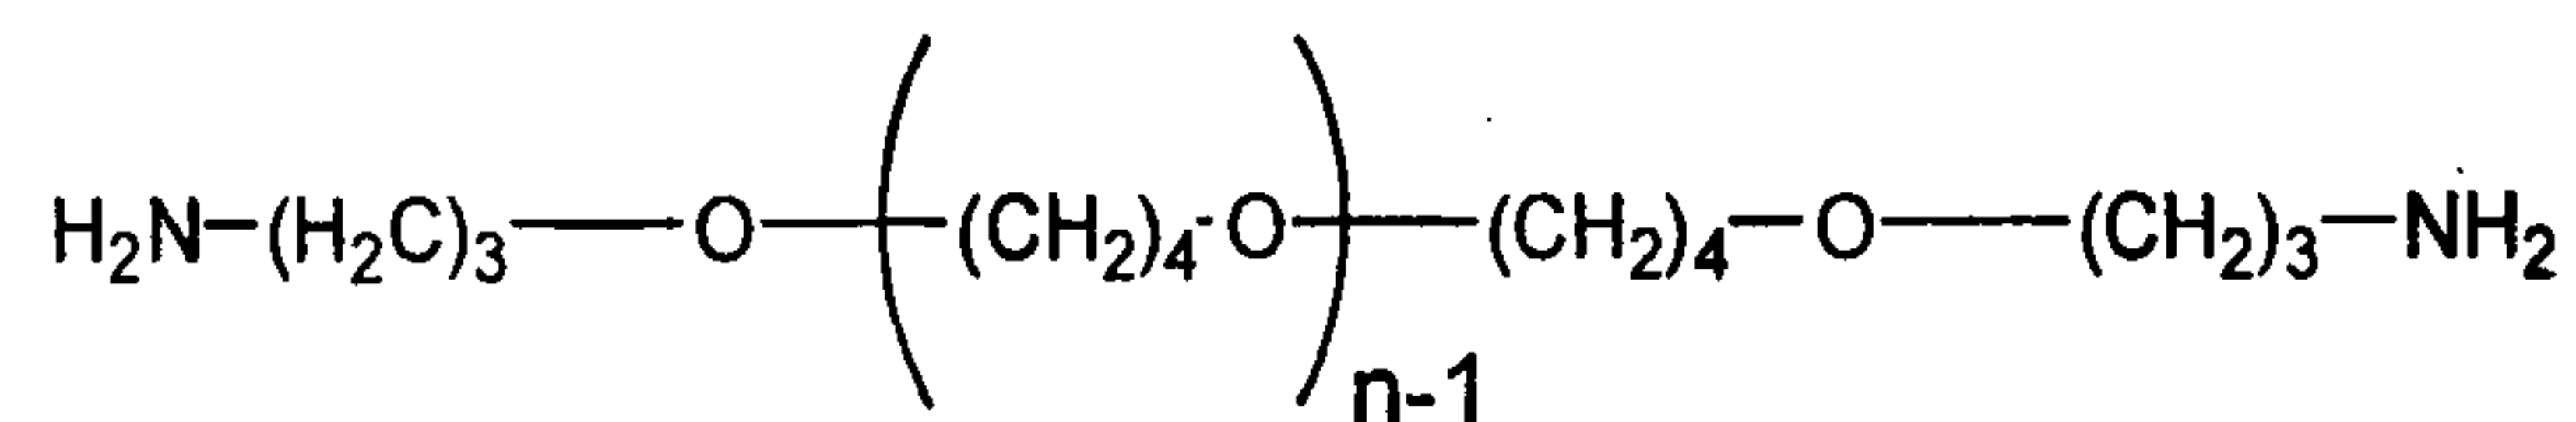

10

wherein n is the degree of polymerization (i.e., number of monomer ether units).


Polyether Amine Derivatives

15 Furthermore, the copolymer reactant may be reacted with a polyether amino alcohol or amino thiol.

Polyether Amino Alcohol


20 Typically, amino alcohols may be formed when the alcohol end groups of a compound are not completely converted to amines during reactions, such as reductive amination. Also, one may initiate a polymer chain (i.e. grow propylene or ethylene oxide) from an amino group and therefore have an amino on one end of the polymer chain (i.e. initiator) and an alcohol terminus, or an amine internally in the molecule
25 with alcohol termini.

Examples of suitable polyetheramino alcohols include compounds having the following structure:

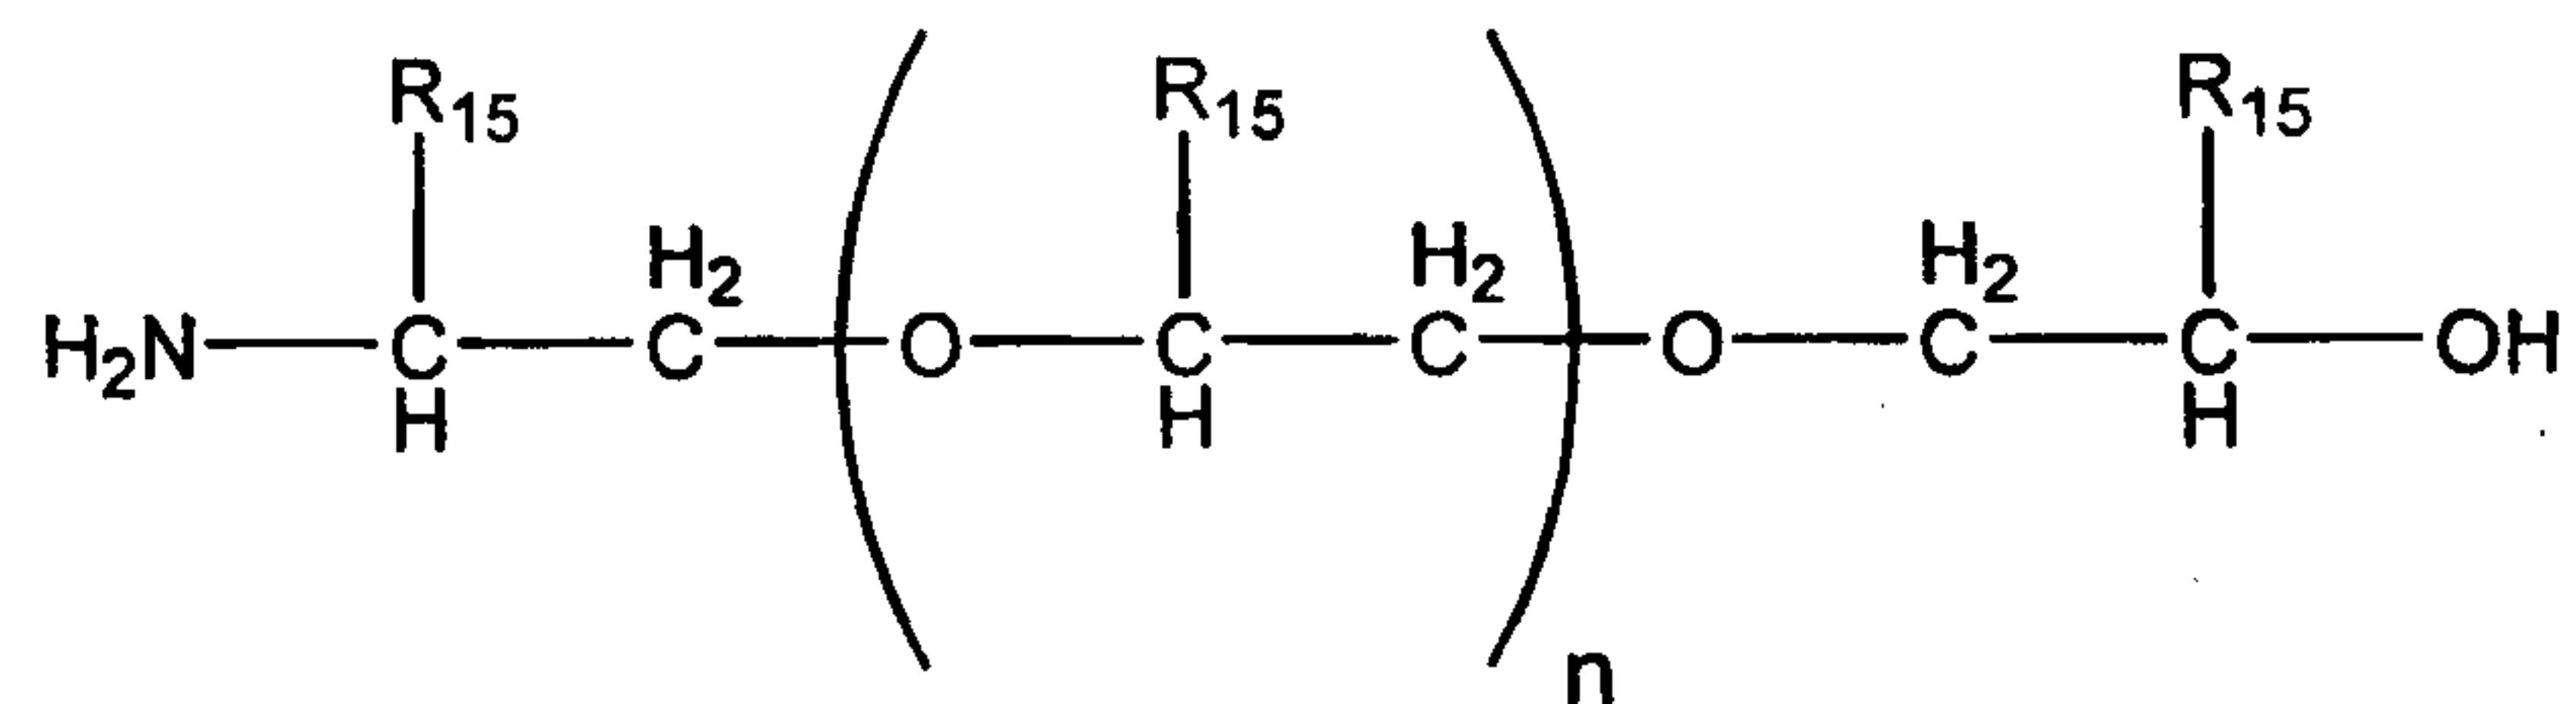

wherein R_{15} is independently a hydrogen or hydrocarbyl group, having about 1 to about 4 carbons, and n is the degree of polymerization. Generally, the polyether amino alcohols, suitable for use in the present invention will contain at least about one ether unit, preferably from about 5 to about 100, more preferably from about 10 to about 50, and even more preferably from about 15 to about 25 ether units.


Other examples of suitable polyetheramino alcohols include polyoxytetramethyleneamino alcohol compounds having the following structure:

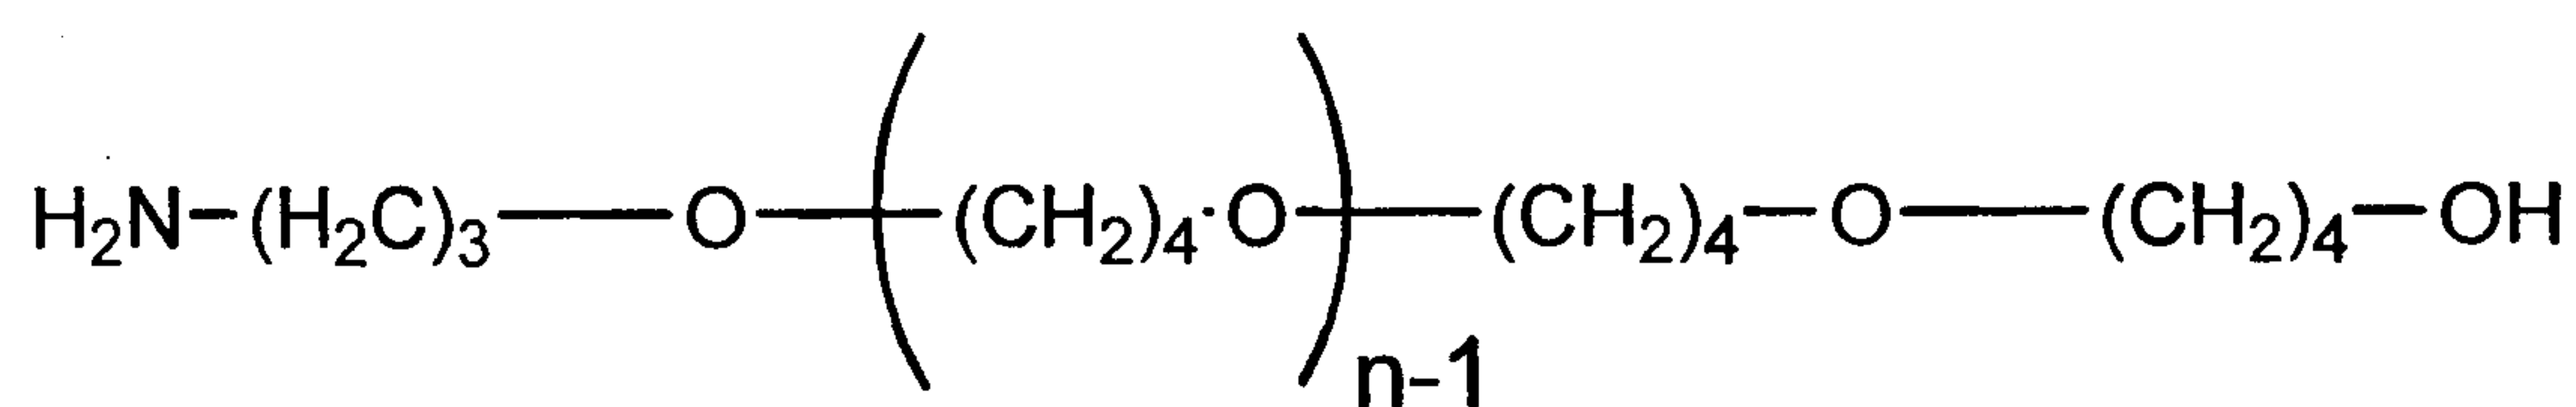

wherein n is the degree of polymerization.

Polyether Amino Thiol


Examples of suitable polyetheramino thiols include compounds having the following structure:

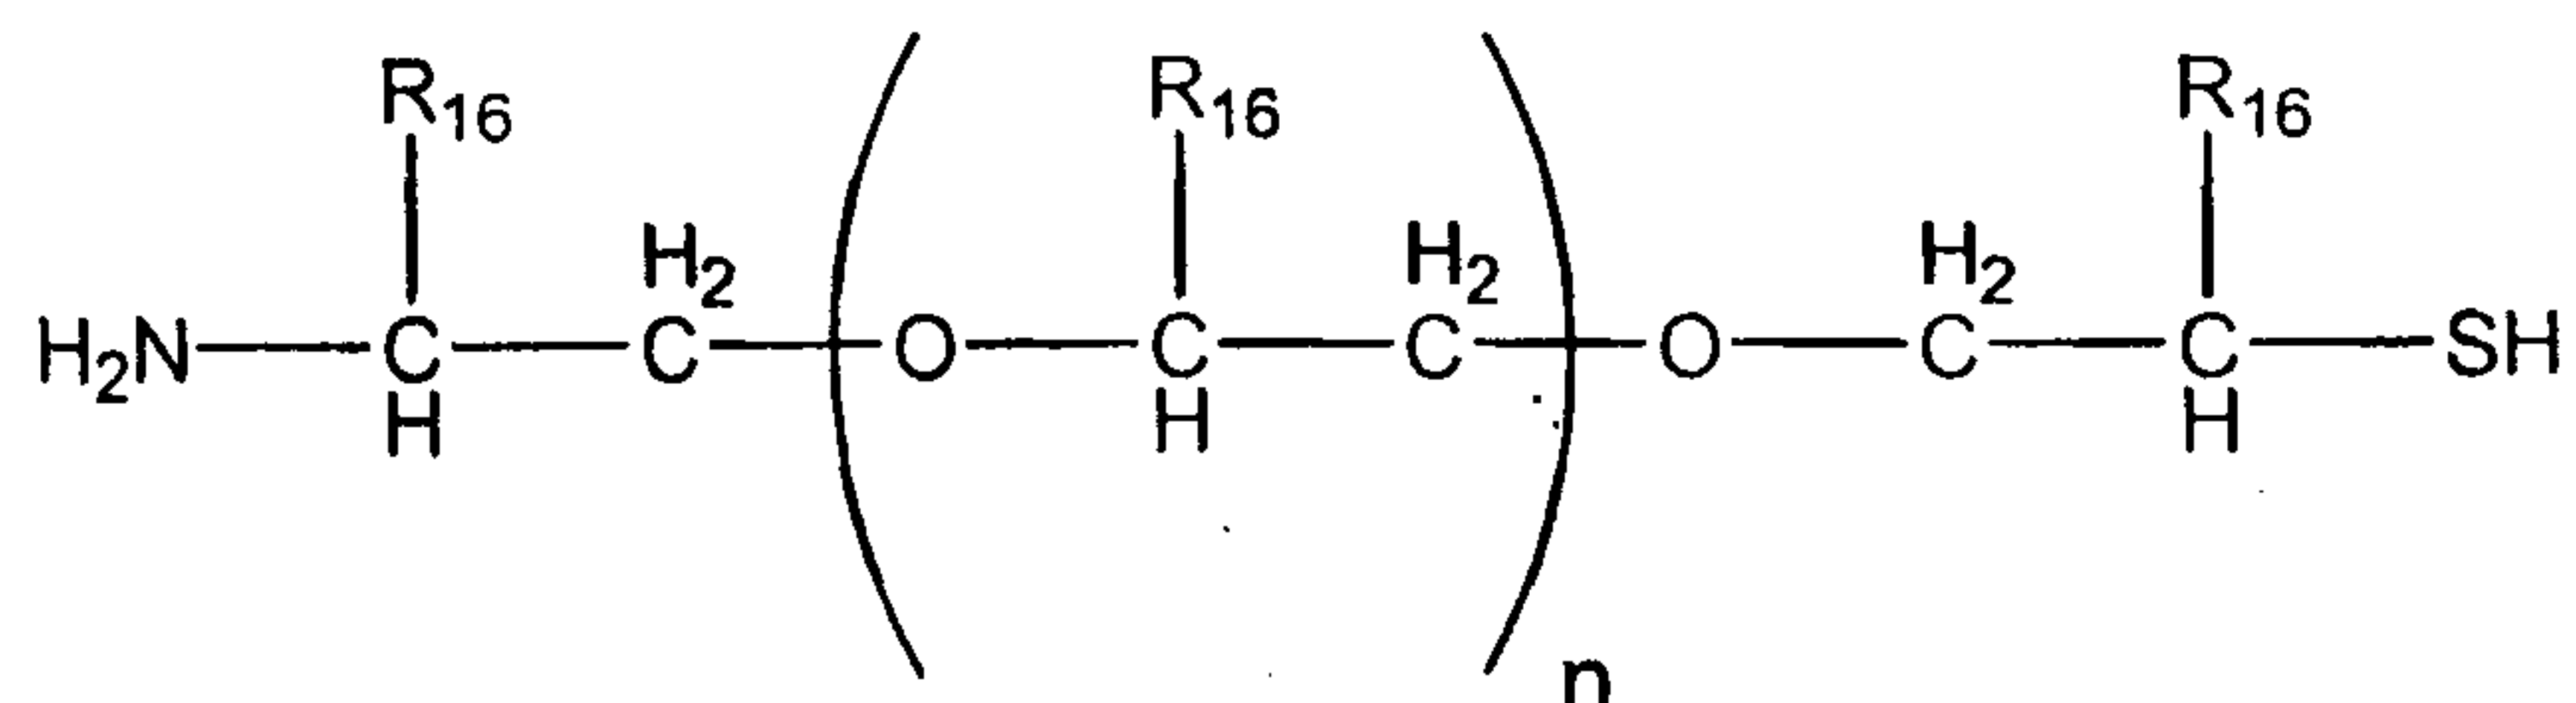

wherein R_{16} is independently a hydrogen or hydrocarbyl group, having from about 1 to about 4 carbons and n is the degree of polymerization.

Other examples of suitable polyetheramino thiols include

5 polyoxytetramethyleneamino thiol having the following structure:

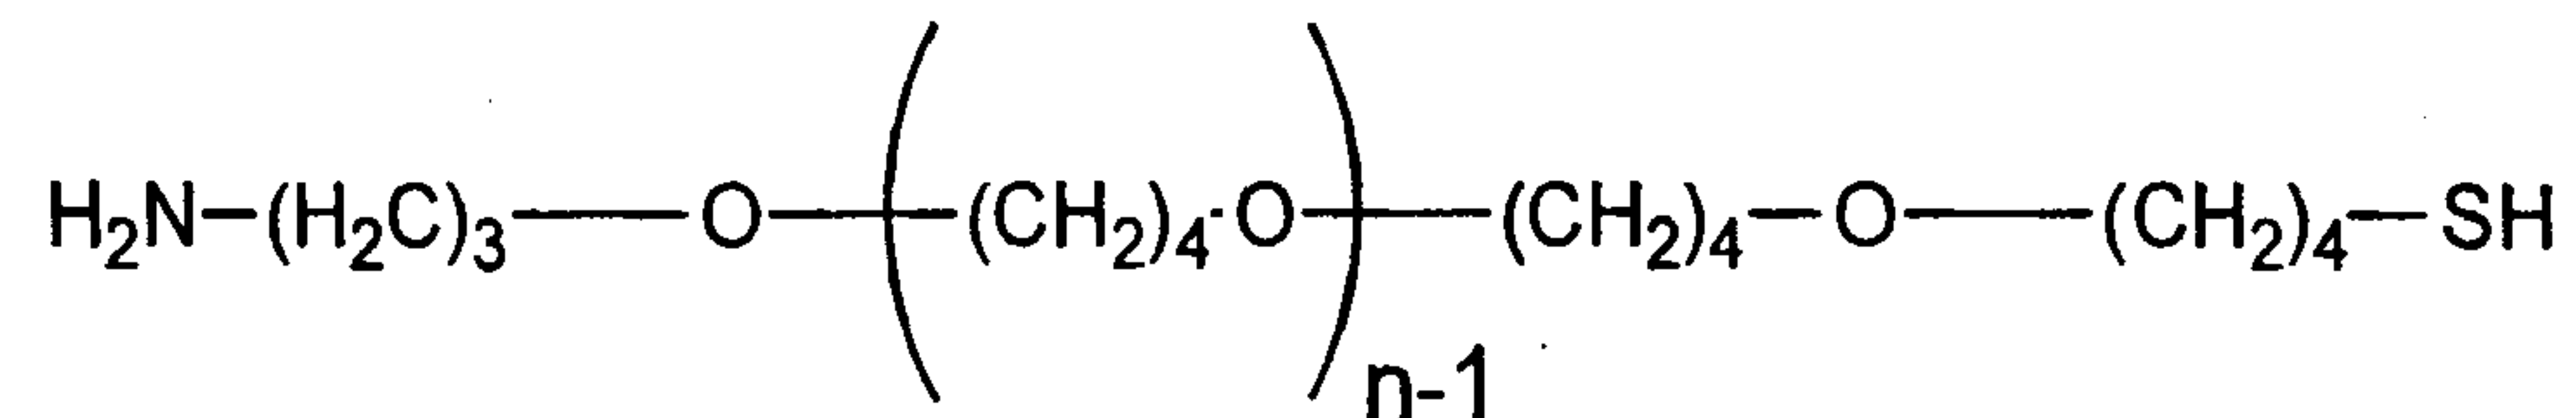

wherein n is the degree of polymerization.

10

Generally, the polyetheramino thiols suitable for use in the present invention will contain at least about one ether unit, preferably from about 5 to about 100, more preferably from about 10 to about 50, and even more preferably from about 15 to about 25 ether units.

15

Ether Polyamines

Ether Diamines


20 In yet another embodiment of the present invention, the copolymer may be reacted with ether diamines. Suitable diamines are reacted with the copolymer, such as decyloxypropyl-1,3-diaminopropane, isodecyloxypropyl-1,3-diaminopropane, isododecyloxypropyl-1,3-diaminopropane, dodecyl/tetradecyloxypropyl-1,3-diaminopropane,
25 isotridecyloxypropyl-1,3-diaminopropane, tetradecyloxypropyl-1,3-diaminopropane.

Ether Triamines

In yet another embodiment of the present invention, the copolymer may be reacted
30 with ether triamines. Suitable triamines include the following:

5


(i)

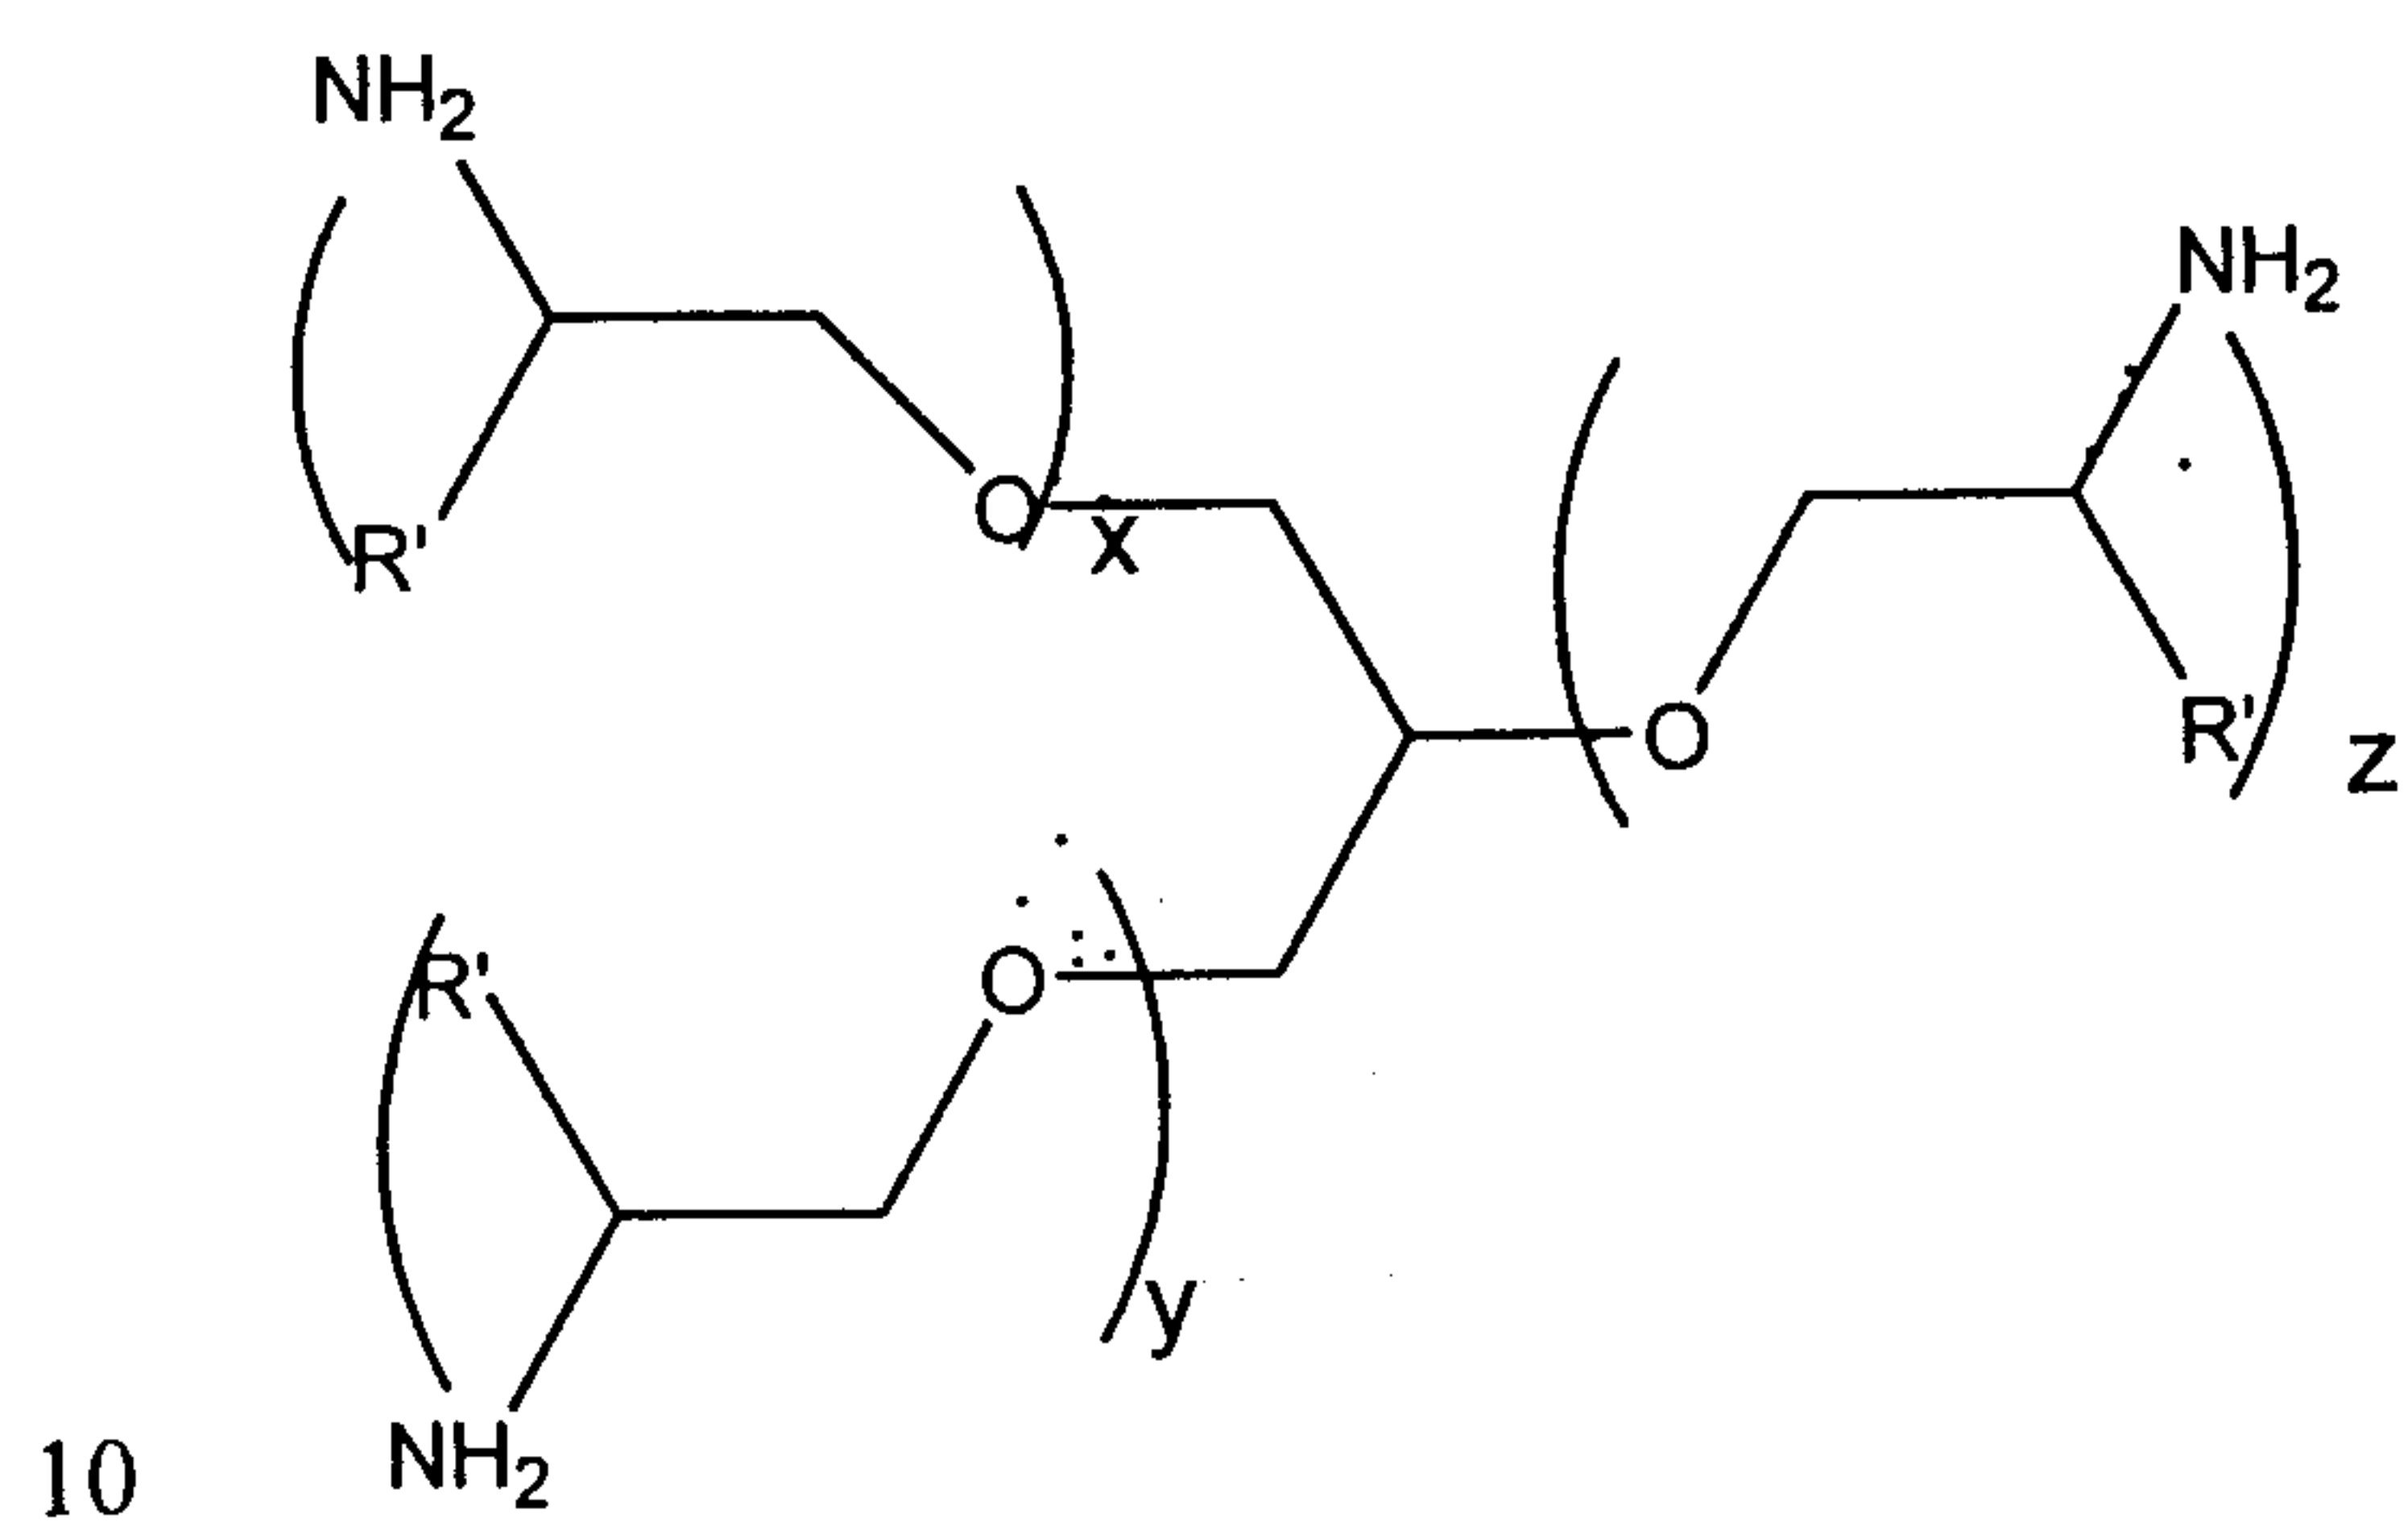

Wherein R' is C₁-C₆;
wherein x+y+z = 1-85.

15

(ii)

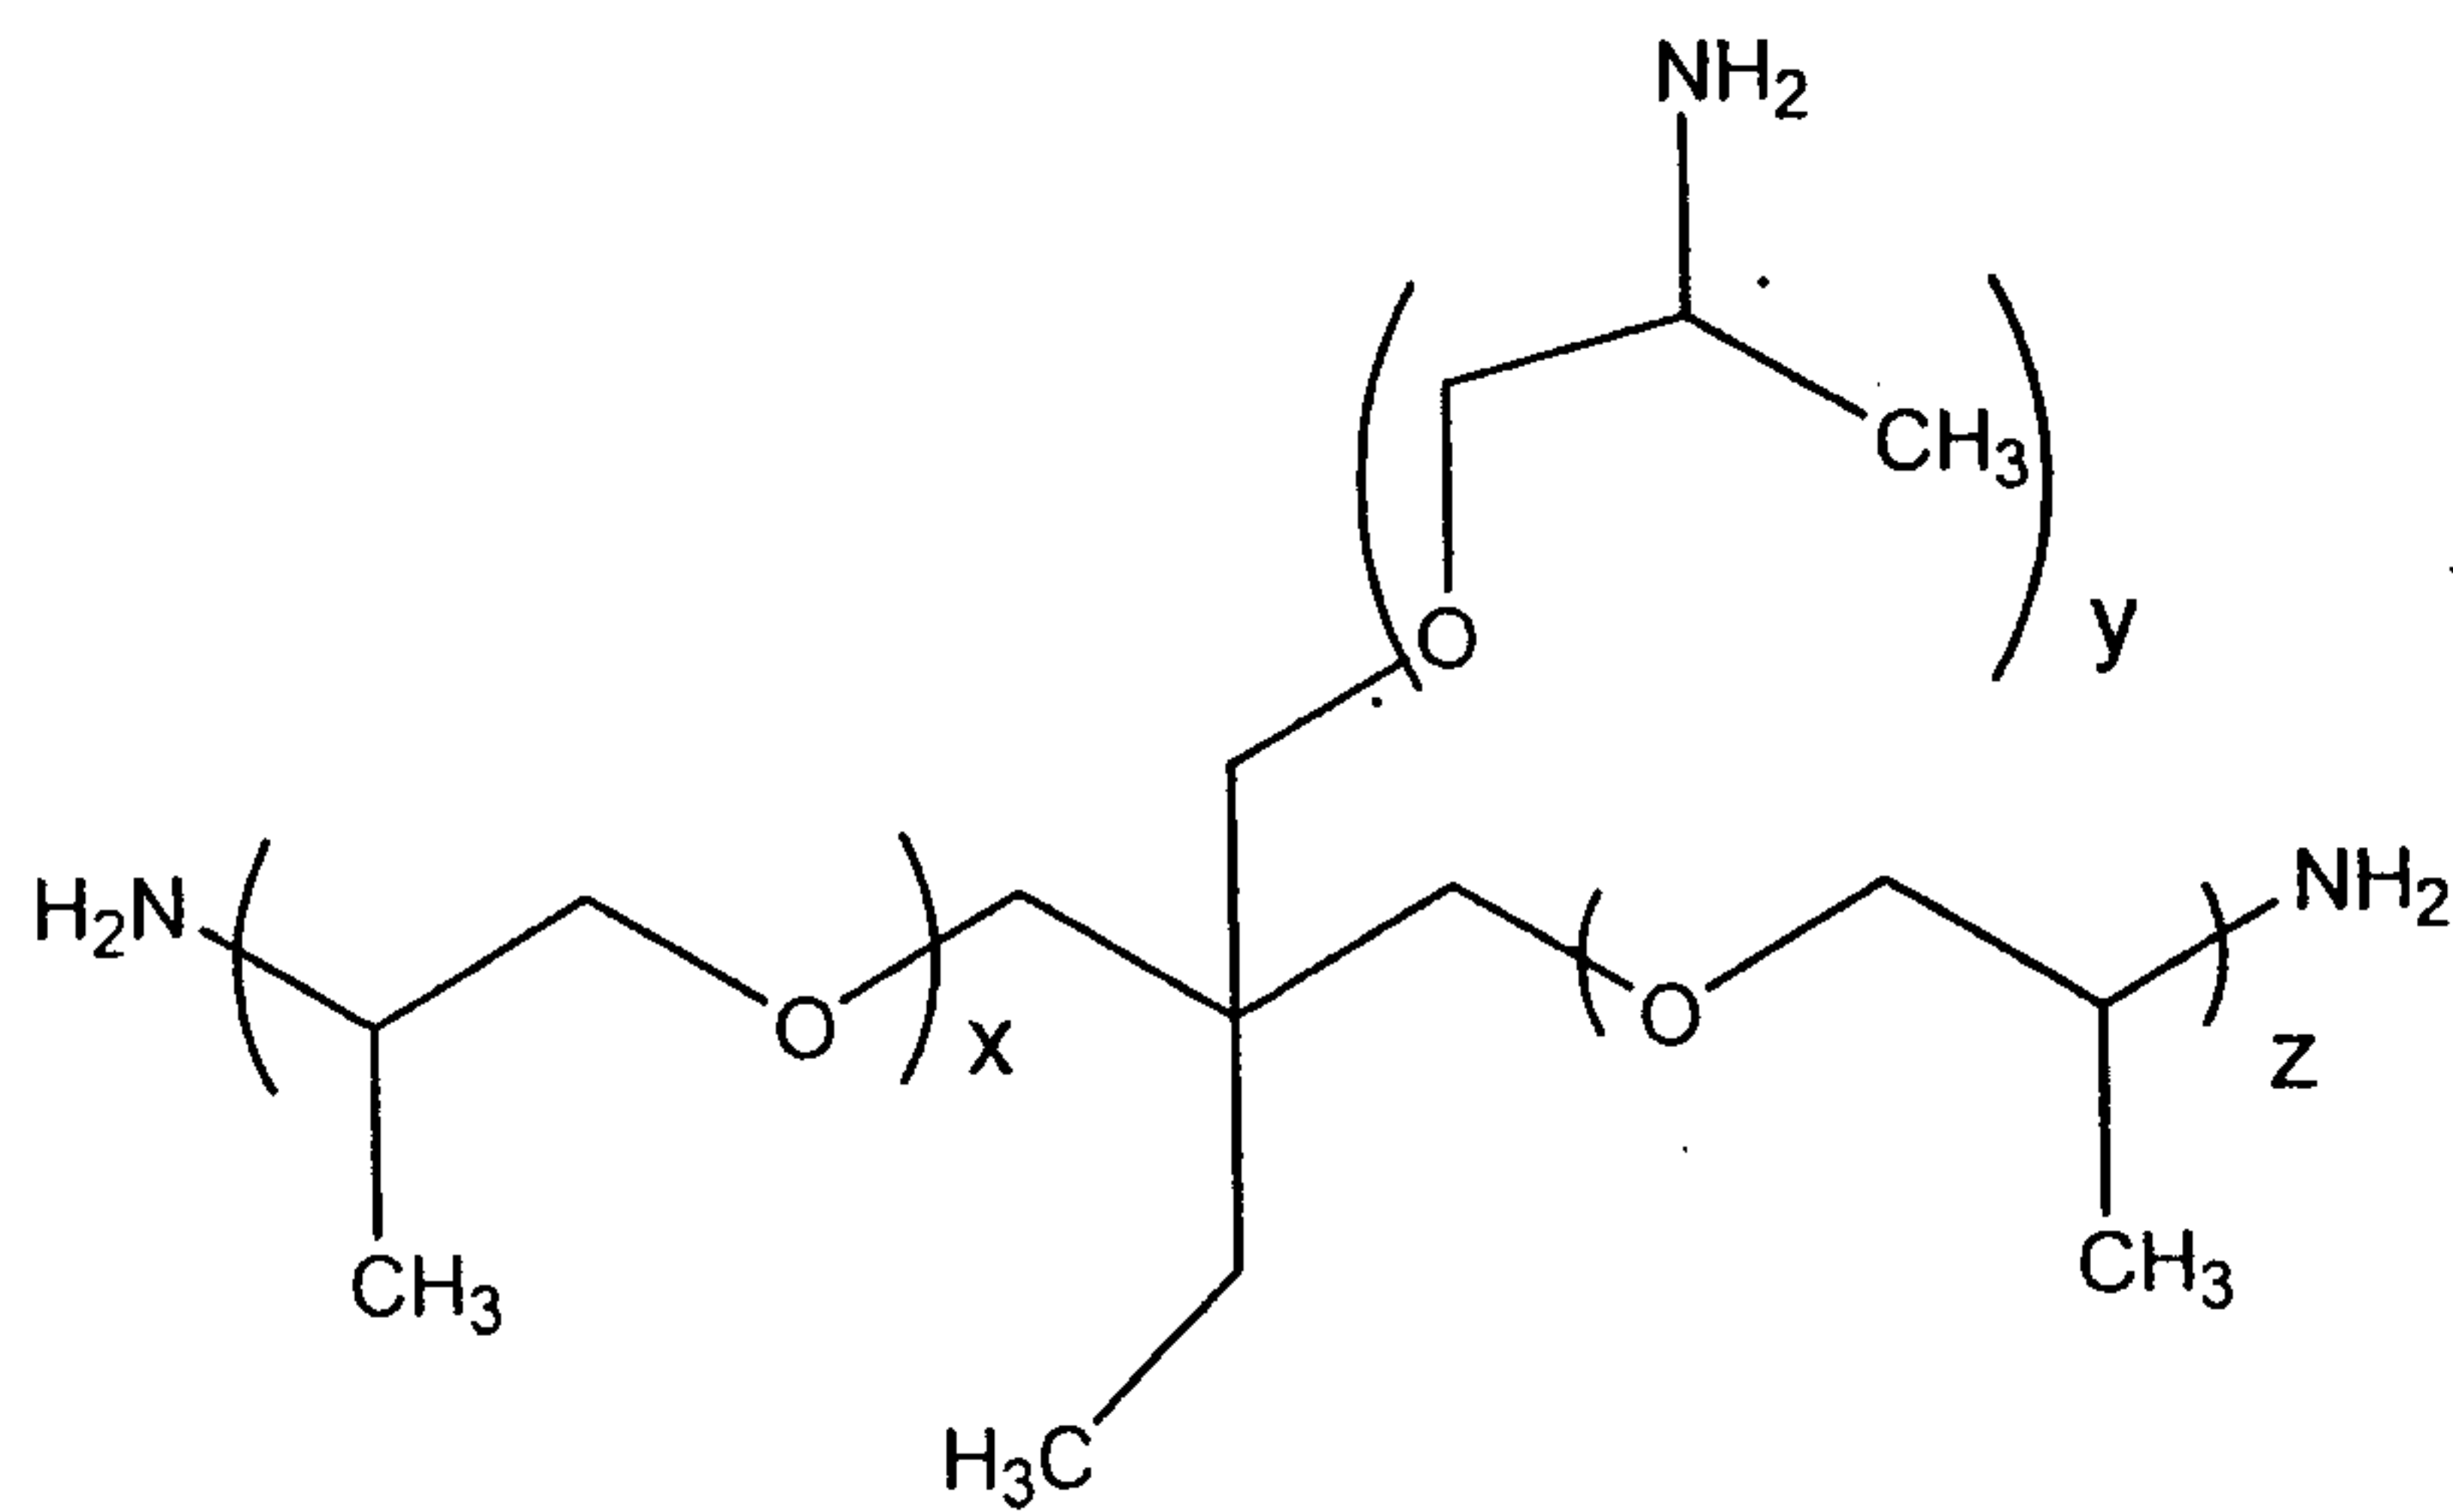


wherein $x+y+z = \text{approx. } 5-6$;

Triamines of this type may be purchased from Huntsman Petrochemical Corporation,
5 Woodlands, Texas.

Polyether Polyol


In yet another embodiment of the present invention, the copolymer may be reacted
10 with a polyether containing at least two hydroxyl end groups to form an ester. The polyether polyols have the following structure:

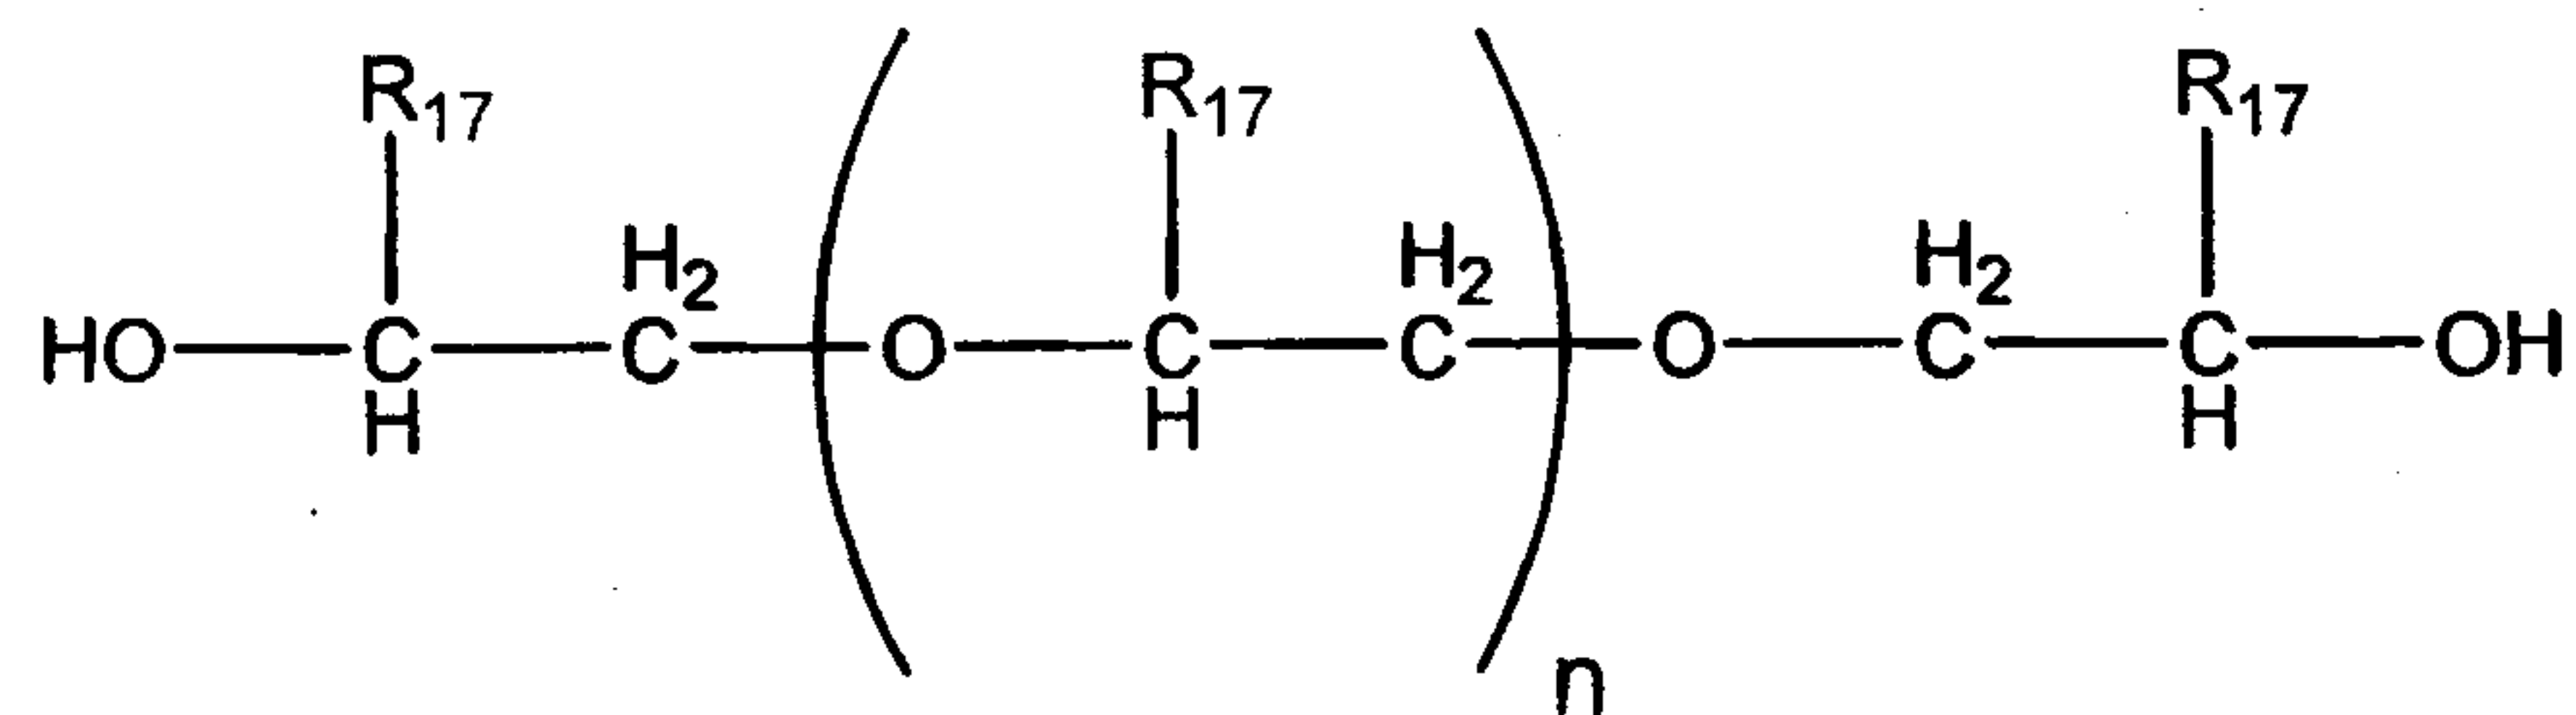

15

wherein R_{17} is independently a hydrogen or hydrocarbyl group, having from about 1 to about 4 carbons, and n is the degree of polymerization.

Other examples of suitable polyether polyols include polyoxytetramethylene polyol
20 compounds, such as those referred to as Terathane® which may be purchased from DuPont Corporation, Wilmington, Delaware, having the following structure:

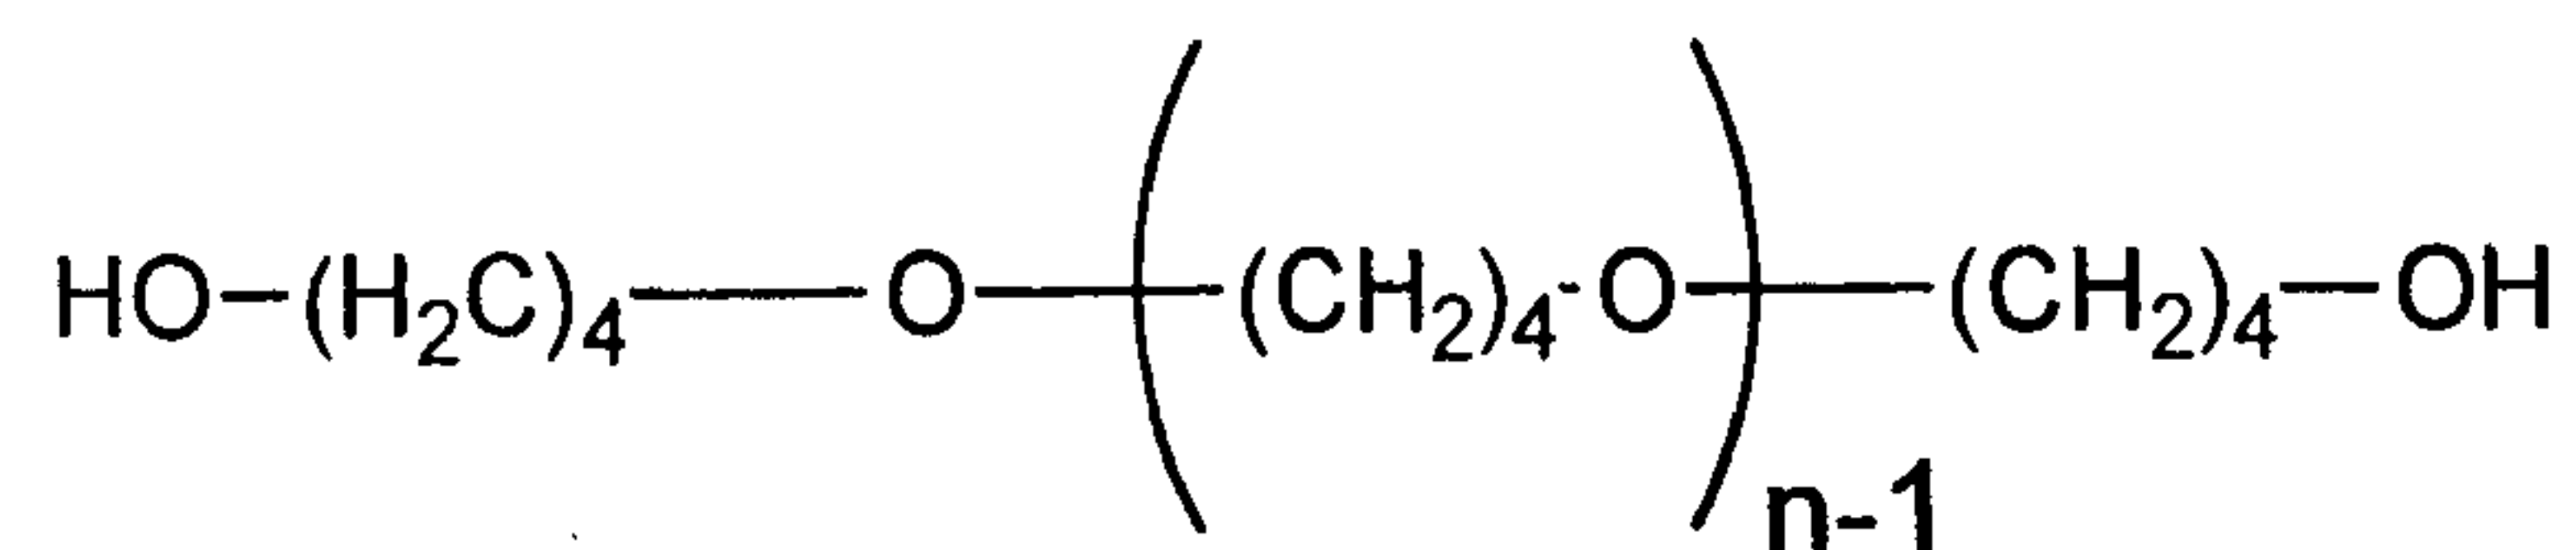

25 wherein n is the degree of polymerization.

Suitable polyether polyols include, but are not limited to, the following:

polyoxyethylene glycol, polyoxypropylene glycol, polyoxybutylene glycol, and polyoxytetramethylene glycol.

5 The number average molecular weight of the presently employed polyether polyol will generally range from about 150 to about 5000, preferably from about 500 to about 2000.

10 Generally, the polyether compounds suitable for use in the present invention will contain at least one ether unit preferably from about 5 to about 100, more preferably from about 10 to about 50, and even more preferred from about 15 to about 25 ether units.

Generally, the polyether compounds suitable for use in the present invention may be derived from only one ether type or a mixture of ether types, such as
 15 poly(oxyethylene-co-oxypropylene) diamine. The mixture of ether units may be block, random, or alternating copolymers. The presently employed ether compounds are capable of reacting with at least two carboxylic acid groups or anhydride derivatives thereof.

20 Generally, the copolymer may be reacted with a mixture of polyether polyamines, polyether amino alcohols, polyether amino thiols, polyether polyols, or ether diamines to form a mixture of imides, amides and esters.

(C) Aliphatic Compound

25

In addition to the ether compound (i.e. polyether polyamine, polyether polyamine derivative, polyether polyol, ether diamines and ether triamine) above, the copolymer is also reacted with at least one aliphatic compound capable of reacting with at least one monocarboxylic acid or ester thereof; or dicarboxylic acid, anhydride or ester
 30 thereof. Preferably, the aliphatic compound will contain one or more amino functional groups or one or more hydroxyl functional groups or both.

Amino Aliphatic Compound

In addition to the ether compound (i.e. polyether aromatic compound) above, optionally, the copolymer may also be reacted with at least one aliphatic compound which may be an amino aliphatic compound.

5

The amino aliphatic compound may be selected from the group comprising of (a) aliphatic monoamines, (b) aliphatic diamines, (c) aliphatic polyamines or (d) polyalkylene polyamines. Aliphatic monoamines include methylamine, ethylamine, propylamine and various higher amines. Diamines or polyamines may also be
 10 employed. Preferably, they will have only a single reactive amino group, that is, a primary or secondary, and preferably primary group. Suitable examples of diamines include dimethylaminopropylamine, diethylaminopropylamine, dibutyl aminopropyl amine, dimethylaminoethylamine, diethylaminoethylamine, dibutylaminoethylamine, 1-(2-aminoethyl) piperidine, 1-(2-aminoethyl)pyrrolidone, aminoethylmorpholine,
 15 and aminopropylmorpholine. Preferably, the aliphatic amine having a single reactive amino group is N,N-dimethylaminopropylamine or aminopropylmorpholine.

Additionally, the amino aliphatic compound could be a polyether containing a single amino end group.

20

Preferably, the polyalkylene polyamine has greater than 4 amine nitrogen atoms per mole, up to a maximum of about 12 amine nitrogen atoms per mole. Most preferred are polyamines having from about 5 to about 7 nitrogen atoms per mole. The number of amine nitrogen atoms per mole of polyamine is calculated as follows:

25

$$\text{Number of nitrogen atoms} = \frac{\% \text{ N} \times M_{\text{pa}}}{14 \times 100}$$

Per mole of polyamine

wherein

30

% N=percent nitrogen in polyamine or polyamine mixture

M_{pa} =number average molecular weight of the polyamine or polyamine mixture

Suitable aliphatic polyamines include polyalkylene polyamines. Preferred polyalkylene polyamines also contain from about 4 to about 40 carbon atoms, there

being preferably from 2 to 3 carbon atoms per alkylene unit. The polyamine preferably has a carbon-to-nitrogen ratio of from about 1:1 to about 10:1.

Examples of suitable include the following: tetraethylene pentamine, pentaethylene
 5 hexamine and heavy polyamine, HPA, (available from Dow Chemical Company, Midland, Michigan). Such amines encompass isomers such as branched-chain polyamines and the previously mentioned substituted polyamines, including hydrocarbyl-substituted polyamines.

10 When more than one primary or secondary amino group is present, the reaction conditions and/or stoichiometry should be such that oil solubility is maintained.

Hydroxy Aliphatic Compound

15 In addition to the ether compound (i.e. polyether aromatic compound) above, optionally, the copolymer may also be reacted with at least one aliphatic compound which may be a hydroxy aliphatic compound.

The mono- or multifunctional hydroxyl compounds used according to the process of
 20 the present invention may contain primary, secondary or tertiary alcohols.

Suitable hydroxyl aliphatic compounds include, but are not limited to, ethanol, isopropyl alcohol, isobutyl alcohol, tert-butyl alcohol, glycerol and the like. Additionally, the hydroxyl aliphatic compound could be a polyether containing a
 25 single hydroxyl end group.

The hydroxyl compound may also contain a hetero atom, such as sulfur (e.g., betamercaptoethanol).

30 *Aliphatic Compounds containing both an Amine Function and a Hydroxy Function*

In another embodiment of the present invention, the aliphatic compound may have at least one amine group and at least one hydroxyl group. Examples of such compounds

include, but are not limited to, ethanol amine, diethanol amine, triethanol amine, and the like.

(D) Aromatic Compound

5


In addition to the ether compound (i.e. polyether polyamine, polyether polyamine derivative, polyether polyol, ether diamines and ether triamine) above and the aliphatic compound, the copolymer may also be reacted with at least one aromatic compound.

10

Preferably, the aromatic compound is selected from the following group of aromatic compounds consisting of:

(a) an N-arylphenylenediamine represented by the formula:

15

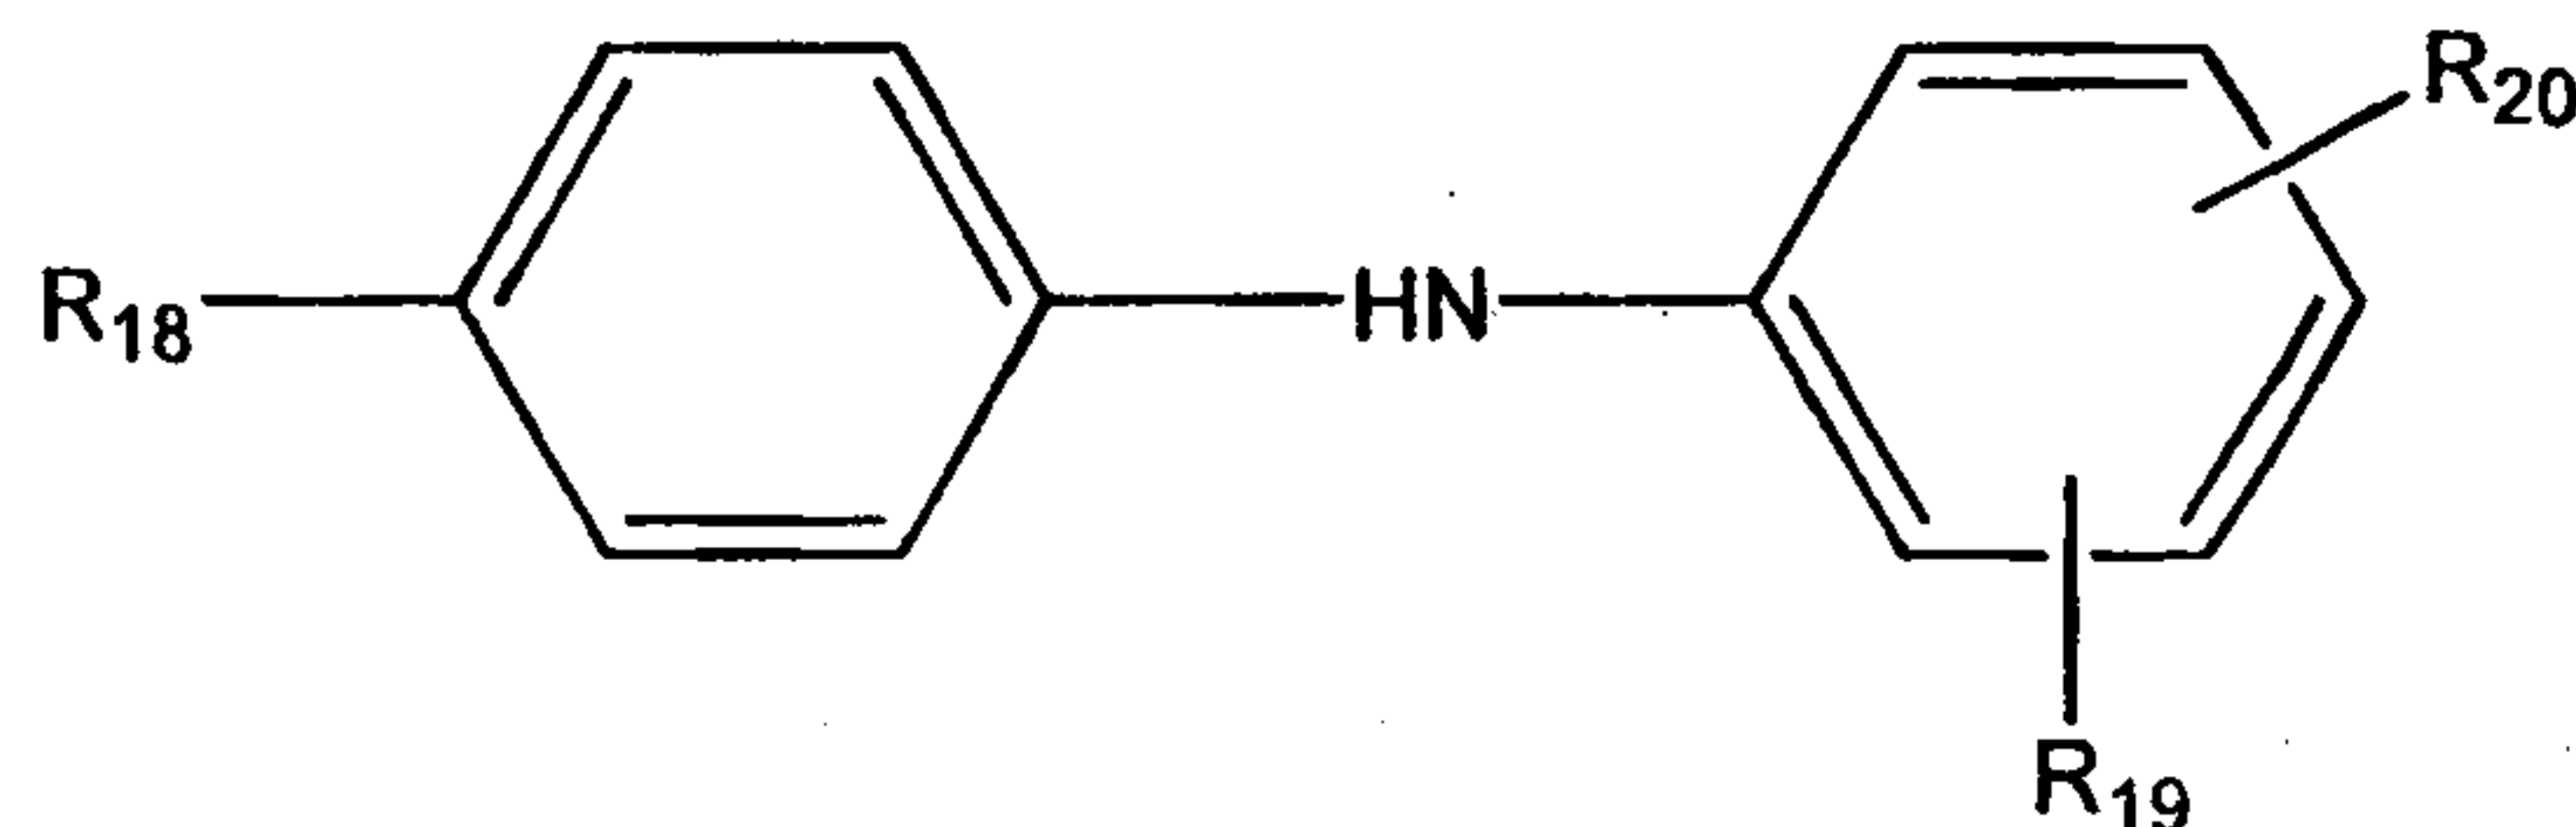

20


R_{18} is H, --NHaryl, --NHalkaryl, or a branched or straight chain hydrocarbyl radical having from about 4 to about 24 carbon atoms selected from alkyl, alkenyl, alkoxyl, aralkyl or alkaryl; R_{19} is --NH₂, --(NH(CH₂)_n)_mNH₂, --NHalkyl, --NHaralkyl, --CH₂--aryl--NH₂, in which n and m each have a value from about 1 to about 10; and R_{20} is hydrogen, alkyl, alkenyl, alkoxyl, aralkyl, or alkaryl, having from about 4 to about 24 carbon atoms.

25

Particularly preferred N-arylphenylenediamines are N-phenylphenylenediamines (NPPDA), for example, N-phenyl-1,4-phenylenediamine, N-phenyl-1,3-phenylenediamine, and N-phenyl-1,2-phenylenediamine and N-naphthyl-1,4-phenylenediamine. Other derivatives of NPPDA may also be included, such as N-propyl-N'-phenylphenylenediamine.


30

- (b) aminocarbazole represented by the formula:

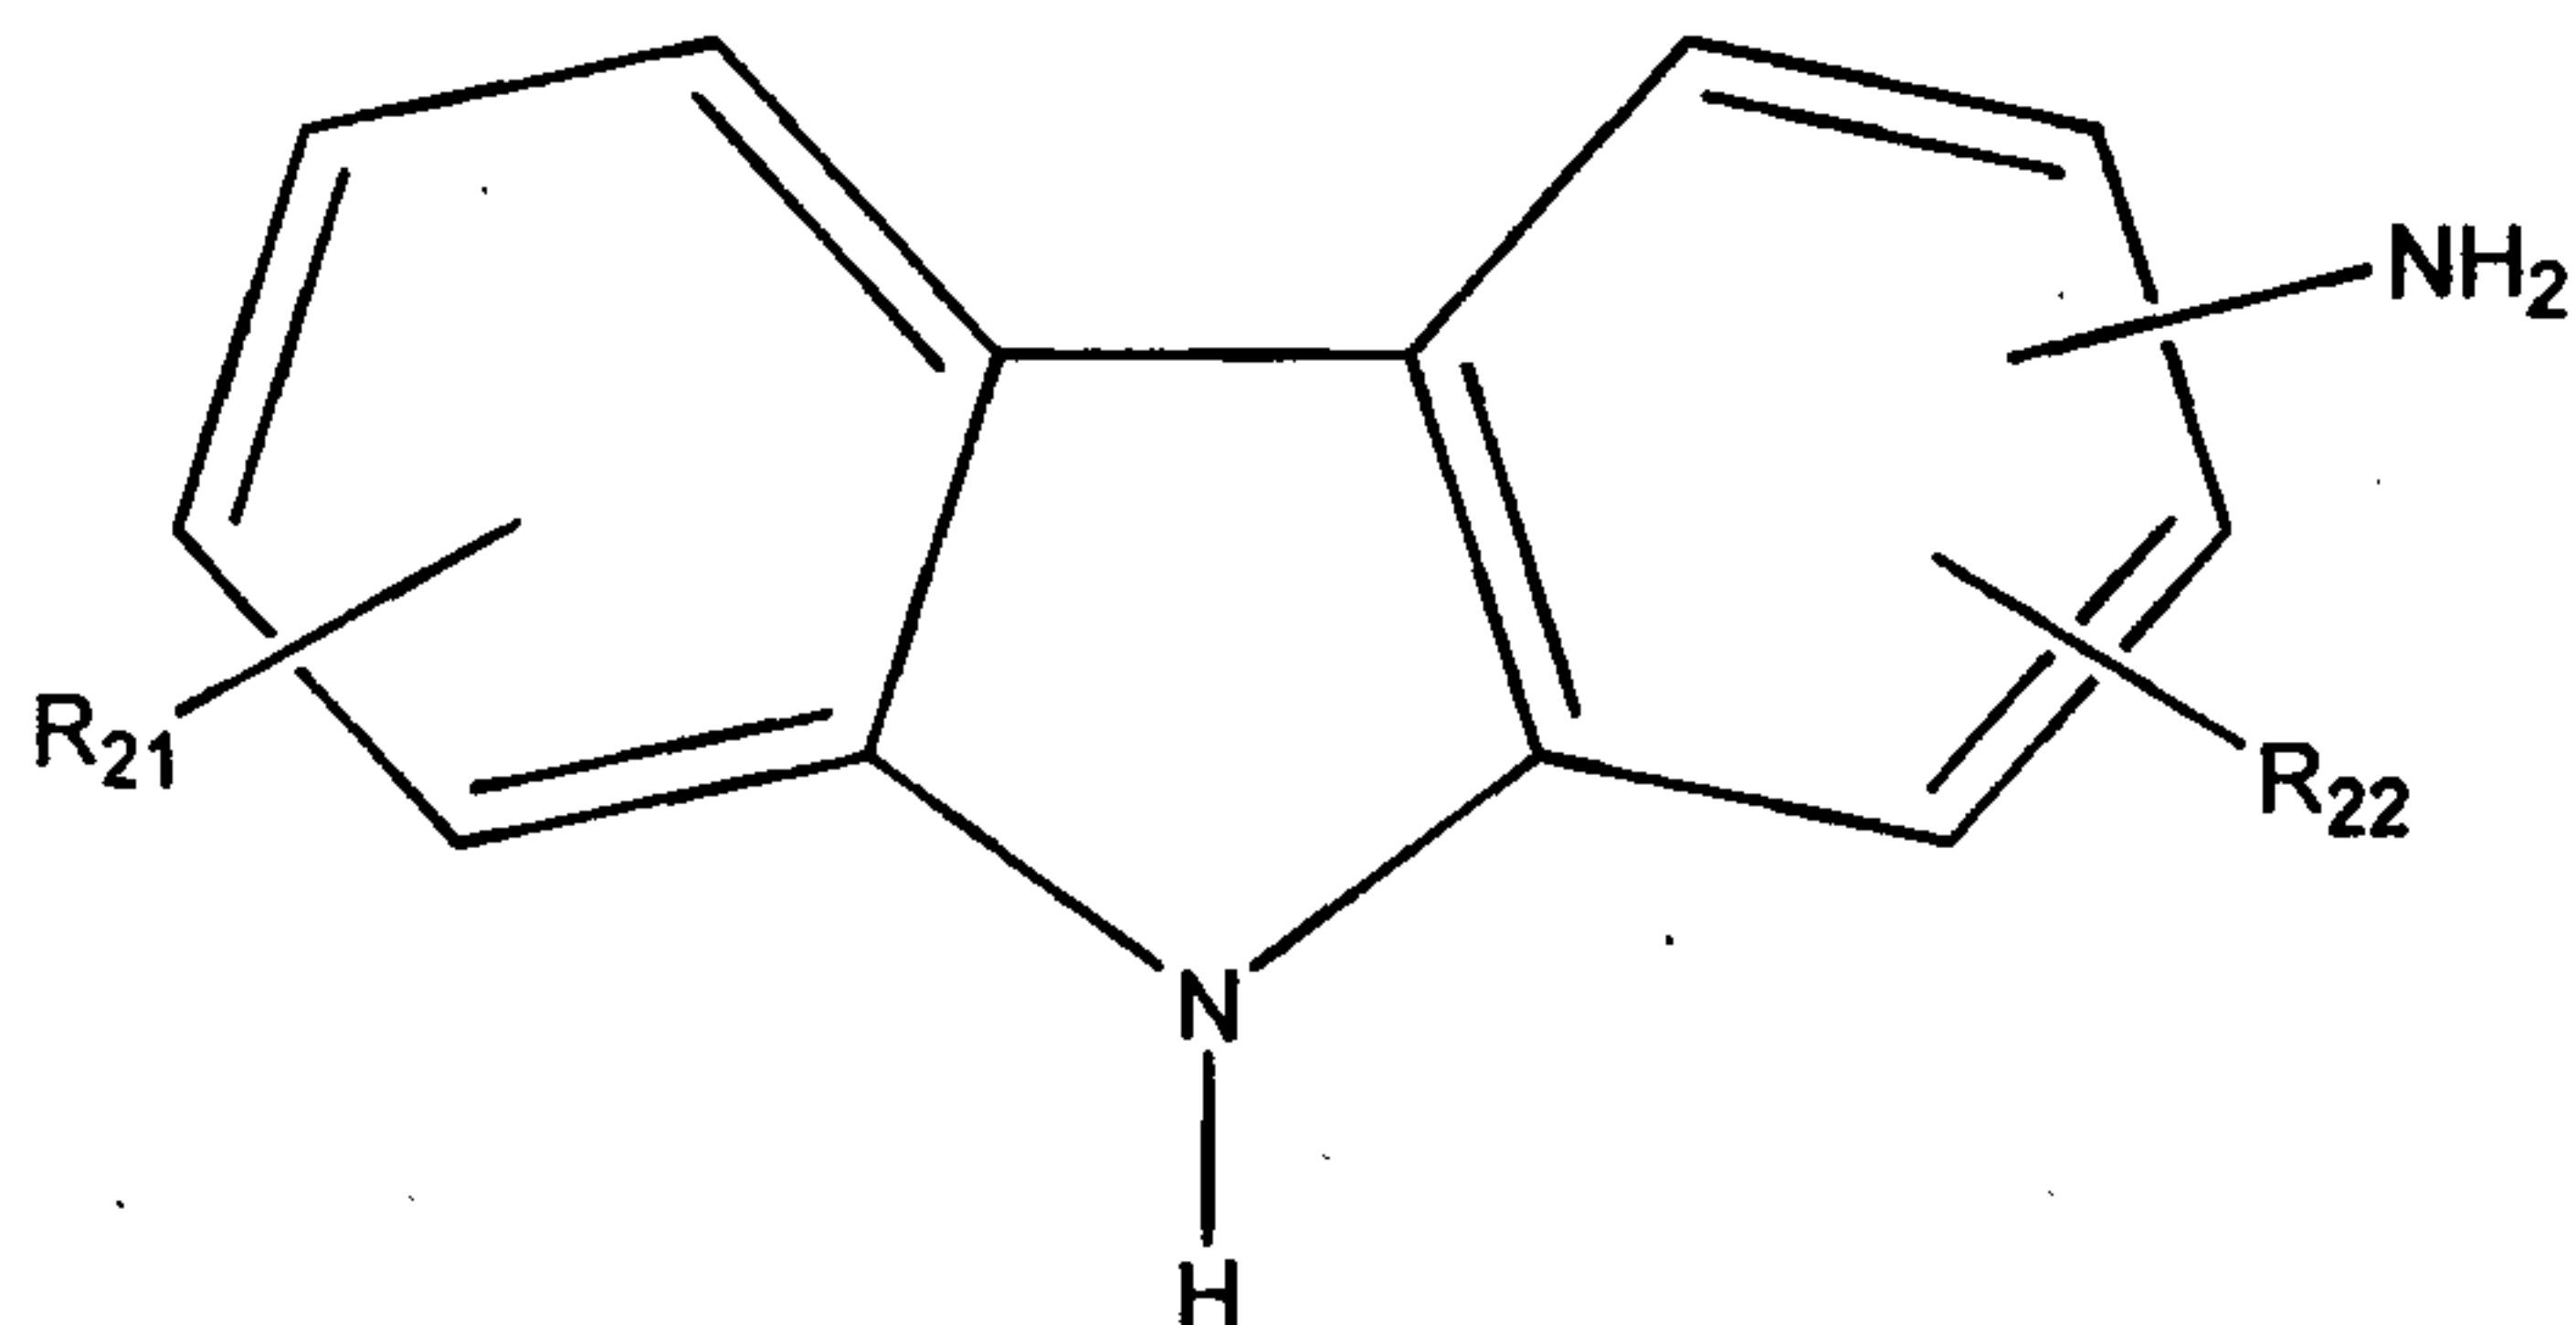

- 5 in which R_{21} and R_{22} each independently represent hydrogen or an alkyl or alkenyl radical having from about 1 to about 14 carbon atoms,


- (c) an amino-indazolinone represented by the formula:

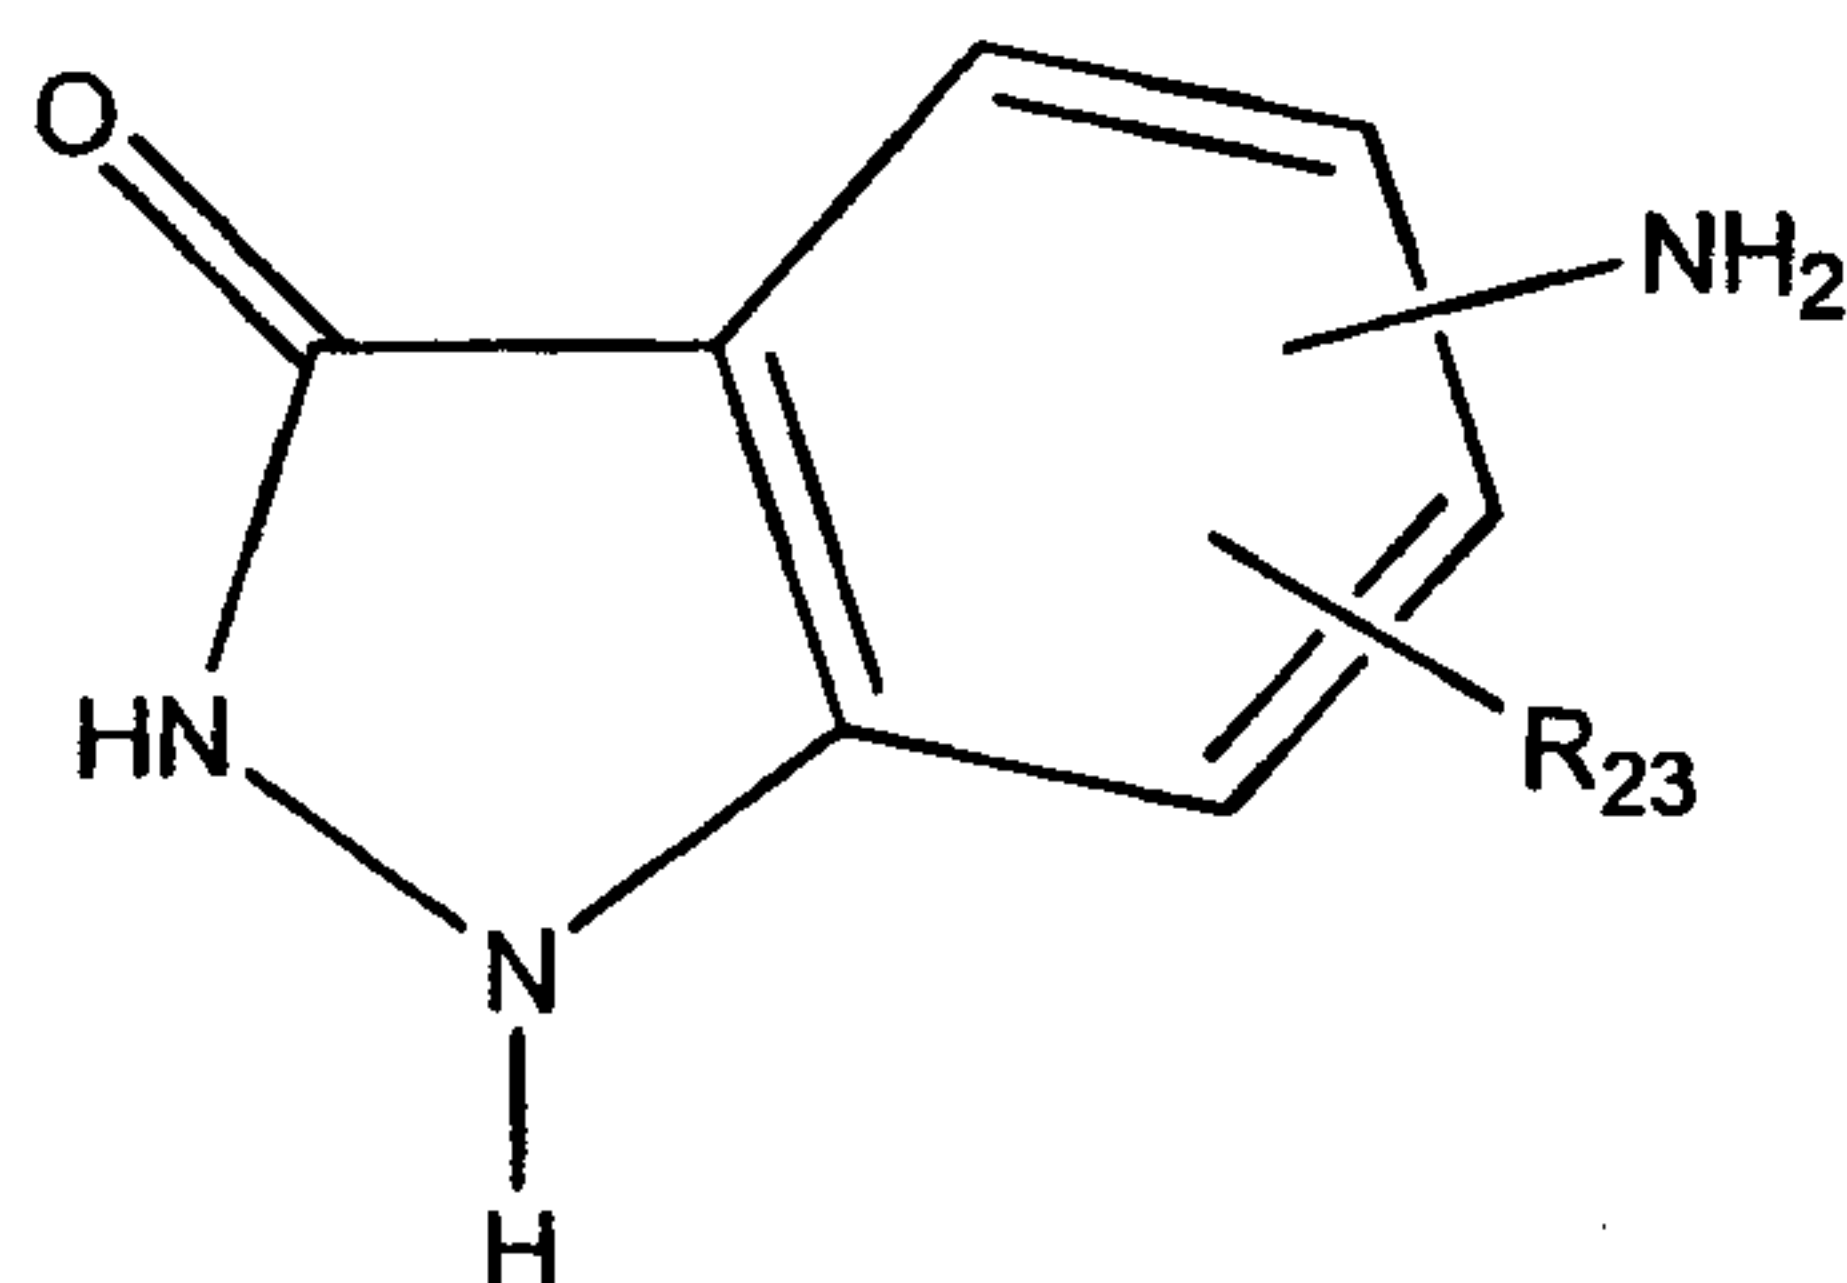


10

in which R_{23} is hydrogen or an alkyl radical having from about 1 to about 14 carbon atoms; and

- 15 (d) an aminomercaptotriazole represented by the formula:

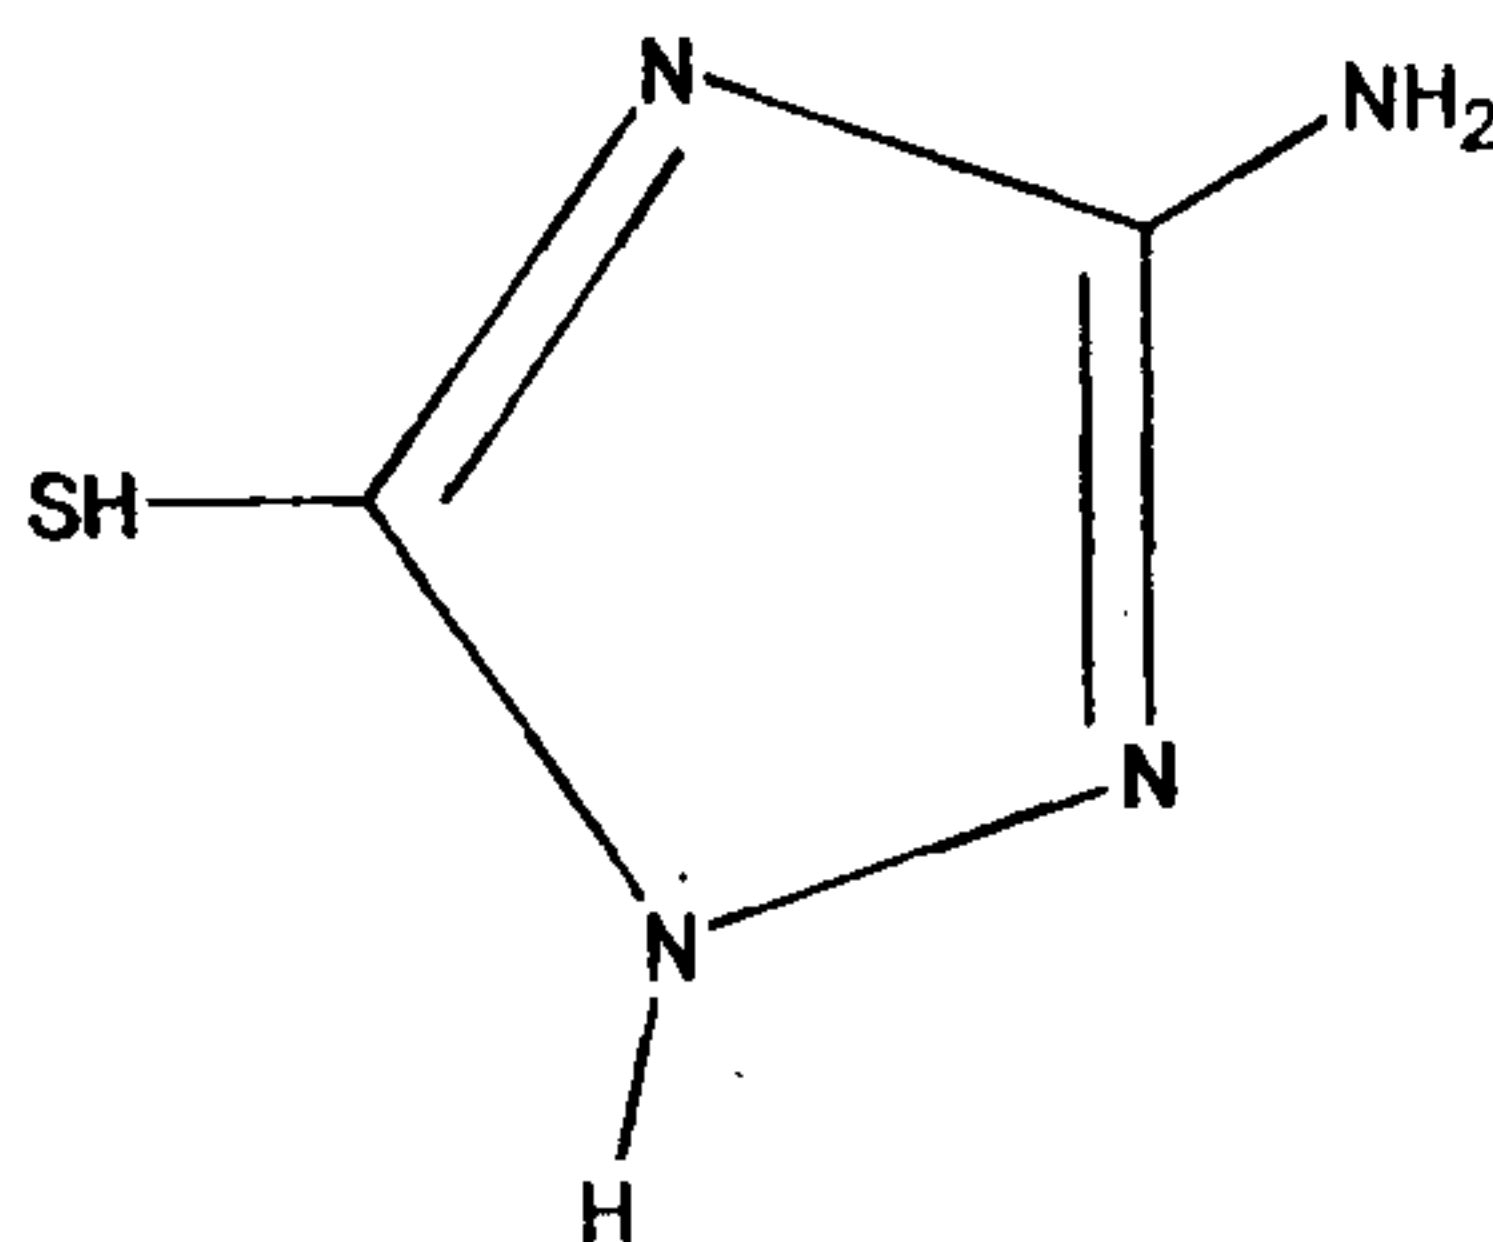

- (e) an aminoperimidine represented by the formula:

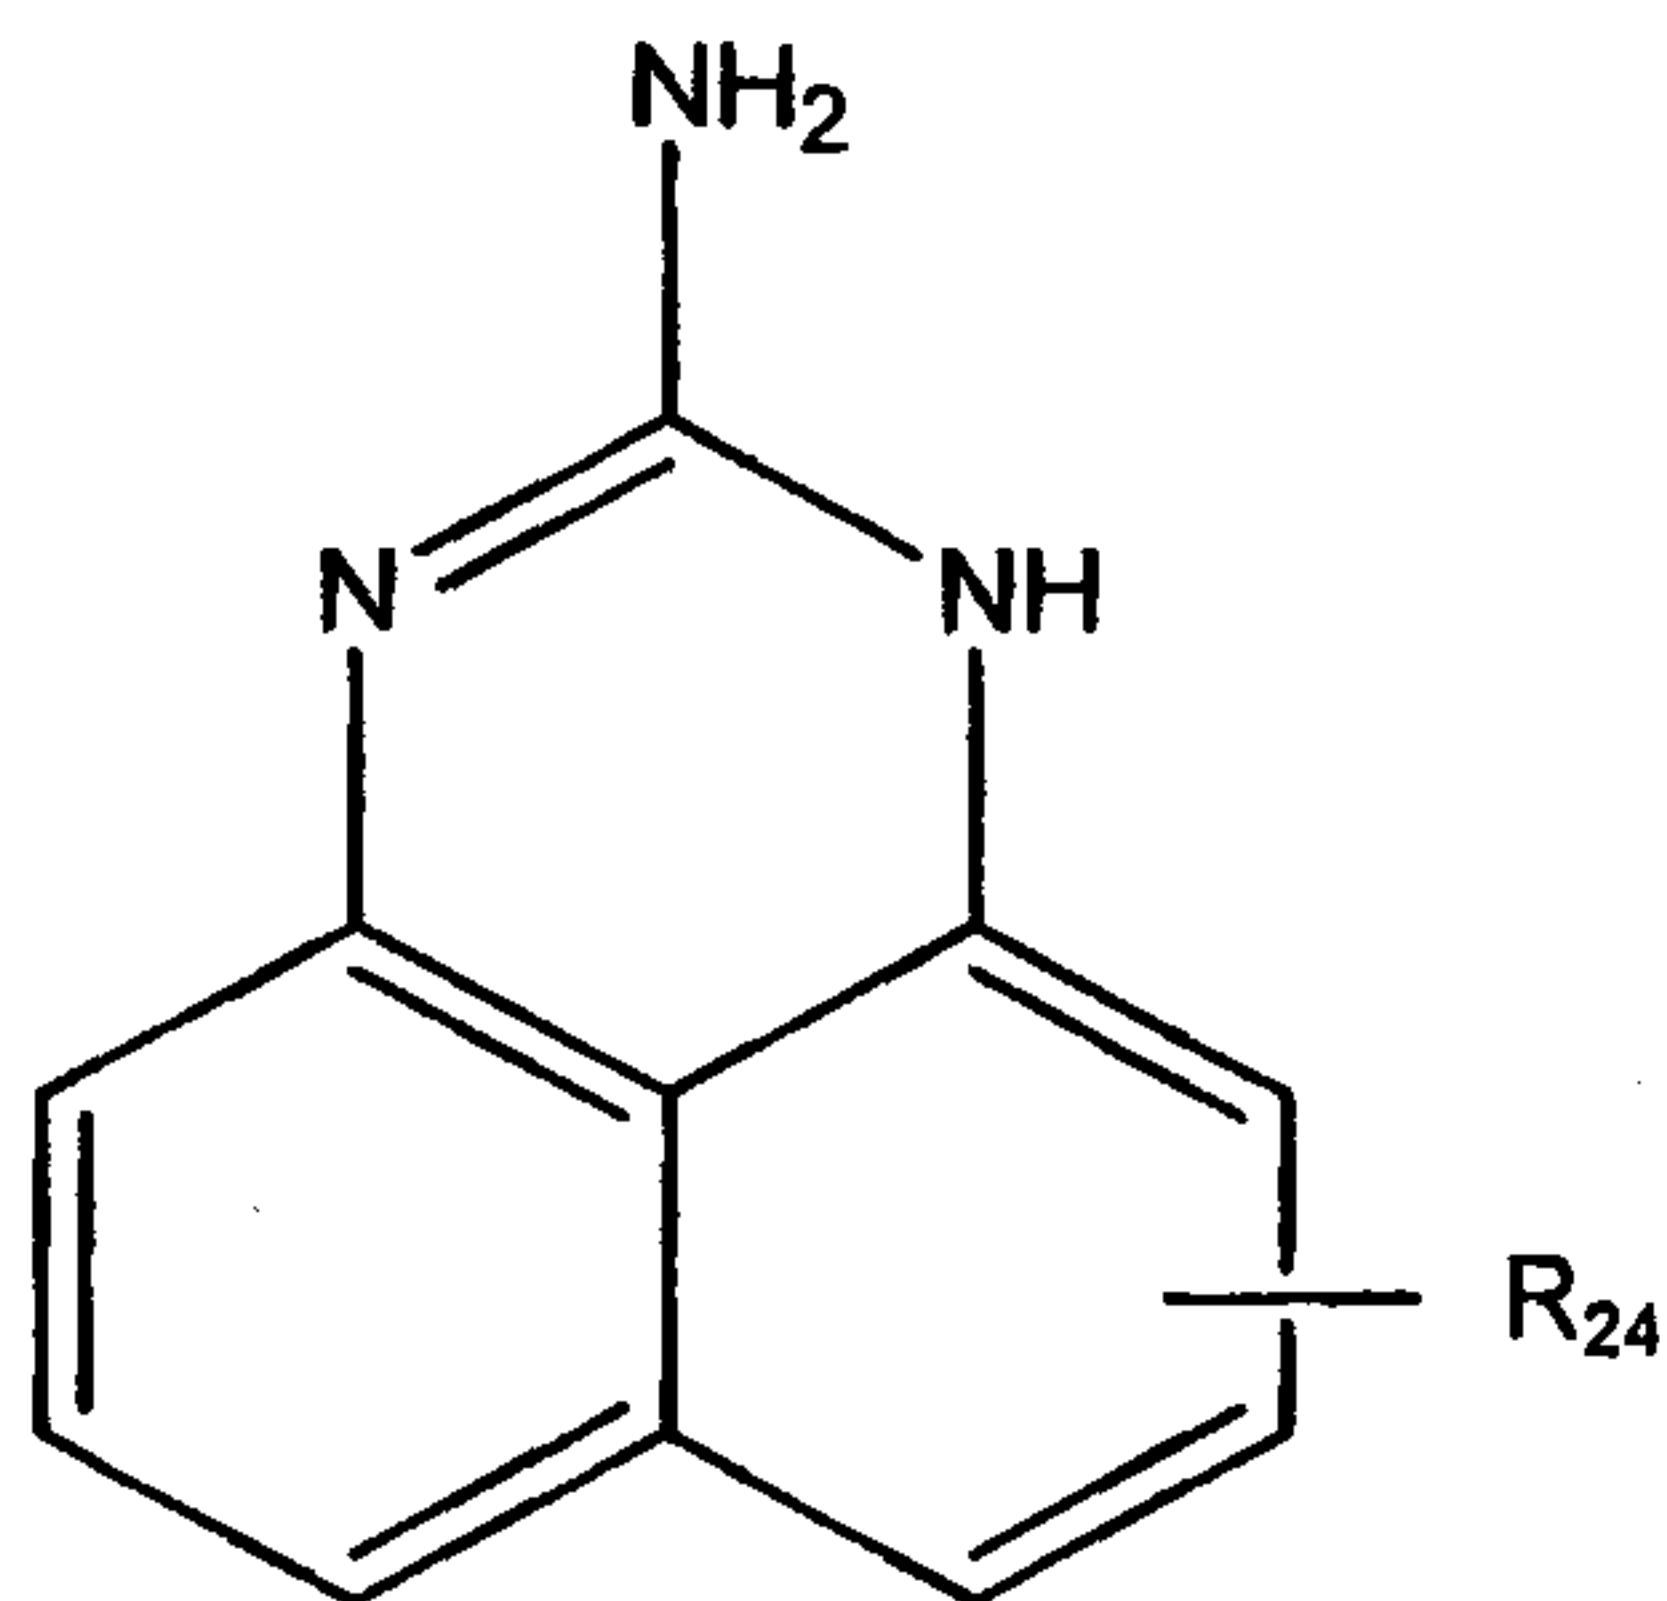


5

in which R_{24} represents hydrogen or an alkyl radical having from about 1 to about 14 carbon atoms;

- (f) an aryloxyphenyleneamine represented by the formula:

10

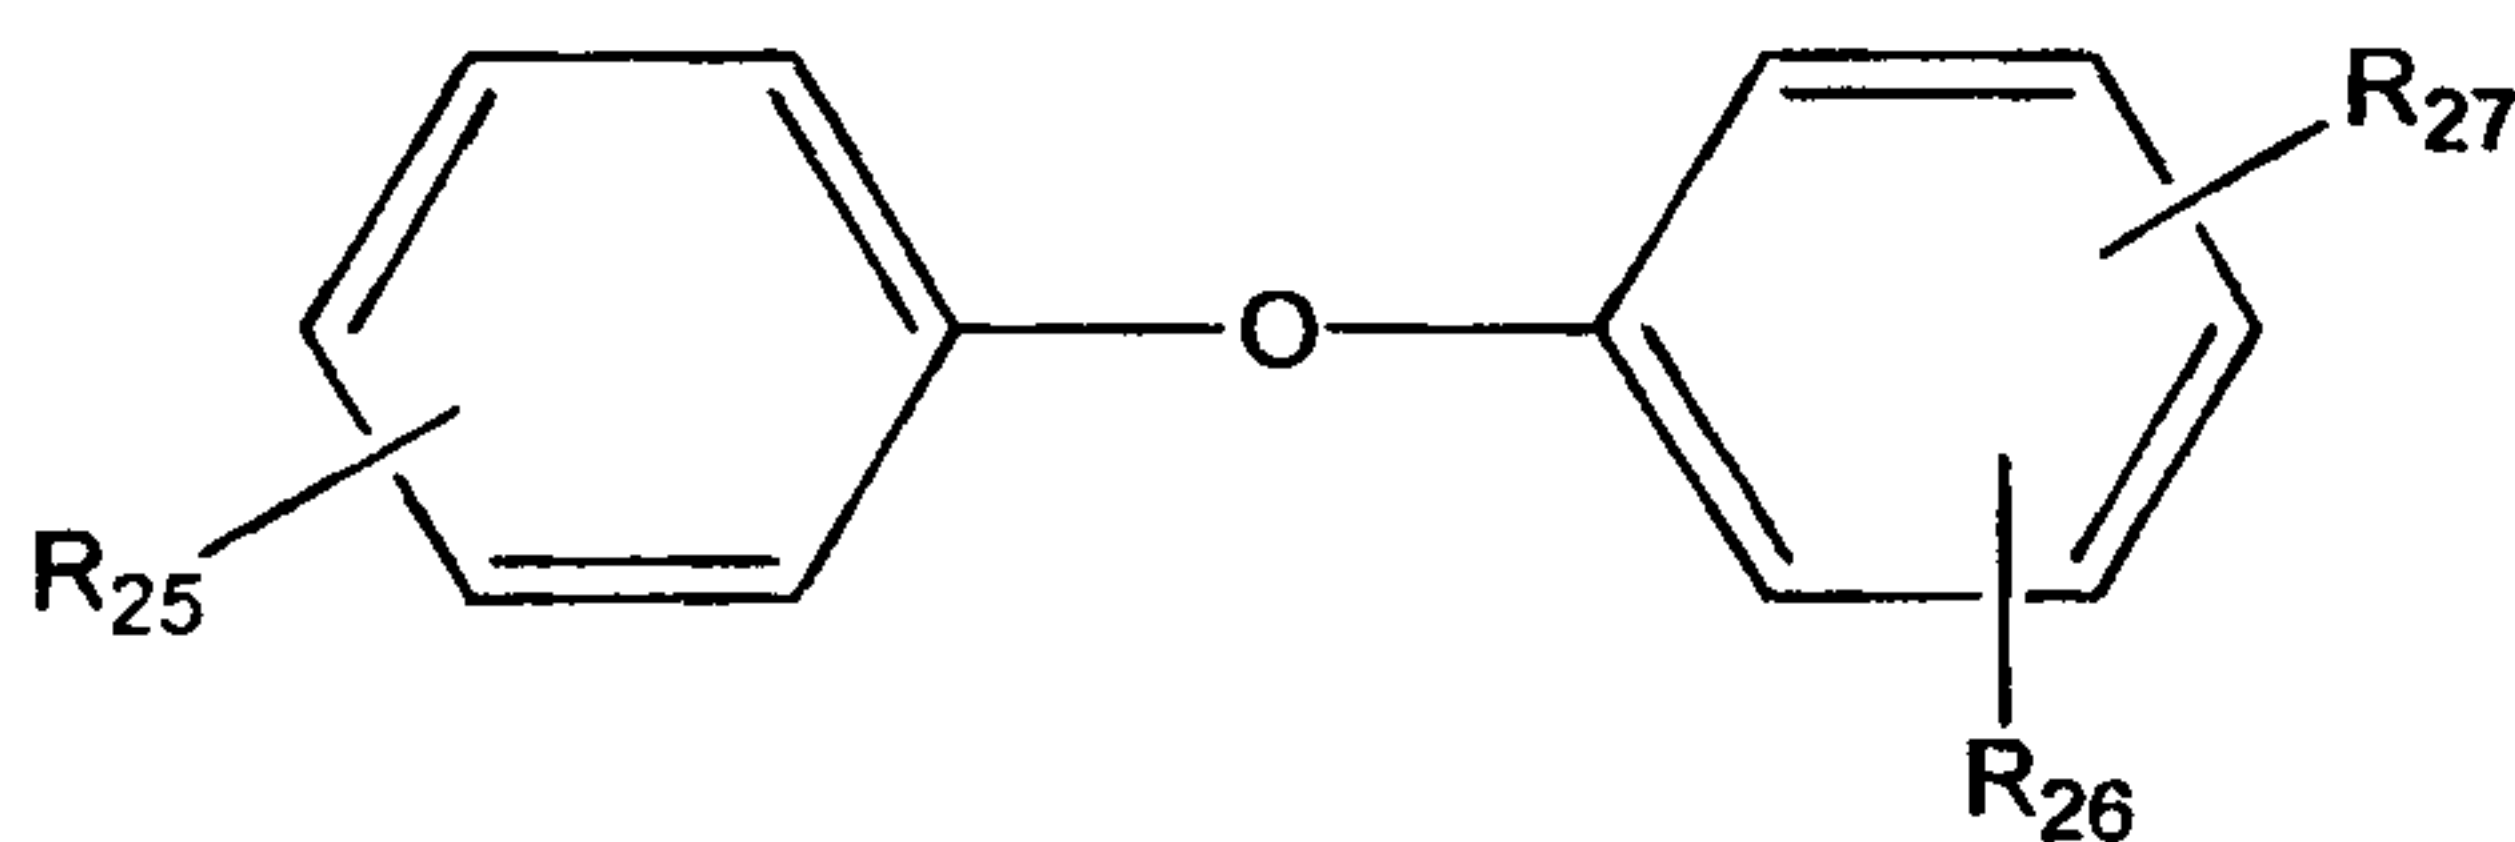


15

in which R_{25} is H, --NHaryl, --NHalkaryl, or branched or straight chain radical having from about 4 to about 24 carbon atoms that can be alkyl, alkenyl, alkoxyl, aralkyl or alkaryl; R_{26} is --NH₂, --(NH(CH₂)_n)_m NH₂, --NHalkyl, or --NHaralkyl, in which n and m each have a value from about 1 to about 10; and R_{27} is hydrogen, alkyl, alkenyl, alkoxyl, aralkyl, or alkaryl, having from about 4 to about 24 carbon atoms; provided that when R_{25} is hydrogen or a branched or straight chain radical having from about 4 to about 24 carbon atoms selected from alkyl, alkenyl, alkoxyl, aralkyl or alkaryl, then R_{26} must be NH₂ or --(NH(CH₂)_n)_mNH₂, --CH₂-(CH₂)_n-NH₂, or --CH₂-aryl-NH₂.

20

A particularly preferred aryloxyphenyleneamine is 4-phenoxyaniline;

- (g) an aromatic amine comprising two aromatic groups, linked by a group, L, represented by the following formula:

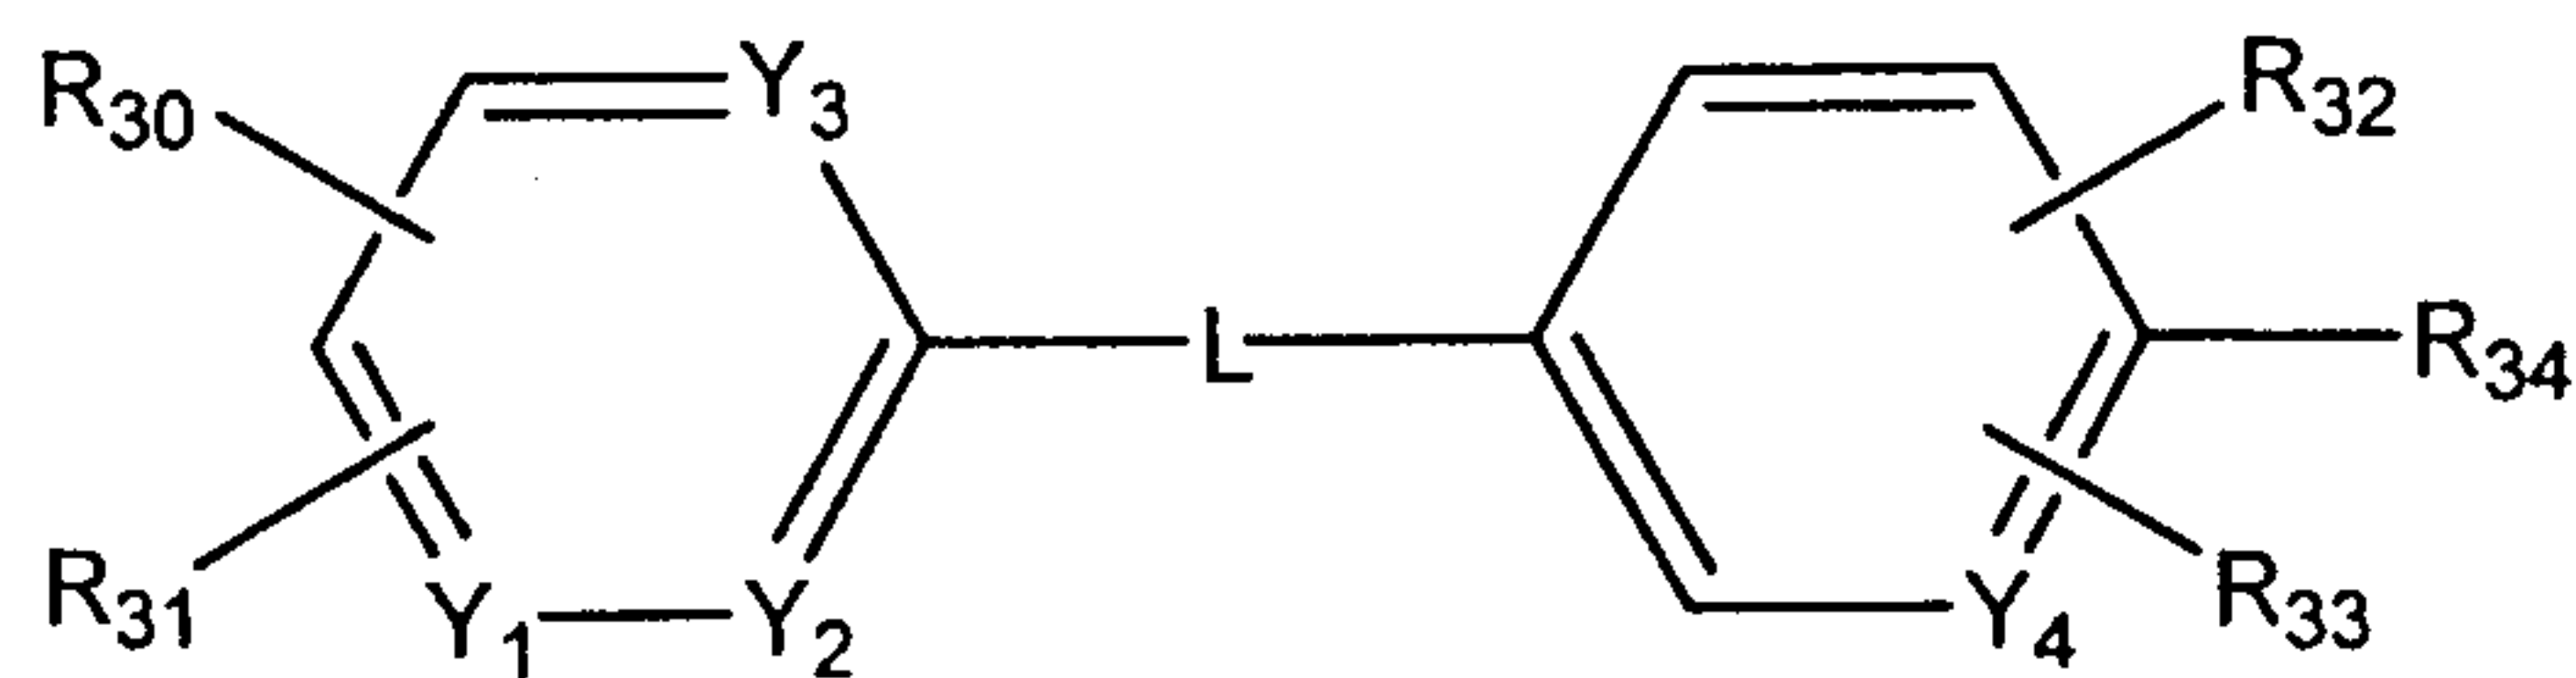

5

wherein L is selected from $-O-$, $-N=N-$, $-NH-$, $-CH_2NH-$, $-C(O)NR_{28}-$, $-C(O)O-$, $-SO_2-$, $-SO_2NR_{29}-$ or $-SO_2NH-$, wherein R_{28} and R_{29} independently represent a hydrogen, an alkyl, an alkenyl or an alkoxy group having from about 1 to about 8 carbon atoms;

10

wherein each Y_1 , Y_2 , Y_3 and Y_4 are independently N or CH provided that Y_1 and Y_2 may not both be N;

15

R_{30} and R_{31} independently represent a hydrogen, alkyl, aryl, alkaryl, aralkyl, alkoxy, hydroxyalkyl, aminoalkyl, $-OH$, $-NO_2$, $-SO_3H$, $-SO_3Na$, CO_2H or salt thereof, $-NR_{41}R_{42}$ wherein R_{41} and R_{42} are independently hydrogen, alkyl, aryl, arylalkyl, or alkaryl;

20

R_{32} and R_{33} independently represent a hydrogen, an alkyl, an alkenyl or an alkoxy group having from about 1 to about 8 carbon atoms, $-OH$, $-SO_3H$ or $-SO_3Na$;


25

R_{34} represents $-NH_2$, $-NHR_{35}$, wherein R_{35} is an alkyl or an alkenyl group having from about 1 to about 8 carbon atoms, $-CH_2-(CH_2)_n-NH_2$ or $-CH_2$ -aryl- NH_2 and n is from 0 to about 10;

- (h) an aminothiazole selected from the group consisting of aminothiazole, aminobenzothiazole, aminobenzothiadiazole and aminoalkylthiazole;

30


- (i) an aminoindole represented by the formula:

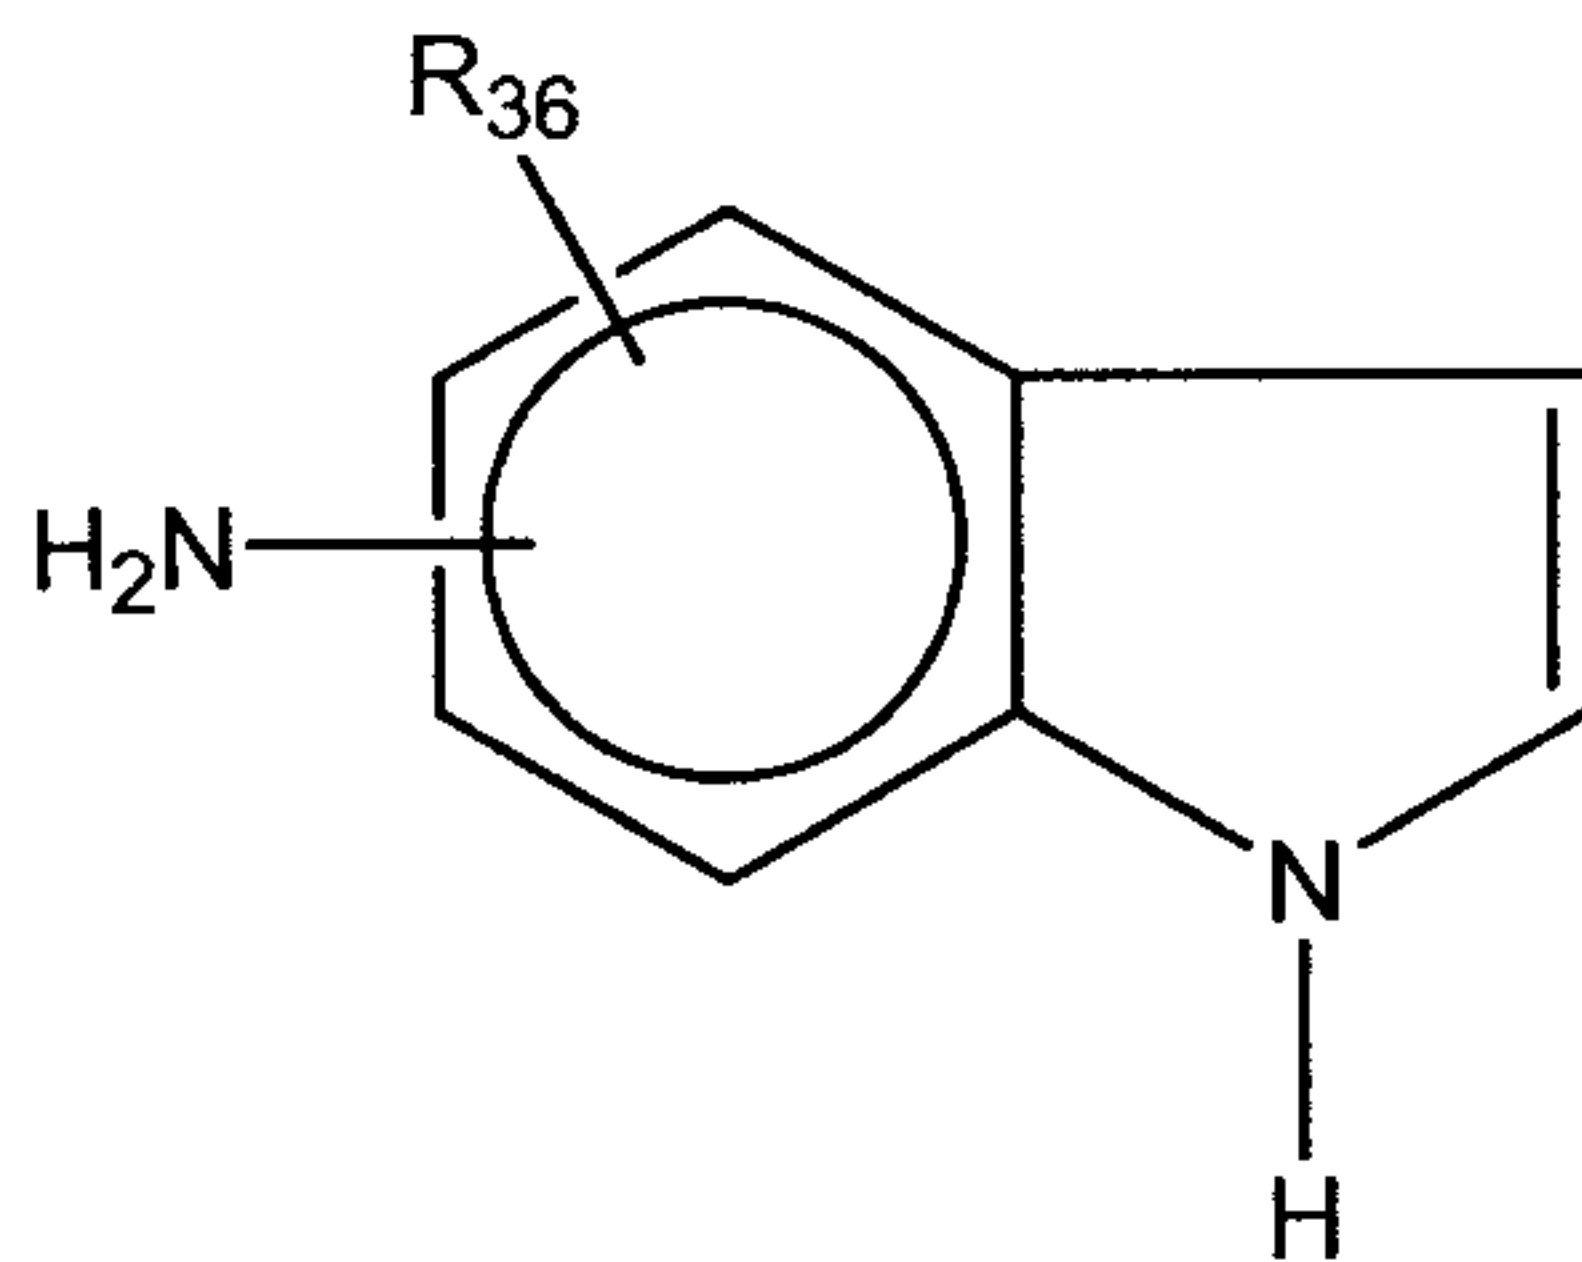

wherein R_{36} represents a hydrogen, an alkyl or an alkenyl group having from about 1 to about 14 carbon atoms;

5

- (j) an aminopyrrole represented by the formula:

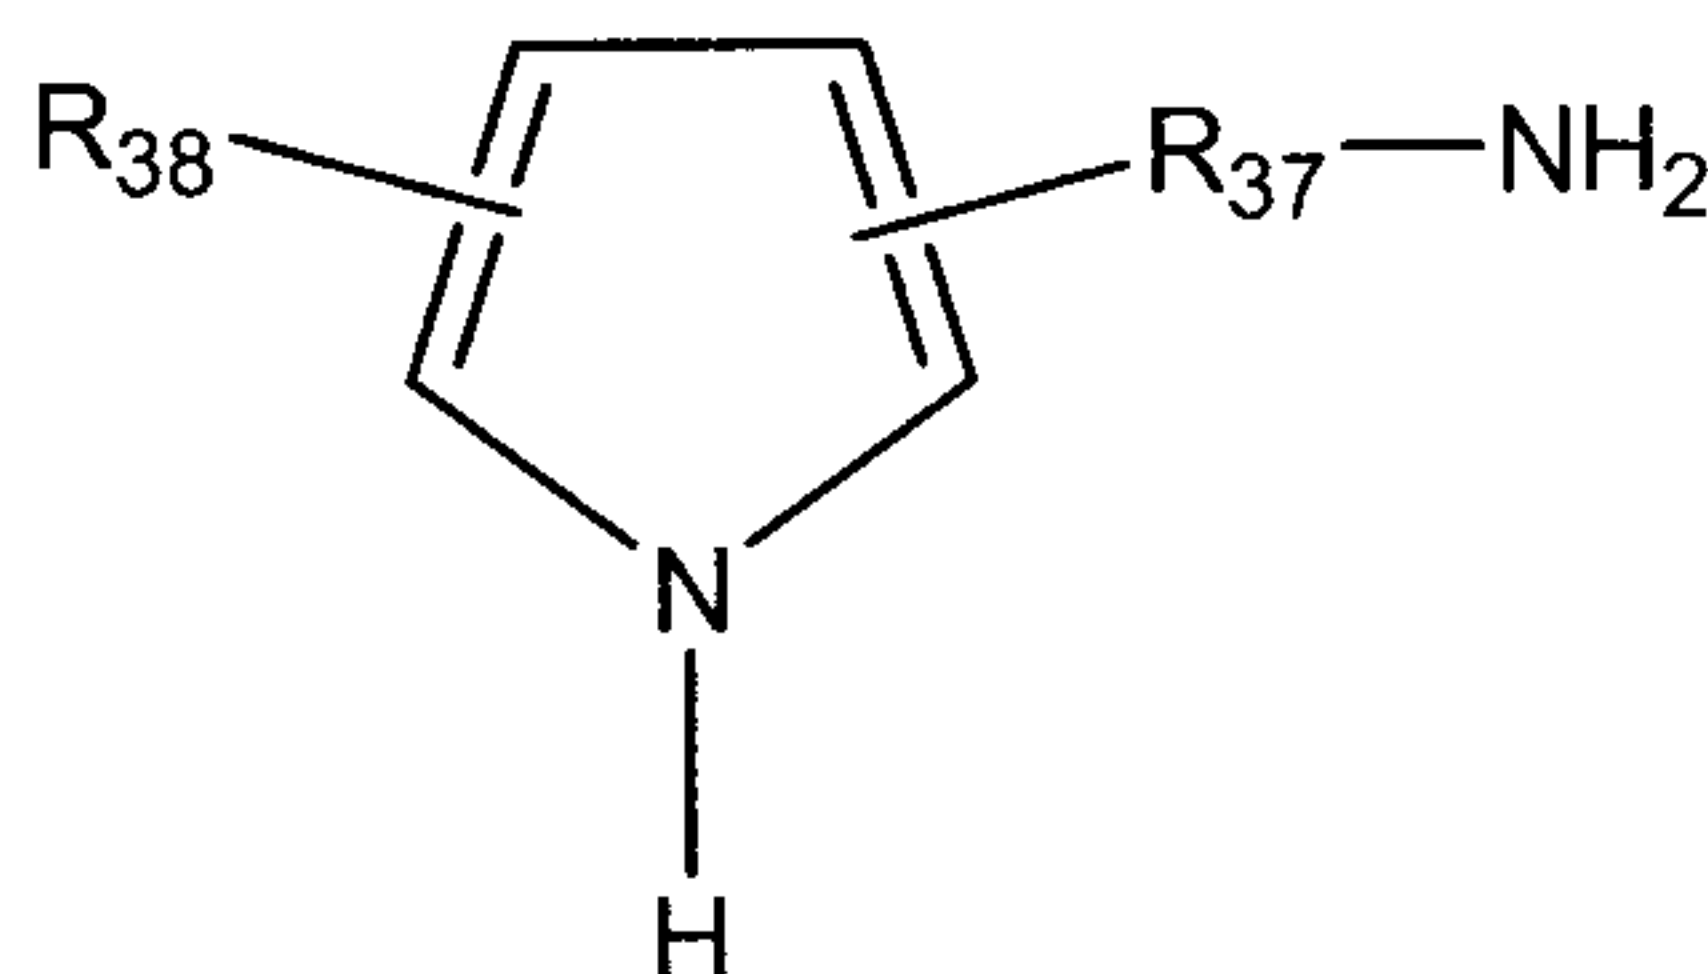

10

wherein R_{37} represents a divalent alkylene group having about 2 to about 6 carbon atoms and R_{38} represents a hydrogen, an alkyl or an alkenyl group having from about 1 to about 14 carbon atoms;

- (k) a ring substituted or unsubstituted aniline, such as nitroaniline or 4-aminoacetanilide;
- (l) an aminoquinoline;
- (m) an aminobenzimidazole;
- (n) a N, N-dialkylphenylenediamine;
- (o) a benzylamine; and
- (p) a benzyl alcohol.

20

The compounds described above in (g) – (o) are substantially described, for example, in Published U.S. Patent Application No. US20060025316.

The above-described amine compounds can be used alone or in combination with each other. Other aromatic amines can include such amines as aminodiphenylamine. These additional amines can be included for a variety of reasons.

- 5 In one embodiment, the preferred aromatic amine compound is either N-arylphenylenediamine or phenoxylaniline. More preferred, the aromatic amine compound is N-arylphenylenediamine. Particularly preferred N-arylphenylenediamines are the N-phenylphenylenediamines, such as for example, N-phenyl-1,4-phenylenediamine, N-phenyl-1,3-phenylenediamine, and N-phenyl-1,2-phenylenediamine.

In one embodiment, the preferred aromatic compound is 4-(4-nitrophenylazo)aniline, 4-phenylazoaniline, N-(4-aminophenyl) acetamide, 4-benzoylamine-2,5-dimethoxyaniline, 4-phenoxy aniline, or 3-nitroniline.

15

Method of Making the Lubricating Oil Additive Composition

- The lubricating oil additive composition is prepared by a process comprising charging the reactant copolymer (e.g., at least one of copolymers (i), (ii) and (iii) as described herein) in a reactor, optionally under a nitrogen purge, and heating at a temperature of from about 80°C to about 170°C. Optionally, diluent oil may be charged optionally under a nitrogen purge in the same reactor, thereby producing a diluted copolymer reactant. The amount of diluent oil in the diluted copolymer is up to about 80 wt. %, more preferred from about 20 to about 60 wt. %, and most preferred from about 30 to about 50 wt. %. An aliphatic compound, an aromatic compound and an ether compound are charged, optionally under a nitrogen purge, to the reactor. This mixture is heated under a nitrogen purge to a temperature in range from about 130°C to about 200°C. Optionally, a vacuum is applied to the mixture for about 0.5 to about 2.0 hours to remove excess water.

30

The lubricating oil additive composition can also be made using a process comprising simultaneously charging all the reactants (reactant copolymer (i), (ii), or (iii); the aliphatic compound; the aromatic compound; and the ether compound at the desired

ratios into the reactor. One or more of the reactants can be charged at an elevated temperature to facilitate mixing and reaction. A static mixer can be used to facilitate mixing of the reactants as they are being charged to the reactor. The reaction is carried out for about 0.5 to about 2 hours at a temperature from about 130°C to about 200°C.

5 Optionally a vacuum is applied to the reaction mixture during the reaction period.

When an aliphatic compound, an aromatic compound or both are employed in the present invention and when more than one functional group is present on the compound(s), the reaction conditions and/or stoichiometry should be such that oil
10 solubility is maintained. For example, when multifunctional aliphatic compounds, aromatic compounds or both are used, the linker group (i.e., the polyether compound) and the copolymer are preferably charged to the reactor first and allowed to react prior to addition of the multifunctional compounds. Furthermore, the stoichiometry should be such that when the multifunctional aliphatic compound, aromatic compound or
15 both are charged to the reactor, there is generally about one molecule of reactive monoethylenically unsaturated mono- or dicarboxylic acid functions per molecule of the multifunctional compound(s). This reaction order and stoichiometry reduces excessive crosslinking by limiting the number of unreacted monoethylenically unsaturated mono- or dicarboxylic acid sites relative to the number of reactive sites on
20 the multifunctional aliphatic compound, aromatic compound or both. Reduction of excessive crosslinking may decrease the probability of gel formation and therefore increase the probability of oil solubility.

In one embodiment of the invention, the non-free radical catalyzed reaction product
25 of compound (i)(a) and compound (i)(b) or (i)(c), which is contacted with either copolymer (i) or copolymer (ii) or both, may be contacted in the presence of components (C) and (D) (i.e. the aliphatic compound and the aromatic compound) prior to the addition of component (B) (i.e. the ether compound).

30 Lubricating Oil Composition

The lubricating oil additive composition described above is generally added to a base oil that is sufficient to lubricate moving parts, for example internal combustion

engines, gears, and transmissions. Typically, the lubricating oil composition of the present invention comprises a major amount of an oil of lubricating viscosity and a minor amount of the lubricating oil additive composition.

5 The base oil employed may be any of a wide variety of oils of lubricating viscosity. The base oil of lubricating viscosity used in such compositions may be mineral oils or synthetic oils. A base oil having a viscosity of at least 2.5 cSt at 40°C and a pour point below 20°C, preferably at or below 0°C, is desirable. The base oils may be derived from synthetic or natural sources.

10

Mineral oils for use as the base oil in this invention include, for example, paraffinic, naphthenic and other oils that are ordinarily used in lubricating oil compositions. Synthetic oils include, for example, both hydrocarbon synthetic oils and synthetic esters and mixtures thereof having the desired viscosity. Hydrocarbon synthetic oils
 15 may include, for example, oils prepared from the polymerization of ethylene, polyalphaolefin or PAO oils, or oils prepared from hydrocarbon synthesis procedures using carbon monoxide and hydrogen gases such as in a Fisher-Tropsch process. Useful synthetic hydrocarbon oils include liquid polymers of alpha olefins having the proper viscosity. Especially useful are the hydrogenated liquid oligomers
 20 of C₆ to C₁₂ alpha olefins such as 1-decene trimer. Likewise, alkyl benzenes of proper viscosity, such as didodecyl benzene, can be used. Useful synthetic esters include the esters of monocarboxylic acids and polycarboxylic acids, as well as mono-hydroxy alkanols and polyols. Typical examples are didodecyl adipate, pentaerythritol tetracaproate, di-2-ethylhexyl adipate, dilaurylsebacate, and the like. Complex esters
 25 prepared from mixtures of mono and dicarboxylic acids and mono and dihydroxy alkanols can also be used. Blends of mineral oils with synthetic oils are also useful.

Thus, the base oil can be a refined paraffin type base oil, a refined naphthenic base oil, or a synthetic hydrocarbon or non-hydrocarbon oil of lubricating viscosity. The
 30 base oil can also be a mixture of mineral and synthetic oils.

Other Additives

The following additive components are examples of some of the components that can be favorably employed in the present invention. These examples of additives are provided to illustrate the present invention, but they are not intended to limit it:

1. Metal Detergents

5

Sulfurized or unsulfurized alkyl or alkenyl phenates, alkyl or alkenyl aromatic sulfonates, borated sulfonates, sulfurized or unsulfurized metal salts of multi-hydroxy alkyl or alkenyl aromatic compounds, alkyl or alkenyl hydroxy aromatic sulfonates, sulfurized or unsulfurized alkyl or alkenyl naphthenates, metal salts of alkanolic acids, metal salts of an alkyl or alkenyl multiacid, and chemical and physical mixtures thereof.

10

2. Anti-Oxidants

Anti-oxidants reduce the tendency of mineral oils to deteriorate in service which deterioration is evidenced by the products of oxidation such as sludge and varnish-like deposits on the metal surfaces and by an increase in viscosity. Examples of anti-oxidants useful in the present invention include, but are not limited to, phenol type (phenolic) oxidation inhibitors, such as

4,4'-methylene-bis(2,6-di-tert-butylphenol), 4,4'-bis(2,6-di-tert-butylphenol),

4,4'-bis(2-methyl-6-tert-butylphenol),

2,2'-methylene-bis(4-methyl-6-tert-butylphenol),

4,4'-butylidene-bis(3-methyl-6-tert-butylphenol),

4,4'-isopropylidene-bis(2,6-di-tert-butylphenol),

2,2'-methylene-bis(4-methyl-6-nonylphenol),

2,2'-isobutylidene-bis(4,6-dimethylphenol),

2,2'-5-methylene-bis(4-methyl-6-cyclohexylphenol),

2,6-di-tert-butyl-4-methylphenol, 2,6-di-tert-butyl-4-ethylphenol,

2,4-dimethyl-6-tert-butyl-phenol, 2,6-di-tert-l-dimethylamino-p-cresol,

2,6-di-tert-4-(N,N'-dimethylaminomethylphenol),

4,4'-thiobis(2-methyl-6-tert-butylphenol),

2,2'-thiobis(4-methyl-6-tert-butylphenol),

20

25

30

bis(3-methyl-4-hydroxy-5-tert-10-butylbenzyl)-sulfide, and bis(3,5-di-tert-butyl-4-hydroxybenzyl). Diphenylamine-type oxidation inhibitors include, but are not limited to, alkylated diphenylamine, phenyl-alpha-naphthylamine, and alkylated-alpha-naphthylamine. Other types of oxidation inhibitors include metal dithiocarbamate (e.g., zinc dithiocarbamate), and 15-methylenebis(dibutyldithiocarbamate).

3. Anti-Wear Agents

As their name implies, these agents reduce wear of moving metallic parts. Examples of such agents include, but are not limited to, phosphates and thiophosphates and salts thereof, carbamates, esters, and molybdenum complexes.

4. Rust Inhibitors (Anti-Rust Agents)

- a) Nonionic polyoxyethylene surface active agents: polyoxyethylene lauryl ether, polyoxyethylene higher alcohol ether, polyoxyethylene nonyl phenyl ether, polyoxyethylene octyl phenyl ether, polyoxyethylene octyl stearyl ether, polyoxyethylene oleyl ether, polyoxyethylene sorbitol monostearate, polyoxyethylene sorbitol mono-oleate, and polyethylene glycol mono-oleate.
- b) Other compounds: stearic acid and other fatty acids, dicarboxylic acids, metal soaps, fatty acid amine salts, metal salts of heavy sulfonic acid, partial carboxylic acid ester of polyhydric alcohol, and phosphoric ester.

5. Demulsifiers

Addition product of alkylphenol and ethylene oxide, polyoxyethylene alkyl ether, and polyoxyethylene sorbitan ester.

6. Extreme Pressure Anti-Wear Agents (EP/AW Agents)

5 Sulfurized olefins, zinc dialky-1-dithiophosphate (primary alkyl, secondary alkyl, and aryl type), diphenyl sulfide, methyl trichlorostearate, chlorinated naphthalene, fluoroalkylpolysiloxane, lead naphthenate, neutralized or partially neutralized phosphates, dithiophosphates, and sulfur-free phosphates.

7. Friction Modifiers

10 Fatty alcohol, fatty acid (stearic acid, isostearic acid, oleic acid and other fatty acids or salts thereof), amine, borated ester, other esters, phosphates, other phosphites besides tri- and di-hydrocarbyl phosphites, and phosphonates.

8. Multifunctional Additives

15

Sulfurized oxymolybdenum dithiocarbamate, sulfurized oxymolybdenum organo phosphorodithioate, oxymolybdenum monoglyceride, oxymolybdenum diethylate amide, amine-molybdenum complex compound, and sulfur-containing molybdenum complex compound.

20

9. Viscosity Index Improvers

25 Polymethacrylate type polymers, ethylene-propylene copolymers, styrene-isoprene copolymers, hydrated styrene-isoprene copolymers, polyisobutylene, and dispersant type viscosity index improvers.

10. Pour Point Depressants

30

Polymethyl methacrylate.

11. Foam Inhibitors

Alkyl methacrylate polymers and dimethyl silicone polymers.

12. Metal Deactivators

Disalicylidene propylenediamine, triazole derivatives,
5 mercaptobenzothiazoles, thiadiazole derivatives, and mercaptobenzimidazoles.

13. Dispersants

Alkenyl succinimides, alkenyl succinimides modified with other organic
compounds, alkenyl succinimides modified by post-treatment with ethylene
carbonate or boric acid, esters of polyalcohols and polyisobutenyl succinic
10 anhydride, phenate-salicylates and their post-treated analogs, alkali metal or
mixed alkali metal, alkaline earth metal borates, dispersions of hydrated alkali
metal borates, dispersions of alkaline-earth metal borates, polyamide ashless
dispersants and the like or mixtures of such dispersants.

15 Method of Use of the Present Invention

The lubricating oil additive composition of the present invention is added to an oil of
lubricating viscosity thereby producing a lubricating oil composition. The lubricating
oil composition contacts the engine, improving dispersancy. Accordingly, the present
20 invention is also directed to a method of improving soot dispersancy, sludge
dispersancy or both in an internal combustion engine which comprises operating the
engine with the lubricating oil composition of the invention.

Optionally, the lubricating oil additive composition described above may be used as a
25 fuel additive. When used in fuels, the proper concentration of the additive that is
necessary to achieve the desired detergency is dependent upon a variety of factors
including the type of fuel used, the presence of other detergents or dispersants or other
additives, etc. Generally, however, the range of concentration of the additive in the
base fuel is 10 to 10,000 weight parts per million, preferably from 30 to 5,000 parts
30 per million of the additive. If other detergents are present, a lesser amount of the
additive may be used. The additives described herein may be formulated as a
fuel concentrate, using an inert stable oleophilic solvent boiling in the range of about

150-400°F (65.6-204.4°C). Preferred solvents boil in the gasoline or diesel fuel range. Preferably, an aliphatic or an aromatic hydrocarbon solvent is used, such as a benzene, toluene, xylene or higher-boiling aromatics or aromatic thinners.

Aliphatic alcohols of about 3 to 8 carbon atoms, such as isopropanol,

5 isobutylcarbinol, n-butanol and the like in combination with hydrocarbon solvents are also suitable for use with the fuel additive. In the fuel concentrate, the amount of the additive will be ordinarily at least 5 % by weight and generally not exceed 70 % by weight, preferably from 5 to 50 and more preferably from 10 to 25 wt. %.

10 The following examples are presented to illustrate specific embodiments of this invention and are not to be construed in any way as limiting the scope of the invention.

EXAMPLES

15

Example 1 - Preparation of Terpolymer

2513 grams of high methylvinylidene polyisobutylene having a number average molecular weight (Mn) of about 2300 and a methylvinylidene content of about 78% (which is available from BASF as Glissopal® 2300) was charged to a 4-L reactor
 20 equipped with agitator, temperature controller and overhead condenser and receiver. 27.3 grams 1-hexadecene was also charged to the reactor, and the agitated mixture was heated to 150°C. Traces of moisture were removed by sparging 250 scm³/min nitrogen through the mixture for about an hour. After drying, the nitrogen was fed to the reactor head space at a rate of 30 scm³/min. 178.8 grams maleic anhydride and
 25 16.4 grams dicumyl peroxide in a 50% solution with toluene were fed simultaneously to the reactor over 2 hours. After the maleic anhydride and dicumyl peroxide charging were finished, the temperature of the reactor was maintained at 150°C for another 1.5 hours. The reactor was heated to 190°C. During the heating of the reactor, the pressure was gradually lowered to 20 mm Hg when the temperature of the reactor
 30 reached 180°C. The temperature was held at 190°C and the pressure was held at 20 mm Hg for 1 hour during which 15 grams of condensate was collected. The product was cooled and a yield of 2693 grams of copolymer (i) was obtained.

Example 2 – Preparation of PolyPIBSA (Copolymer (ii))

4005 grams of high methylvinylidene polyisobutene having a number average molecular weight (M_n) of about 1000 and a methylvinylidene content of about 76% (which is commercially available from BASF and is known as Glissopal 1000) was charged to a reactor and the reactor was heated to a temperature of about 150°C. 589 grams maleic anhydride and 54.14 grams of dicumyl peroxide were fed to the reactor. The temperature of the reactor was maintained at 150°C for 1.5 hours after the maleic anhydride and dicumyl peroxide are charged to the reactor. The reactor was heated to about 200°C. The product was then filtered to provide the neat product.

10

Example 3 – Preparation of Alpha-Olefin/Maleic Anhydride Copolymer

100 parts by weight Exxon 150 solvent (C_{10} aromatic solvent) and 81.94 parts per weight of C_{14-24} alpha olefin mixture (average molecular weight - 215.3 Daltons) were charged to a stirred reactor. The mixture was heated to 150°C, and the temperature was maintained for about 30 minutes to dehydrate the mixture. The mixture was cooled to 65°C, and 36.5 parts of maleic anhydride were charged to the reaction mixture. The reactor headspace was purged with nitrogen. The reaction mixture was heated to 150°C. 0.13 parts of di-tert-butyl peroxide were added to the reaction mixture. The reactor temperature was allowed to increase (exotherm) to about 180°C. Once the temperature began to decrease (exotherm passed), the reaction mixture was cooled to 150°C. The peroxide addition step was repeated five more times. After the sixth peroxide addition the reactor was heated to 170°C, and the temperature was maintained for one hour. The aromatic solvent was the stripped from the product under vacuum, and then approximately 276 parts of 100N neutral oil were added to the product.

25

Example 4 – Preparation of Thermal PIBSA

30 The procedure of Preparation 2 in U.S. Patent No. 5,872,083 ('083 Patent) was employed except that 2300 Mn polybutene, available as Glissopal® 2300 from BASF, was used instead of 2200 Mn polybutene as used in the '083 Patent.

Example A

160 grams of Terpolymer, as prepared in Example 1, were charged into a 500 mL stirred glass reactor. A constant 180 mL/min nitrogen purge through the reactor headspace was then started. The reactor was heated to 160°C. When the reactor temperature attained 160°C, 1.97 grams of N-phenyl-1,4-phenylenediamine, 1.09 grams of 3-dimethylamino-1-propylamine and 20.14 grams of poly(oxyethylene-co-oxypropylene)diamine were added to the reactor sequentially. The reaction mixture was held at 160°C for 1.5 hours. The reactor pressure was then reduced to <20 mmHg (abs) to remove any water generated during the reaction. The vacuum conditions were maintained for 30 minutes. The reaction temperature was maintained for another 16.5 hours because the reaction appeared to be incomplete. The reactor pressure was again reduced to <20 mmHg (abs) and maintained for 30 minutes to remove any water generated during the reaction.

15

Example B had the same process steps and conditions as Example 1. The amount of the reactants in Example B are disclosed in Table 1.

Example C

20 303.4 grams of thermal PIBSA (saponification number = 35.4 mg KOH/g) and 113.7 grams of alpha olefin / maleic anhydride copolymer (saponification number = 94.5 mg KOH/g) were charged into a 500 mL stirred glass reactor. A nitrogen purge (~180 mL/min) through the reactor headspace was then started. The reactor was heated to 160°C. When the reactor temperature approached 160°C, 58.27 grams of Huntsman XTJ-501 (an ethylene oxide and propylene oxide based polyoxyalkylenediamine); 25 7.76 grams of N-phenyl-1,4-phenylenediamine; and 2.15 grams of 3-dimethylamino-1-propylamine were added to the reactor sequentially. The reaction mixture was then held at approximately 160°C for 1.5 hours. The reactor pressure was then reduced to <20 mmHg (abs) to remove any water generated during the reaction. The vacuum conditions were maintained for 30 minutes. Analysis of the product showed it to 30 contain 0.759 wt% nitrogen and 2.61 mg KOH/g Total Base Number (ASTM D2896).

TABLE 1

Example	Copolymer	Copolymer (g)	PIBSA	PIBSA (g)	Polyether	Polyether (g)	Aromatic Compound	Aromatic Compound (g)	Aliphatic Compound	Aliphatic Compound (g)	Diluent Oil (g)
A	Example 1	160		0	PED	20.14	NPPDA	1.97	DMAPA	1.09	14.05
B	Example 2	110		0	PED	39.13	NPPDA	3.75	DMAPA	2.08	47.46
C	Example 3	113.7	Example 4	303.4	PED	58.27	NPPDA	7.76	DMAPA	2.15	0

5 PED: 1000 g/mol poly(oxyethylene-co-oxypropylene)diamine
NPPDA: N-phenyl- 1,4- phenylenediamine
DMAPA: 3-dimethylamino-1-propylamine

Examples A and C, which exemplify the lubricating oil additive composition of the present invention, were evaluated for percent viscosity increase using a soot thickening bench test, which measures the ability of the formulation to disperse and control viscosity increase resulting from the addition of carbon black, a soot surrogate. Using the soot thickening bench test, the viscosity of a fresh oil is measured in centistokes. The fresh oil is then treated with 2 wt% Vulcan™ XC 72R carbon black, supplied by Columbia Chemical Co., to form a mixture containing approximately 2 grams Vulcan™ XC72R carbon black and 98 grams fresh oil (test oil). The test oil, which contains carbon black, is then left to sit overnight. It is then homogenized using a high speed tissue homogenizer for approximately 60 seconds to thoroughly mix the carbon black with the fresh oil. The resulting test oil containing carbon black is then degassed at 100°C for 30 minutes. The viscosity of the oil containing carbon black is measured according to methods that are well known in the art. The percent viscosity increase is calculated according to the following formula:

15

$$\% \text{ viscosity increase} = [(\text{vis}_{\text{cbo}} - \text{vis}_{\text{fo}}) / (\text{vis}_{\text{fo}}) \times 100]$$

vis_{cbo} : viscosity of carbon black in oil

vis_{fo} : viscosity of fresh oil

20 Using the soot thickening bench test, the percent viscosity increase calculated for the additive composition of Examples A and C in a formulated oil was compared to a formulated oil that does not contain the lubricating oil additive composition of the present invention. The formulated oil of the present invention comprises 0.66 wt% of an oxidation inhibitor package, 0.33 wt% pour point depressant, 4.07 wt% of a calcium based detergent package containing a phenate and sulfonates, 2.41 wt% zinc dithiophosphate, 0.03 wt% foam inhibitor, 7.7 wt% viscosity index improver and 85.10 wt% of a lube oil blend which is a mixture of basestocks that consists of 69.24 wt% Exxon150N oil, and 30.76 wt% Exxon600N oil (all of which may be purchased from ExxonMobil Corporation, Fairfax, Virginia) to provide the comparative oil

formulation. To prepare the formulated lubricating oil composition of the present invention, approximately 7.6 wt% of the additive composition of Examples A and C were top treated to the formulated comparison oil.

- 5 The results of the soot thickening bench test are summarized in Table 2.

Table 2: Soot Thickening Bench Test Results

Example	% Viscosity Increase
A	31.14
C	27.3
No Dispersant	283.9

10 The results of the soot thickening bench test indicate that the percent viscosity increase using the lubricating oil additive composition of the present invention was lower than the percent viscosity increase in a formulated oil that did not contain a lubricating oil additive composition of the present invention, which yielded approximately a 284% viscosity increase. This test indicates that the lubricating oil additive composition of the present invention has good dispersant properties.

15

It is understood that although modifications and variations of the invention can be made without departing from the scope thereof, only such limitations should be imposed as are indicated in the appended claims.


WHAT IS CLAIMED IS:

1. An oil-soluble lubricating oil additive composition prepared by the process which comprises reacting
 - (A) at least one of the following copolymers:
 - (i) a copolymer obtained by free radical copolymerization of components comprising:
 - (a) at least one monoethylenically unsaturated C₃-C₂₈ monocarboxylic acid or ester thereof, or C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof;
 - (b) at least one 1-olefin comprising 2 to 40 carbon atoms or at least one polyolefin comprising 4 to 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof; and
 - (c) at least one monoolefin compound which is copolymerizable with the monomers of (a) and (b) and is selected from the group consisting of:
 - (1) an alkyl vinyl ether and an allyl alkyl ether where the alkyl group is hydroxyl, amino, dialkylamino or alkoxy substituted or is unsubstituted, and containing from 1 to 40 carbon atoms;
 - (2) an alkyl amine and an N-alkylamide of a monoethylenically unsaturated mono- or dicarboxylic acid of from 3 to 10 carbon atoms where the alkyl substituent contains from 1 to 40 carbon atoms;

- (3) an N-vinylcarboxamide of carboxylic acids of from 1 to 8 carbon atoms;
 - (4) an N-vinyl substituted nitrogen-containing heterocyclic compound; and
 - (5) at least one 1-olefin comprising 2 to 40 carbon atoms or at least one polyolefin comprising 4 to 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof, provided that the olefin employed is not the same as the olefin employed in (i)(b);
- (ii) a copolymer obtained by reacting compound (i)(a) and compound(i)(b) in the presence of a free radical initiator; or
 - (iii) a copolymer obtained by (a) reacting compound (i)(a) with compound (i)(b) or (i)(c) in a non-free radical catalyzed reaction in the presence of copolymer (i) or copolymer (ii) or both; or by (b) contacting copolymer (i) or copolymer (ii) or both with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c); with
- (B) at least one ether compound capable of being reacted with at least two monocarboxylic acids, or esters, thereof, or dicarboxylic acids, anhydrides or esters thereof, or mixtures thereof;and
 - (C) at least one aliphatic compound capable of reacting with at least one monocarboxylic acid or ester thereof, or dicarboxylic acid, anhydride or ester thereof; and

- (D) at least one aromatic compound capable of reacting with at least one monocarboxylic acid or ester thereof; or dicarboxylic acid, anhydride or ester thereof.
2. The lubricating oil additive composition of claim 1, wherein in copolymer (iii)(b), said copolymer (i) or copolymer (ii) or both are contacted with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c) in the presence of component (C), component (D) or both.
 3. The lubricating oil additive composition of claim 1, wherein the ether compound (B) is a polyether polyamine.
 4. The lubricating oil additive composition of claim 3, wherein the polyether polyamine is a polyoxyalkylene diamine wherein each alkylene unit individually contains from 2 to 5 carbon atoms.
 5. The lubricating oil additive composition of claim 4 wherein the oxyalkylene moiety is oxyethylene or oxypropylene, or mixtures thereof.
 6. The lubricating oil additive composition of claim 5 wherein the polyether polyamine is polyoxyethylene diamine.
 7. The lubricating oil additive composition of claim 1 wherein the copolymer is copolymer (i).
 8. The lubricating oil additive composition of claim 1 wherein the copolymer is copolymer (ii).
 9. The lubricating oil additive composition of claim 8 wherein copolymer (ii) is polyPIBSA, obtained by the free radical catalyzed reaction of maleic anhydride and polyisobutylene.


10. The lubricating oil additive composition of claim 1 wherein the copolymer is copolymer (iii).
11. The lubricating oil additive composition of claim 1 wherein the aliphatic compound is selected from the group consisting of aliphatic monoamines, aliphatic diamines, and aliphatic polyamines.
12. The lubricating oil additive composition of claim 1 wherein the aliphatic compound is a polyalkylene polyamine.
13. The lubricating oil additive composition of claim 12 wherein the aliphatic compound is an aliphatic diamine.
14. The lubricating oil additive composition of claim 13 wherein the aliphatic diamine is N,N-diethyl amino ethylamine, N,N-diethyl amino propylamine, N,N-dimethyl amino propylamine or 1,3-aminopropyl morpholine.
15. The lubricating oil additive composition of 12, wherein the polyalkylene polyamine is selected from the group consisting of tetraethylene pentamine, pentaethylene hexamine and heavy polyamine.
16. The lubricating oil additive composition of claim 1 wherein the at least one aromatic compound is selected from the group consisting of
 - a) an N-arylphenylenediamine represented by the formula:

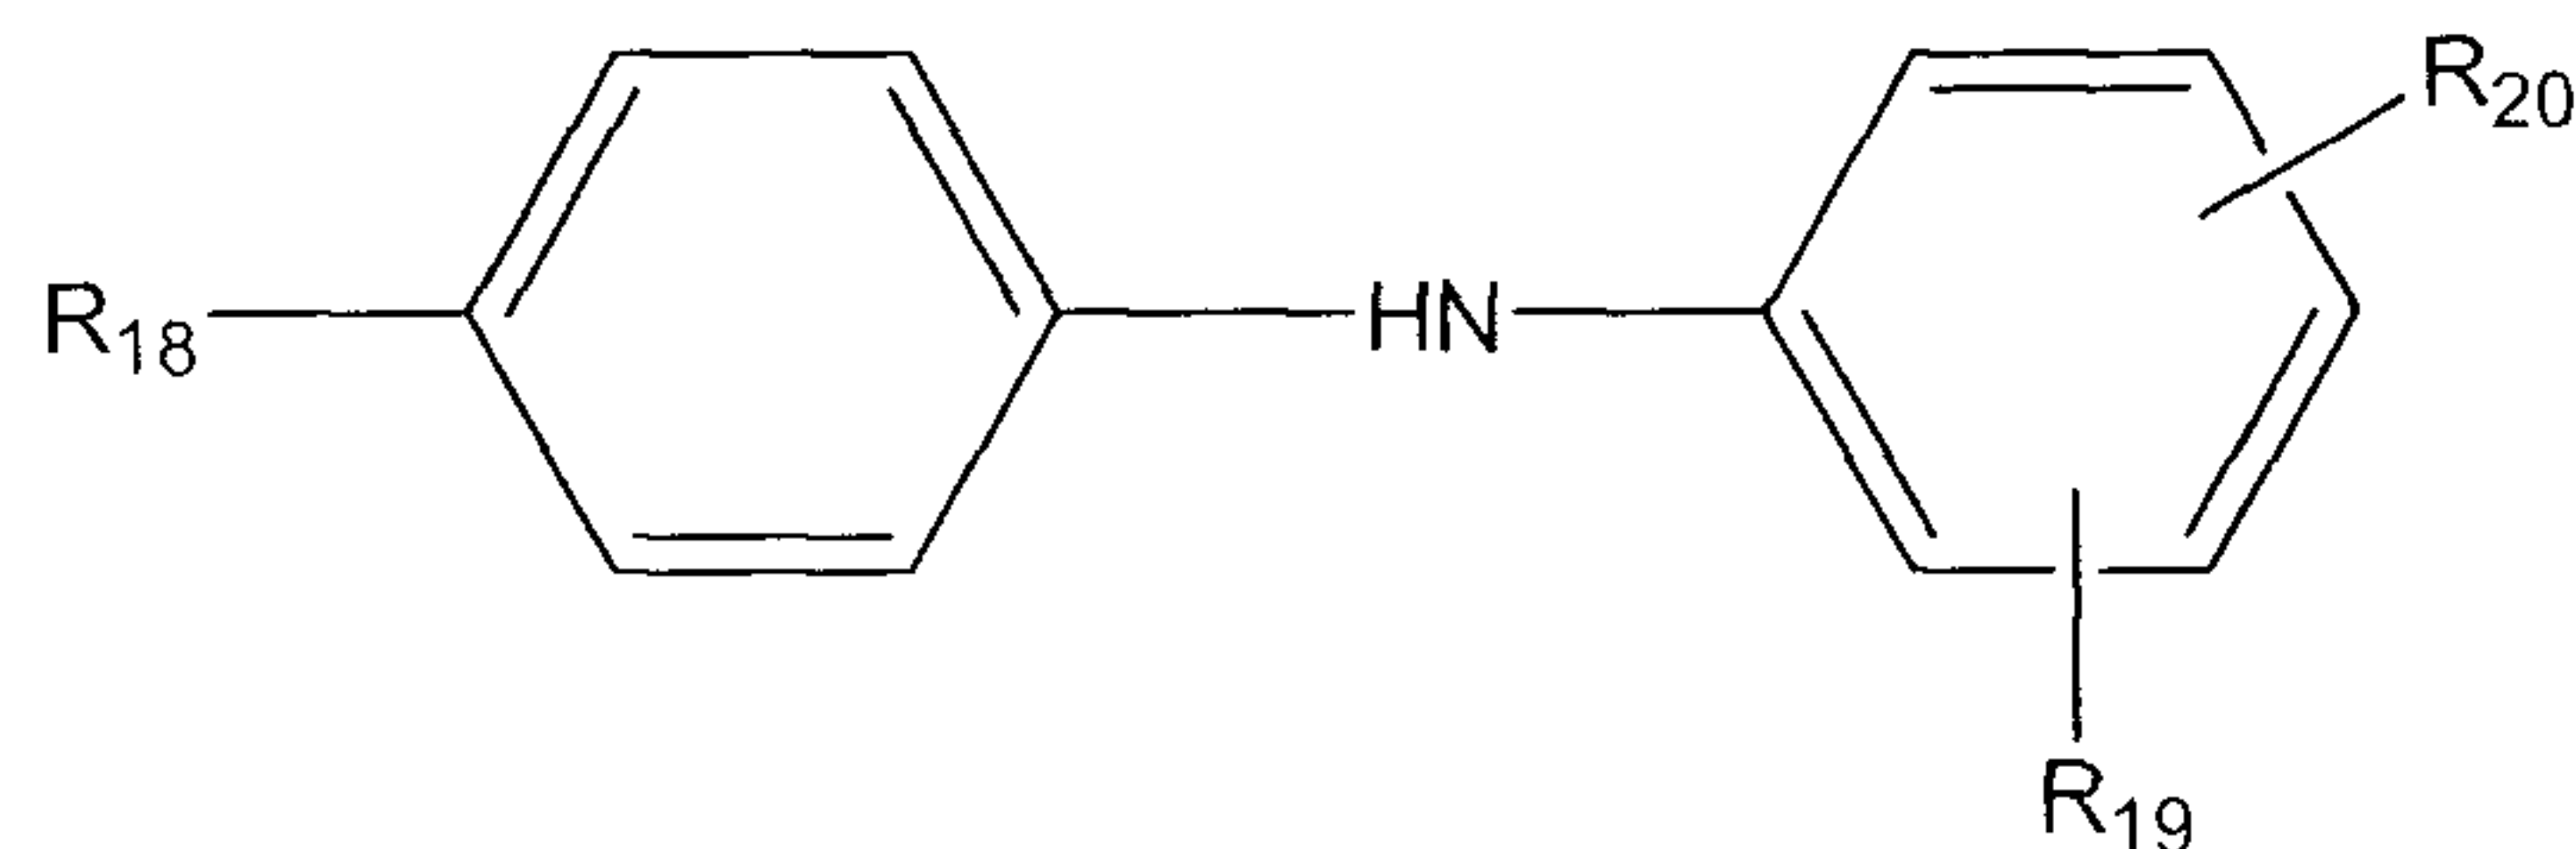

R_{18} is H, --NHaryl, -NHalkaryl, or a branched or straight chain hydrocarbyl radical having from 4 to 24 carbon atoms selected from the group consisting of alkyl, alkenyl, alkoxyl, aralkyl and alkaryl; R_{19} is --NH₂,


--(NH(CH₂)_n)_mNH₂, --NHalkyl, --NHaralkyl, or --CH₂--aryl--NH₂, in which n and m each have a value from 1 to 10; and R₂₀ is hydrogen, alkyl, alkenyl, alkoxyl, aralkyl, or alkaryl, having from 4 to 24 carbon atoms;

(b) aminocarbazole represented by the formula:

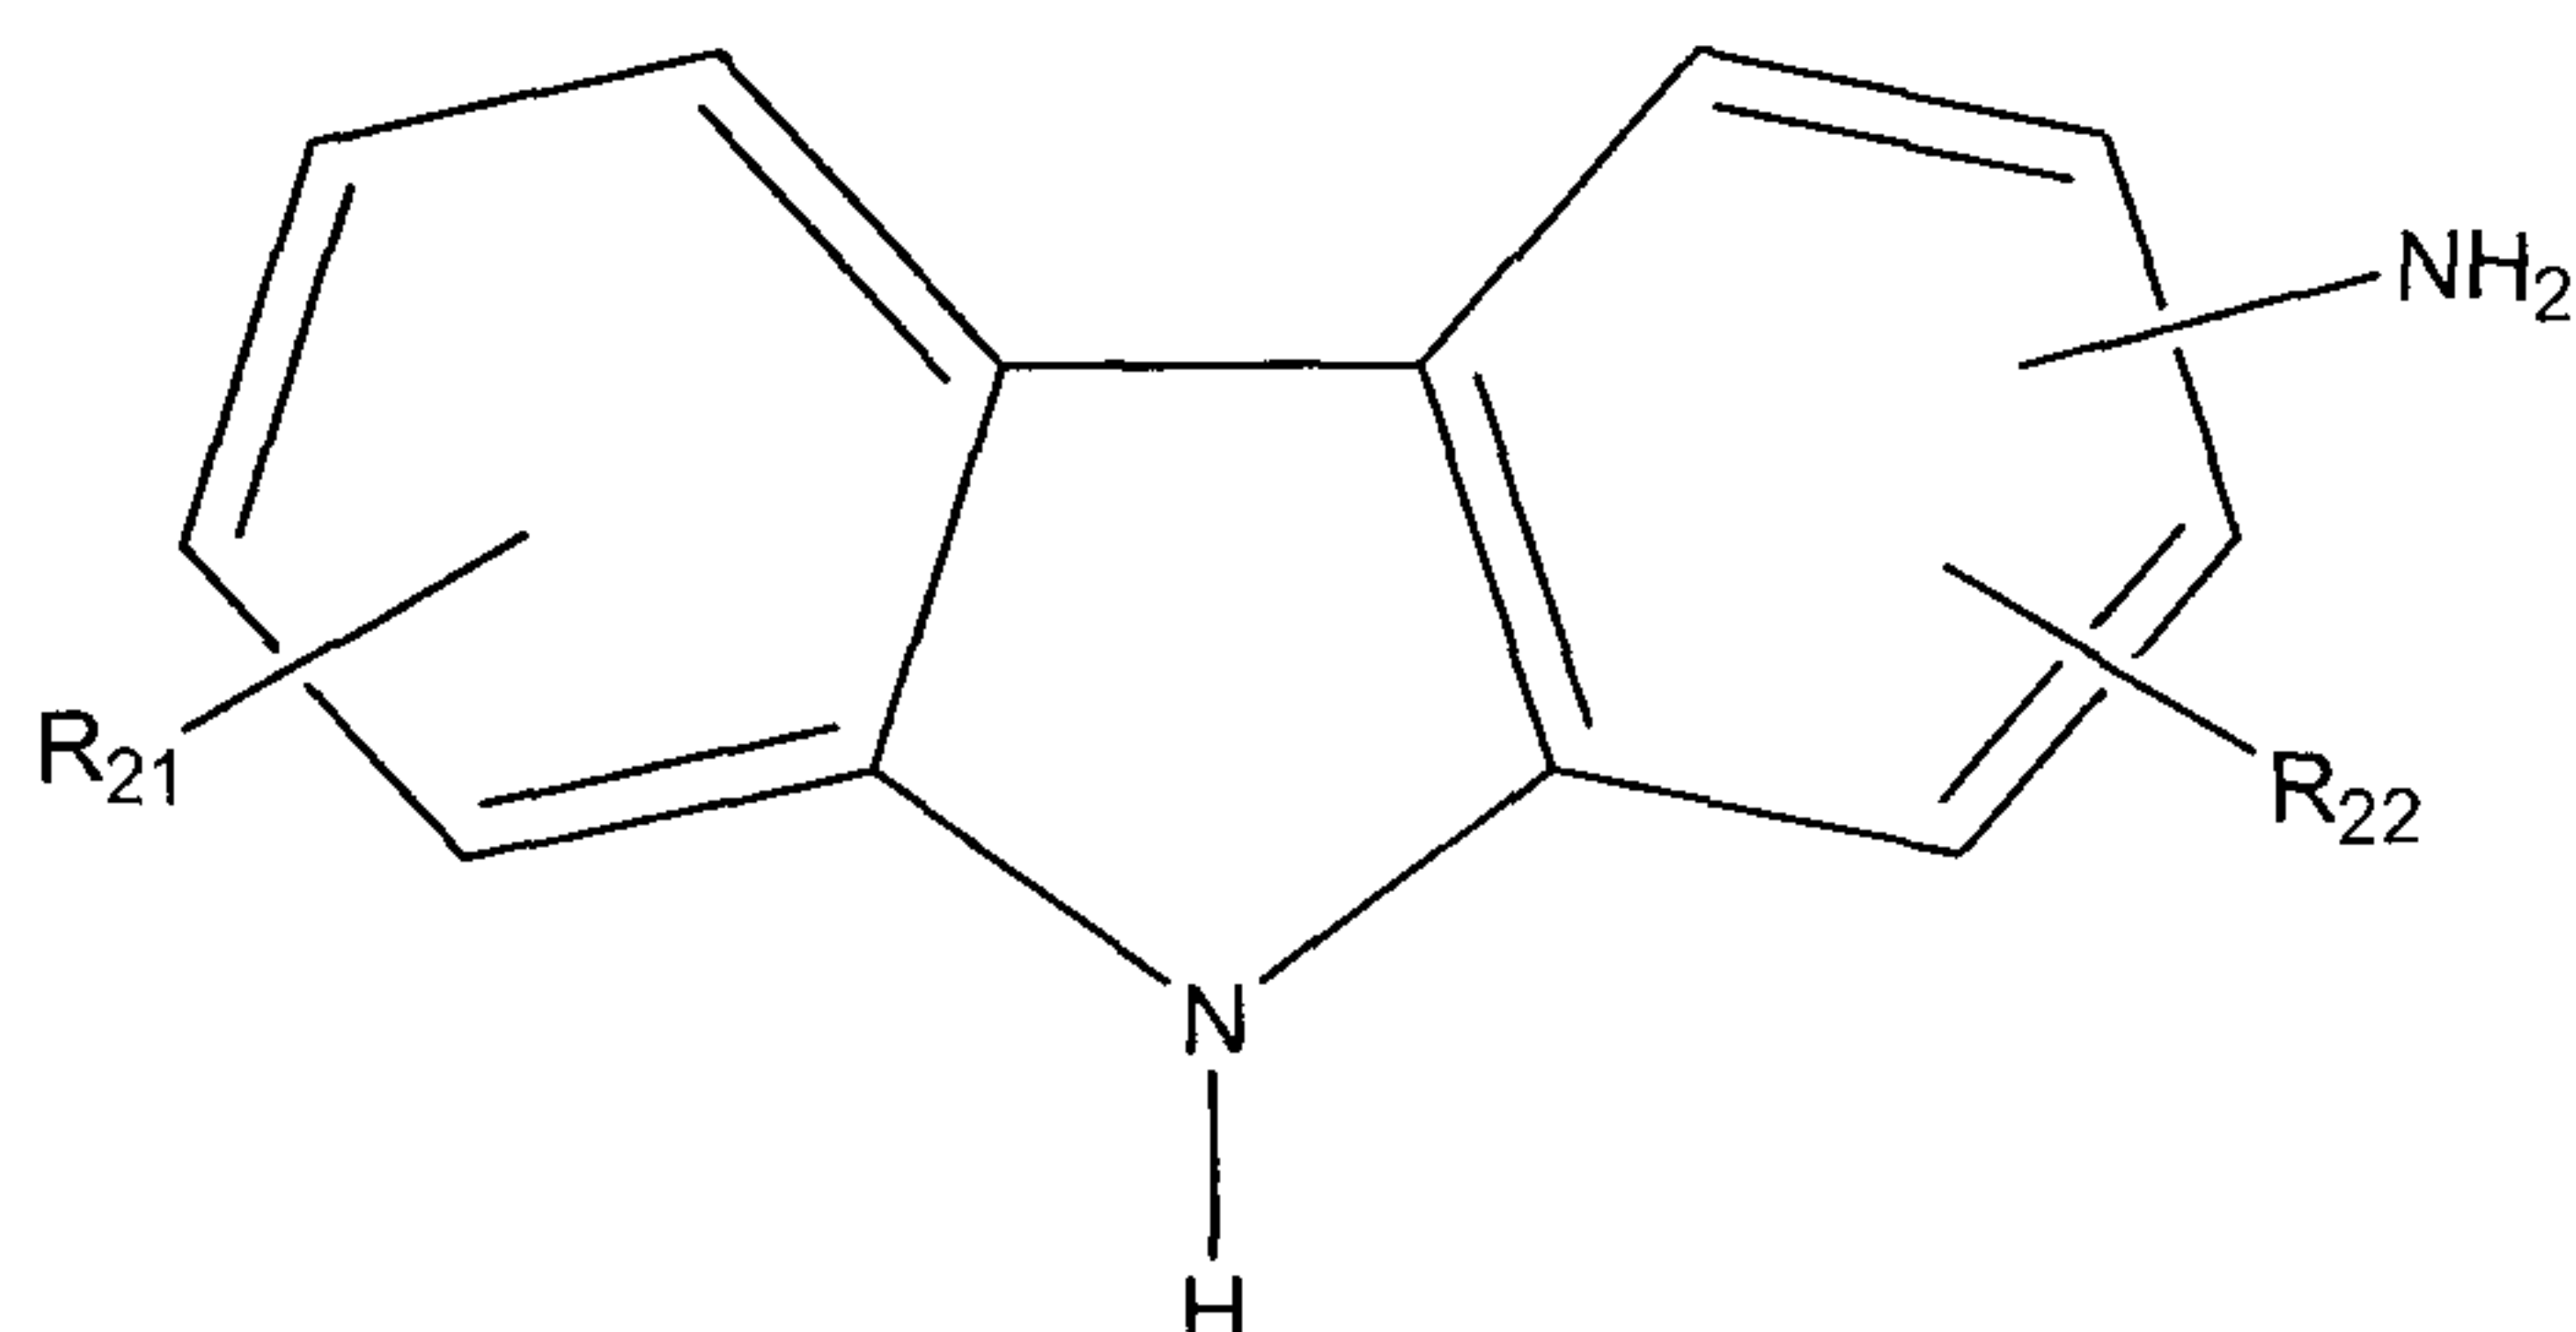


in which R₂₁ and R₂₂ each independently represent hydrogen or an alkyl or alkenyl radical having from 1 to 14 carbon atoms;

(c) an amino-indazolinone represented by the formula:

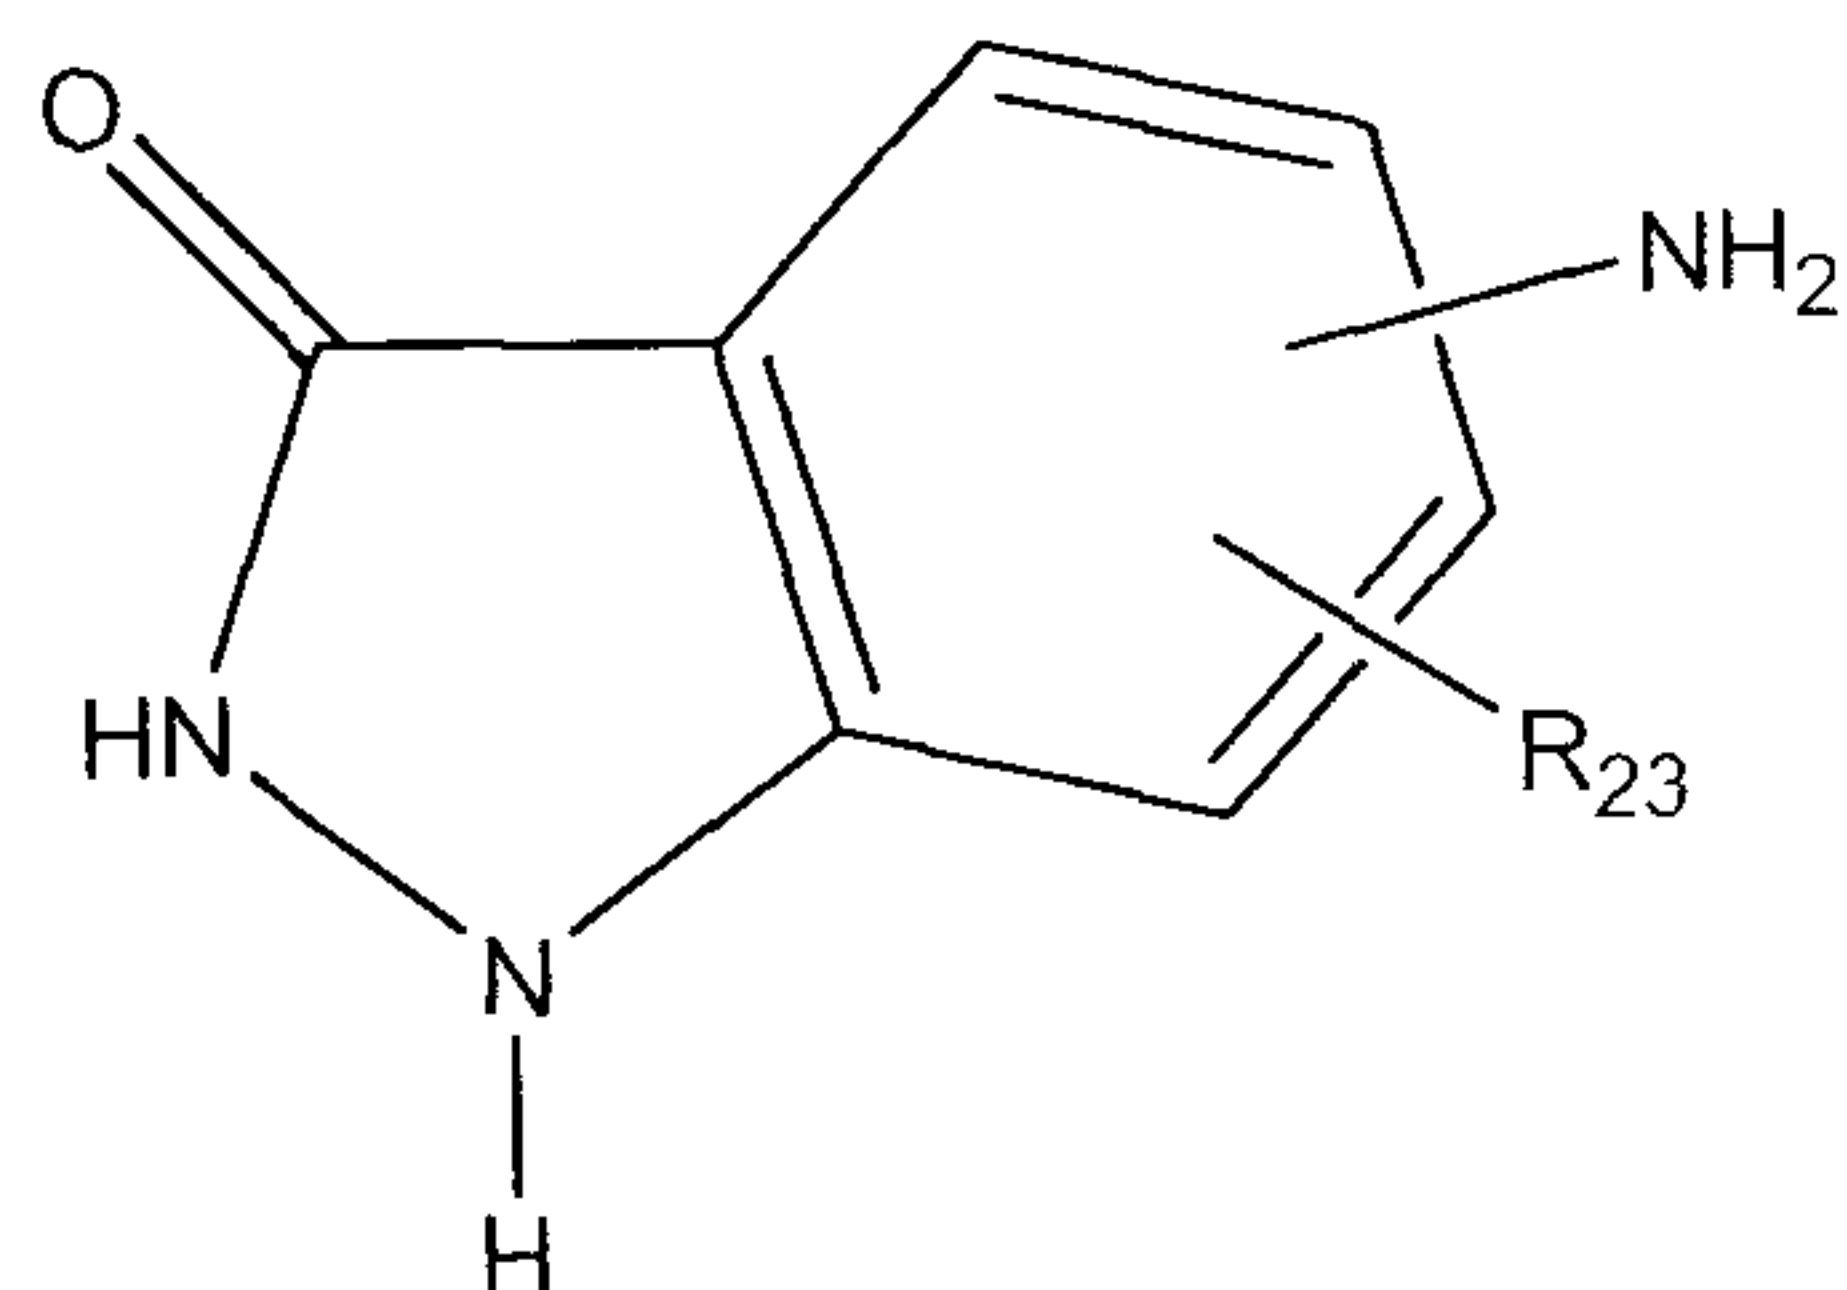


in which R₂₃ is hydrogen or an alkyl radical having from 1 to 14 carbon atoms;

- (d) an aminomercaptotriazole represented by the formula:

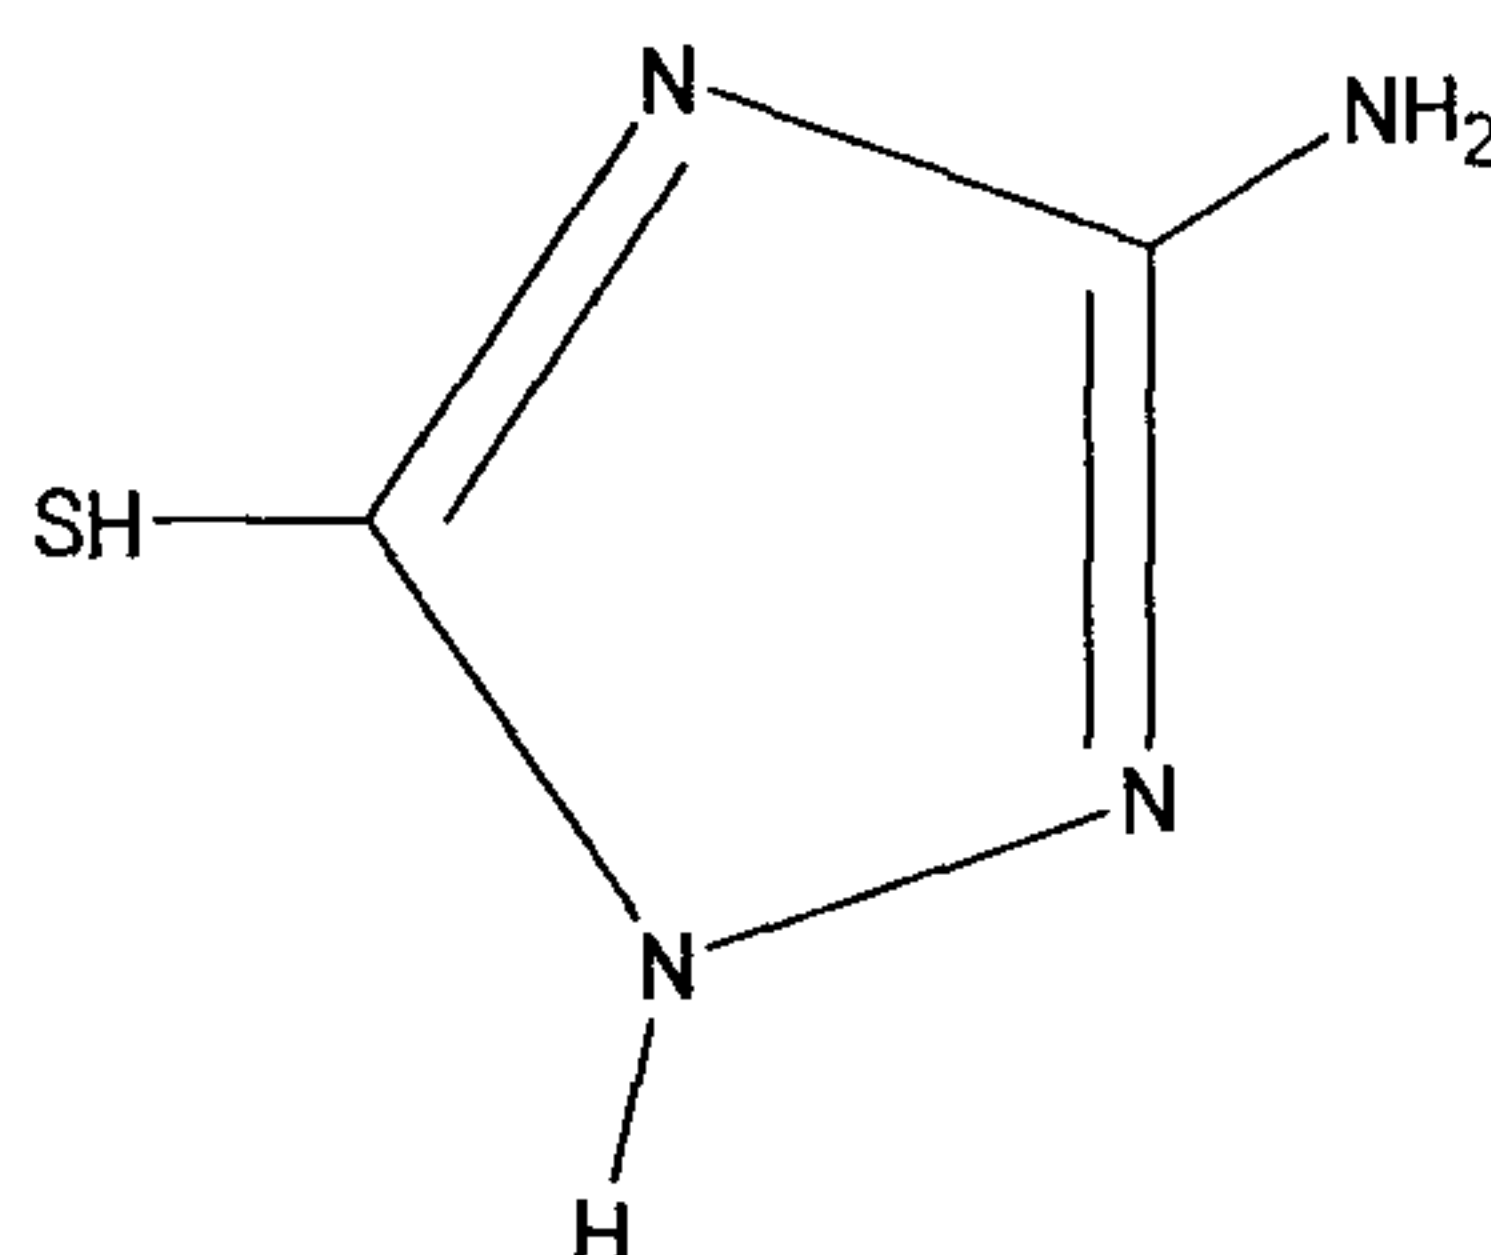


;

- (e) an aminoperimidine represented by the formula:

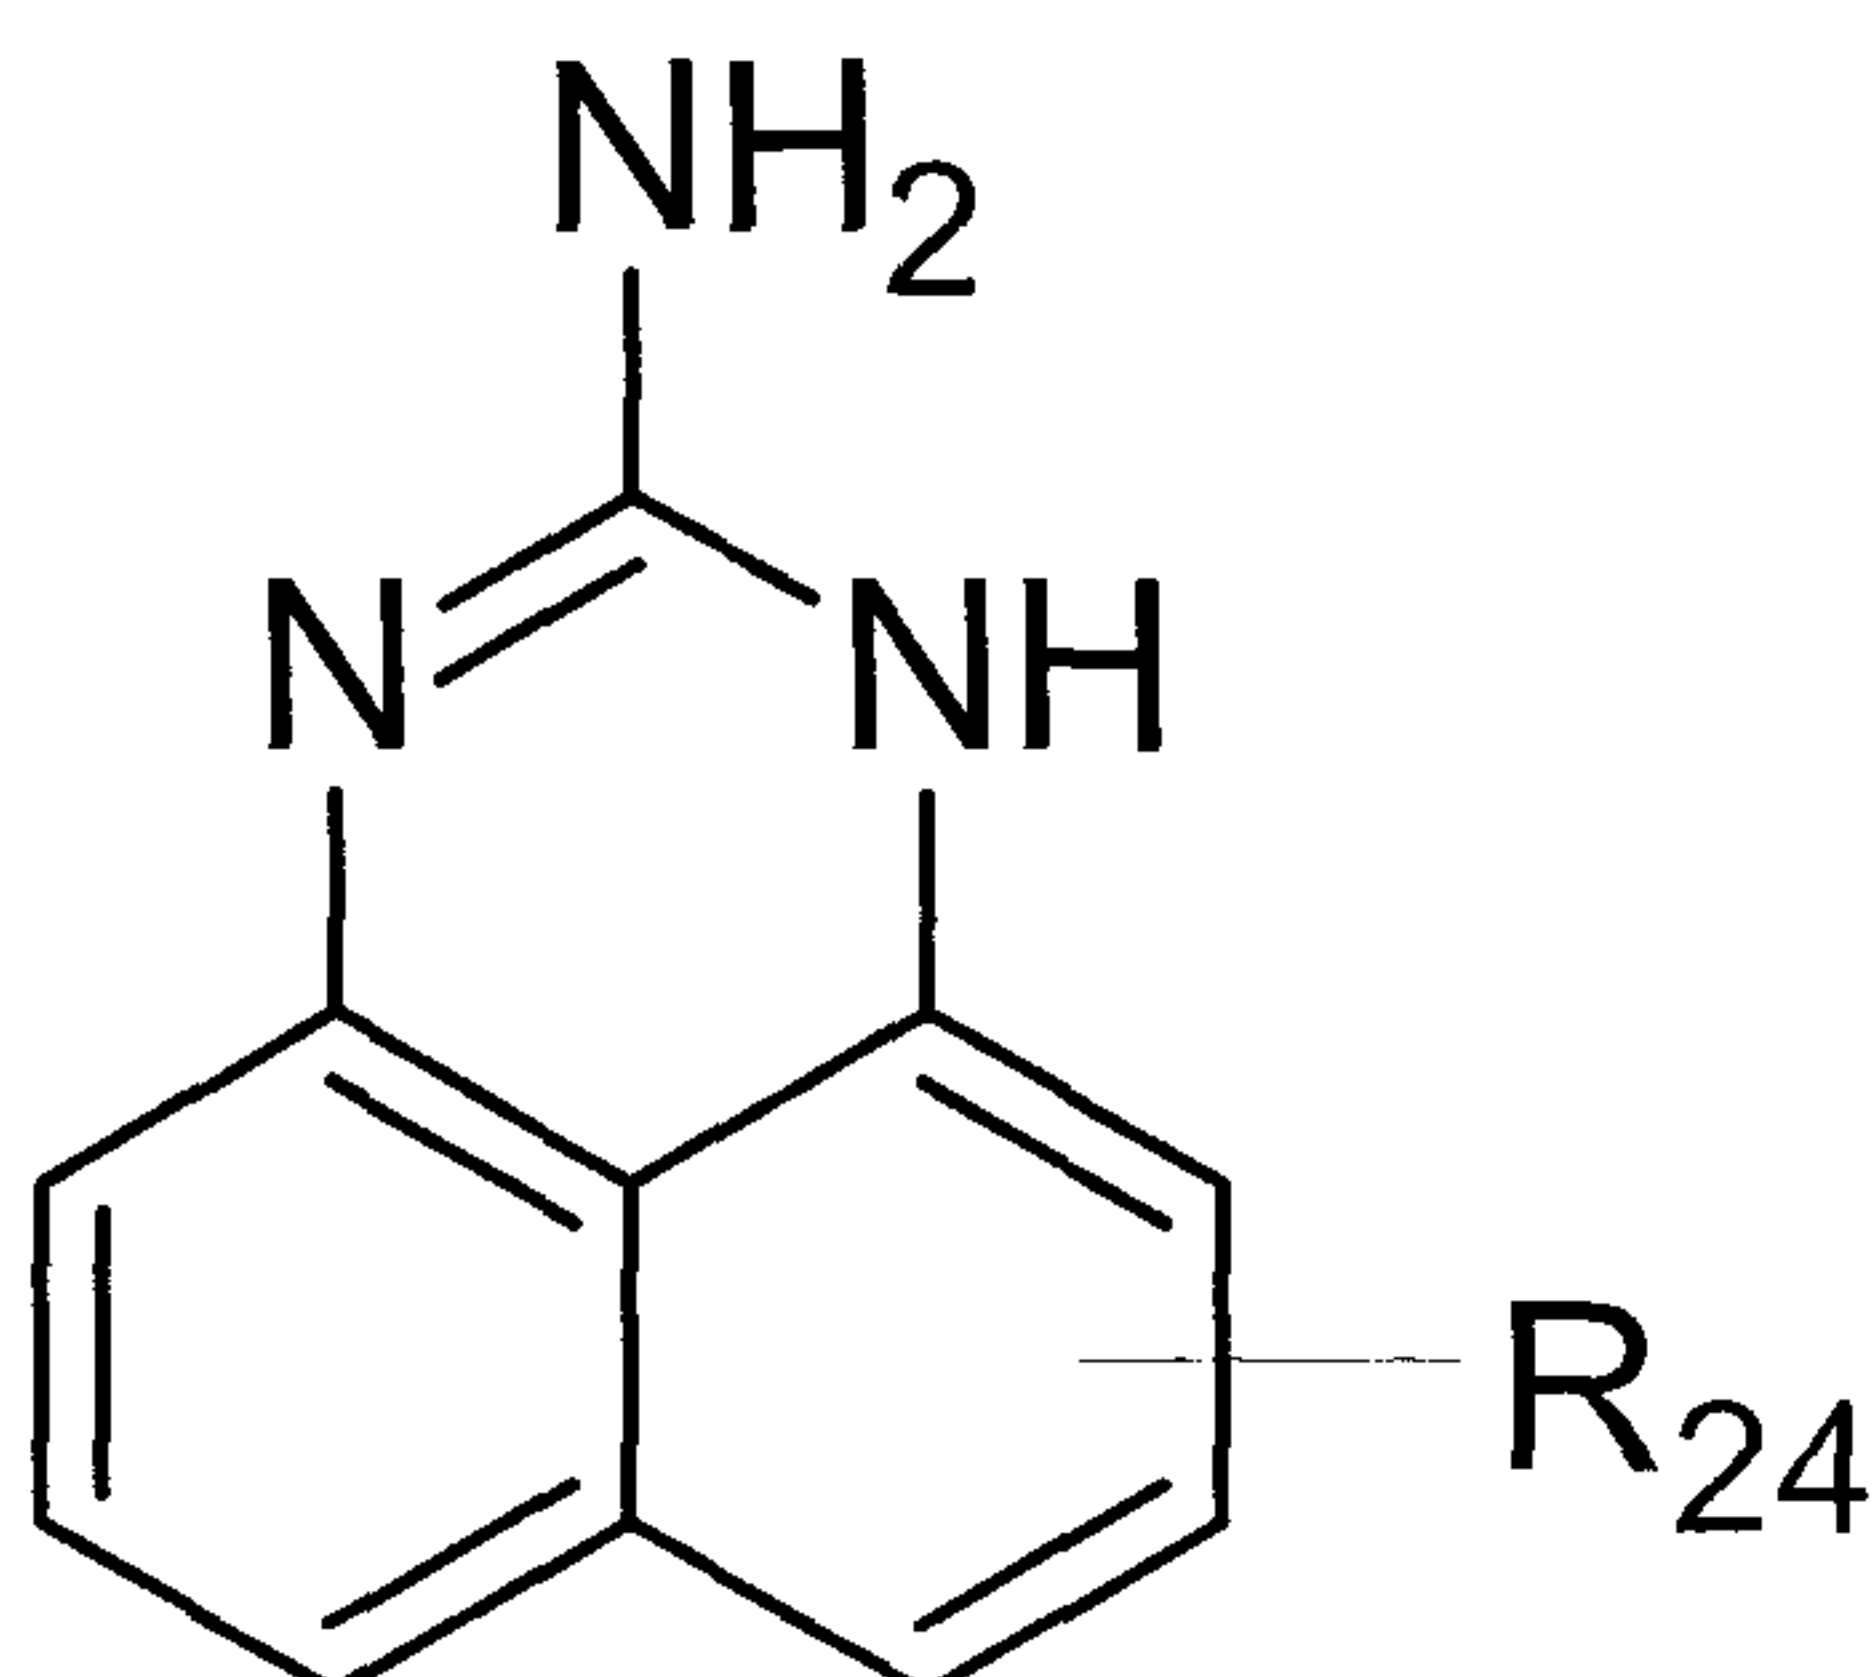

in which R_{24} represents hydrogen or an alkyl radical having from 1 to 14 carbon atoms;


- (f) an aryloxyphenyleneamine represented by the formula:

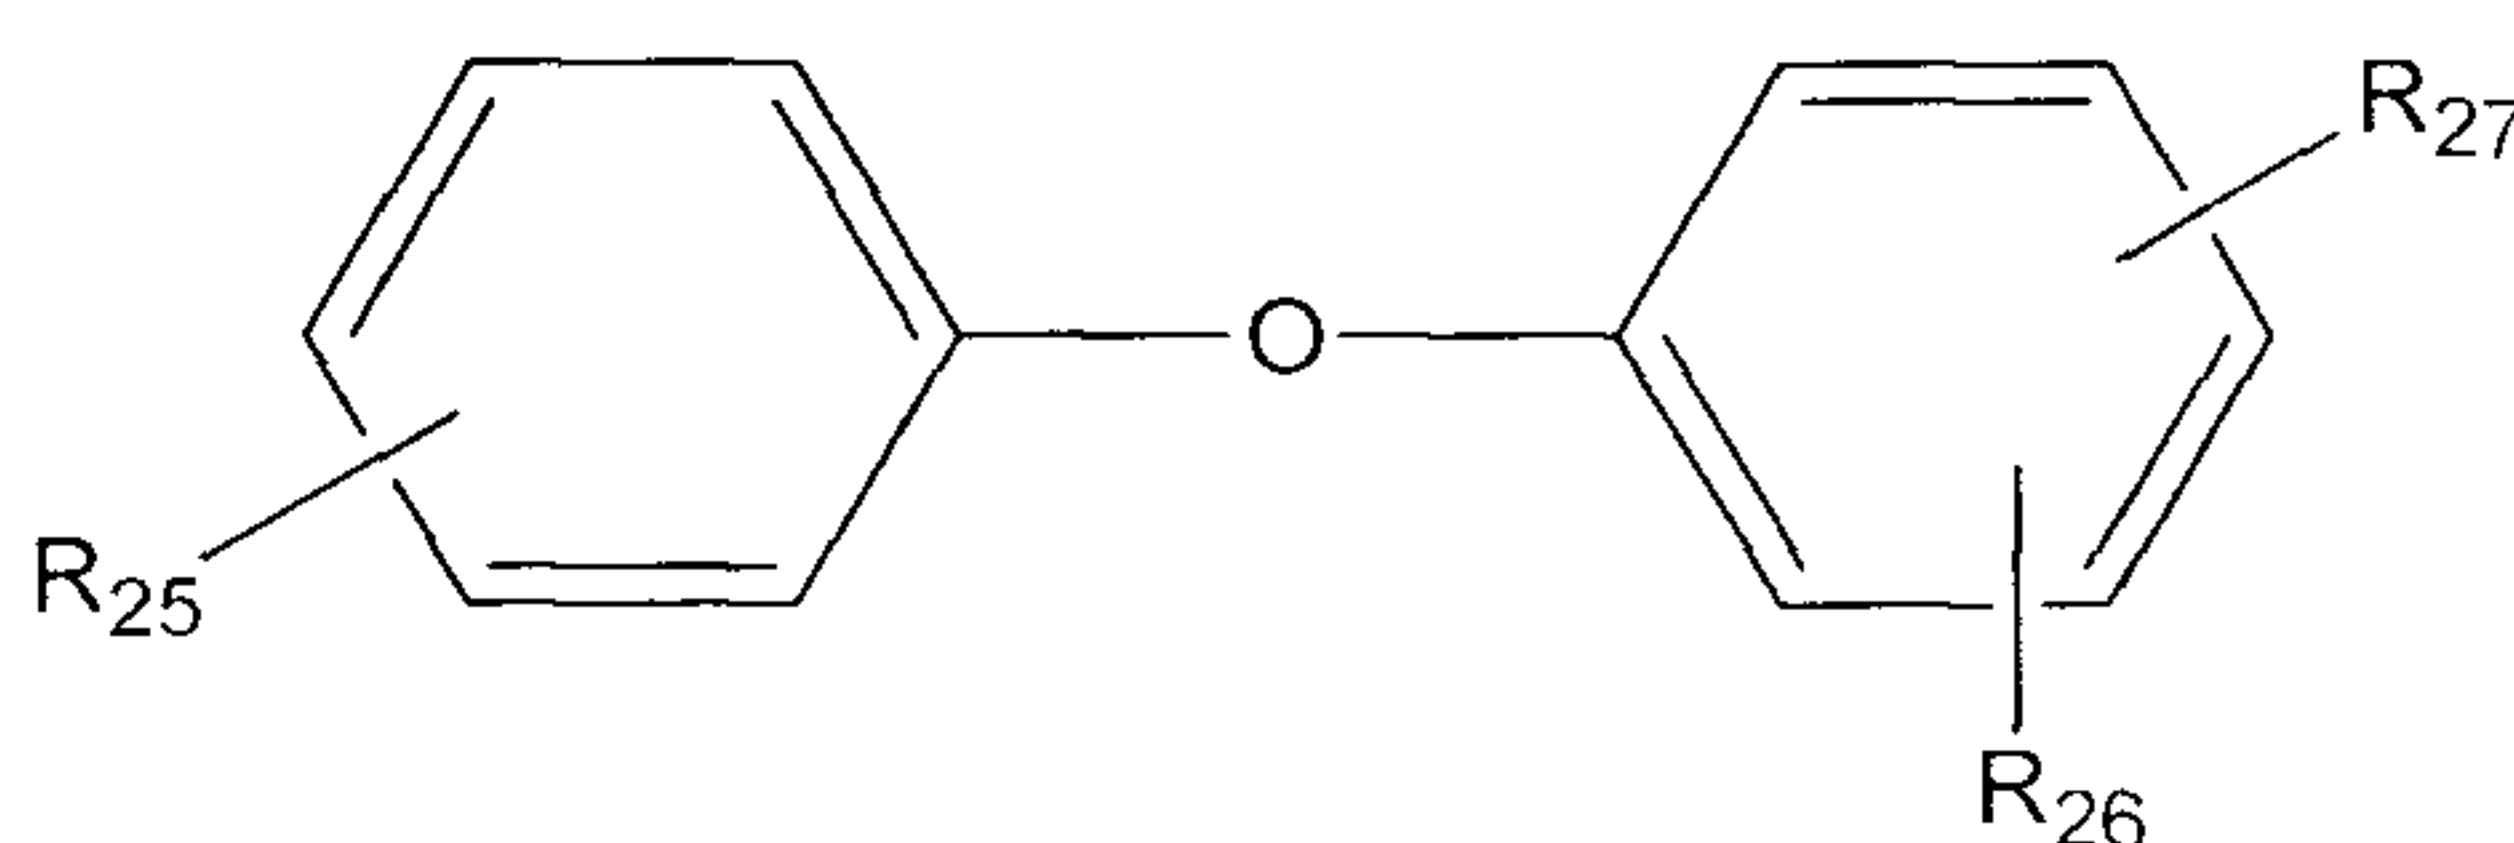

in which R_{25} is H, --NHaryl, -NHalkaryl, or branched or straight chain radical having from 4 to 24 carbon atoms selected from the group consisting of alkyl, alkenyl, alkoxyl, aralkyl and alkaryl; R_{26} is --NH₂, --(NH(CH₂)_n)_m NH₂,

--NHalkyl, or --NHaralkyl, in which n and m each have a value from 1 to 10; and R_{27} is hydrogen, alkyl, alkenyl, alkoxy, aralkyl, or alkaryl, having from 4 to 24 carbon atoms;

- (g) an aromatic amine comprising two aromatic groups, linked by a group, L, represented by the following formula:

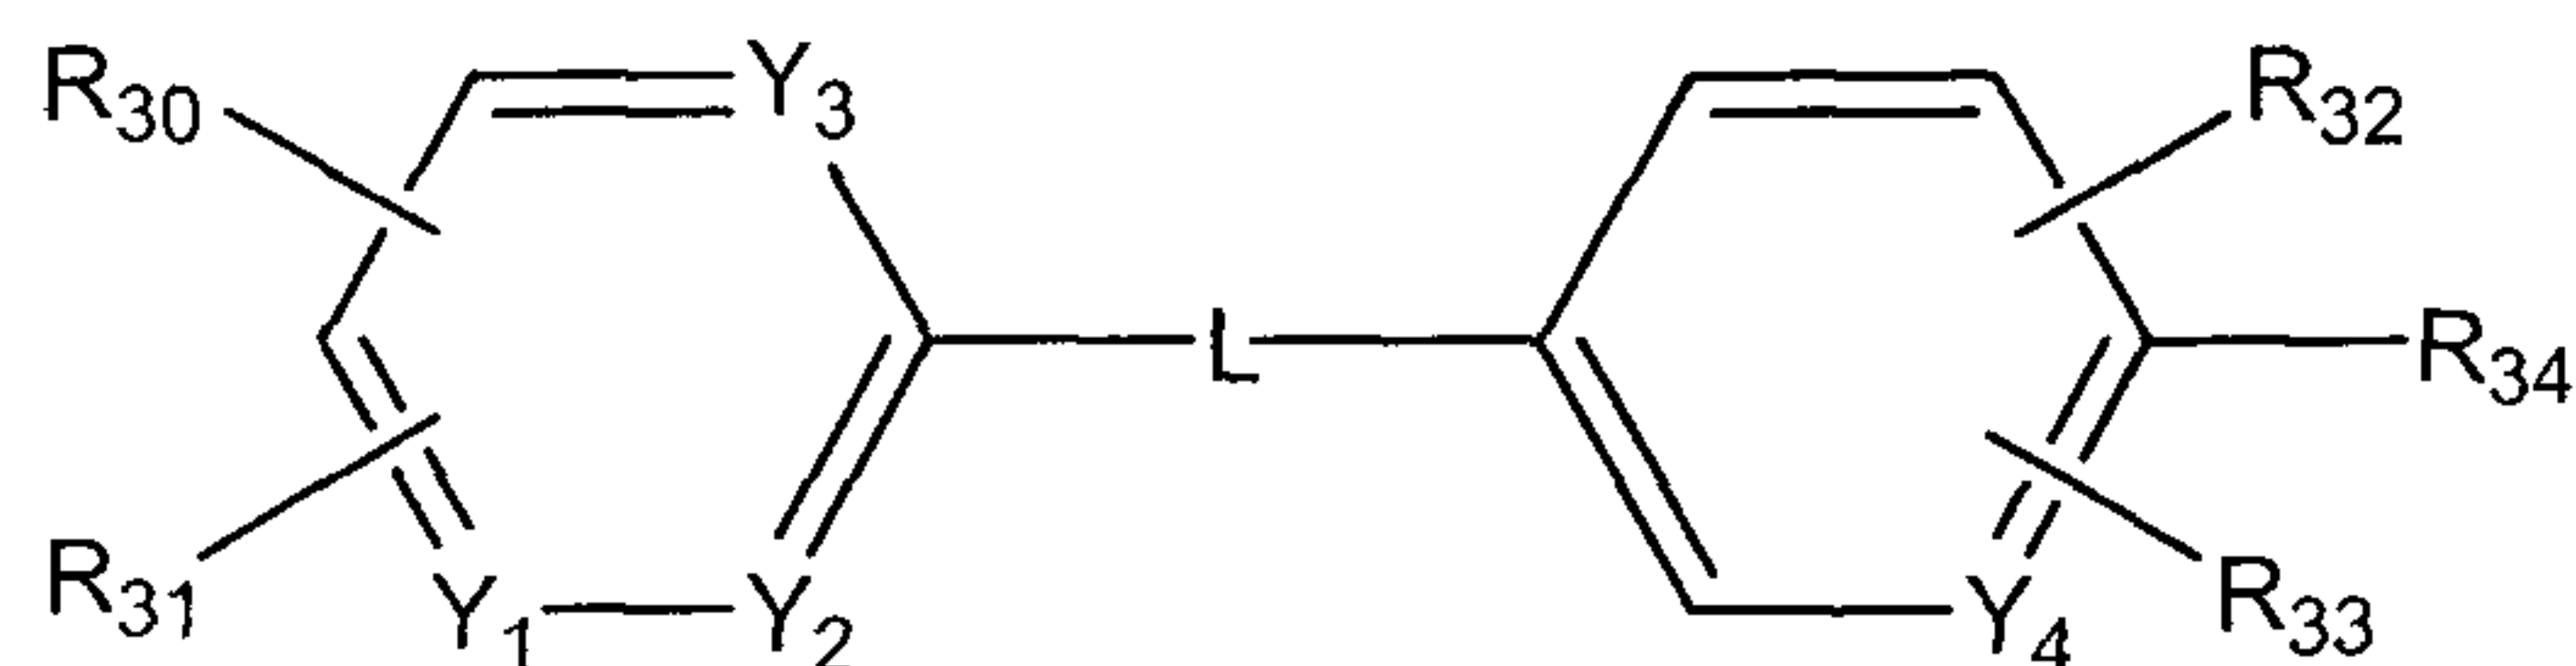

wherein L is selected from the group consisting of $-O-$, $-N=N-$, $-NH-$, $-CH_2NH-$, $-C(O)NR_{28}-$, $-C(O)O-$, $-SO_2-$, $-SO_2NR_{29}-$ and $-SO_2NH-$, wherein R_{28} and R_{29} independently represent a hydrogen, an alkyl, an alkenyl or an alkoxy group having from 1 to 8 carbon atoms;

wherein each Y_1 , Y_2 , Y_3 and Y_4 are independently N or CH provided that Y_1 and Y_2 may not both be N;


R_{30} and R_{31} independently represent a hydrogen, alkyl, aryl, alkaryl, aralkyl, alkoxy, hydroxyalkyl, aminoalkyl, $-OH$, $-NO_2$, $-SO_3H$, $-SO_3Na$, CO_2H or salt thereof, $-NR_{41}R_{42}$ wherein R_{41} and R_{42} are independently hydrogen, alkyl, aryl, arylalkyl, or alkaryl;

R_{32} and R_{33} independently represent a hydrogen, an alkyl, an alkenyl or an alkoxy group having from 1 to 8 carbon atoms, $-OH$, $-SO_3H$ or $-SO_3Na$;

R_{34} represents $-NH_2$, $-NHR_{35}$, wherein R_{35} is an alkyl or an alkenyl group having from 1 to 8 carbon atoms, $-CH_2-(CH_2)_n-NH_2$ or $-CH_2-aryl-NH_2$ and n is from 0 to 10;


(h) an aminothiazole selected from the group consisting of aminothiazole, aminobenzothiazole, aminobenzothiadiazole and aminoalkylthiazole;

(i) an aminoindole represented by the formula:

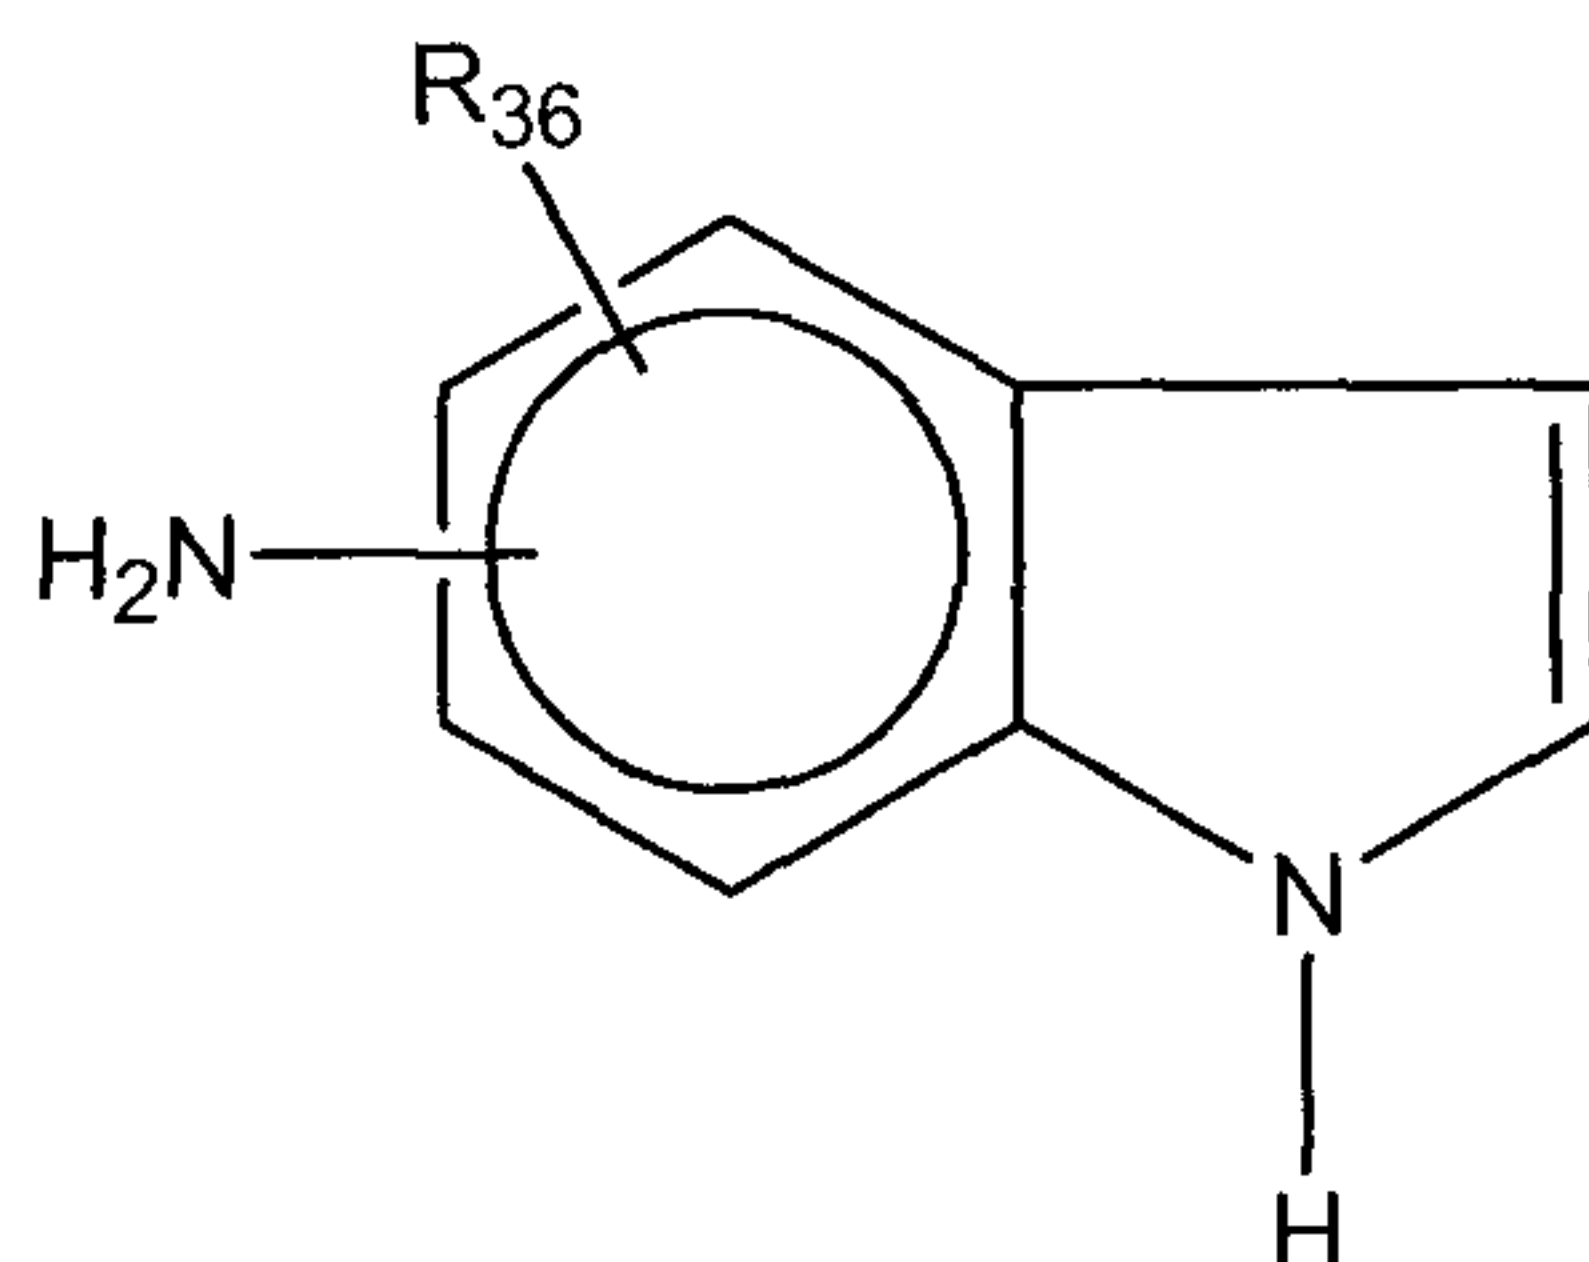

wherein R_{36} represents a hydrogen, an alkyl or an alkenyl group having from 1 to 14 carbon atoms;

(j) an aminopyrrole represented by the formula:

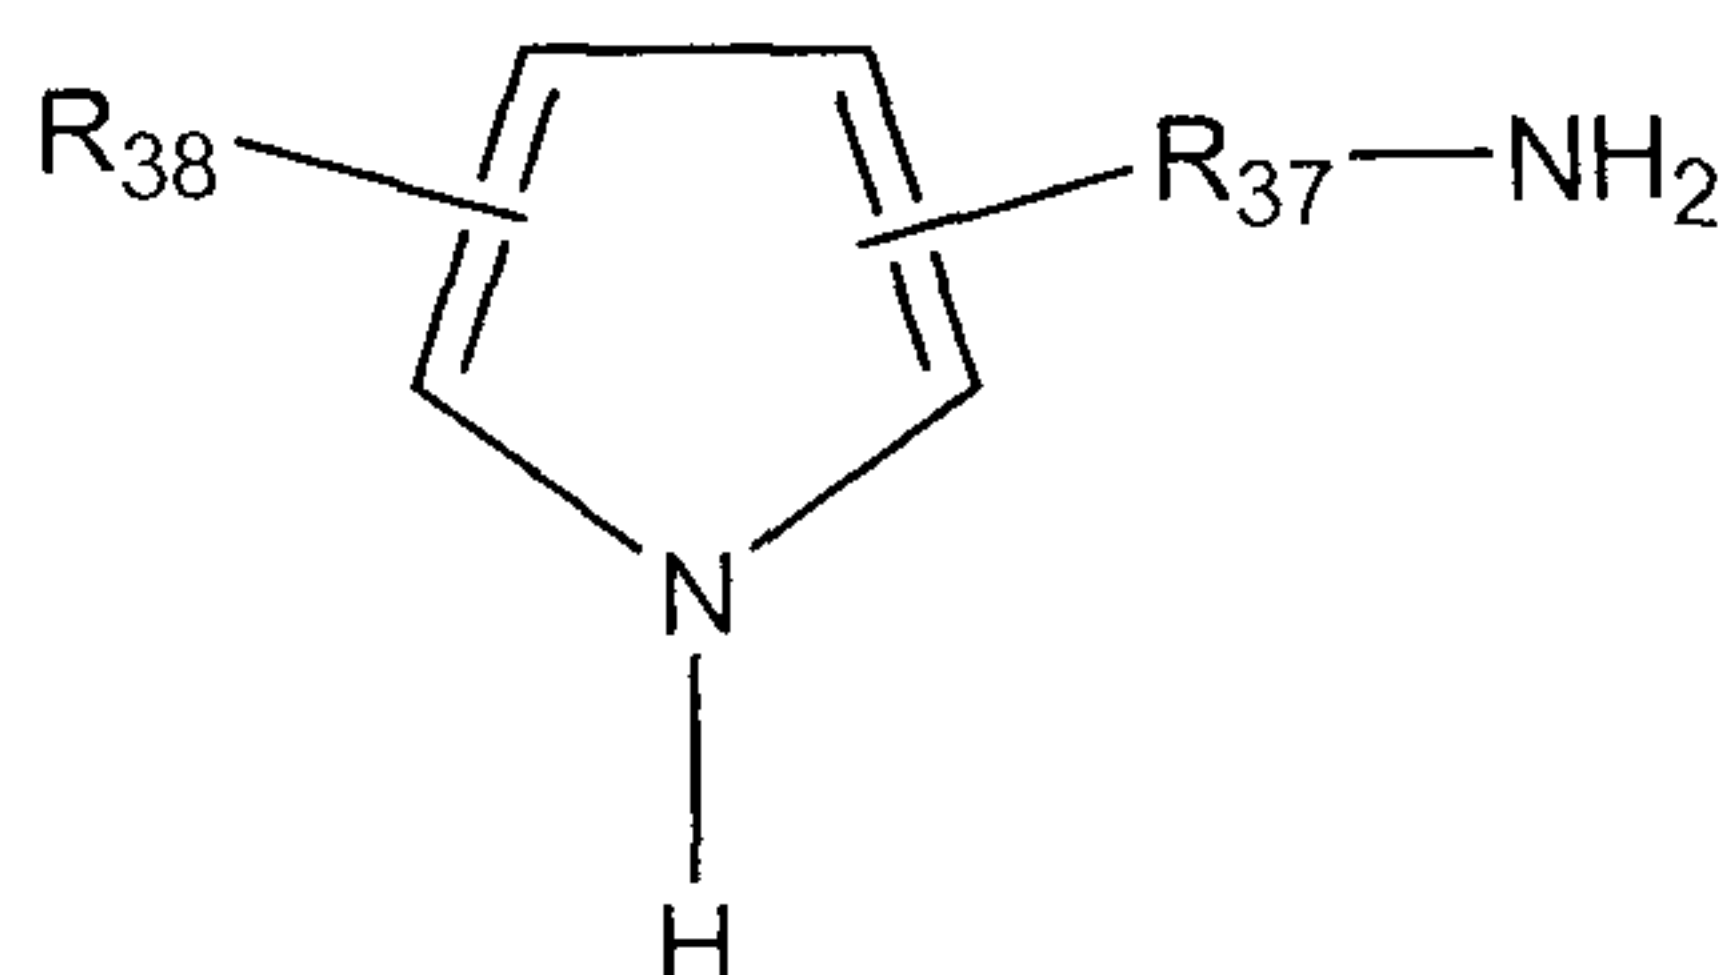

wherein R_{37} represents a divalent alkylene group having 2 to 6 carbon atoms and R_{38} represents a hydrogen, an alkyl or an alkenyl group having from 1 to 14 carbon atoms;

(k) a ring substituted or unsubstituted aniline;

(l) an aminoquinoline;

(m) an aminobenzimidazole;

- (n) a N, N-dialkylphenylenediamine;
 - (o) a benzylamine; and
 - (p) a benzyl alcohol.
17. The lubricating oil additive composition of claim 16 wherein the aromatic amine is N-arylphenylenediamine.
 18. The lubricating oil additive composition of claim 17 wherein the N-arylphenylenediamine is N-phenylphenylenediamine.
 19. The lubricating oil additive composition of Claim 18 wherein the N-phenylphenylenediamine is N-phenyl-1,4-phenylenediamine.
 20. The lubricating oil additive composition of claim 1 wherein compound (i)(b) of copolymer (i) is polyisobutene having a number average molecular weight (M_n) of from about 112 to about 5000.
 21. The lubricating oil additive composition of claim 20, wherein the number average molecular weight (M_n) is from about 500 to about 3000.
 22. The lubricating oil additive composition of claim 21, wherein the number average molecular weight (M_n) is from about 1000 to about 2500.
 23. The lubricating oil additive composition of claim 1 wherein (i)(a) is a dicarboxylic acid, anhydride or ester thereof.
 24. The lubricating oil additive composition of claim 23 wherein wherein (i)(a) is maleic anhydride or ester thereof.

25. The lubricating oil additive composition of claim 1 wherein the monoolefin of (i)(c) is a 1-olefin.

26. A lubricating oil composition comprising a major amount of an oil of lubricating viscosity and a minor amount of the lubricating oil additive composition prepared by the process which comprises reacting

(A) at least one of the following copolymers:

(i) a copolymer obtained by free radical copolymerization of components comprising:

(a) at least one monoethylenically unsaturated
C₃-C₂₈ monocarboxylic acid or ester thereof, or
C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof;

(b) at least one 1-olefin comprising 2 to 40 carbon atoms or at least one polyolefin comprising 4 to 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof; and

(c) at least one monoolefin compound which is copolymerizable with the monomers of (a) and (b) and is selected from the group consisting of:

(1) an alkyl vinyl ether and an allyl alkyl ether where the alkyl group is hydroxyl, amino, dialkylamino or alkoxy substituted or is unsubstituted, and containing from 1 to 40 carbon atoms;


(2) an alkyl amine and an N-alkylamide of a monoethylenically unsaturated mono- or dicarboxylic

acid of from 3 to 10 carbon atoms where the alkyl substituent contains from 1 to 40 carbon atoms;

- (3) an N-vinylcarboxamide of carboxylic acids of from 1 to 8 carbon atoms;
 - (4) an N-vinyl substituted nitrogen-containing heterocyclic compound; and
 - (5) at least one 1-olefin comprising 2 to 40 carbon atoms or at least one polyolefin comprising 4 to 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof, provided that the olefin employed is not the same as the olefin employed in (i)(b);
- (ii) a copolymer obtained by reacting compound (i)(a) and compound(i)(b) in the presence of a free radical initiator; or
 - (iii) a copolymer obtained by (a) reacting compound (i)(a) with compound (i)(b) or (i)(c) in a non-free radical catalyzed reaction in the presence of copolymer (i) or copolymer (ii) or both; or by (b) contacting copolymer (i) or copolymer (ii) or both with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c); with
- (B) at least one ether compound capable of being reacted with at least two monocarboxylic acids, or esters, thereof, or dicarboxylic acids, anhydrides or esters thereof, or mixtures thereof; and

- (C) at least one aliphatic compound capable of reacting with at least one monocarboxylic acid or ester thereof, or dicarboxylic acid, anhydride or ester thereof; and
- (D) at least one aromatic compound capable of reacting with at least one monocarboxylic acid or ester thereof; or dicarboxylic acid, anhydride or ester thereof.
27. The lubricating oil composition of claim 26, wherein in copolymer (iii)(b), said copolymer (i) or copolymer (ii) or both are contacted with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c) in the presence of component (C), component (D) or both.
 28. The lubricating oil composition of claim 26, wherein the ether compound (B) is a polyether polyamine.
 29. The lubricating oil composition of claim 28, wherein the polyether polyamine is a polyoxyalkylene diamine wherein each alkylene unit individually contains from 2 to 5 carbon atoms.
 30. The lubricating oil composition of claim 29 wherein the oxyalkylene moiety is oxyethylene or oxypropylene, or mixtures thereof.
 31. The lubricating oil composition of claim 30 wherein the polyether polyamine is polyoxyethylene diamine.
 32. The lubricating oil composition of claim 26 wherein the copolymer is copolymer (i).
 33. The lubricating oil composition of claim 26 wherein the copolymer is copolymer (ii).
 34. The lubricating oil composition of claim 33 wherein copolymer (ii) is polyPIBSA, obtained by the free radical catalyzed reaction of maleic anhydride and polyisobutylene.


35. The lubricating oil composition of claim 26 wherein the copolymer is copolymer (iii).
36. The lubricating oil composition of claim 26 wherein the aliphatic compound is selected from group consisting of aliphatic monoamines, aliphatic diamines, and aliphatic polyamines.
37. The lubricating oil composition of claim 26 wherein the aliphatic compound is a polyalkylene polyamine.
38. The lubricating oil composition of claim 37 wherein the aliphatic compound is an aliphatic diamine.
39. The lubricating oil composition of claim 38 wherein the aliphatic diamine is N,N-diethyl amino ethylamine, N,N-diethyl amino propylamine, N,N-dimethyl amino propylamine or 1,3-aminopropyl morpholine.
40. The lubricating oil composition of 37, wherein the polyalkylene polyamine is selected from the group consisting of tetraethylene pentamine, pentaethylene hexamine and heavy polyamine.
41. The lubricating oil composition of claim 26 wherein the at least one aromatic compound is selected from a group consisting of
- a) an N-arylphenylenediamine represented by the formula:

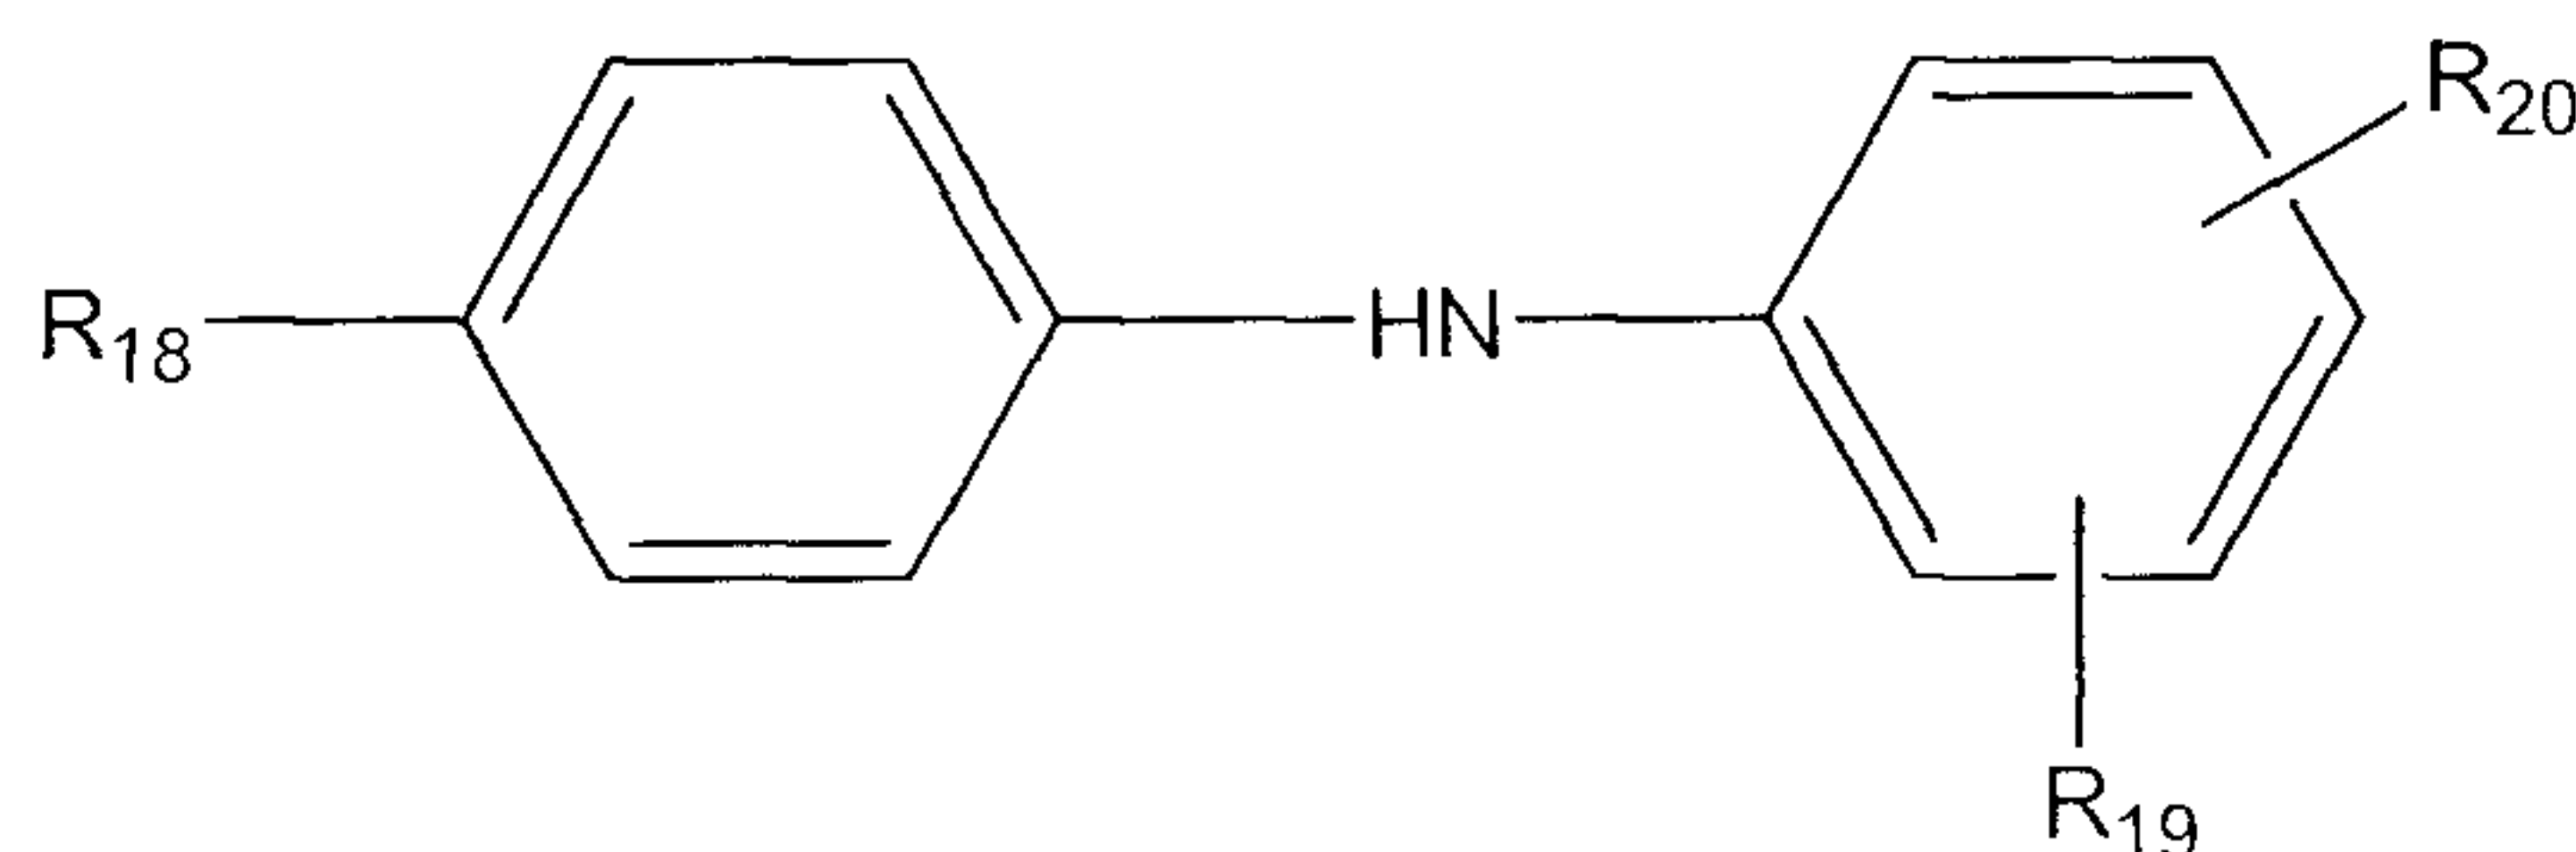

R_{18} is H, --NHaryl, -NHalkaryl, or a branched or straight chain hydrocarbonyl radical having from 4 to 24 carbon atoms selected from the group consisting of alkyl, alkenyl, alkoxy, aralkyl and alkaryl; R_{19} is --NH₂,


--(NH(CH₂)_n)_mNH₂, --NHalkyl, --NHaralkyl, or --CH₂--aryl--NH₂, in which n and m each have a value from 1 to 10; and R₂₀ is hydrogen, alkyl, alkenyl, alkoxyl, aralkyl, or alkaryl, having from 4 to 24 carbon atoms;

(b) aminocarbazole represented by the formula:

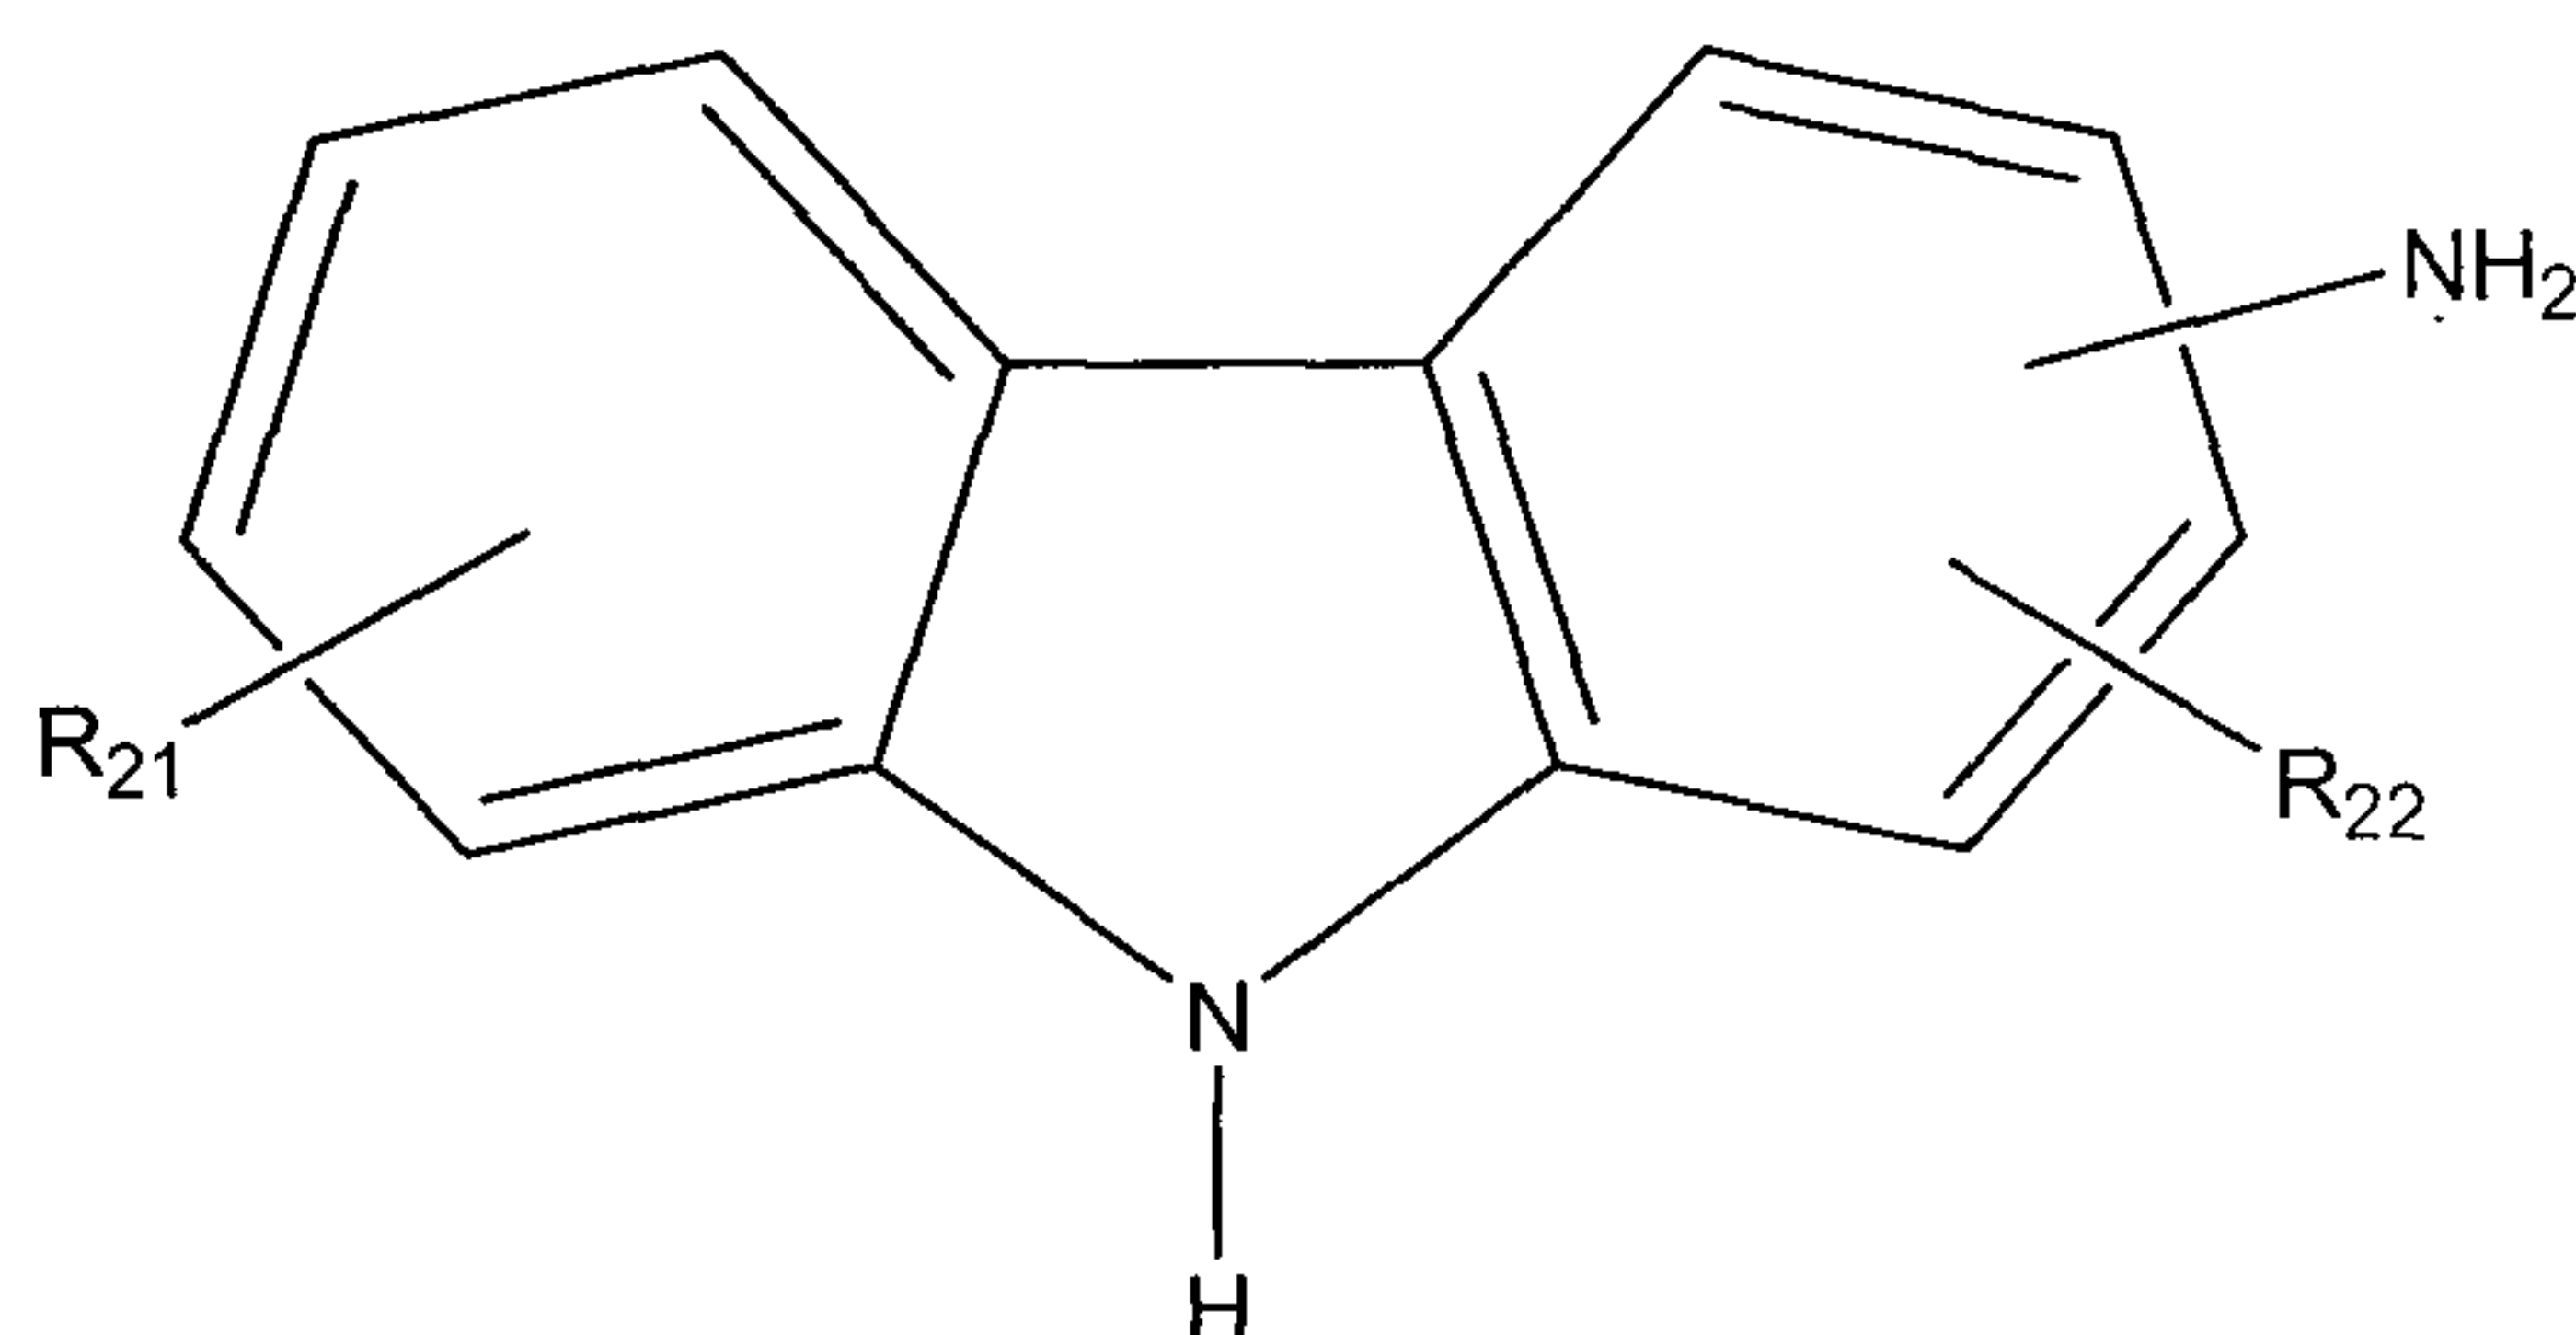


in which R₂₁ and R₂₂ each independently represent hydrogen or an alkyl or alkenyl radical having from 1 to 14 carbon atoms;

(c) an amino-indazolinone represented by the formula:

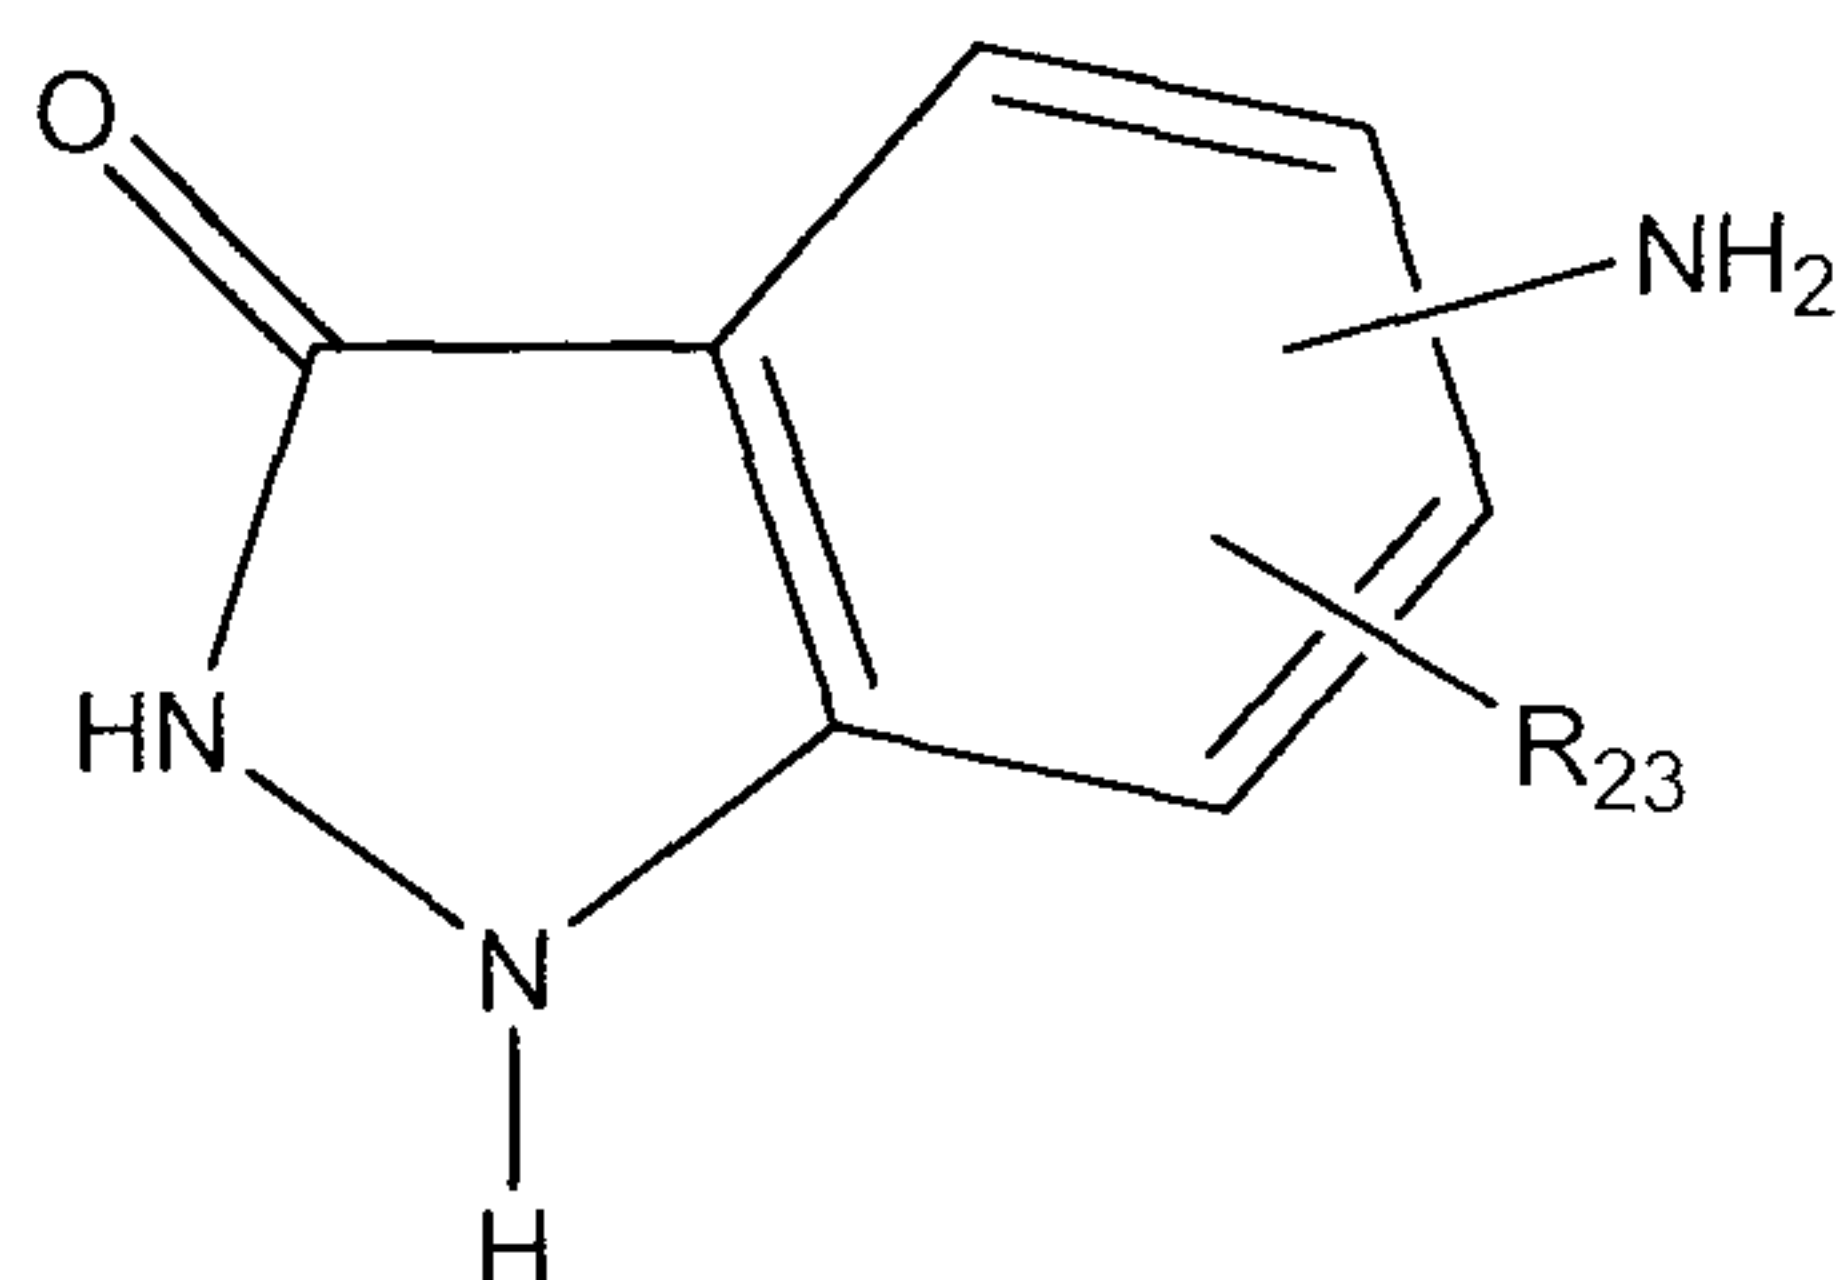


in which R₂₃ is hydrogen or an alkyl radical having from 1 to 14 carbon atoms;

- (d) an aminomercaptotriazole represented by the formula:

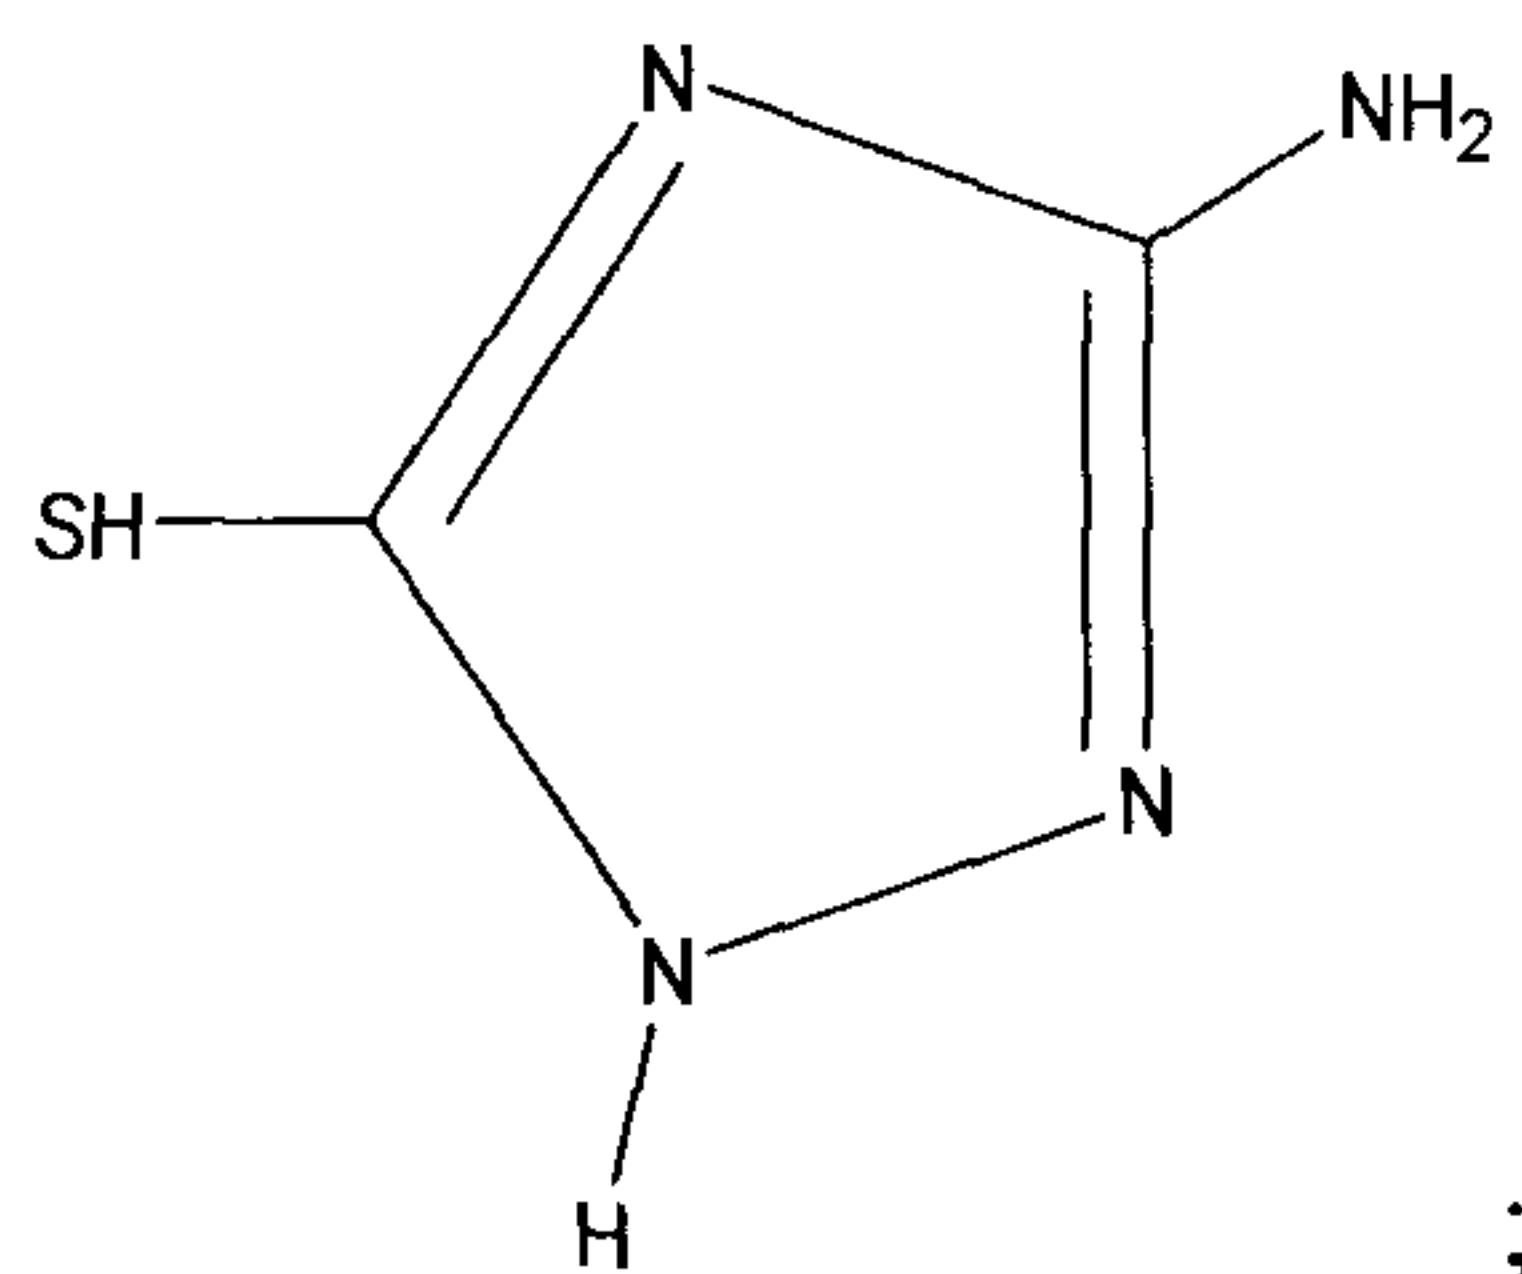


- (e) an aminoperimidine represented by the formula:

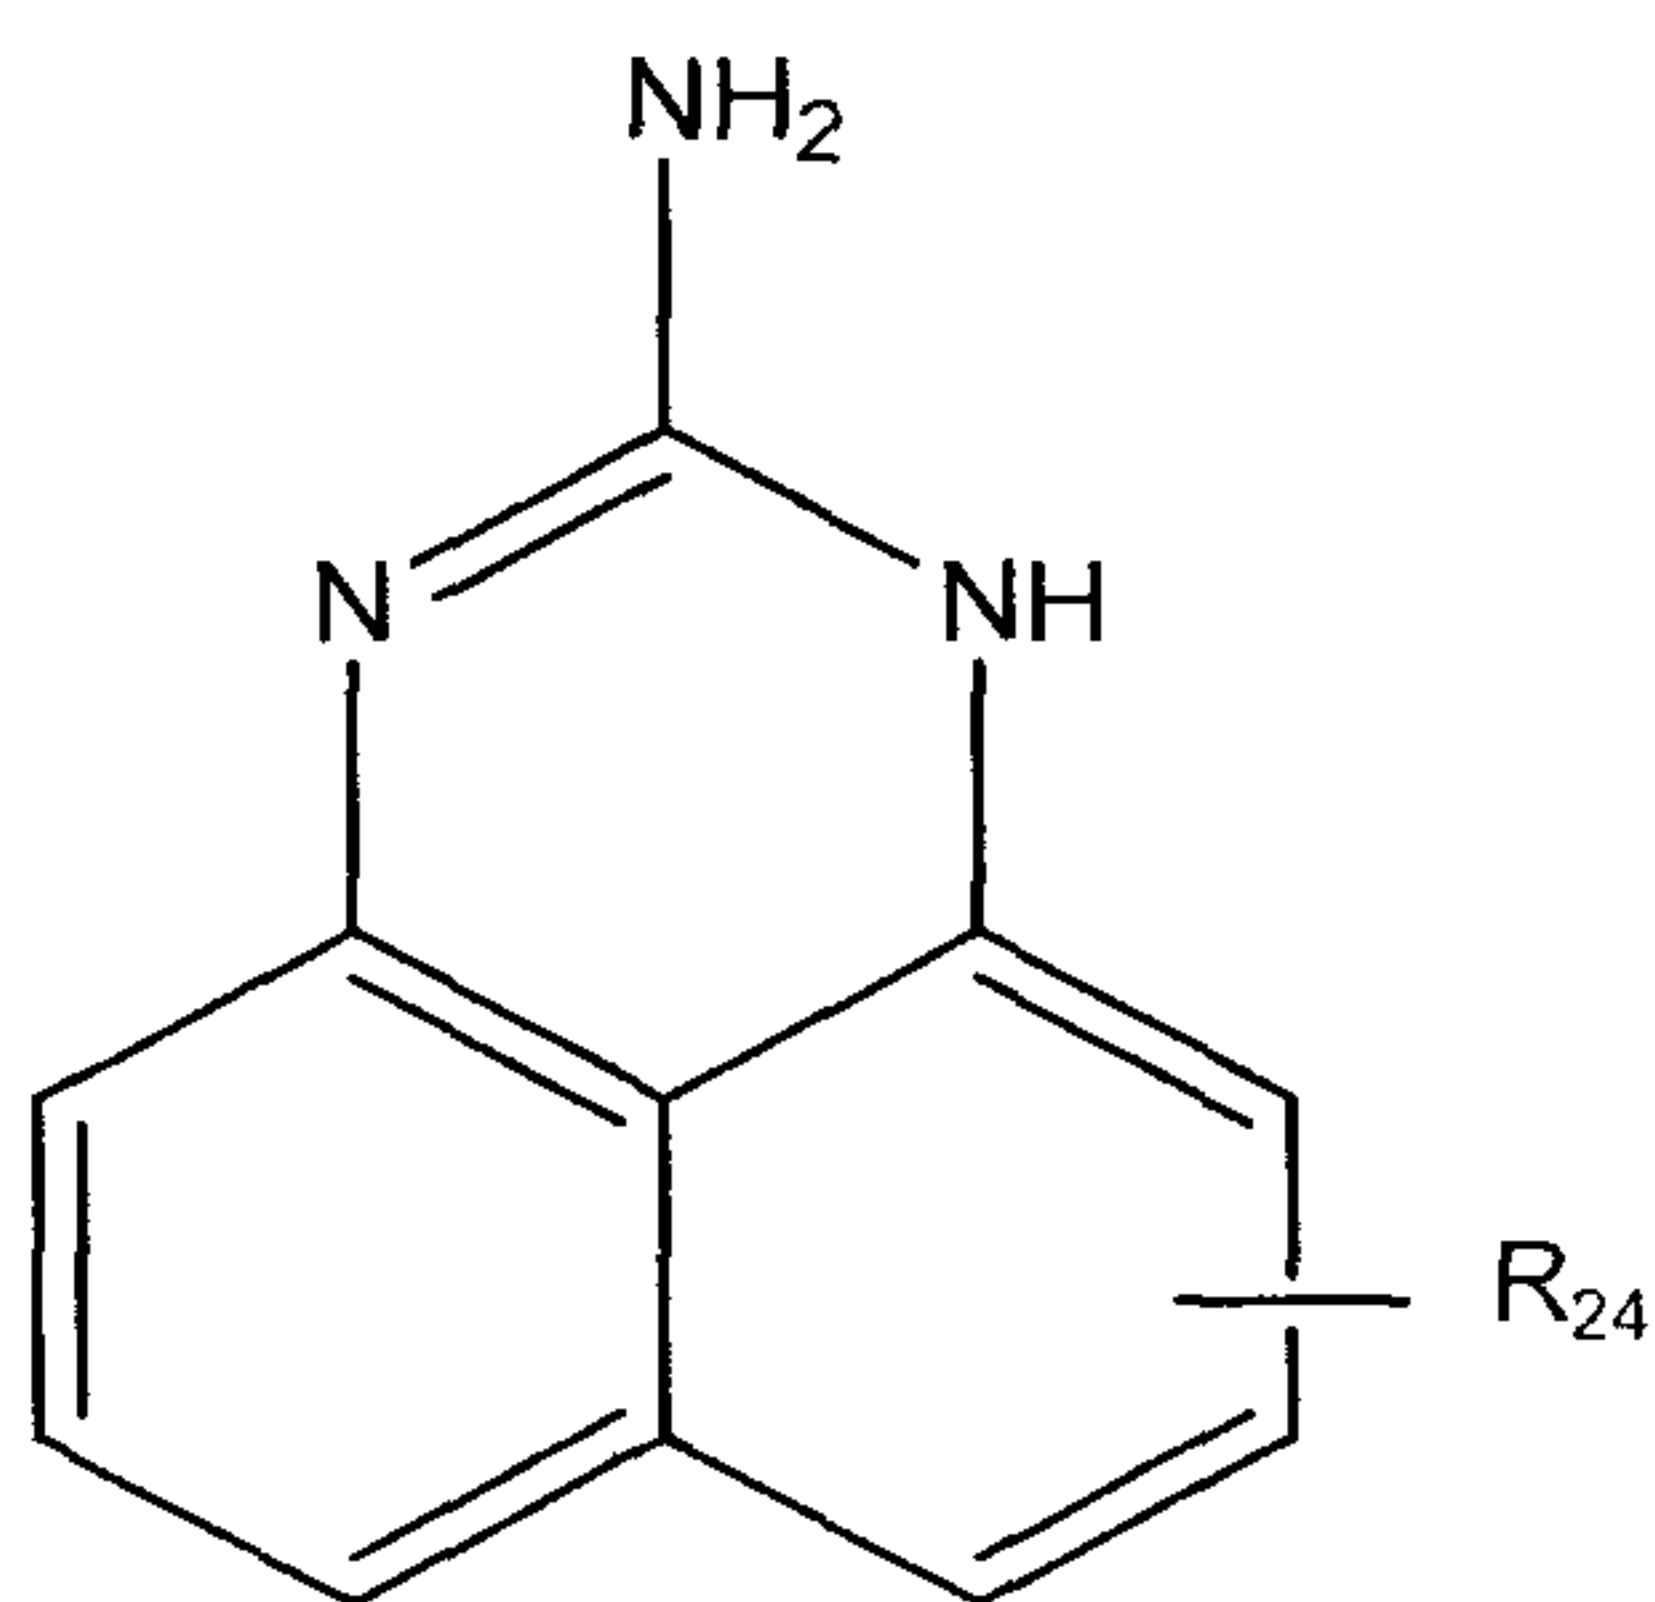


in which R_{24} represents hydrogen or an alkyl radical having from 1 to 14 carbon atoms;

- (f) an aryloxyphenyleneamine represented by the formula:

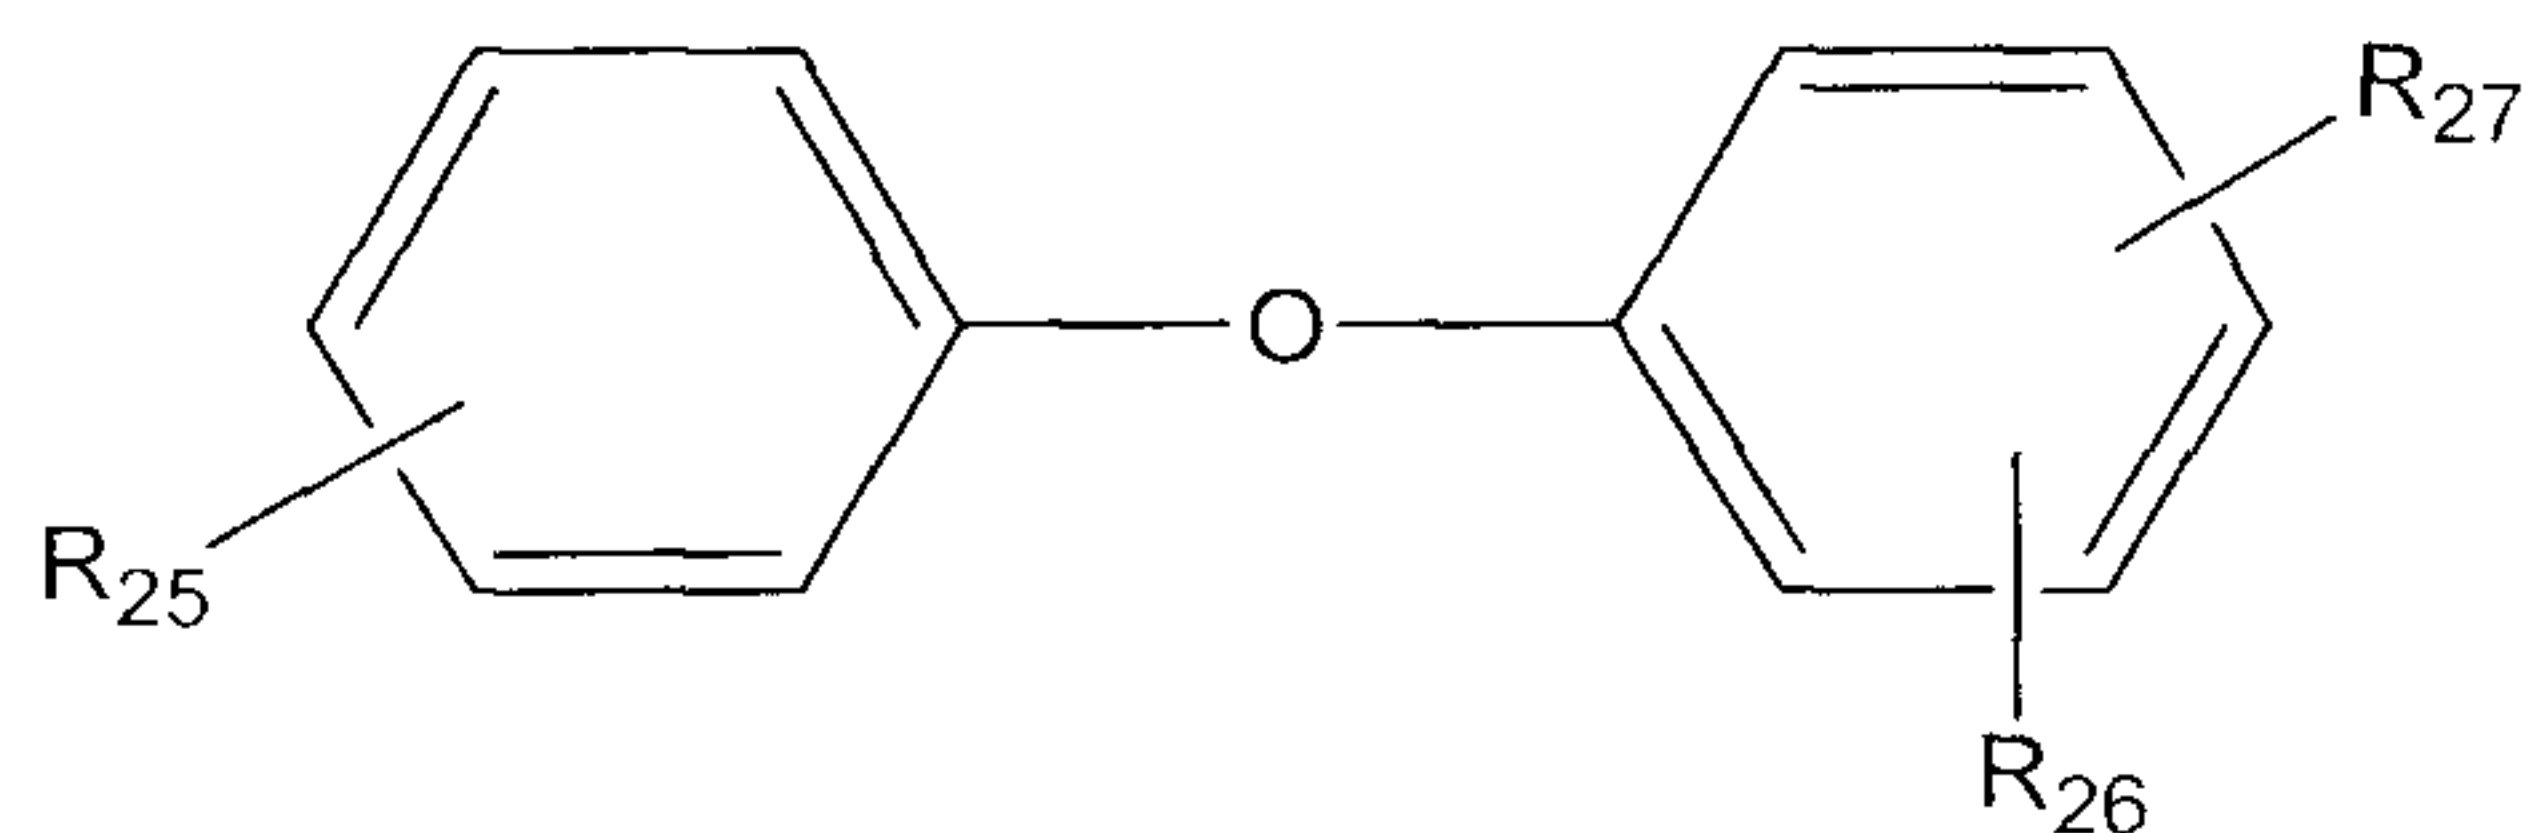

in which R_{25} is H, $--NHaryl$, $-NHalkaryl$, or branched or straight chain radical having from 4 to 24 carbon atoms selected from the group consisting of alkyl, alkenyl, alkoxyl, aralkyl and alkaryl; R_{26} is $--NH_2$, $--(NH(CH_2)_n)_m NH_2$, $--NHalkyl$, or $--NHaralkyl$, in which n and m each have a value from 1 to 10; and R_{27} is hydrogen, alkyl, alkenyl, alkoxyl, aralkyl, or alkaryl, having from 4 to 24 carbon atoms; provided that when R_{25} is hydrogen or a branched or straight chain radical having from 4 to 24 carbon atoms selected from the group consisting of alkyl, alkenyl, alkoxyl, aralkyl and alkaryl, then R_{26} must be NH_2 or $--(NH(CH_2)_n)_m NH_2$, $-CH_2-(CH_2)_n -NH_2$, or $-CH_2-aryl-NH_2$;

- (g) an aromatic amine comprising two aromatic groups, linked by a group, L, represented by the following formula:

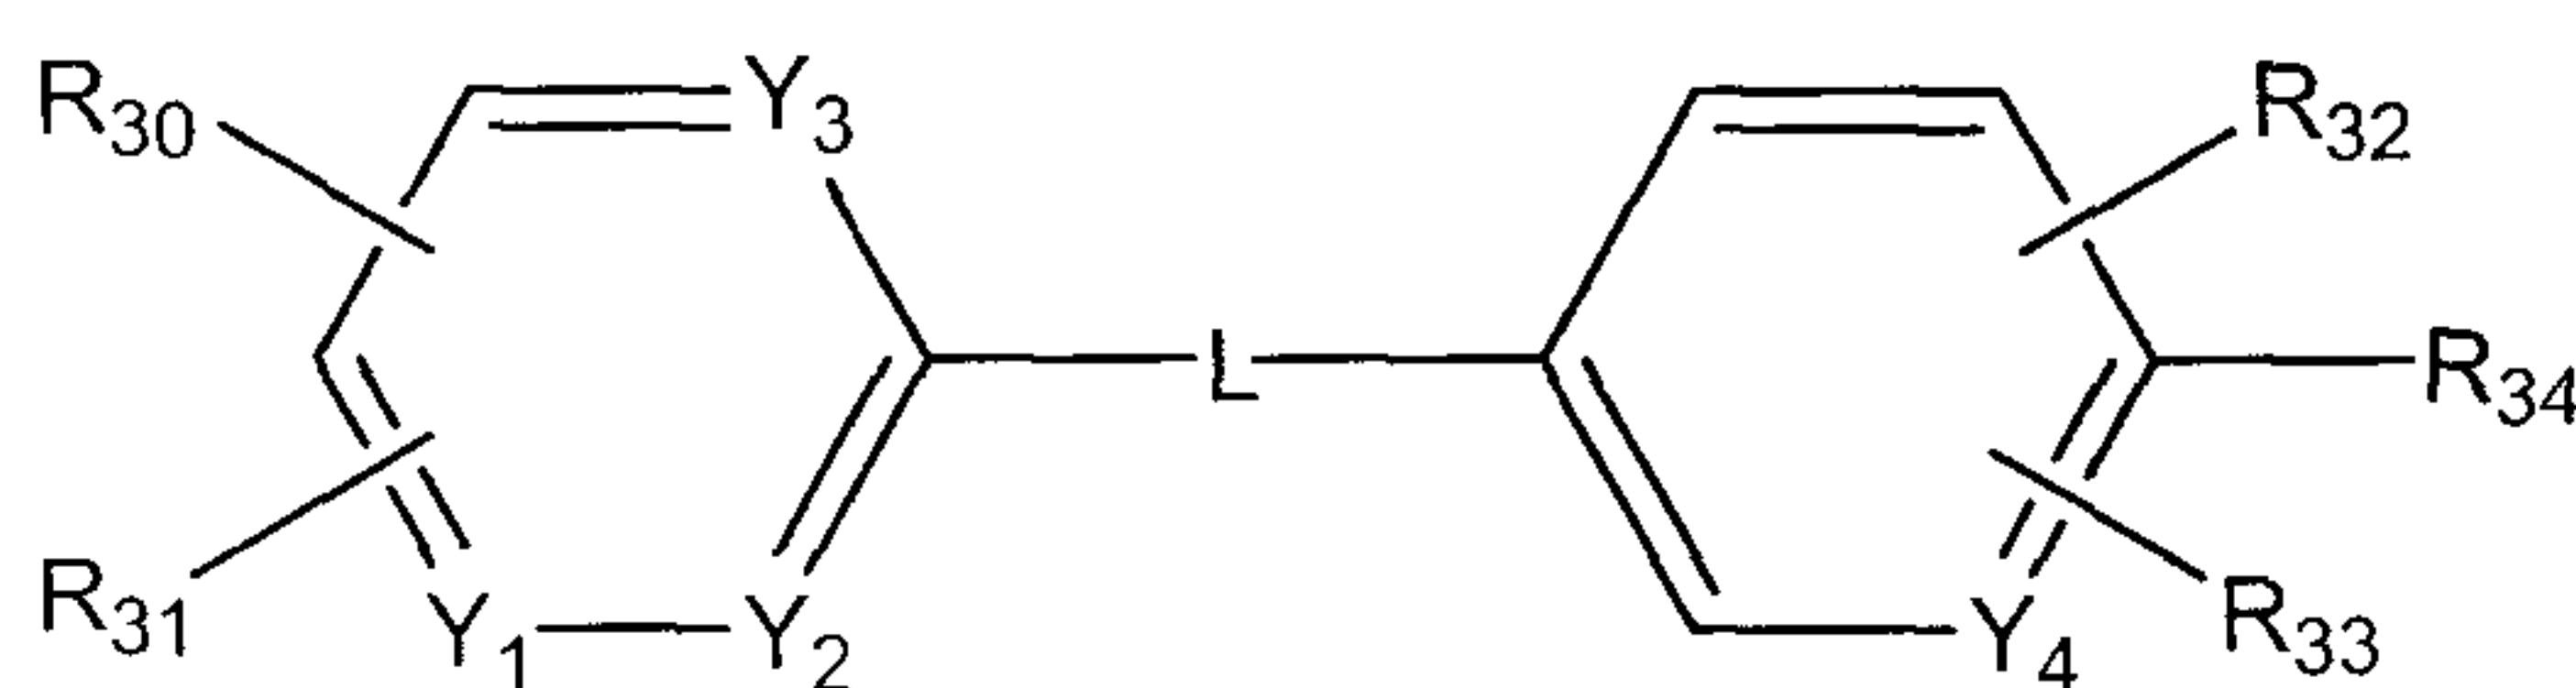

wherein L is selected from the group consisting of $-O-$, $-N=N-$, $-NH-$, $-CH_2NH-$, $-C(O)NR_{28}-$, $-C(O)O-$, $-SO_2-$, $-SO_2NR_{29}-$ and $-SO_2NH-$, wherein R_{28} and R_{29} independently represent a hydrogen, an alkyl, an alkenyl or an alkoxy group having from 1 to 8 carbon atoms;


wherein each Y_1 , Y_2 , Y_3 and Y_4 are independently N or CH provided that Y_1 and Y_2 may not both be N;

R_{30} and R_{31} independently represent a hydrogen, alkyl, aryl, alkaryl, aralkyl, alkoxy, hydroxyalkyl, aminoalkyl, $-OH$, $-NO_2$, $-SO_3H$, $-SO_3Na$, CO_2H or salt thereof, $-NR_{41}R_{42}$ wherein R_{41} and R_{42} are independently hydrogen, alkyl, aryl, arylalkyl, or alkaryl;

R_{32} and R_{33} independently represent a hydrogen, an alkyl, an alkenyl or an alkoxy group having from 1 to 8 carbon atoms, $-OH$, $-SO_3H$ or $-SO_3Na$;


R_{34} represents $-NH_2$, $-NHR_{35}$, wherein R_{35} is an alkyl or an alkenyl group having from 1 to 8 carbon atoms, $-CH_2-(CH_2)_n-NH_2$ or $-CH_2$ -aryl- NH_2 and n is from 0 to 10;

- (h) an aminothiazole selected from the group consisting of aminothiazole, aminobenzothiazole, aminobenzothiadiazole and aminoalkylthiazole;
- (i) an aminoindole represented by the formula:

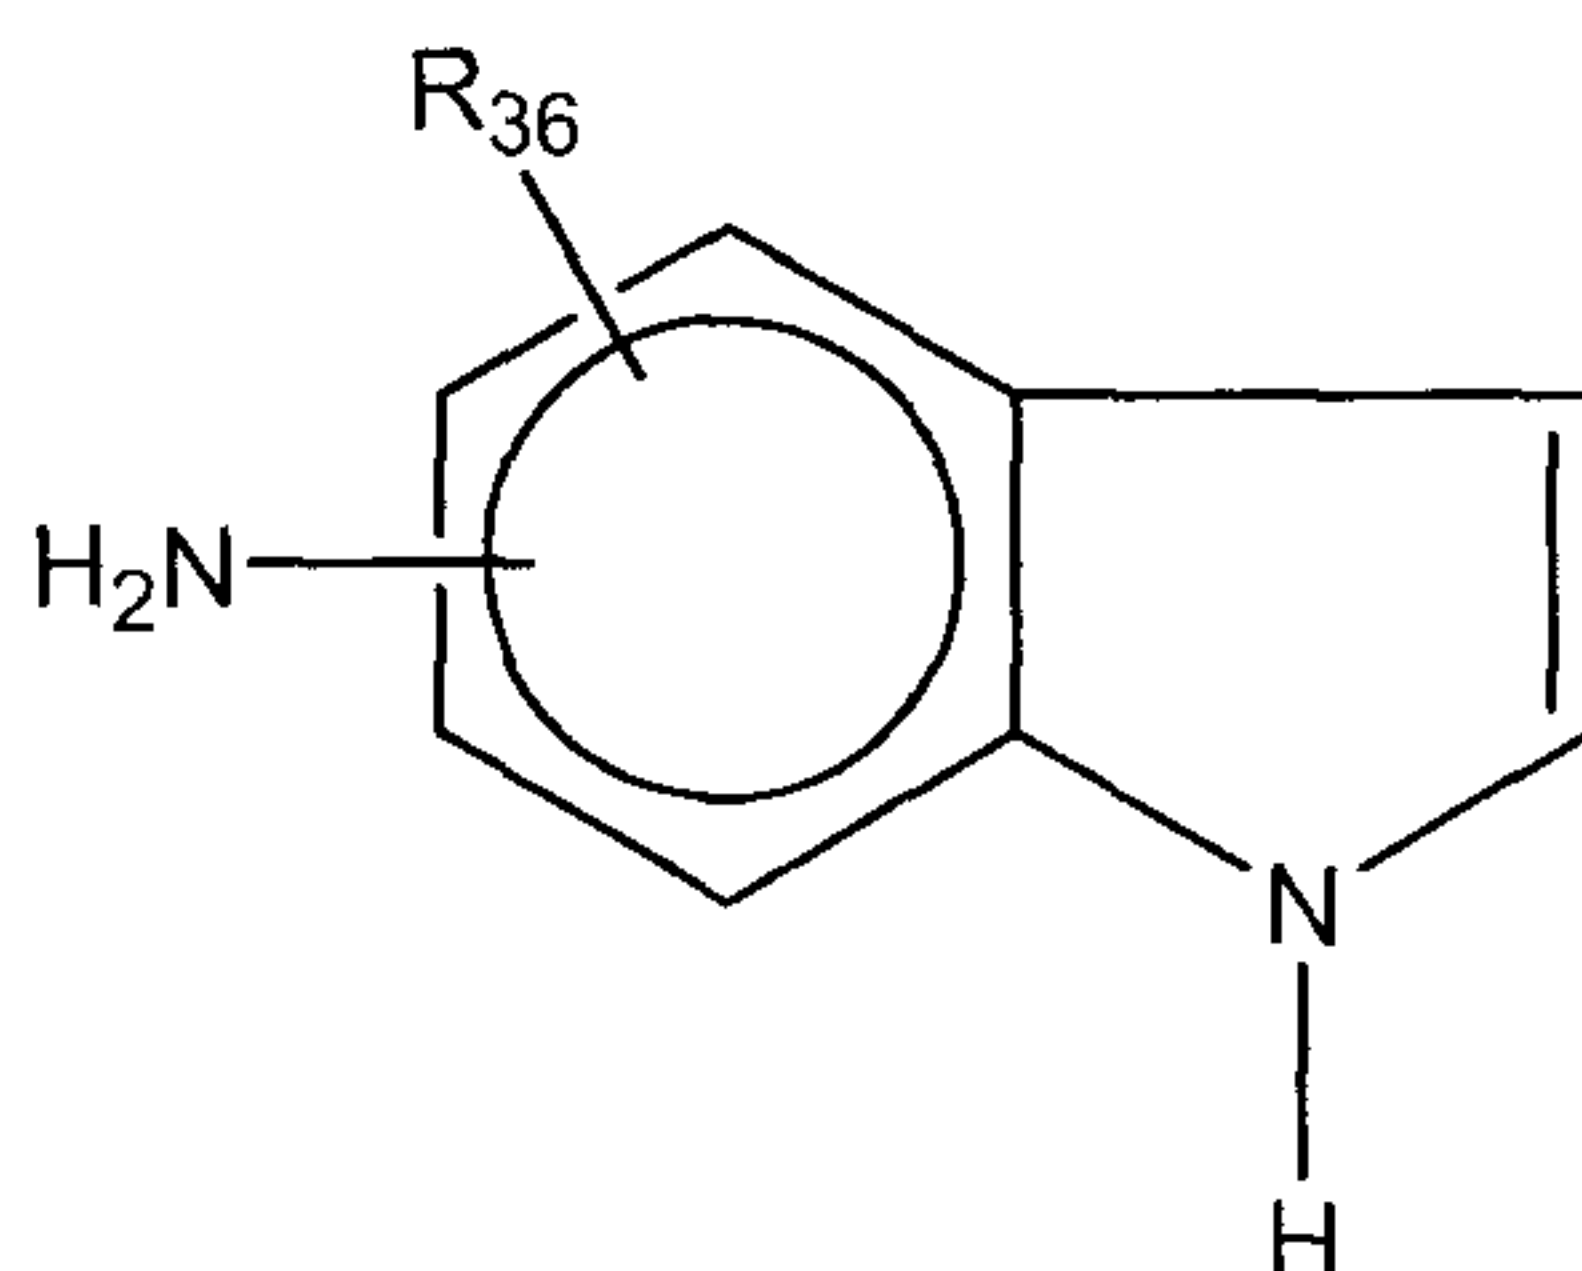

wherein R_{36} represents a hydrogen, an alkyl or an alkenyl group having from 1 to 14 carbon atoms;

- (j) an aminopyrrole represented by the formula:

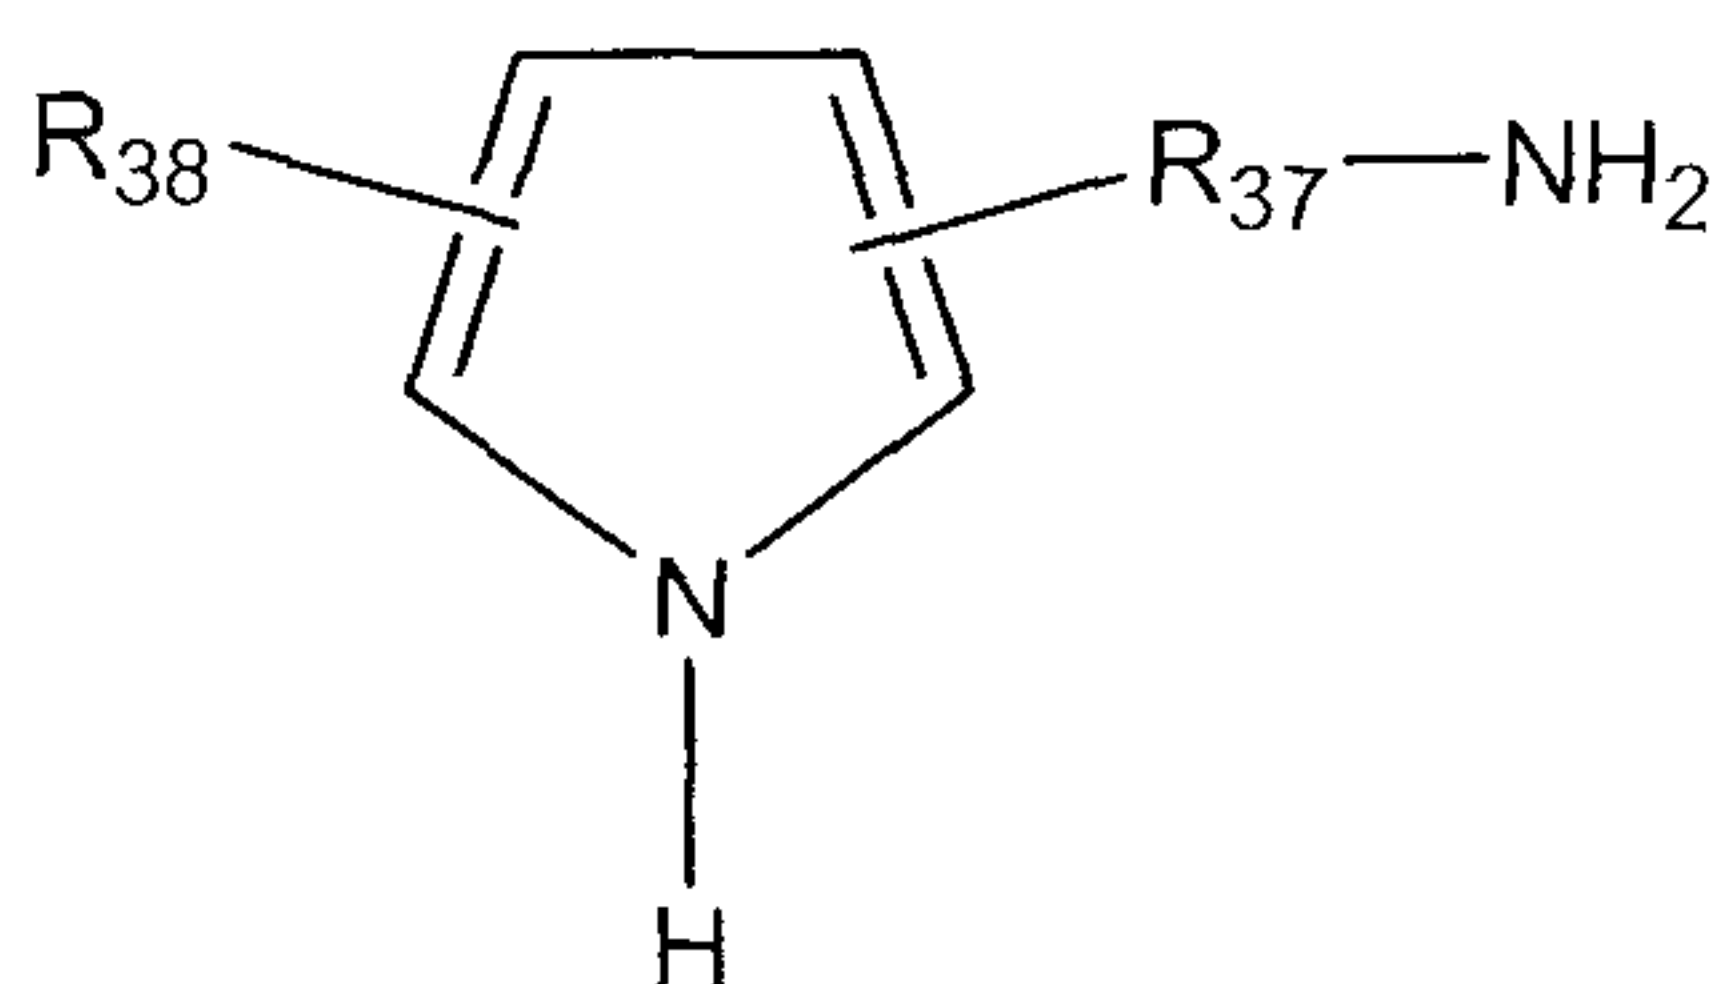

wherein R_{37} represents a divalent alkylene group having 2 to 6 carbon atoms and R_{38} represents a hydrogen, an alkyl or an alkenyl group having from 1 to 14 carbon atoms;

- (k) a ring substituted or unsubstituted aniline;

- (l) an aminoquinoline;
 - (m) an aminobenzimidazole;
 - (n) a N, N-dialkylphenylenediamine;
 - (o) a benzylamine; and
 - (p) a benzyl alcohol.
42. The lubricating oil composition of claim 41 wherein the aromatic amine is N-arylphenylenediamine.
43. The lubricating oil composition of claim 42 wherein the N-arylphenylenediamine is N-phenylphenylenediamine.
44. The lubricating oil composition of Claim 43 wherein the N-phenylphenylenediamine is N-phenyl-1,4-phenylenediamine.
45. The lubricating oil composition of claim 26 wherein compound (i)(b) of copolymer (i) is polyisobutene having a number average molecular weight (M_n) of from about 112 to about 5000.
46. The lubricating oil composition of claim 45, wherein the number average molecular weight (M_n) is from about 500 to about 3000.
47. The lubricating oil composition of claim 46, wherein the number average molecular weight (M_n) is from about 1000 to about 2500.
48. The lubricating oil composition of claim 26 wherein (i)(a) is a dicarboxylic acid, anhydride or ester thereof.


49. The lubricating oil composition of claim 48 wherein wherein (i)(a) is maleic anhydride or ester thereof.
50. The lubricating oil composition of claim 26 wherein the monoolefin of (i)(c) is a 1-olefin.
51. A method of making a lubricating oil additive composition which comprises reacting
 - (A) at least one of the following copolymers:
 - (i) a copolymer obtained by free radical copolymerization of components comprising:
 - (a) at least one monoethylenically unsaturated C₃-C₂₈ monocarboxylic acid or ester thereof, or a C₄-C₂₈ dicarboxylic acid, anhydride or ester thereof;
 - (b) at least one 1-olefin comprising 2 to 40 carbon atoms or at least one polyolefin comprising 4 to 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof; and
 - (c) at least one monoolefin compound which is copolymerizable with the monomers of (a) and (b) and is selected from the group consisting of:
 - (1) an alkyl vinyl ether and an allyl alkyl ether where the alkyl group is hydroxyl, amino, dialkylamino or alkoxy substituted or is unsubstituted, and containing from 1 to 40 carbon atoms;

- (2) an alkyl amine and an N-alkylamide of a monoethylenically unsaturated mono- or dicarboxylic acid of from 3 to 10 carbon atoms where the alkyl substituent contains from 1 to 40 carbon atoms;
 - (3) an N-vinylcarboxamide of carboxylic acids of from 1 to 8 carbon atoms;
 - (4) an N-vinyl substituted nitrogen-containing heterocyclic compound; and
 - (5) at least one 1-olefin comprising 2 to 40 carbon atoms or at least one polyolefin comprising 4 to 360 carbon atoms and having a terminal copolymerizable group in the form of a vinyl, vinylidene or alkyl vinylidene group or mixtures thereof, provided that the olefin employed is not the same as the olefin employed in (i)(b);
- (ii) a copolymer obtained by reacting compound (i)(a) and compound(i)(b) in the presence of a free radical initiator; or
 - (iii) a copolymer obtained by (a) reacting compound (i)(a) with compound (i)(b) or (i)(c) in a non-free radical catalyzed reaction in the presence of copolymer (i) or copolymer (ii) or both; or by (b) contacting copolymer (i) or copolymer (ii) or both with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c); with
- (B) at least one ether compound capable of being reacted with at least two monocarboxylic acids, or esters, thereof, or dicarboxylic acids, anhydrides or esters thereof, or mixtures thereof; and

(C) at least one aliphatic compound capable of reacting with at least one monocarboxylic acid or ester thereof, or dicarboxylic acid, anhydride or ester thereof; and


(D) at least one aromatic compound capable of reacting with at least one monocarboxylic acid or ester thereof; or dicarboxylic acid, anhydride or ester thereof.

52. The lubricating oil additive composition of claim 51, wherein in copolymer (iii)(b), said copolymer (i) or copolymer (ii) or both are contacted with the non-free radical catalyzed reaction product of compound (i)(a) and compound (i)(b) or (i)(c) in the presence of component (C), component (D) or both.
53. A method of improving soot dispersancy in an internal combustion engine which comprises operating the engine with the lubricating oil composition comprising a major amount of oil of lubricating viscosity and an effective amount of the lubricating oil additive composition of claim 1.
54. The lubricating oil additive composition of claim 16, wherein the aromatic compound is an aromatic amine having the following formula

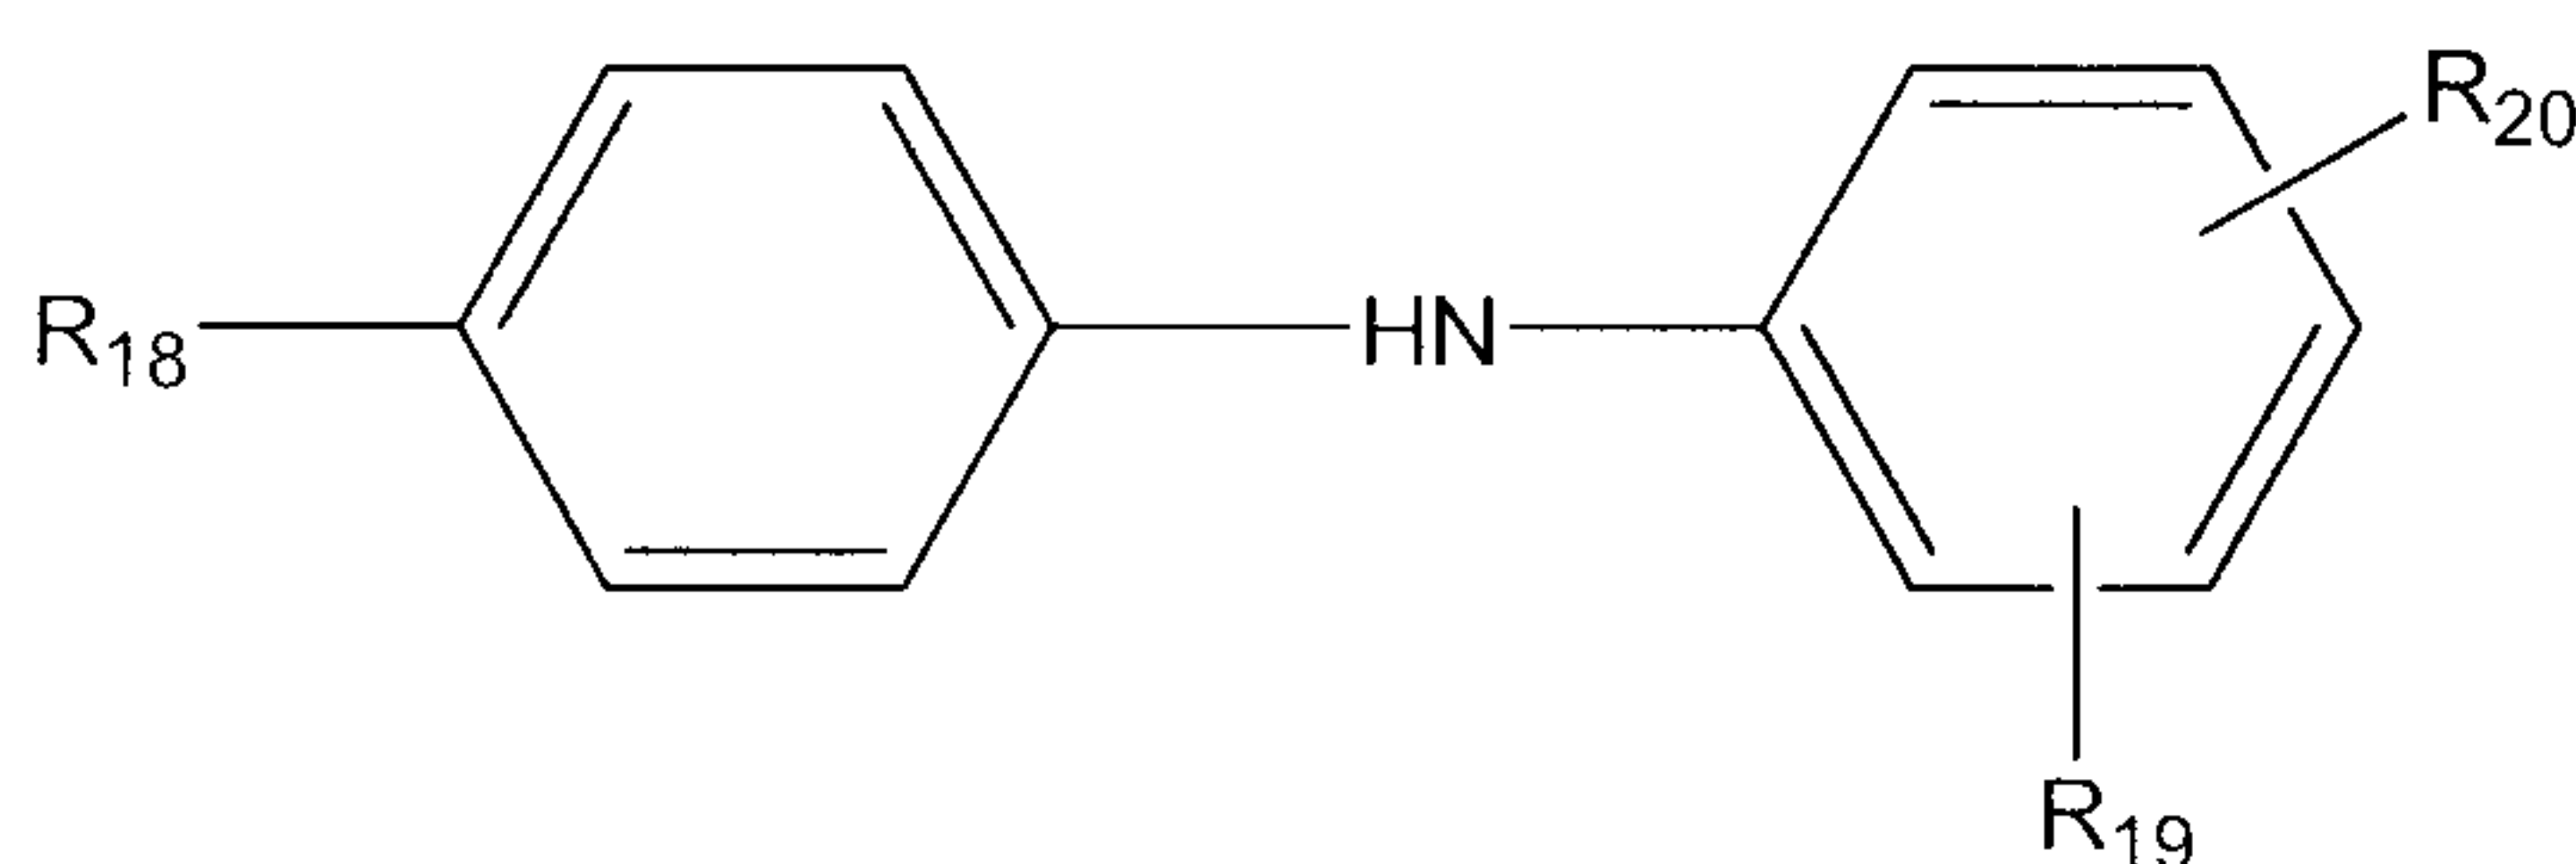

R_{18} is H, --NHaryl, -NHalkaryl, or a branched or straight chain hydrocarbyl radical having from 4 to 24 carbon atoms selected from the group consisting of alkyl, alkenyl, alkoxy, aralkyl and alkaryl; R_{19} is --NH₂, --(NH(CH₂)_n)_mNH₂, --NHalkyl, --NHaralkyl, or --CH₂ --aryl--NH₂, in which n and m each have a value from 1 to 10; and R_{20} is hydrogen, alkyl, alkenyl, alkoxy, aralkyl, or alkaryl, having from 4 to 24 carbon atoms.

55. The lubricating oil additive composition of Claim 16 wherein the compound has the following formula:

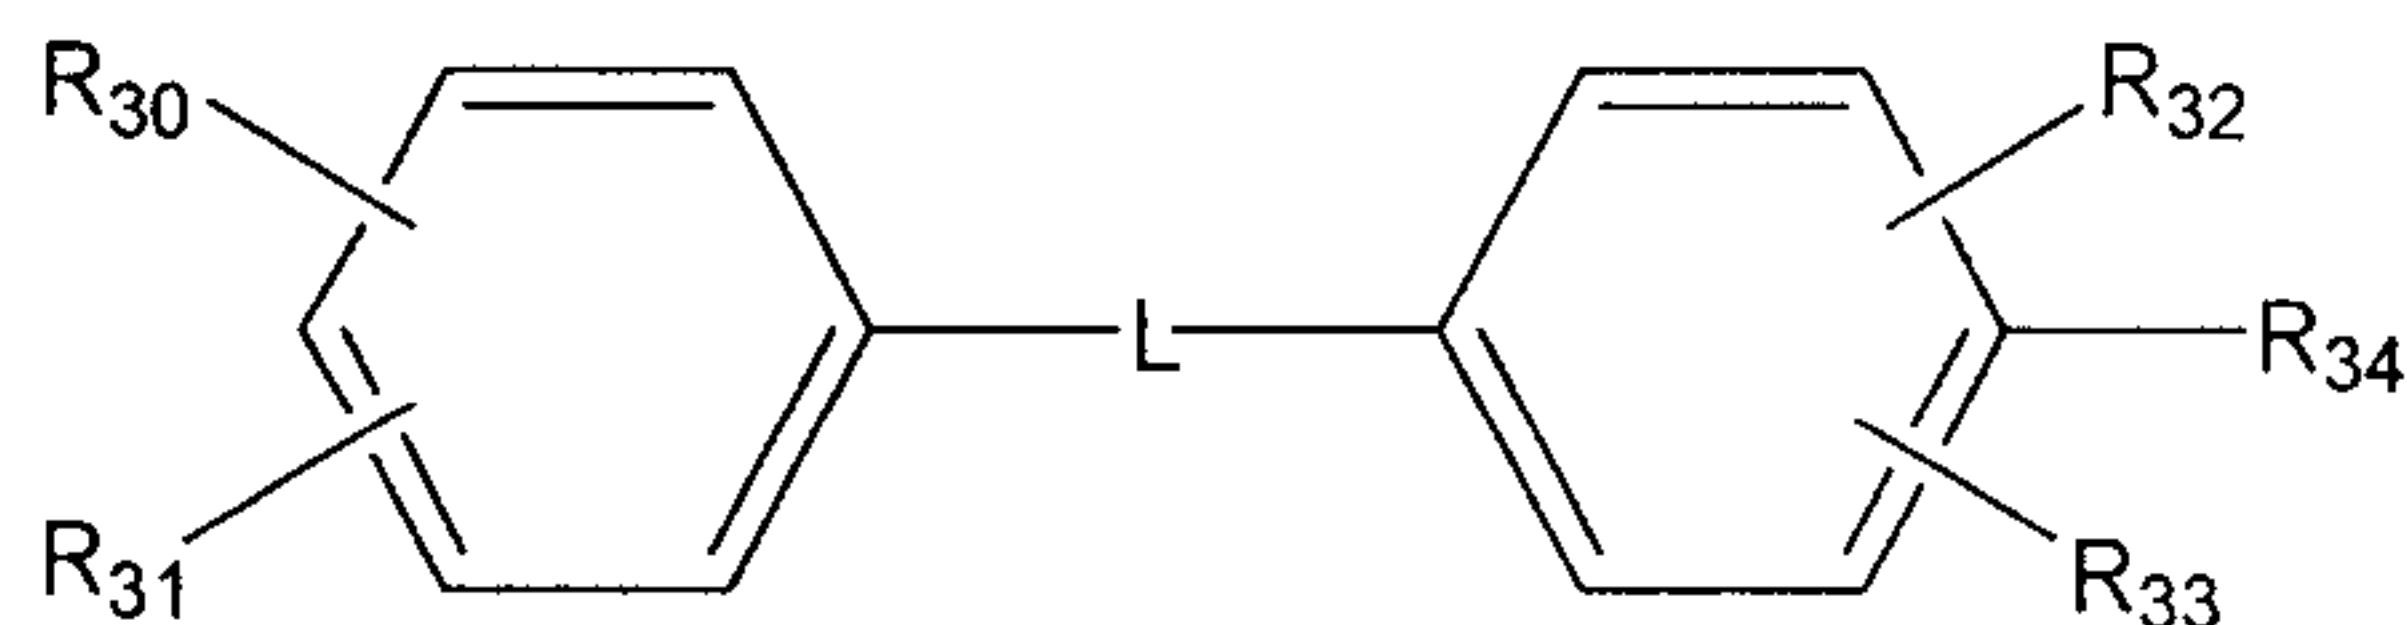

wherein L is selected from the group consisting of $-O-$, $-N=N-$, $-NH-$, and $-CH_2NH-$;

R_{30} and R_{31} independently represent a hydrogen, alkyl, aryl, alkaryl, aralkyl, alkoxy, hydroxyalkyl, aminoalkyl, $-OH$, NO_2 or, $-NR_{41}R_{42}$ wherein R_{41} and R_{42} are independently hydrogen, alkyl, aryl, arylalkyl, or alkaryl;

R_{32} and R_{33} independently represent a hydrogen, an alkyl, an alkenyl or an alkoxy group having from 1 to 8 carbon atoms, or $-OH$;

R_{34} represents $-NH_2$, $-NHR_{35}$, wherein R_{35} is an alkyl or an alkenyl group having from 1 to 8 carbon atoms, $-CH_2-(CH_2)_n-NH_2$ or $-CH_2$ -aryl- NH_2 and n is from 0 to 10;

provided that when R_{34} is $-NHR_{35}$ wherein R_{35} is an alkyl or an alkenyl group having from 1 to 8 carbon atoms, then either L is $-NH-$ or $-CH_2NH-$; or R_{30} or R_{31} is OH or $-NR_{41}R_{42}$ wherein at least one of R_{41} or R_{42} is hydrogen; or R_{32} or R_{33} is OH .

56. The lubricating oil additive composition of Claim 16 wherein the aromatic compound is 4-benzoylamine-2,5-dimethoxyaniline or N-(4-aminophenyl) acetamide.
57. The lubricating oil additive composition of Claim 16 wherein the aromatic compound is 3-nitroaniline.
58. The lubricating oil additive composition of Claim 54 wherein the aromatic compound is N-phenyl-1,4-phenylenediamine.
59. The lubricating oil additive composition of Claim 55 wherein the aromatic compound is 4-(4-nitrophenylazo)aniline or 4-phenylazoaniline.

60. The lubricating oil additive composition of Claim 55 wherein the aromatic compound is 4-phenoxyaniline.