



(51) International Patent Classification:

B67D 1/04 (2006.01) *B67D 7/02* (2010.01)
B67D 1/08 (2006.01) *B29C 49/06* (2006.01)

(21) International Application Number:

PCT/NL2013/050557

(22) International Filing Date:

26 July 2013 (26.07.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2009236 26 July 2012 (26.07.2012) NL

(71) Applicant: **HEINEKEN SUPPLY CHAIN B.V.**
[NL/NL]; Tweede Weteringplantsoen 21, NL-1017 ZD
Amsterdam (NL).

(72) Inventors: **WITTE, Pieter Gerard**; c/o Tweede Wetering-
plantsoen 21, NL-1017 ZD Amsterdam (NL). **PAAUWE,**
Arie Maarten; c/o Tweede Weteringplantsoen 21, NL-
1017 ZD Amsterdam (NL). **BAX, Bart Jan**; c/o Tweede
Weteringplantsoen 21, NL-1017 ZD Amsterdam (NL).

(74) Agent: **JANSEN, C.M.**; Johan de Wittlaan 7, NL-2517 JR
Den Haag (NL).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: CONTAINER AND SET OF PREFORMS FOR FORMING A CONTAINER

(57) Abstract: Container of a bag-in-container type, wherein a neck region of the container is provided with at least one opening extending substantially radially there through, into a space between the outer container and an inner container adjacent thereto, wherein: the neck region is provided with coupling elements, preferably at opposite sides of said at least one opening, seen in circumferential direction, for coupling of a connecting device to the container for introducing a pressure fluid through said at least one opening into a space between the inner and outer container; and/or the at least one opening is provided with or forming part of a first coupler for coupling a pressure fluid feed line to said opening, for pressurising a space between the inner and outer container.



WO 2014/017910 A2

Title: Container and set of preforms for forming a container.

The invention relates to a container, especially of a bag-in-container type, and a set of preforms for forming the same.

The invention further relates to a tapping assembly for dispensing beverages. The invention especially but not exclusively relates to such
5 tapping assembly for dispensing a beverage from a bag-in-container type container.

The invention further relates to a method for forming a container, especially of the bag-in-container type.

It is known to dispense beverages such as carbonated beverages,
10 especially beer from a rigid metal or wooden container such as a keg, barrel or cask by feeding pressurised gas, such as CO₂ into the container, forcing the beverage out of the container.

In an alternative system, as for example known from Heineken's DraughtKeg® and disclosed in for example EP1064221, a beverage
15 container can be provided with an integrated, for example internal pressurizer, with which preferably automatically gas is introduced into the container in order to pressurise the beverage for dispensing and maintain as much as possible a constant pressure inside the container.

It has further been known, as is for example known from
20 Heineken's BeerTender® and disclosed in WO00/03944, to dispense beverages from a bag-in-container type of container, in which a beverage is contained inside a flexible inner container, which is suspended in a more rigid outer container. In such system a pressurising gas can be inserted into the container, between the inner and outer container, thereby compressing
25 the bag or inner container, squeezing out the beverage without the pressurising gas coming into direct contact with the beverage.

In EP2148771 an integrally blow moulded bag-in-container is disclosed, for holding and dispensing beverages, wherein at least one vent is provided running parallel to an interface between inner and outer containers, which vent opens to the atmosphere at a location adjacent to and orientated approximately coaxially with the bag-in-container's mouth. EP2148771 fails to disclose how this container is used in a dispensing assembly, especially how this is to be connected to a tapping line or tapping device.

WO2011/002295 further discloses a system in which a container is compressed within a pressure chamber, such that beverage contained within the container is dispensed. This requires a strong pressure chamber and an air tight closure of the pressure chamber to the container.

WO2011/002294 discloses an integrally blow moulded bag-in-container type container, wherein at a neck region of the inner container an opening is provided, opening into a space between the inner and outer container. A closure can be provided, with a valve and a gas feed channel, connecting to said opening for feeding gas under pressure into said space. The full gas pressure is therein exerted on the neck region of the outer container, in the neck region. In an alternative embodiment the opening could be in the neck of the outer preform or container.

The present invention aims at providing an alternative container, especially of a BIC-type, for dispensing beverages. The present invention furthermore aims at a preform set for manufacturing a container, especially of a BIC-type container. The invention further aims at providing an alternative method for forming a beverage container. These aims are not extensive. Other aims can and will be fulfilled by the present disclosure.

In an aspect the present invention can be characterised by a container of a bag-in-container type, wherein a neck region of an outer container is provided with at least one opening extending substantially radially there through, into a space between the outer container and an

inner container adjacent thereto. The neck region can be provided with coupling elements, preferably at opposite sides of said at least one opening, seen in circumferential direction, for coupling of a connecting device to the container for introducing a pressure fluid through said at least one opening
5 into a space between the inner and outer container. Alternatively or additionally to the coupling elements the at least one opening can be provided with or forming part of a first coupler for coupling a pressure fluid feed line to said opening, for pressurising a space between the inner and outer container of the BIC container.

10 In another aspect the present invention can be characterised by a set of preforms for forming a container of a bag-in-container type, comprising an inner preform and an outer preform. A neck region of an outer preform is provided with at least one opening extending substantially radially there through, into a space between the outer preform and a part of
15 the inner preform adjacent thereto. The neck region can be provided with coupling elements, preferably at opposite sides of said at least one opening, seen in circumferential direction, for coupling of a connecting device to a BIC container after blow moulding of the preforms, for introducing a pressure fluid through said at least one opening into a space between the
20 inner and outer container. Alternatively or additionally to the coupling elements the at least one opening can be provided with or forming part of a first coupler for coupling a pressure fluid feed line to said opening, for pressurising a space between the inner and outer container of the BIC container.

25 In embodiments the first container has a neck portion and the second container is suspended in the first container, from the neck portion thereof. The neck portion of the second container can extend at least partly and preferably entirely within the first container, for example within the neck region of the first container. The container can for example be used in
30 an assembly which can further comprise a connecting device, connected or

connectable to the neck portion. The connecting device can then comprise at least one connecting element for connecting to the at least one opening, wherein the connecting element is connected to a source of a pressurising fluidum, preferably a pressurised gas.

5 Another aspect of the invention can be characterised by a method for forming a container, wherein a bag-in-container is blow moulded integrally from at least two super positioned preforms or an integral, multilayer preform, such that an outer container and an inner container or bag are formed. Prior to or after blow moulding the container a closure ring
10 can be provided, for example by spin welding the ring onto the inner and outer preforms, closing off a space between the inner and outer preforms and the containers blow moulded there from. Alternatively or additionally the two preforms or containers can be welded, especially spin welded or otherwise connected to each other at the neck regions, closing off the space
15 between the containers or preforms. At least one opening is provided in a peripheral wall of a neck region of one of the preforms and/or containers, preferably the outer preform and/or container, opening into said space, for introducing gas under pressure into said space and compressing the inner container within the outer container. After blow moulding the container the
20 inner container is filled with beverage and a valve is mounted in or on an opening in said ring, opening into said inner container.

 When connecting the preforms by a ring, which can be an integral part of one of the preforms or can be a separate ring, preferably at least one and more preferably two labyrinth shaped sections are formed, within the
25 neck region, preventing debris formed during welding, especially spin welding, from falling into the space between the inner and outer containers. Such debris, for example small pieces of plastic, could damage, especially puncture the inner and/or outer container, which is avoided by the labyrinth sections.

Preforms and preform assemblies will be discussed and disclosed for forming a container.

In order to further elucidate the present invention, embodiments thereof shall be disclosed and discussed hereafter, with reference to the
5 drawings. Therein shows:

Fig. 1 in side view part of an assembly according to the disclosure, showing a neck region of a container with a connecting device, in a first embodiment;

Fig. 2 in side view part of an assembly according to the disclosure,
10 showing a neck region of a container with a connecting device, in a second embodiment;

Fig. 3 schematically the embodiment of fig. 1 in connected position;

Fig. 4 schematically the embodiment of fig. 2 in connected
15 position;

Fig. 5A - C a neck region of a container, in top view, cross sectional view and perspective view respectively;

Fig. 6 a cross sectional perspective view of a closure ring;

Fig. 7A and B in top view and in cross sectional view along the
20 line A - A a preform assembly;

Fig. 7C and D in top view and in cross sectional view along the line A - A an alternative preform assembly;

Fig. 8 a detail of part of the preform assembly of fig. 7A and B, in cross section, showing a closure ring mounted to the preforms;

25 Fig. 8A a detail of part of the preform assembly of fig. 7C and D, in cross section, showing a closure ring mounted to the preforms;

Fig. 9 an exploded view of a preform assembly according to fig. 7A, B and 8;

30 Fig. 9A an exploded view of a preform assembly according to fig. 7C, D and 8A;

Fig. 10 and 10A a container, within in phantom lines showing the preform assembly from which the container is blow moulded;

Fig. 11 a detail in cross section of the neck region, comparable to fig. 8;

5 Fig. 11A a detail in cross section of the neck region, comparable to fig. 8A.

Fig. 12A and B an embodiment of a pre-form set, assembled and preassembling respectively;

10 Fig. 12C and D a cross sectional view of the assembly according to line B - B in fig. 12A and a detail of fig. 12C respectively;

Fig. 13A and B another embodiment of a pre-form set, assembled and preassembling respectively;

Fig. 13C and D a cross sectional view of the assembly according to line B - B in fig. 13A and a detail of fig. 13C respectively;

15 In this description embodiments are shown and disclosed of the invention, by way of example only. These should by no means be interpreted or understood as limiting the scope of the present invention in any way. In this description the same or similar elements are indicated by the same or similar reference signs. In this description embodiments of the present
20 invention shall be discussed with reference to carbonated beverages, especially beer. However, other beverages could also be used in the present invention.

In this description references to above and below, top and bottom and the like shall be considered, unless specifically stipulated differently, to
25 a normal orientation of a container standing on a bottom part and having a neck region comprising an orifice for filling and/or dispensing facing substantially upward. This is for example shown in the drawings, especially fig. 10, wherein top, bottom, up and down are indicated by arrows and appropriate wording, for indicative purposes only. This does not necessarily

reflect the orientation in which a tapping device of the present disclosure or parts thereof have to be used.

In this description a bag-in-container has to be understood as meaning at least a container comprising an outer holder and an inner
5 holder, wherein the inner holder is designed to hold a beverage and is more flexible or compressible than the outer holder. The outer holder can for example be a container, such as a bottle shaped container with a neck and a body, a box shaped holder or the like, whereas the inner holder can be a flexible container, such as a bag. The inner and/or outer holder can be made
10 of mono materials or blends, can be made entirely or partly by injection moulding and/or blow moulding, rotation moulding or the like. Preferably a bag-in-container according to the invention is made by integrally blow moulding. In embodiments the bag-in-container can be made by inserting at least one preform into another preform and then blow moulding them
15 together into a bag-in-container type container. In embodiments the bag-in-container can be made by over-moulding at least one preform forming a multi layered preform and then blow moulding them together into a bag-in-container type container. In embodiments a bag can be suspended inside an outer container, after forming the outer container and the bag separately, at
20 least in part.

In the present disclosure by way of example a bag in container (BIC) shall be described, integrally blow moulded from a preform set comprising two plastic preforms, super imposed, which should be understood as meaning that one of the preforms is inserted into the other,
25 after which they are together blow moulded in a known manner into a BIC. In embodiments prior to said blow moulding a closure ring is fitted over the preforms, connecting them together and closing off the space, which can also be referred to as interface or inter space, between the preforms, such that at least after blow moulding said space is or can be in communication with the
30 environment only through one or more openings provided in a neck region of

the container, especially an outward opening, extending through a wall of the neck region of the outer preform and/or container. The said at least one opening can be provided during manufacturing the preforms, especially during injection moulding thereof, but could also be provided later, for example by punching, drilling or otherwise machining. In embodiments the ring can be provided as an integral part of one of the preforms.

In this description a tapping assembly shall be described, comprising at least a connecting device, a container, especially a bag in container (BIC) type container and a tap or such device to which the container is to be coupled, as well as a source of pressurised gas, such as air. The tap and source of gas shall not be discussed explicitly, since these are commonly known in the art. In advantageous embodiments as a gas to be introduced into the container air can be used, for example pressurised by a compressor, connected to the connecting device by a gas line, especially an air hose. As pressure fluidum other gasses can however be used, such as CO₂, or another fluidum, such as water. The fluidum can be supplied in any suitable way, as is known in the art. As a tap any fixed or mobile tap can be used, depending on for example the tapping line used. In embodiments the tapping line can be a replaceable tapping line, especially a disposable tapping line, as for example used in Heineken's David® system, as for example disclosed in EP1289874 or US2004226967, in which case a tap can be used to which the tapping line can be releasably coupled, for example by an in-line valve or by forming a valve assembly of the hose valve type, or by a quick coupling type coupling. In other embodiments the tapping line used can be a fixed tapping line of a beverage dispense system. Both types of systems are well known in the art and shall not be further discussed.

Fig. 1 shows in a side view part of a first embodiment of a tapping assembly 1, showing a neck region 2 of a container 3, a gas connecting unit 4 of a connecting device 5, connected to a gas line 6, such as an air line or air hose, and a connector 7 connected to a tapping line 8, especially a flexible

tapping line. As will be discussed the gas connecting unit 4 can be connected to the neck region 2, whereas the connector 7 can be coupled to or at least over a valve 9 mounted in a closure ring 10 of the container 3. The container is a bag-in-container type container 3.

5 Fig. 2 shows in a side view part of a second embodiment of a tapping assembly 1, showing a neck region 2 of a container 3, a gas connecting unit 4 of a connecting device 5, connected to a gas line 6, such as an air line or air hose, and a connector 11 connected to a tapping line 8, especially a flexible tapping line. As will be discussed the gas connecting
10 unit 4 can be connected to the neck region 2, whereas the connector 1 can be coupled to the gas unit 4, in a position over a valve 9 mounted in a closure ring 10 of the container 3. The container is a bag-in-container type container 3.

 Alternative to the embodiment of fig. 2 the connector 11 could also
15 be integral to the connecting device 5. In embodiments disclosed preferably the tapping line 8 is provided with a valve spaced apart from or in the connector 11 for closing off the tapping line 8, such that when connecting the connecting device 5 to the container 3 and thereby opening the valve 9 as will be discussed, beverage will not flow out of the tapping line 8
20 unintended. Such valve can for example be as disclosed in EP1289874 or US2004226967, and as discussed here above.

 In the embodiments of fig. 1 and 2 the container 3 can be the same, whereas the connectors 7 and 11 can be different, the connector 7 of the first embodiment being designed basically for single use, i.e. for use with
25 one container only, disposable with the tapping line 8, although it could be reusable for different containers, whereas in the second embodiment the connector 11 is designed basically for repeated use, i.e. for use with a series of different containers 3. A connecting device according to this description can therefore comprise an air unit 4 and, depending on the intended use,
30 either one or both of the connectors 7, 11. The connector 7 of the first

assembly could be provided with and/or could be discarded with the container 3, such that for each subsequent container 3 a new connector 7 is used.

In fig. 1 and 2 schematically a tapping device 200 is shown, to which the tapping line 8 is connected in a known and suitable manner, such that when operating a tapping handle 201 of the tapping device 200, beverage from the container 3 can flow through the tapping line 8 and out of the tapping device 200.

Embodiments of the air unit 4 and container 3 shall be discussed in general, whereas the connectors shall be described with specific references to the relevant figures.

As can be seen in fig. 1 and 2 the container 3 can have an outer container 12 with a body 13, of which a shoulder portion is visible, having a substantially cylindrical neck 15 forming part of the neck region 2. The neck comprises a ring shaped flange 14 as is common in the art and can for example be used for engaging the preform from which the container is formed as well as the container during manufacturing, filling and/or further handling, whereas the flange 14 can also increase the rigidity of the neck 15. The neck 15 can further be provided with a number of coupling elements 16, preferably above the flange 14, which can cooperate with compatible coupling provisions of the gas unit 4. In an alternative embodiment, as shown in fig. 2, the connecting unit 4 can be coupled by engaging the flange 14, for example similar to known tapping handles.

As shown in fig. 1 and 2 and as is discussed further on in more detail, at least one opening 22 is provided in the neck region 11, for example in a wall of the neck of an inner or outer container or in a ring or flange connecting them, which opening opens into a space 28 between the inner and outer containers or inner and outer preforms.

In fig. 1 a pressure medium feeding line 6 can be connected to the at least one opening 22, for feeding a fluid, such as preferably gas under

pressure into the space 28, for pressurising said space and thereby compressing the inner container. In this embodiment a first coupler element 60 is provided in or by the opening 22, whereas the feeding line 6 is provided with a complementary second coupler element 61, for gas and/or fluid tight cooperation of the coupling elements 60, 61. In the embodiment shown the first and second coupling elements 60, 61 can be any type of suitable couplers, such as for example quick couplers as known in the art for realisably forming pressure connections. The coupler elements 60, 61 are preferably connected in such a way that they stay connected without external help, for example by press fitting, clicking, snap coupling, screw threads, bayonet coupling or the like. In an embodiment the opening 22 can be provided with such means, such as for example screw threads or bayonet coupling elements. The coupler 61 can thus be or be part of the coupling unit 4.

15 In the embodiment of fig. 1 the coupler element 61 is separate from the connector 7, such that they can be placed and/or removed independently from each other.

In fig. 2 a tapping handle 67 as a connecting unit 4 is disclosed, schematically, which comprises, in a known manner, a horse shoe shaped coupling element 63 with two substantially parallel legs 64 fitting on opposite sides of the neck of the outer container, under the flange 14. An arm 66 is hingedly connected to the coupling element 63, such that it can be pushed over the top of the container, especially over a ring 10 and valve 9. At one end the legs 64 they are connected by a cross bar element 65, in which a coupler 61 is provided, extending into the space between the legs 64. The coupler 61 can be liquid and/or gas tightly connected to the opening 22, for example directly or by a coupler 60 provided in or by the opening 22, as described with reference to fig. 1. The connector 11 is pivotly mounted to the arm 66, such that when the arm 66 is pushed over the valve 9, the valve is or can be opened by the connector 11 and, at the same time or just prior to

it, the coupler 61 is coupled to the opening 22 or the coupler 60 provided therein or thereby. The arm 66 can be locked to the coupling element 63 in a known manner by a locking lever 68 biased by a spring or similar locking means.

5 In embodiments according to fig. 1 the opening and therefore the first coupler 60 can be provided in another position and can be formed such that the second coupler 61 can be coupled in a different direction, for example substantially parallel to the axis X - X of the container, as shown in fig. 1 in broken lines. In such embodiment with a tapping handle 67 both the
10 connector 11 and the coupler element 61 can be coupled by pushing the arm down over the valve. The coupler element 61 can be provided in or at least partly by the at least one opening 22, wherein the coupler element 60 comprises a channel including a bent between the container and an opposite end for coupling to the pressure medium feed line 6.

15 In these embodiments, if there is more than one opening 22, further openings can be closed off, for example by a stop. In embodiments in such second or further opening a pressure relieve valve can be provided for preventing overpressure in the space 28. In embodiments the first and/or second coupling elements 61, 62 can be provided with such over pressure
20 safety provision for releasing pressure fluid, especially gas from the coupling or space 28 when the pressure becomes higher than a set safety pressure.

Fig. 3 and 4 show schematically the embodiments of fig. 1 and 2 respectively in coupled condition. As can be seen in fig. 4 the connector 11 has a skirt 69 fitting over the wall 42 of the ring 10 (fig. 5) centring the
25 connector relative to the valve 9 and also locking the tapping handle 67 and thus the connector 61 into position.

In fig. 5 a neck region 2 of a container 3 is shown, whereas fig. 7 - 11 show a preform assembly 19 that can be used for forming such container as well as a container 3 as such.

The preform assembly 19 comprises an outer preform 20 and an inner preform 21, which is inserted into the outer preform 20. Both preforms 20, 21 are in the embodiment shown basically rotational symmetrical around a longitudinal axis X - X, though openings 22 as will be discussed
5 can be provided in discrete positions. Other shapes and dimensions would be possible too. The outer preform will, when blow moulded, form the outer container 12, whereas the inner preform 21 will by blow moulding form an inner container 35, which will be more flexible than the outer container 12 and may for example be a bag or balloon or such container.

10 The outer preform 20 has a neck or neck region 15, as indicated before, which on the inside is provided with a shoulder 23, for example at a longitudinal level substantially the same as an upper face 14A of the flange 14. The inner preform 21 has a neck or neck region 24, which is wider than a body forming portion 25 thereof, such that a shoulder 26 is formed which
15 can rest on the shoulder 23 of the outer preform 20. Thus an insertion depth is defined. As can be seen the shoulder 26 and the neck 24 of the inner preform 21 can be provided with spacer elements 27, such as teeth, channels or the like, such that at least at different peripheral positions gaps are maintained between the preforms at the neck and shoulder regions, in order
20 to prevent them from close contact, since such close contact could seal off the shoulders 23, 26 and necks 15, 24 or at least substantially prevent gas such as air passing the shoulders 23, 26 into the body 32 of the container, between outer and inner containers 12, 35.

In the embodiment shown the spacer elements 27 can comprise a
25 flange or ridge 121 extending outward from the outer surface of the neck region of the inner preform 21, for example approximately at a level of the lower end of or just below the outer wall part 49B of the groove 49, which has an outer diameter only slightly smaller than the inner diameter of the neck of the outer preform at the same level. This flange or ridge 121 thus
30 can form at least part of a shoulder 26 for resting on the shoulder 23 in the

outer preform 20. The flange or ridge 121 comprises at least one and preferably a number of cut-troughs 122. As is shown in fig. 9 this or these cut-troughs 122 can each be in communication with a channel 122A extending in an outer face of the inner preform and/or in an inner face of the outer preform, extending over at least part of a shoulder forming part 123 thereof. Upon blow moulding the BIC integrally from the preforms 20, 21 the shoulder forming part 123 will be expanded in radial and tangential direction, for forming a shoulder of the inner and outer containers. The cut troughs 122 and the channels 122A will remain open, even though the channels 122A will deform slightly, such that a clear passage for pressurised gas is obtained or maintained from the at least one opening 22 into the space 32 between the body forming portions of the inner and outer containers. As can for example be seen in fig. 8 and 11 the neck 24 of the inner preform 21 and the neck 15 of the outer preform 20 and/or outer and inner containers 12, 35 are connected to a closure ring 10, such that an air tight connection is provided between the neck 26 and the ring 10 and between the neck 15 and the ring 10. The ring 10 thus closes off the upper end of the space or interface 28 between the outer and inner preform 20, 21 or containers 12, 35 formed there from.

In the embodiments shown the ring 10 is mounted on the free ends 30, 31 of the respective necks 15, 26 of the outer 20 and inner preform 21 or containers 12, 35. The free ends 30, 31 are formed at a side of the respective necks 15, 26 at a side remote from the body 32 of the container 3. These free ends 30, 31 are positioned at first and second longitudinal levels A and B. Each level A, B can for example be represented as a plane substantially perpendicular to the longitudinal axis X - X. The levels A and B can coincide, but in the embodiment shown the level A at which the free end 30 of the outer preform 20 or outer container 12 lies is positioned at a higher longitudinal level A, that is further from the body 32 of the container

3 than the level B at which the free end 31 of the inner preform 21 or container 35 formed therefore, which may be a bag, is positioned.

In the embodiment shown in fig. 7B the inner preform 21 can have longitudinal length X_1 which is substantially smaller than the
5 longitudinal length X_2 of the outer preform 20, such that a substantial open area is formed between bottom portions 33A, 33B of the inner 20 and outer preform 21. This means that the outer longitudinal length of the inner container below the neck region, including the bottom forming portion, is considerably smaller than the inner longitudinal length of the outer
10 container below the neck forming portion. Thus when blow moulding the preforms into a container, the inner preform 21 is likely to be stretched longitudinally first, before the outer preform is stretched as well, which can mean that the wall thickness of the body forming portion 28 of the inner container 35 or bag formed is reduced more significantly than the wall
15 thickness of the outer container 12 when stretched. Moreover this may lead to different material properties of the inner and outer containers formed, even if the same material is used. The same material should be understood as at least meaning the same type of plastic, even if they are different grades of such plastic, or the same blends of plastics, wherein blends are at
20 least considered the same within the context of this application when they contain substantially the same plastic materials in substantially the same weight percentages. Substantially the same should be understood in this context as at least meaning within 10% differences in weight ratios, wherein substantially the same plastics should be understood as meaning that they
25 should comprise the same plastics, even if they are different grades, whereas if they contain different plastics, the amount of difference may by weight ratio not exceed 10 percent of the total weight of the preforms or containers. In embodiments the inner and outer preform may be made of different plastic materials. Release agents or the like may be provided
30 between the preforms and/or parts thereof. A substantial open area should

be understood as meaning that the area is seen in the longitudinal length direction of the preforms larger than strictly necessary for accommodating fabrication tolerances of the injection moulded preforms and possibly a stub formed at the bottom portion 33B of the inner preform, which is due to the
5 injection point of the preform being present centrally at said bottom portion 33B. By way of example only, $(X2-X1)/X2$ could be in a range of for example between 0.1 and 0.3.

In the embodiment of fig. 7D the lengths X1 and X2 of the inner and outer preforms 21, 20 are chosen such that the bottom portion 33B of
10 the inner preform 21 is close, preferably as close as possible to the bottom portion 33A of the outer preform 20 as physically possible, taking into account normal production tolerances for the preforms and alignment of the preforms relative to each other and for accommodating the stub resulting from the injection point of the inner preform 21. This can be understood that
15 said lengths are as close to being equal as allowable. In embodiments this means that the difference in length X2 and X1 would be in the order of a few millimetres. The difference in length is preferably sufficient to allow relative rotation of the inner preform and the outer preform during spin welding steps. By way of example, which should not be understood as limiting the
20 scope of the disclosure in any way, for a BIC having an internal volume for beverage of between 15 and 20 litres, the difference in length X2 and X1 could be less than 5 mm, for example less than 4 mm, at a total outer length of the outer preform 20 of for example about 250 mm. The relation $(X2-X1)/X2$ can be in the order of less than 0.1, for example about 0.05 or less.
25 By making the preforms 20, 21 substantially of the same length, the stretch ratios of the preforms 20, 21 during blow moulding them together into a BIC will be better controlled and more optimal for the material properties of both the inner and outer container. For example the inner container will be prevented from being over stretched. Over stretching the inner container
30 could be detrimental to its strength and could make the inner container

prone to breaking. The outer container could be prevented from being under stretched. Under stretching of the outer container could lead to a container with insufficient stability necessary for performing its functions, such as but not limited to protecting the inner container and providing for a pressure
5 barrel in order to be able to squeeze the inner container by pressurising the space between the inner and outer container.

The plastic materials and processing parameters for especially blow moulding should be chosen such that the inner container 35 will release from the body 13 of the outer container 12 when the space 32 in
10 between them is pressurised to a pressure sufficient to properly dispense the beverage by squeezing at least part of the body portion of the inner container. The release pressure can be understood as the difference between the pressure of the fluidum, especially gas, such as air or CO₂ introduced into the space 32 between the inner and outer containers and the pressure
15 inside the inner container, for example provided by a carbonated beverage enclosed therein, such as but not limited to beer. This pressure difference preferably is relatively low, such as for example less than about 1 bar (1.10⁵ Pa), more preferably less than 0.5 Bar (0.5.10⁵ Pa), even more preferably less than 0.2 Bar (0.2.10⁵ Pa). A low release pressure will have
20 the advantage that the absolute pressure within the space 32 and therefore within the BIC can be kept relatively low, which can increase safety. For example a pressure in said space can be kept below 4 barg , more specifically less than 3 barg absolute. Preferably the outer and inner preforms 20, 21 or containers 12, 35 are not connected to each other over any substantial area
25 within the body 32.

As can be seen in for example fig 5, 8 and 11 at least one opening 22 can be provided, extending through the wall of the neck 15 of the outer container 12. In the embodiment shown there are two such openings 22, diametrically opposite each other. The opening or openings 22 is/are
30 positioned at a longitudinal level C between the levels A and B. i.e. above

the flange 14 and below the free end 30 of the outer preform 20 or container 12.

In embodiments the free ends 30, 31 are spaced apart over a longitudinal distance W. The closure ring 10, as is shown for example in fig. 5, 6, 7, 8, 8A, 11, 11A, 12A-D and 13A-D in more detail, can comprise a central opening 34, opening into the inner volume of the inner preform 21 or inner container 35, and is designed to hold a valve 9 as will be discussed. The closure ring 10 can be provided with an outer, first ring shaped portion or flange 36 that can be positioned on the free end 30 of the outer preform 20 or outer container 12, an intermediate or second peripheral ring shaped flange or portion 37 that can be positioned on the free end 31 of the inner preform 21 or inner container 35, and an inner or third peripheral ring shaped flange or portion 38. The outer and intermediate portions 36, 37 are connected by a first peripheral wall 39, extending upward from an outer edge 43 of the intermediate portion 37. The intermediate and inner portions 37 and 38 are connected by a second peripheral wall 40, extending downward from an inner edge 44 of the intermediate portion 37. From an inner edge 41 of the inner portion 38 a third peripheral wall 42 extends upward, forming or at least enclosing the opening 34. The walls 39, 40 and 42 can be considered as forming substantially concentric skirts. The second and third walls 40, 42 can be substantially parallel to each other and to the longitudinal axis X - X, whereas the first wall can slope slightly outward in upward direction.

The first wall 39 preferably extends directly adjacent the inner face 45 of the neck 15 of the outer preform 20 or container 12, such that the outer edge 43 is positioned above the shoulders 23 and 26, wherein the neck portion 24A of the neck 24 between the free edge 31 and the shoulder 26 is enclosed between the said edge 43 and the shoulder 23. Preferably at least at a lower end of the first wall 39, close to the edge 43 a gap is provided between the wall 43 and the inner face 45. The second wall 40 extends

preferably adjacent the inner face 46 of the neck 24 of the inner preform 21 or inner container 35. The inner portion 38 of the closure ring 10 can be positioned at the longitudinal level of the shoulder 23 and/or the flange 14. Thus the neck 24 of the inner preform 21 or container 35 is well enclosed.

5 The third or inner wall 42 can extend from the portion 38 upward to a level D substantially the same as level A, and preferably below a top surface 47 of the first or outer portion 37. The contact surfaces between the ring 10 and the free ends 30, 31 could have any suitable shape and configuration, and may depend on for example the method of connecting. In embodiments the

10 ring 10 can be connected to the preforms by mechanical or physical means, such as but not limited to press fitting, screw threads, bayonet coupling, glue, welding, over moulding or other suitable means. In the present disclosure especially welding is disclosed, more specifically spin welding, by way of example. Combinations of connecting techniques as discussed are

15 also possible. The configuration discussed hereafter is not limiting but may be advantageous for welding, especially spin welding.

In the embodiment as shown in for example fig. 7 C and D and fig. 8A and 11A the ring 10 is mounted substantially entirely within the neck portion of the outer container. In this embodiment the ring 10 is not

20 provided with the flange 36, or at least not such flange for resting on top of the neck of the outer container but is during spin welding forced into and fused with an internal portion of the neck of the outer preform 20.

In the embodiments shown the ring 10 and free ends 30, 31 of the preforms or containers form a labyrinth 32A type of connecting, which may

25 be beneficial because it can limit or even prevent debris coming from the plastic during spin welding or otherwise connecting the parts from entering into the space 28 and/or into the inner volume 48 of the inner preform 21 or inner container 35. In the embodiment shown the free edge 31 of the inner preform 21 and/or of the inner container 35 is provided with an annular

30 groove 49, between an inner wall portion 49A and an outer wall portion 49B,

open in upward direction, away from the body 32. From the intermediate portion 38 a skirt 50 extends downward, preferably a peripheral skirt, into the groove 49. The groove 49 is preferably somewhat deeper than the height 51 of the skirt 50, whereas the skirt may be slightly wider than the groove 49, at least over part of its height 51. In fig. 8 overlapping materials are shown at the top right hand corner of the groove, which may be used during spin welding, to merge the ring 10 and inner preform 21 or container 35. The free end 30 of the outer preform 20 and/or of the outer container 35 can be provided with a further annular or peripheral skirt 52, whereas the outer portion 37 of the ring may be provided, at the side facing said free edge 30, with an annular groove 53. The depth of the groove 53 may again be slightly larger than the height of the skirt 53 above the free end 30. During welding any material released from the ring 10 and/or the preforms 20, 21 or containers 12, 35 respectively may, at least to a large extent, be caught within the grooves 49, 53.

In the embodiment shown in fig. 7C and D and fig. 8A and 11A, a second labyrinth 32B type of connection is provided between the inner and outer preforms 21, 20 and the ring 10. In this embodiment the outer wall portion 49B of the groove 49 of the inner container 21 is extending further upward relative to the inner wall portion 49A thereof, forming a peripheral lip portion 49C inclined outward, such that the free edge 49D of said lip portion 49C is in close proximity of or in contact with the inner face 45 of the neck outer preform or outer container, preferably above the at least one opening 22, that is at a side of said at least one opening 22 facing towards the free ends 30, 31. In this embodiment any debris forming during connecting the ring 10, especially to the outer preform, for example by spin welding, or otherwise present at the ring will be caught by said lip portion 49C and will be trapped, prevented from entering into the space 32.

In the embodiment shown of the closure ring 10, the second wall 40 may be provided with engagement elements 54 for engaging the ring 10

during spin welding, in which the ring and preforms 20, 21 and/or containers 12, 35 are rotated relative to each other around the longitudinal axis X - X at such speed and pressure that the materials of the ring 10 and the preforms 20, 21 and/or containers 12, 35 at least partly melt and merge, such that a gas and liquid tight connection is obtained, as is schematically shown especially in the cross section of fig. 11. Spin welding as such is a technique well known in the art and is therefore not discussed herein in extenso. The engagement elements 54, here shown as teeth, enable an easy and firm grip of the closure ring 10.

10 In embodiments of a method of the disclosure the preforms 20, 21 and the ring 10 can be assembled prior to blow moulding. In embodiments they can be assembled directly or shortly after injection moulding of the preforms, and then stored and shipped to a filling station, where they can be blow moulded into a container directly prior to filling the container with a
15 beverage. In an alternative embodiment the preforms and the ring 10 can be shipped in a position in which the ring 10 is not connected to both preforms 20, 21 or at least not to one of them, such that the inner preform can be inserted into the outer preform directly prior to blow moulding the container, which would typically be close to or in line with a blow moulding
20 apparatus and a filling station for filling beverage into the container. An advantage thereof could be that when for example a release agent is used between the inner and outer preforms, for preventing at least in part adherence between the inner and outer containers, this release agent can be applied directly prior to blow moulding, which may prevent the release
25 agent from running, which could lead to an uneven distribution and therefore improper functioning of the release agent. Such release agent, which in itself is known in the art, could be applied for example by (dip)coating or spraying, for example using a silicon based material. In embodiments the ring could be adhered to the inner preform first, and then
30 to the outer preform, for example after applying a release agent. In

embodiments the ring 10 can be part of the inner preform, at least in part. In embodiments the ring 10 can be adhered to the outer preform only after blow moulding the container from the set of preforms. In embodiments the inner preform could be blow moulded into a container blow moulded from
5 the outer preform.

When assembling the inner and outer preforms directly prior to blow moulding them into the container an advantage can be obtained that the preforms, and especially the inner preform, can be heated at least in part prior to inserting the inner preform into the outer preform, which
10 facilitates accurate heating of the preforms even further.

During blow moulding of a container 3 a tool of a blow moulding apparatus, such as for example a stretch rod, heating device or the like can be inserted through the opening 34 in the ring 10, if previously provided, wherein the opening 34 is preferably slightly larger than the relevant cross
15 section of the tool, such that pressure release of the inner volumes of the preforms is possible, at least partly passed the tool.

As can be seen in for example fig. 5, 8 and 11, the opening or openings 22 open into the space or interface 28 between the necks 15, 24 at a level just above the level B. In other words through such opening 22 the
20 wall 39 and/or a lip portion 49C if applicable is visible. Any gas such as air injected into and through the opening will therefore impinge onto said wall, which is relatively rigid, and be forced down towards the body 32. By providing the or each opening in the neck region 2, it is ensured that during blow moulding of the container 3 the opening or openings 22 will not be
25 deformed or displaced, since the neck region 2 will not deform during blow moulding.

As is shown in for example fig. 5, a valve 9, such as but not limited to an aerosol valve type valve as is commonly known in the art and for example described in WO00/35803 or EP1506129. The valve 9 is
30 mounted in a clinch plate 55, for example made of metal or plastic, which

can be clinched onto a upper end 56 of the inner wall 42. In the embodiment shown the valve 9 is a female type aerosol type of valve. Obviously also other such valves can be used, such as but not limited to male aerosol valves and/or tilting aerosol valves and the like. Any type of valve suitable for closing off the dispense opening and for being opened by the connecting device or connector or dispense adapter can be used in the present disclosure. The valve 9 preferably extends below the level 47 of the outer portion of the closure ring 10, such that the valve 9 is well protected. The valve 9 with clinch plate 55 closes off the opening 34 and thus the inner volume of the inner container 35. In embodiment the valve 9 can be connected to a dip tube 108. In the embodiment of fig. 3 such dip tube 108 is omitted. In this embodiment, which could be used with the container standing on its bottom and the valve 9 on top, the head space of the inner container will be emptied and removed immediately upon pressurising the container and opening the valve 9 for the first time, such that after that the entire remaining volume of the inner container will be filled with beverage when pressurised sufficiently, improving the tapping behaviour and the quality of the beverage. In this embodiment a valve body 130 of the valve 9 is biased in a manner known from for example aerosol valves, against a seal 131 by a spring enclosed within a housing 132. In this embodiment the housing is provided with relatively large side openings 133 for not unduly restriction the flow when the valve 9 is opened.

A unit 4 could be provided solely with such connecting element for connecting a gas supply to the opening 22. In such embodiment the container is preferably only provided with one opening 22, or the unit is provided with a sealing element for sealing the or each further such opening 22.

In fig. 10 and 10A schematically a container is shown in side view, with in broken lines the preforms 20, 21 from which the container has been blow moulded integrally. In fig. 10 the bottom of the container has a

petaloid shape, as known in the art. In the embodiment of fig. 10A the bottom is hemispherical. Especially but not exclusively in the latter embodiment the container can be packaged in a outer package such as a box, for example made of cardboard, fibre board, plastic or wood, for supporting and protecting the container and/or for enabling stable
5 positioning of the container during for example transport, storage and dispensing and other use.

As can be seen in fig. 1 and 3, in the first embodiment the connector 7 can be connected directly to the valve 9, for example by fitting
10 the connector 7 to the closure ring 10, especially to the third wall 43 and/or to the clinch plate 55. In the embodiment shown to that end the connector 7 has a substantially dome shaped housing 100 with a rim portion 101 that fits as a snap fitting over the outer edge 102 of the clinch plate 55 and snaps below said edge 102, against the wall 43. Preferably this snap fit is such
15 that the dome and thus the connector 7 cannot be removed, once fitted, without damage to the connector 7 and/or the ring 10 and/or the clinch plate 55, preferably such that proper refitting the connector 7 to the same or a different container 3 is prohibited. The connector 7 comprises a stem 103 that engages the valve 9, such that the valve 9 is opened and beverage can
20 flow from the inner container 35 through the valve into the stem 103, to further flow into a tapping line connected thereto, to be fed to a tap for dispensing. By fitting the connector 7 properly to the container 3, especially over the valve 9, the valve is thus opened and preferably cannot be opened and closed repeatedly. The connector can be fitted prior to placing the unit 4
25 on the container 3, or after such placing of the unit 4.

As can be seen in fig. 2 and 4 in the second embodiment the connector 11 can be positioned over the valve 9 and clinch plate 55 by pushing down the arm 66. The connector 11 comprises a stem 103 extending downward, within the skirt 69. In embodiments the connector 11 may be
30 integral to the arm, such that when placing the tapping handle 67 also the

connector 11 is placed. In other embodiments the connector may be releasably connected to the tapping handle 67, such that for example first the tapping handle 67 can be placed and locked onto the container and then the connector is connected to the tapping handle 67 and/or container 3.. The stem 103 again acts on the vale 9 for opening it and allowing beverage to be passed from the inner volume of the inner container 35 to a tapping line 8 connected to the connector 11. The tapping line can be part of a tapping device with for example an in line cooler 106, schematically shown in fig. 2 in part. In this embodiment a non-return valve can be provided in the connector 11, for example a ball valve 70, preventing backflow from the tapping line 8.

When the placement or removal of the connector 7, 11 is or at least can at least partly be independent from placing and/or removing of the unit 4 onto or from the container, the connector, especially connector 11 can be removed from the container, for example for cleaning, without decompression of the container.

In the embodiments shown the outer preform 20 has a body forming portion which is substantially cylindrical with a longitudinal axis X - X and closed off at the bottom by a bottom forming portion. The cylindrical portion has a maximum cross section or maximum diameter D_b and preferably a substantially constant outer diameter D_b over its cylindrical length L_b between the flange 14 and the bottom forming portion, wherein the body forming portion may have a draft over said length L_b , suitable for release from an injection moulding mould, as is known to the person skilled in the art. The maximum diameter D_b is preferably smaller than that of the flange 14, if applicable. The neck portion or region preferably is also substantially cylindrical with a longitudinal axis X-X substantially coinciding with the longitudinal axis of the body forming portion. The substantially cylindrical part of the neck region has an average outer diameter $D_n(\text{out})$ which is larger than the maximum diameter D_b . In the

embodiment shown the neck portion has a substantially constant outer diameter $D_{n(out)}$ above the flange 14. The wall thickness of the neck region of the outer preform 20 is preferably slightly smaller than that of at least most of the body forming portion. In the embodiment shown the inner

5 surface 45 of the neck region of the outer preform is positioned above and substantially coinciding with the outer surface of the body forming portion of said preform 20, or positioned only slightly inward, providing for the shoulder on which the inner container can be supported. The inner surface of the body forming portion of the outer preform 20 slopes inward over a

10 part directly adjacent the flange 14. The wall part comprising the sloping surface will during blow moulding form at least most of a shoulder of the outer container. Over at least part of this sloping surface and/or the facing surface part of the adjacent inner container spacing elements and/or channel forming parts are provided which remain at least partly open

15 during and after blow moulding the container from the preforms, allowing gas to be inserted from said at least one opening 22 into the space between the body forming portions of the container. Such outer preform can be manufactured easily, by injection moulding, without complicated movable parts in the mould. Only for forming the at least one opening and the

20 coupling elements at least one part has to be provided in the injection moulding mould moving in a direction different from a direction parallel to the longitudinal axis X - X of the preforms. In the embodiments shown the coupling elements 16 are provided substantially as tubular elements 16 having a release direction in a mould parallel to the release direction of the

25 at least one opening 22, such that they can easily be formed by the same mould part.

In fig. 12A - D an embodiment of a preform assembly 19 is shown again, in longitudinal section through a mid sectional plane along the line A - A in fig. 12C, in both assembled condition (fig. 12A) and pre assembling

(fig. 12B) and, in fig. 12C, in cross section along the line B - B in fig. 12A. Fig. 12D shows a detail of fig. 12C.

In fig. 13A - D an embodiment of a preform assembly 20 is shown again, in longitudinal section through a mid sectional plane along the line A - A in fig. 13C, in both assembled condition (fig. 13A) and pre assembling (fig. 13B) and, in fig. 13C, in cross section along the line B - B in fig. 13A. Fig. 13D shows a detail of fig. 13C.

These preform assemblies can for example be similar to the assembly according to fig. 7. Only some details will be discussed herein, whereas for the further description reference is made to the earlier descriptions of the preform assembly 19 and parts thereof, including the closure ring 10.

Fig. 12B shows the outer preform 20, the inner preform 21 and the closure ring 10, aligned for assembling. In fig. 12B the shoulder forming part 123 of the inner preform 21 is only partly cut away, such that the cut through 122 and the spacing elements and/or channel forming parts 122A can be clearly seen in side view. The neck region 24 with the shoulder 26 is shown, being wider than the body forming portion 25. The shoulder forming part 123 is slightly frusto conical, widening from the body forming portion 25 to the neck region 24. In the outer periphery of the neck region 24 at least one, and in the embodiment shown two diametrically opposed cut outs 22 are provided, though the neck region 24, extending in longitudinal direction thereof and open to the peripheral surface. On the outer surface of the shoulder forming portion 123 of the inner preform 21 directly below the cut out 122 spacer elements 27 are provided, formed by two adjacent ribs 122B enclosing a channel 122A there between. This channel 122A extends from the cut out 122 towards at least near and preferably passed the end of the shoulder forming portion 123 at the side of the body forming portion 25. Thus it is prevented that when blow moulding the container from the assembly, the outer preform 20 can fully engage the outer surface of the

shoulder forming part 123 of the inner container, thus obstructing a pressure fluidum from entering into the space the between the then formed inner and outer containers.

By providing two diametrically opposed cut throughs 122 and adjacent channels 122A, the spacer elements 27 can be formed relatively
5 easy in mold parts releasing to two opposite sides. When assembled, as can be seen in fig. 12A and B, the outer surface of the inner preform and the inner surface of the outer preform will be spaced apart mostly, over a distance approximately similar to the radial height of the ribs 122B. The
10 ribs 122B are placed relatively close together, such that the channel 122A will remain open, even after blow moulding the container.

When assembling the preforms 20, 21, preferably the cut throughs 122 and adjacent channels 122A are positioned such that the openings 22
open adjacent said cut throughs 122. However, as can be seen in fig. 12B,
15 the shoulder 23 on which the shoulder 26 can rest can be provided with a stepped surface such that there will always be sufficient openings between the shoulders 23, 26 for allowing a pressure fluid to proceed from the opening 22 or openings 22 into the channel or channels 122A and into the space between the inner and outer preforms. In this embodiment again the
20 length X1 of the inner preform is significantly smaller than the length X2 of the outer preform 20, as shown and discussed with reference to fig. 7A, for the same or similar reasons.

In fig. 13 an alternative embodiment of a preform assembly is shown, both pre assembling (fig. 13B) and in assembled condition (fig. 13A)
25 In this embodiment the spacing elements 7 are primarily formed on the inner surface of the outer preform 20, at least in the shoulder forming part 23 thereof. In the embodiment shown again, as discussed with reference to fig. 12, the elements 7 can be formed as channels 122A between adjacent ribs 122B, which channels open in lower parts 7A of a stepped surface 7b of
30 the shoulder 23 on which the shoulder 26 of the inner preform 20 can come

to rest. In this embodiment there are several such channels 122A, preferably more than two, for example six, spaced around the periphery of the inner surface of the shoulder forming portion, 23, as shown in fig. 13C. By increasing the number of channels 122A the area for allowing a pressure medium to flow from the opening or openings 22 is increased, better ensuring proper pressurising of the space between the inner and outer containers after blow moulding. Moreover, these channels can be more easily maintained at least in part during blow moulding, due to their positioning on the outer preform 20. By providing them on the inner surface of the outer preform it is easier to manufacture a multitude of such channels. During blow moulding the inner preform may be heated to a higher temperature, which could be detrimental to the channels if they are provided on the inner preform. The inner preform will be more fluid during blow moulding, which would reduce the accuracy of the shape of the ribs and thus of the remaining channel. Especially since during blow moulding the pressure exerted for forming the container will be from the inside out, meaning that the inner preform will be pushed against the inner surface of the outer preform. Again, providing the ribs and channels on the outer preform will then be advantageous for maintaining the proper profiles of the ribs and channels.

In the embodiments shown the height H of the ribs 122B can be similar to the radial distance between the preforms 20, 21 in the neck region and/or shoulder forming part 23 of the preforms, for example a few millimetres.

In this embodiment the lengths X1 and X2 are again as similar as possible, as described with reference to fig. 7D, for the same or similar reasons.

Obviously the configuration of the elements 7 and/or the neck region configuration of fig. 13 could be used in a set of preforms according to fig. 12 or vice versa, or in the embodiments of fig. 7.

It is preferred that the spacing elements and/or channel forming parts 122 are at least mainly formed on the inside surface of the outer preform 20, at least in the shoulder forming part or region 123 thereof. This can have a number of advantages, including but not limited to that the wall thickness of the outer preform may be larger, that during blow moulding there may be less deformation in the outer preform, especially in the shoulder forming part or region 123, so that the shape and dimensions of the spacing elements and/or channel forming parts 122 will be maintained more easily. Moreover, when the shoulder forming part 123 widens in the direction of the open upper end 30, these spacing elements and/or channel forming parts 122 can easily be formed by a releasing core of an injection moulding mould, providing sufficient draft. Moreover, by providing them on the outer preform there may be less stress in the container formed,

In the embodiments shown gas or such pressure fluid will be introduced in a substantially radial direction A_{in} of the neck portion of the container, i.e. at an angle α relative to the axis X - X of the neck, which angle α preferably is between 30 and 150 degrees, more preferably between 45 and 135 degrees and more preferably about 90 degrees. By this direction the safety of the assembly can be increased, for example because the pressure exerted by the gas is not in a direction in which the connecting device can be removed from the container. Moreover, the direction is such that the gas will aid in providing passage for the gas into said space between the containers. Furthermore by providing the at least one opening in a wall of the neck region the gas inlet will not interfere with the positioning of the beverage dispense line or tube or the removal thereof.. By providing an over pressure safety in the connecting device overpressure in the container can be avoided and/or resolved easily. By providing the at least one inlet opening 22 at a level such that it faces a wall part of the ring, i.e. for example at a level above the free end of the inner container 21, it is further ensured that the passage of gas between the opening 22 and the

space 32 between the containers is not obstructed. In the embodiments shown having the lip portion 49C gas flow will be directed by the sloping surface of the lip portion 49C towards the space 32.

In embodiment the source of the pressurised gas can be or at least
5 can comprise a compressor for air. Preferably the direction of the
compressor is reversible, such that when the inner container 35 is emptied
to a desired extend, the air can be sucked from the space 28 through the
relevant opening 22, with the valve 9 still closed, which would lead to
reducing the volume of the container since the outer container 12 will be
10 compressed by pressure reduction within it. This will significantly reduce
the volume of the container to be discarded.

The invention is by no means limited to the embodiments
specifically disclosed and discussed here above. Many variations thereof are
possible, including but not limited to combinations of parts of embodiments
15 shown and described. For example the at least one opening 22 can be
provided in a different position, for example extending through the ring 10,
preferably in substantially radial direction outward, for example through
the inner surface 39 or wall 40 of the ring, into the space 32 between the
containers, wherein the connecting device can extend into the ring for
20 communicating properly with said at least one opening. The container can
be provided with only one opening in the neck or several such openings. In
embodiments the ring 10 can be left out in part or entirely, wherein the unit
4 can be fitted directly over the neck of the container, closing off to the neck
gas tightly, such that gas can be inserted directly into the space 28. Before
25 use the said space 28 could be sealed off by a lid or seal, for example to be
pierced by or be removed prior to attaching the unit 4, which may be fitted
for example under or onto the protrusions 16.

Claims

1. Container of a bag-in-container type, wherein a neck region of the container is provided with at least one opening extending substantially radially there through, into a space between the outer container and an inner container adjacent thereto, wherein:
- 5 - the neck region is provided with coupling elements, preferably at opposite sides of said at least one opening, seen in circumferential direction, for coupling of a connecting device to the container for introducing a pressure fluid through said at least one opening into a space between the inner and outer
- 10 - the at least one opening is provided with or forming part of a first coupler for coupling a pressure fluid feed line to said opening,
- for pressurising a space between the inner and outer container.
- 15 2. Container according to claim 1, manufactured by blow moulding from at least an inner and an outer plastic preform, wherein the inner and outer preform are preferably integrally blow moulded to form the bag-in-container type container, such that the outer preform forms at least part of the outer container and the inner preform forms at least part of the bag or
- 20 inner container, and wherein a closure ring is provided to the inner and outer container, at least closing off the space between said inner and outer container.
3. Container according to claim 2, wherein the outer container and inner container have first and second neck regions respectively, wherein the
- 25 ring is connected to the free ends of the first and second neck regions, preferably by welding.

4. Container according to any one of claims 1 - 3, wherein the bag is suspended by a neck region of the bag in the neck region of the outer container, wherein the neck regions both have a free end opposite a body portion of the container, wherein a closure ring is mounted to the free ends
5 of the inner and outer container, preferably by welding, wherein an edge of the free end of the neck region of the inner container lies at a level closer to the body portion of the container than an edge of the free end of the neck region of the outer container, such that the ring extends at least partly into the neck region of the outer container.
- 10 5. Container according to claim 3 or 4, wherein the at least one opening in the neck region is positioned at a level between the free ends of the neck regions of the inner and outer containers to which the ring is connected.
6. Container according to any one of the previous claims, wherein
15 the inner container is provided at the neck region with an outward facing flange, which has an edge positioned close to or in abutment with an inner surface of the outer container above the at least one opening, substantially closing off the space between the neck regions of the inner and outer container, for preventing debris from entering the space between the inner
20 and outer container, especially during mounting of a closure ring to the inner and/or outer container.
- 7 Container according to any one of claims 1 - 6, wherein the inner container has a free edge opposite a body portion of the container, which free edge is provided with an annular groove open to the side opposite the
25 body portion, and wherein a ring is mounted to the free edge, having a skirt extending into said groove.
8. Container according to any one of claims 1 - 7, wherein the or a ring has been mounted to the inner and outer containers by spin welding.
9. Container according to any one of claims 1 - 8, wherein the or a
30 ring is provided with an opening, opening into the bag or inner container,

which opening is closed by a valve, preferably an aerosol type valve, and/or a valve mounted to the ring by clinching.

10. Container according to any one of claims 1 - 9, wherein the ring is provided with at least one circumferential wall part, preferably extending
5 substantially parallel to a longitudinal axis of the container or at least of the neck regions thereof, wherein teeth are provided on said wall part for engaging a spin welding tool.

11. Container according to any one of claims 1 - 10, wherein at least one of the inner and outer preform is provided with spacer elements, at least
10 in a transition area between the neck regions and the body portion of the container, preventing close contact between at least part of the inner surface of the outer container and the outer surface of the inner container.

12. Container according to any one of the previous claims, wherein a coupler element is provided in or at least partly by the at least one opening,
15 wherein the coupler element comprises a channel including a bent between the container and an opposite end for coupling to a pressure medium feed line.

13. Set of preforms for forming a container according to any one of claims 1 - 12.

20 14. Set of preforms for forming a container of a bag-in-container type, comprising an inner preform and an outer preform, wherein a neck region of one of the preforms, preferably an outer preform is provided with at least one opening extending substantially radially there through, into a space between the outer preform and a part of the inner preform adjacent thereto,
25 wherein the neck region is provided with at least one of

- coupling elements, preferably at opposite sides of said at least one opening, seen in circumferential direction; and
- a coupler element in or partly formed by the at least one opening

for coupling of a pressure medium feed line to a BIC container after blow moulding of the preforms,

for introducing a pressure fluid through said at least one opening into a space between the inner and outer container.

5 15. Set of preforms according to claim 13 or 14, wherein the inner and outer preform are for preferably integrally blow moulding to form the bag-in-container type container, wherein a closure ring is mounted on the inner and outer container, at least closing off the space between said inner and outer container.

10 16. Set of preforms according to claim 15, wherein the outer preform and inner preform have first and second neck regions respectively, wherein the ring is connected to the free ends of the first and second neck regions, preferably by welding.

15 17. Set of preforms according to any one of claims 13 - 16, wherein the inner preform is suspended in the outer preform by a neck region of the inner preform, wherein the neck regions both have a free end opposite a body portion, wherein a closure ring is mounted to the free ends of the inner and outer preforms, preferably by welding, wherein an edge of the free end of the neck region of the inner preform lies at a level closer to a bottom
20 forming portion of the outer preform than an edge of the free end of the neck region of the outer preform, such that the ring extends at least partly into the neck region of the outer preform.

18. Set of preforms according to claim 16 or 17, wherein the at least one opening in the neck region is positioned at a level between the free ends
25 of the neck regions of the inner and outer preform to which the ring is connected.

19. Set of preforms according to any one claims 13 - 18, wherein the inner preform is provided at the neck region with an outward facing flange, which has an edge positioned close to or in abutment with an inner surface
30 of the outer preform above the at least one opening, substantially closing off

the space between the neck regions of the inner and outer preforms, for preventing debris from entering the space between the inner and outer preforms, especially during mounting of a closure ring to the inner and/or outer preform.

- 5 20 Set of preforms according to any one of claims 13 - 19, wherein the inner preform has a free edge opposite a bottom forming portion, which free edge is provided with an annular groove open to the side opposite the bottom forming portion, and wherein a ring is mounted to the free edge, having a skirt extending into said groove.
- 10 21. Set of preforms according to any one of claims 13 - 20, wherein the or a ring has been mounted to the inner and/or outer preforms by spin welding.
22. Set of preforms according to any one of claims 13 - 21, wherein the or a ring is provided with an opening, opening into the inner preform, which
15 is sufficiently large for entering a blow moulding core tool, such as a stretch rod, into the inner preform during blow moulding the preforms into a BIC type container and for pressure release passed said tool.
23. Set of preforms according to any one of claims 13 - 22, wherein a ring is provided with at least one circumferential wall part, preferably
20 extending substantially parallel to a longitudinal axis of the preforms or at least of the neck regions thereof, wherein teeth are provided on said wall part for engaging a spin welding tool.
24. Set of preforms according to any one of claims 13 - 23, wherein the inner and outer preforms each have a body forming portion extending from
25 the respective neck regions, said body forming portions including bottom forming portions, wherein a longitudinal outer length of the body forming portion of the inner preform is substantially equal to a longitudinal inner length of the body forming portion of the outer preform.
25. Set of preforms according to any one of claims 13 - 24, wherein the
30 outer preform has a substantially cylindrical body forming portion

extending from the neck region, which is at least partly substantially cylindrical, the body forming portion and the neck region preferably having coinciding longitudinal axes, wherein a maximum outer cross section of the body forming portion is smaller than an average cross section of the substantially cylindrical portion of the neck region.

5 26. Set of preforms according to claim 25, wherein a flange is provided between the substantially cylindrical part of the neck region and the body forming portion of the outer preform.

10 27. Set of preforms according to claim 25 or 26, wherein the neck region of the outer preform is provided with an inward reaching shoulder, wherein the inner preform has an outward reaching flange, adjacent to or resting at least partly on said shoulder, wherein said flange and/or said shoulder preferably comprises at least one spacer element or passage for providing a passage between the flange and the shoulder.

15 28. Set of preforms according to claim 26 and 27, wherein the shoulder is provided at a level substantially the same as the level of the flange.

20 29. Set of preforms according to any one of claims 13 - 28, wherein at least one of the inner and outer preform is provided with spacer elements, at least in a transition area between the neck regions and the body portion of the container, preventing close contact between at least part of the inner surface of the outer container and the outer surface of the inner container.

25 30. Method for forming a set of preforms for integrally blow moulding a BIC type container, wherein an inner preform is inserted into an outer preform, wherein the inner preform is connected to the outer preform by at least a ring, welded or glued to a free end of at least one of the inner and outer preforms, wherein the ring can be an integral part of or can be connected to the other of the inner and outer preform, such that a space between the inner and outer preform is closed off by said ring and wherein
30 at least one opening is provided through a neck region of the inner preform

or outer preform, opening into said space and preferably extending substantially radially through a wall of said neck region.

31. Method for forming a BIC type container using a set of preforms according to any one of claims 13 - 29 or a method according to claim 30,
5 wherein part of a blow moulding tool is inserted into the inner preform through an opening in a or the ring closing off a space between the inner and outer preform and integrally blow moulding the set of preforms into the container, thereby preferably allowing pressure equilibration between said space and the environment of the container through said at least one
10 opening in the neck region, at least during blow moulding of the container.

32. Tapping assembly for a beverage, comprising a container according to any one of claims 1 - 12 or formed from a set of preforms according to any one of claims 13 - 29 or using a method according to claim 30 or 31, wherein the assembly further comprises a coupler element,
15 connected or connectable to a coupler element formed at least partly by or provided in the at least one opening, , wherein the connecting element is connected to a source of pressurised gas.

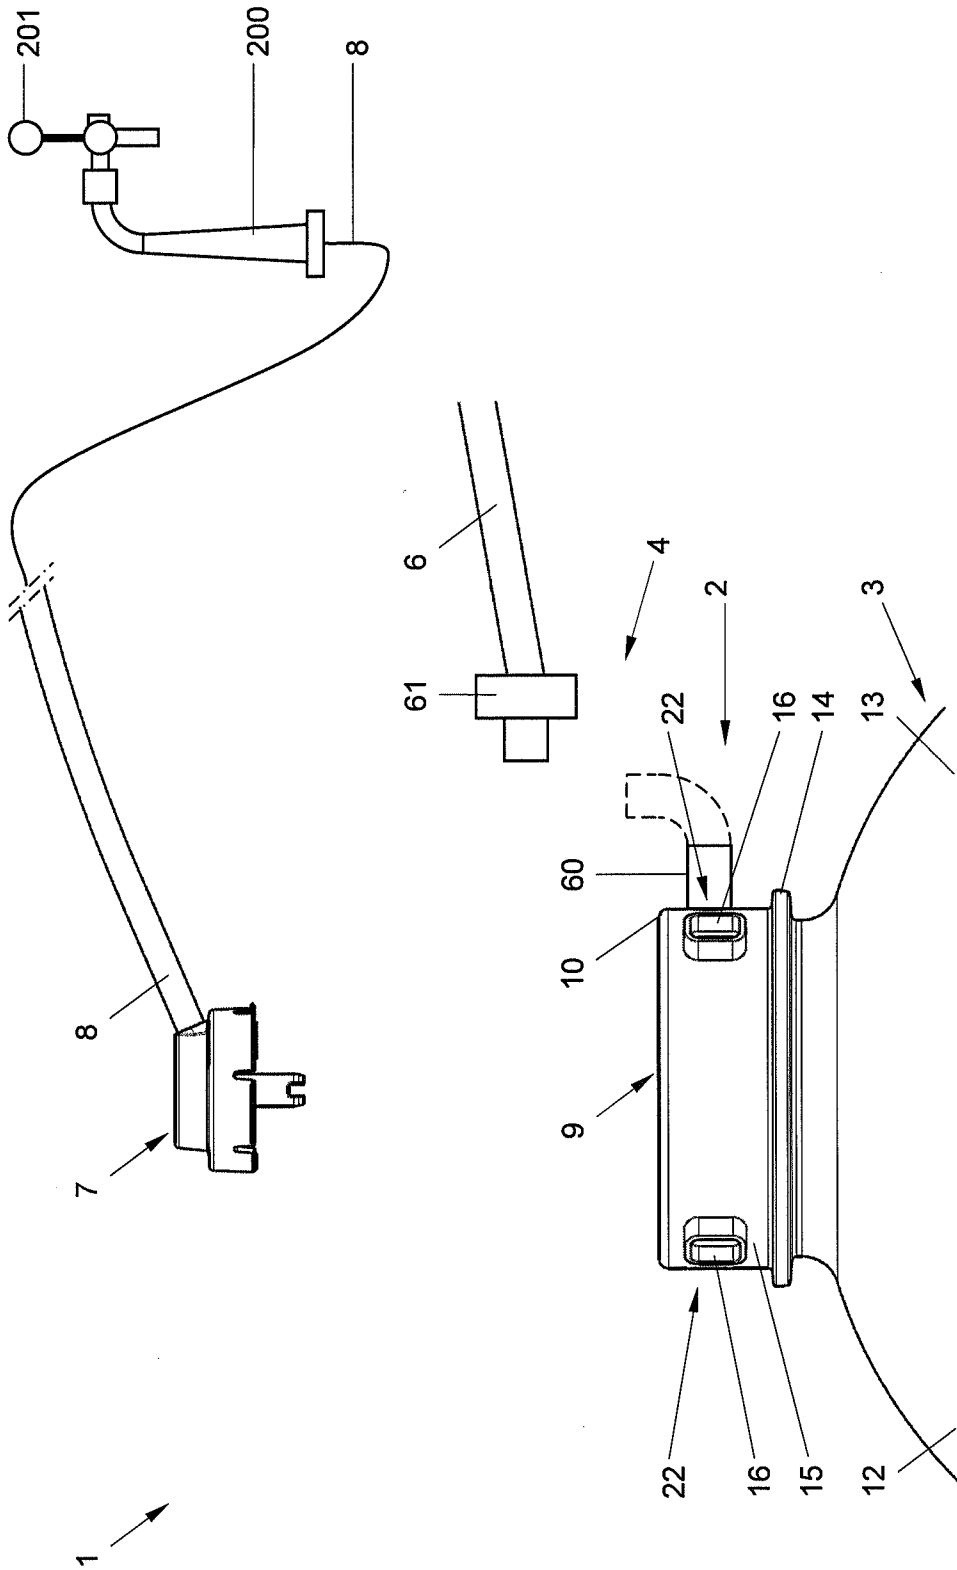


Fig. 1

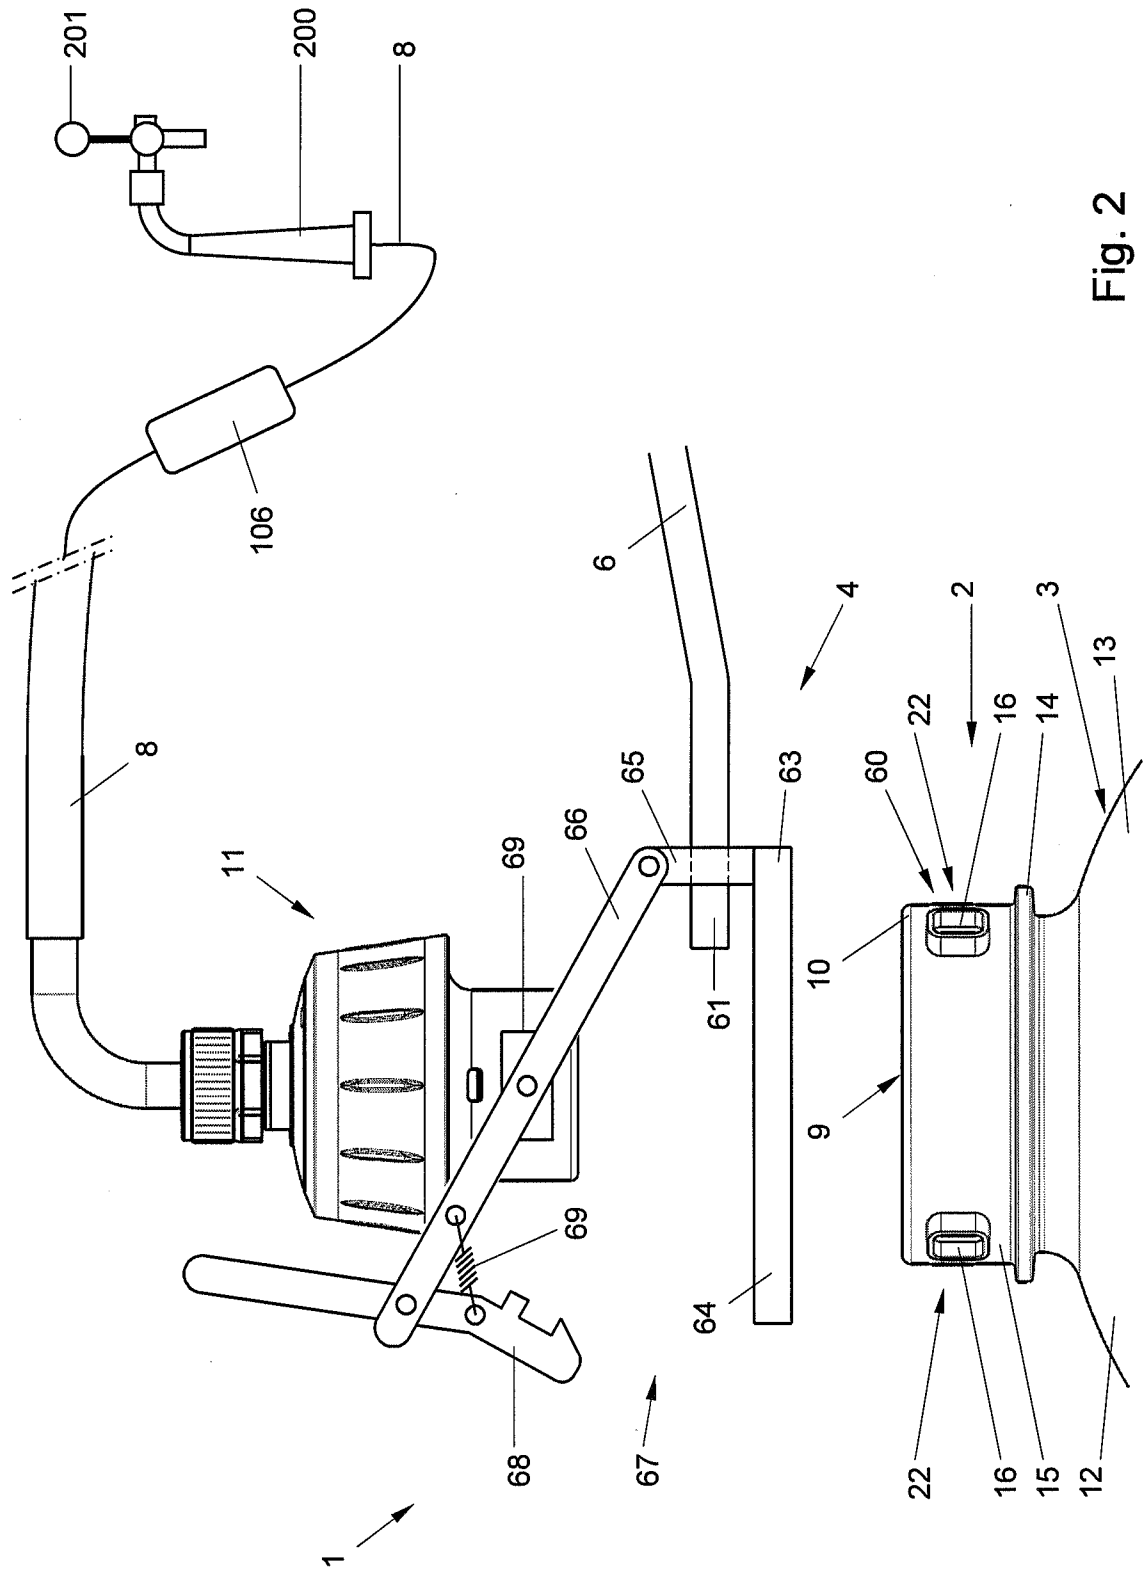


Fig. 2

4/21

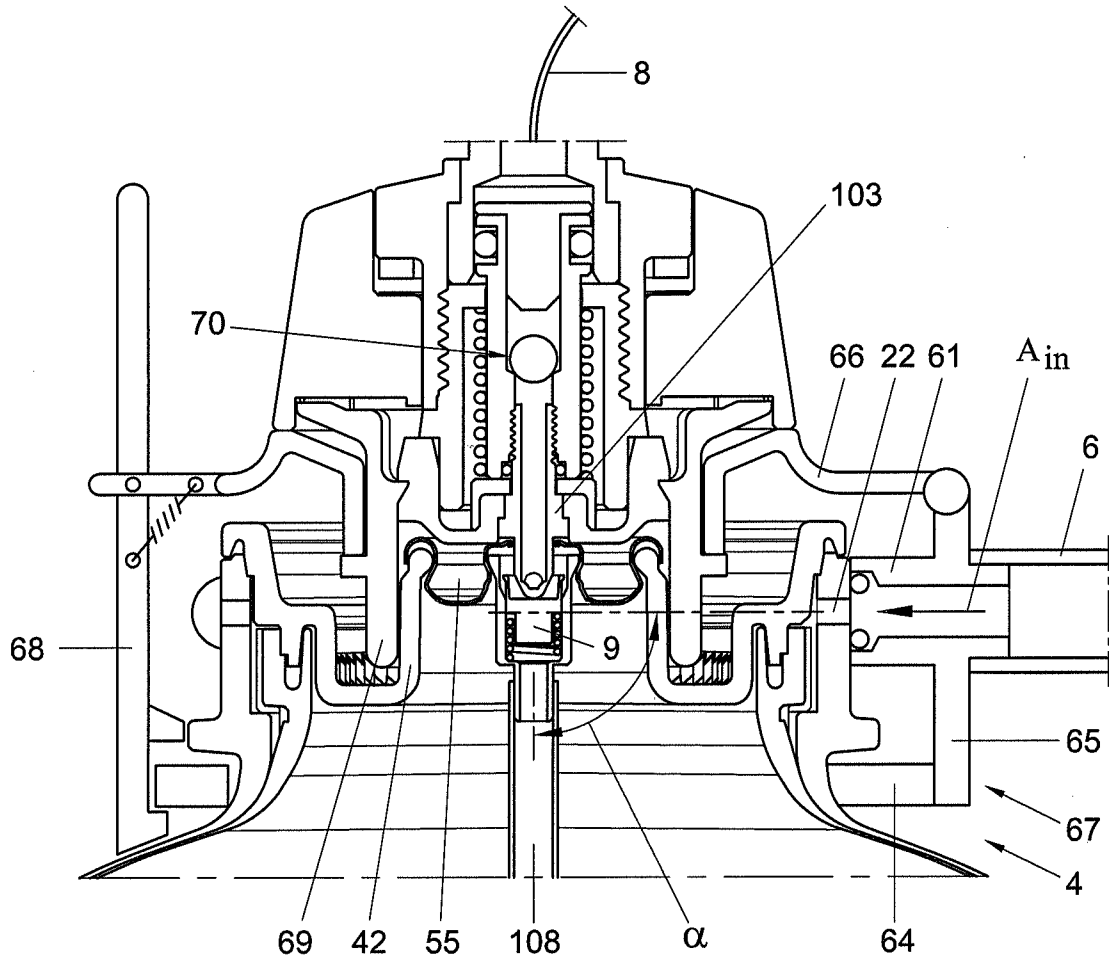


Fig. 4

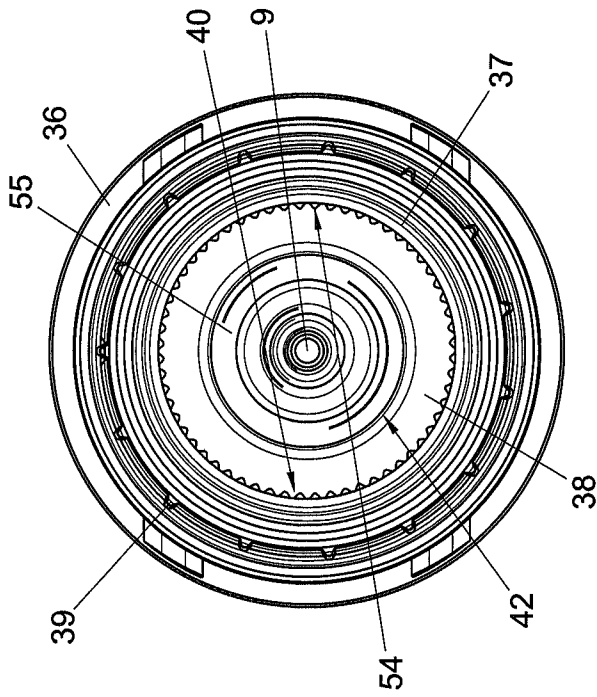


Fig. 5A

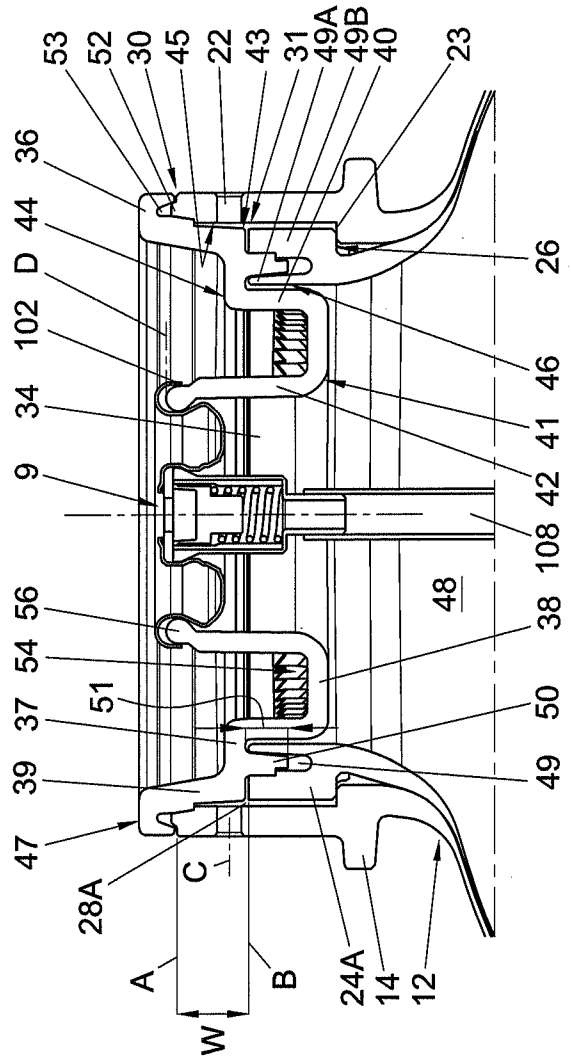


Fig. 5B

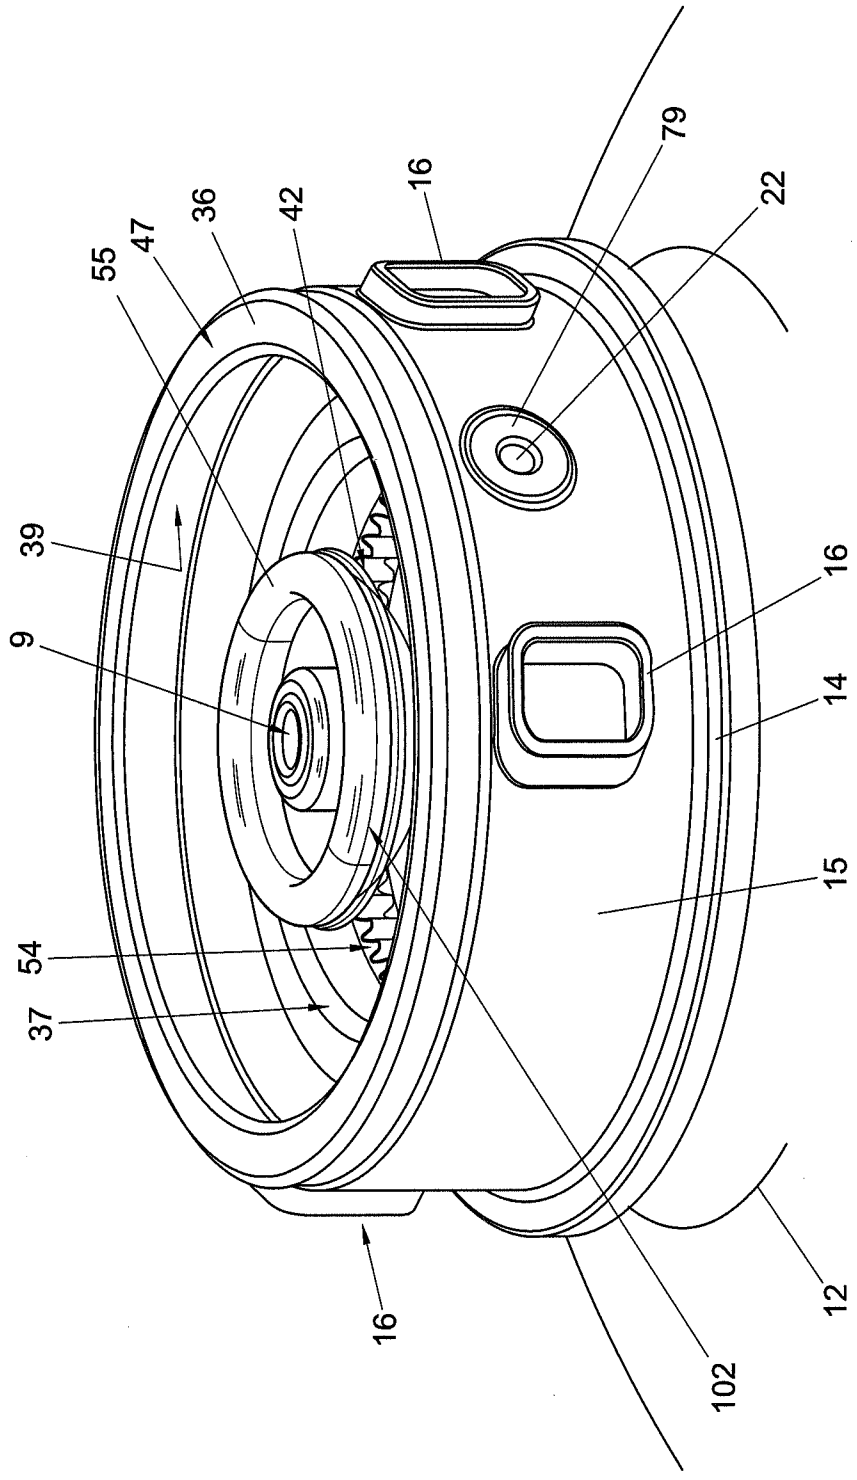


Fig. 5C

7/21

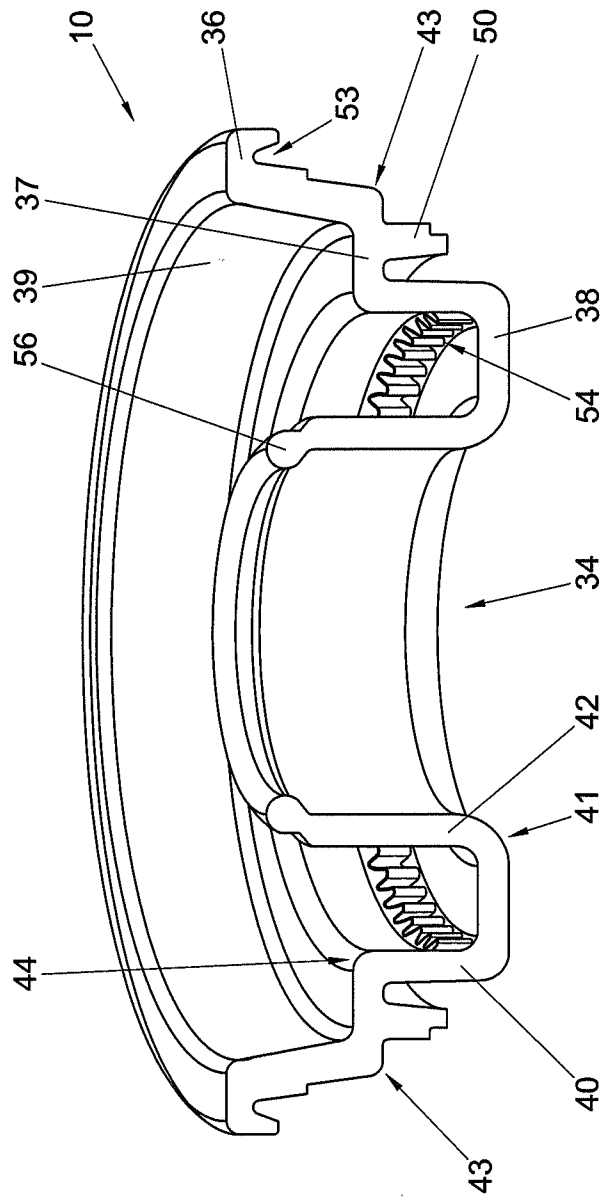


Fig. 6

8/21

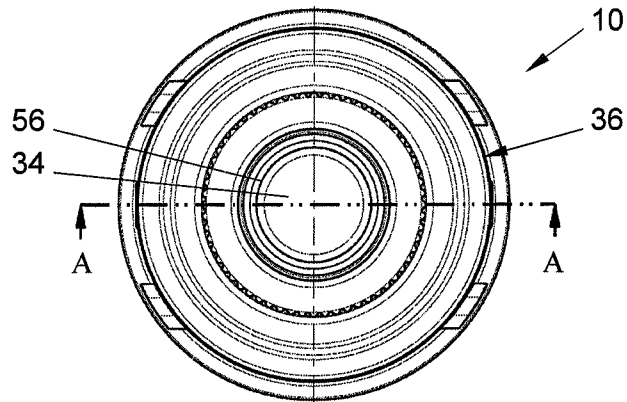


Fig. 7A

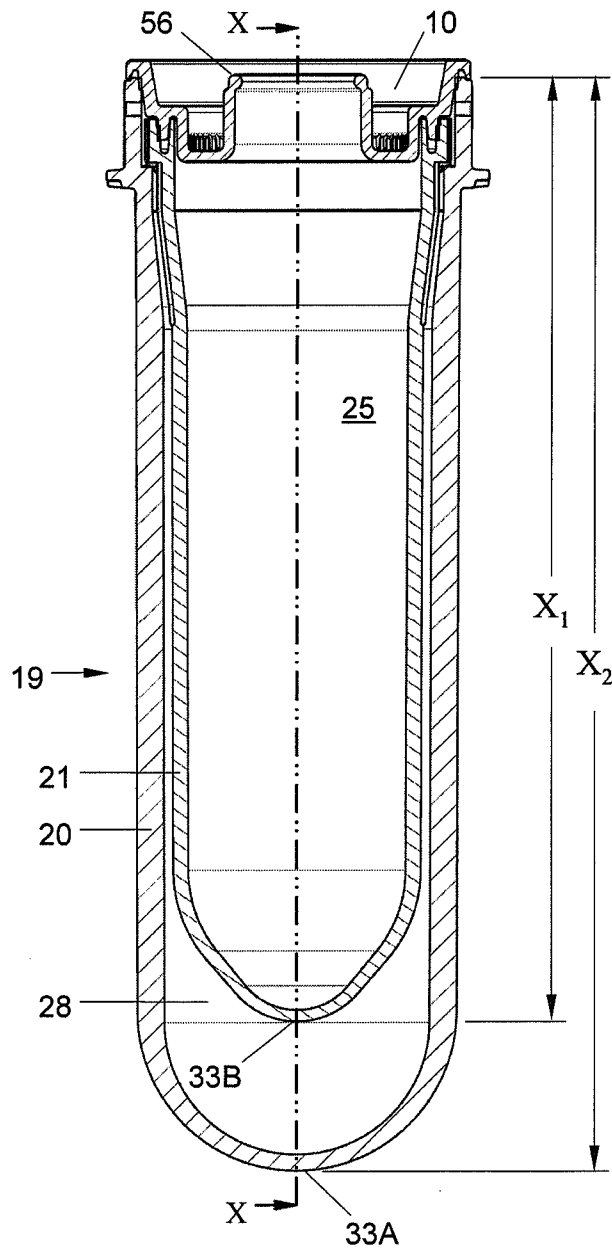


Fig. 7B

9/21

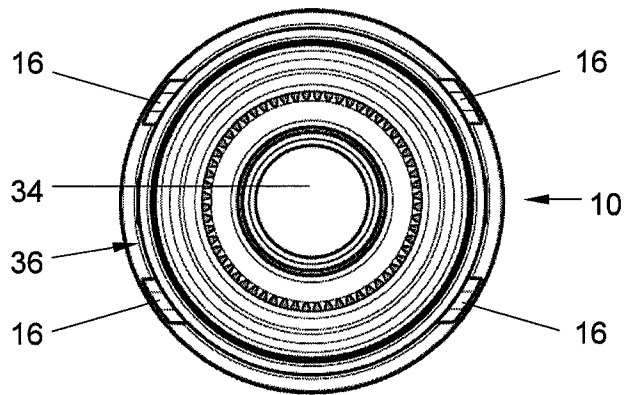


Fig. 7C

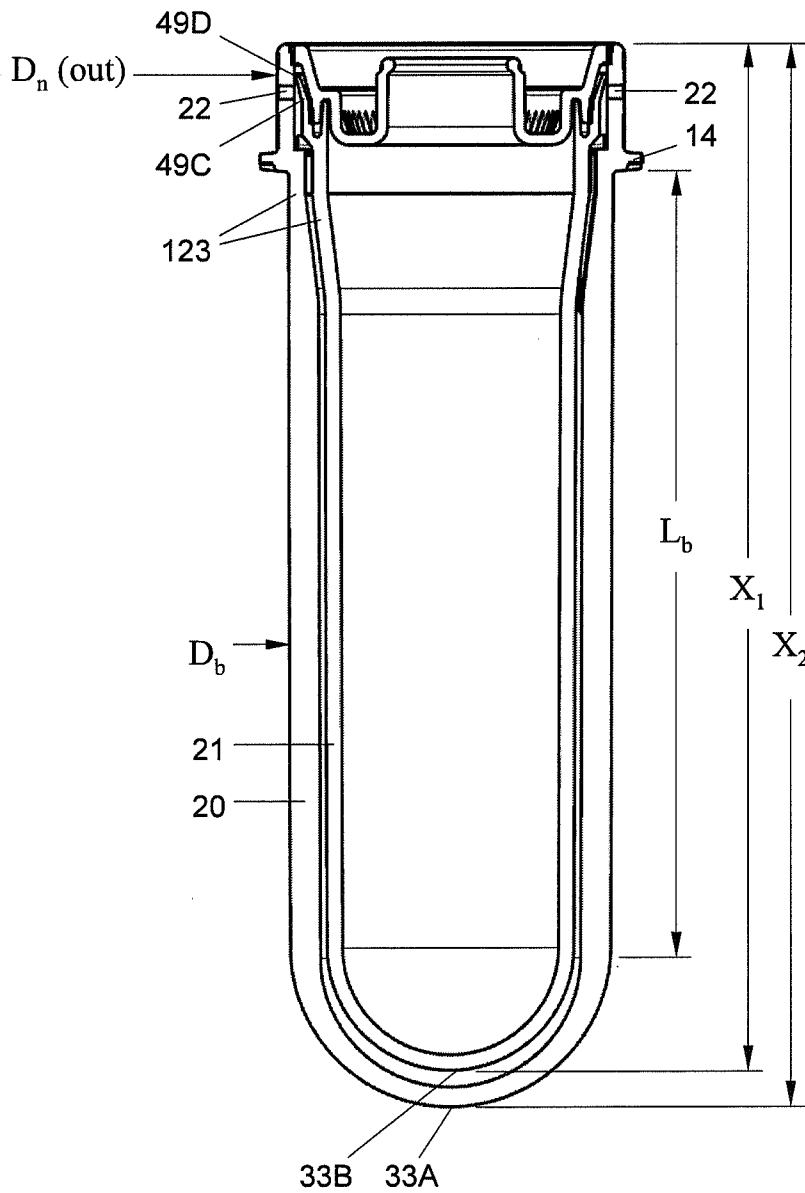


Fig. 7D

10/21

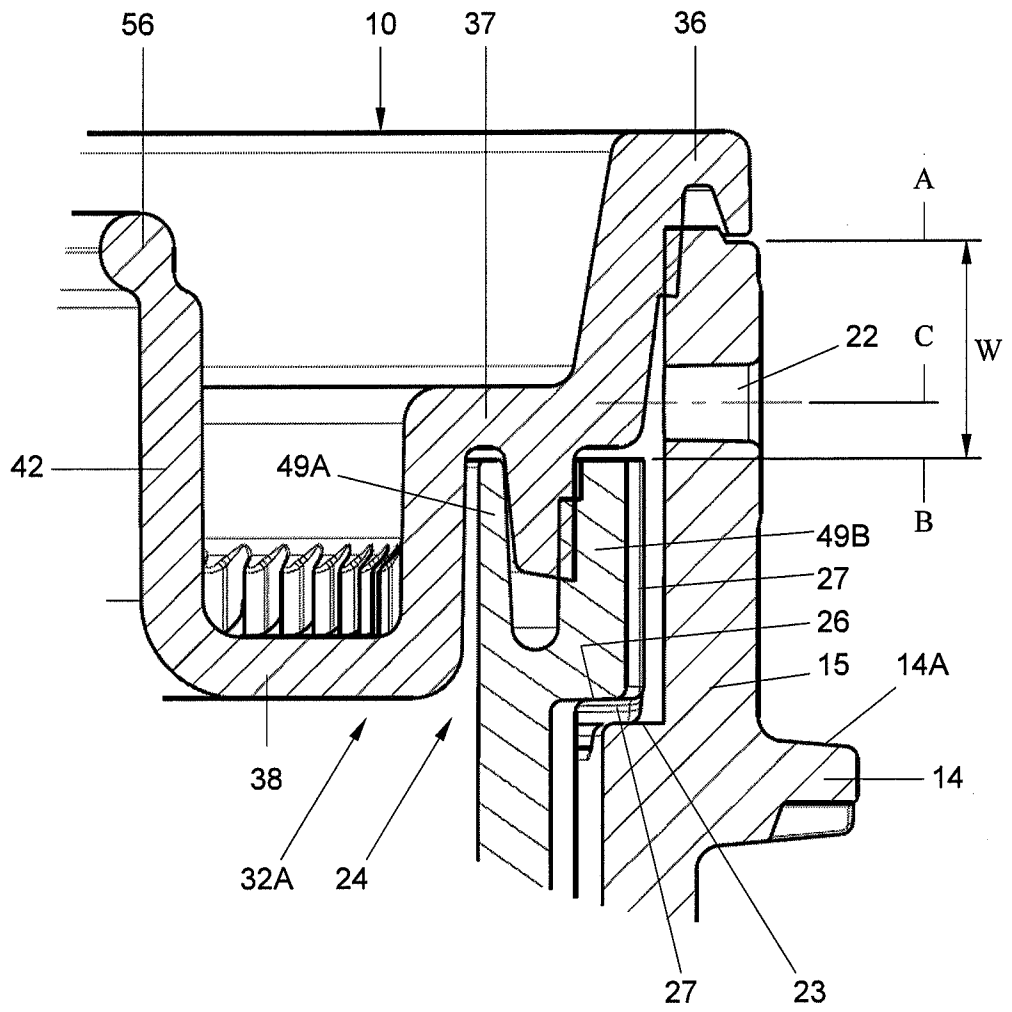


Fig. 8

11/21

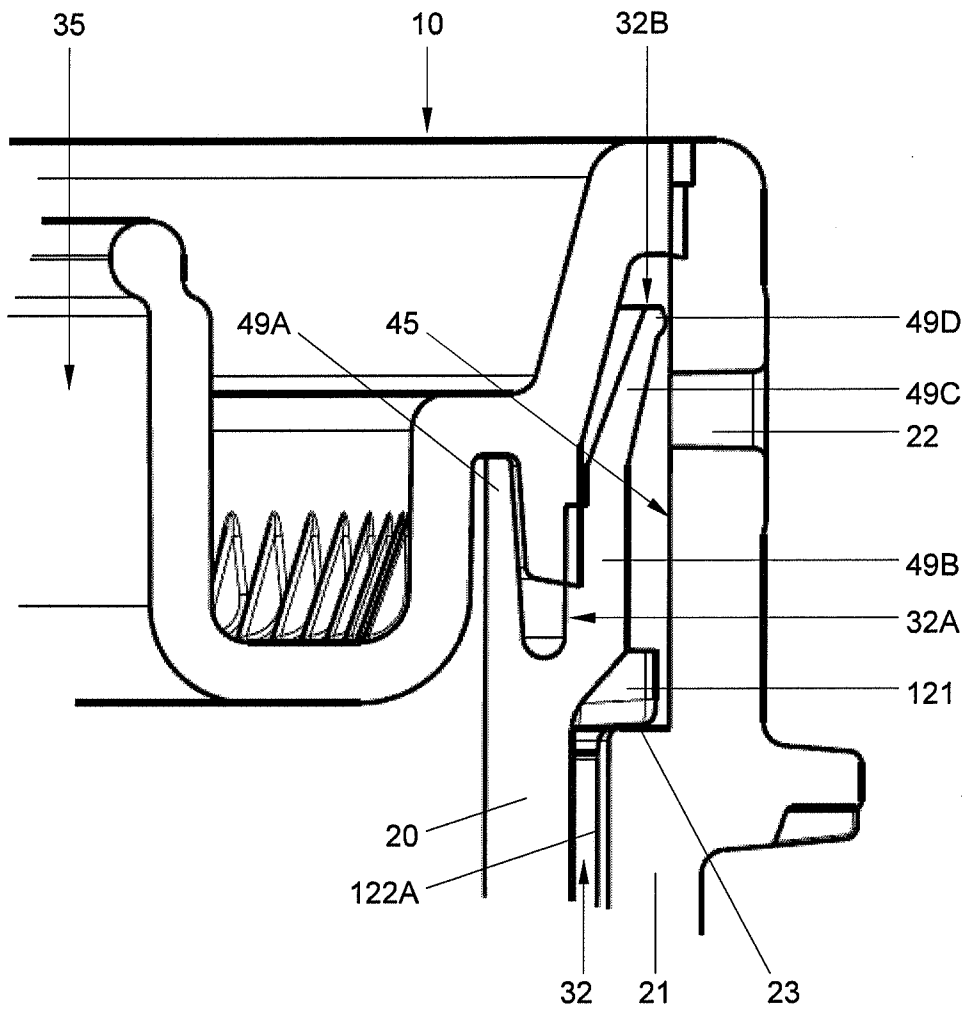


Fig. 8A

12/21

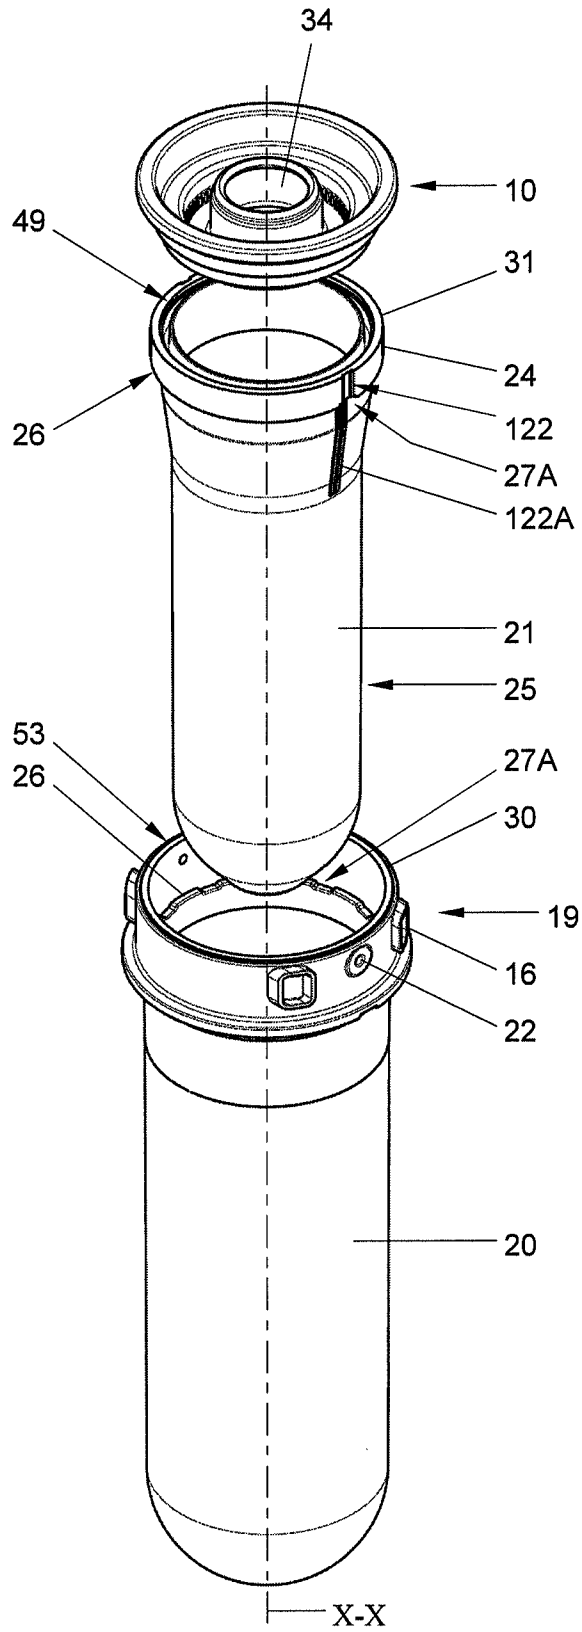


Fig. 9

13/21

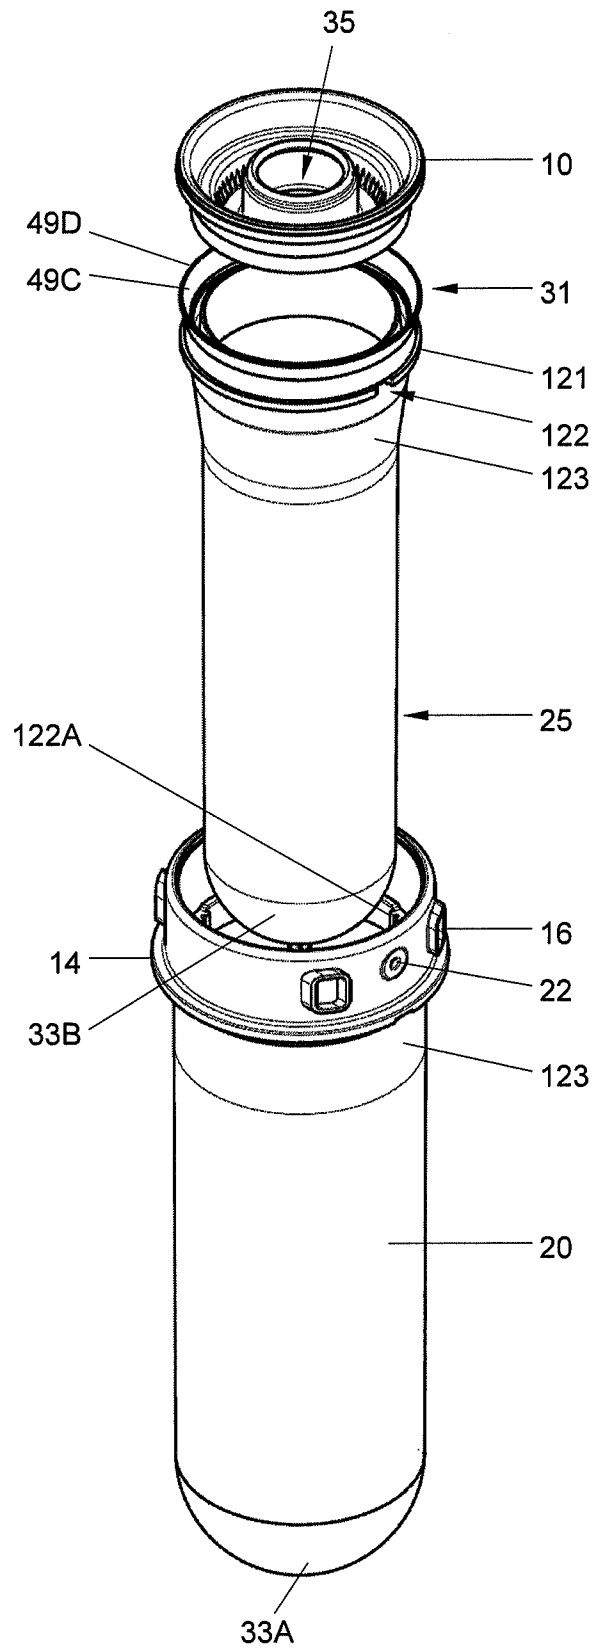


Fig. 9A

14/21

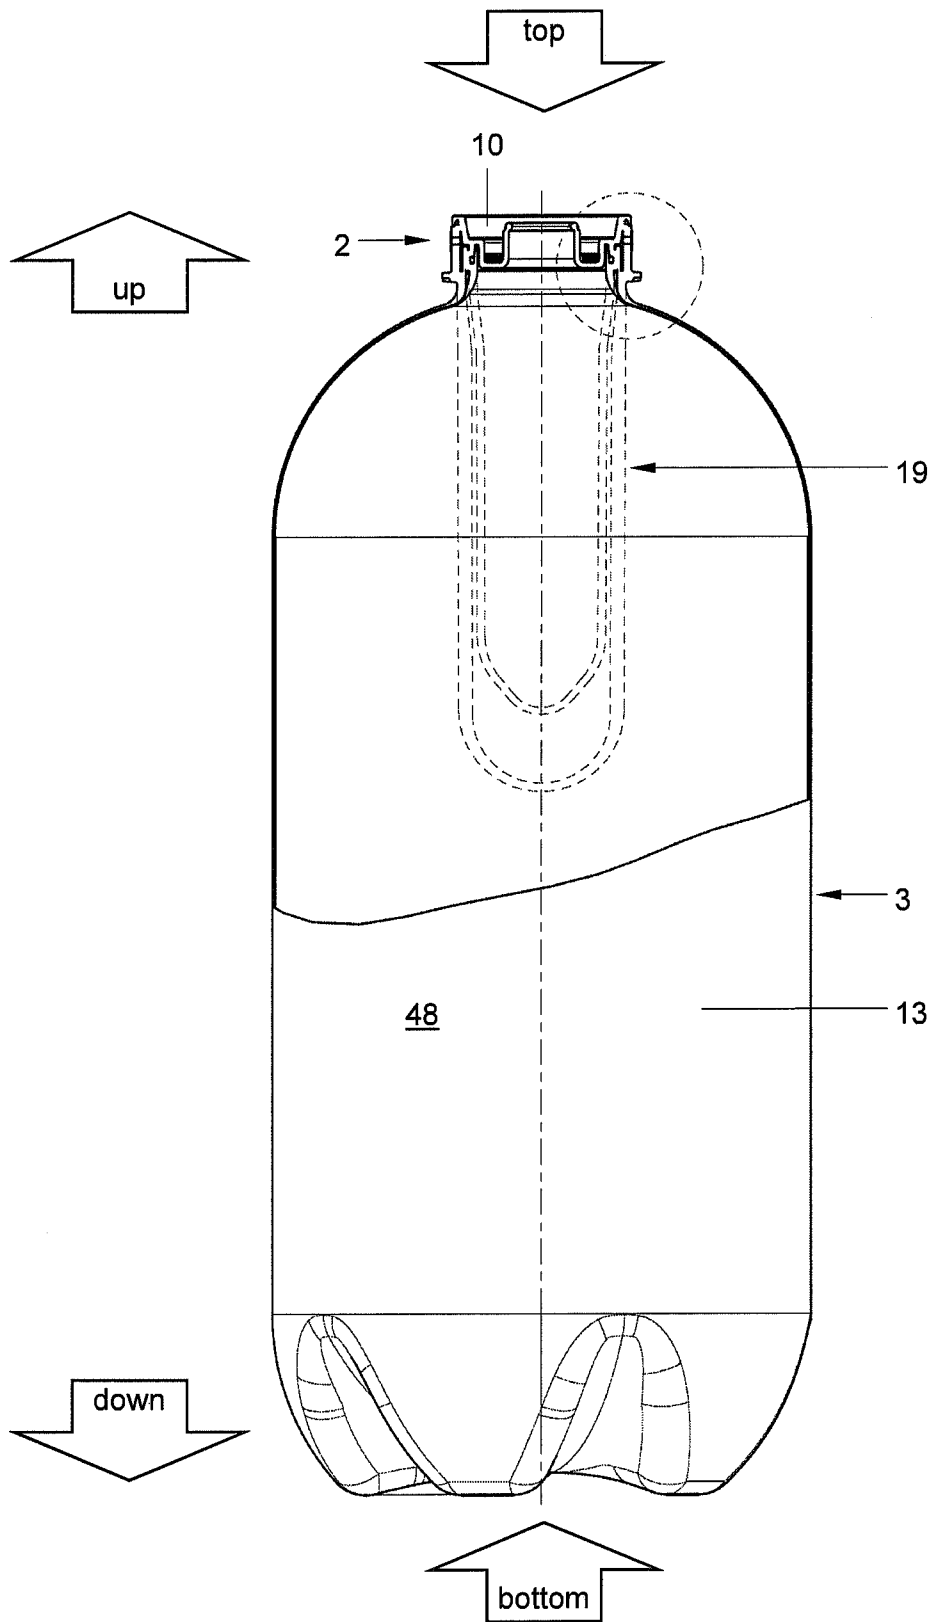


Fig. 10

15/21

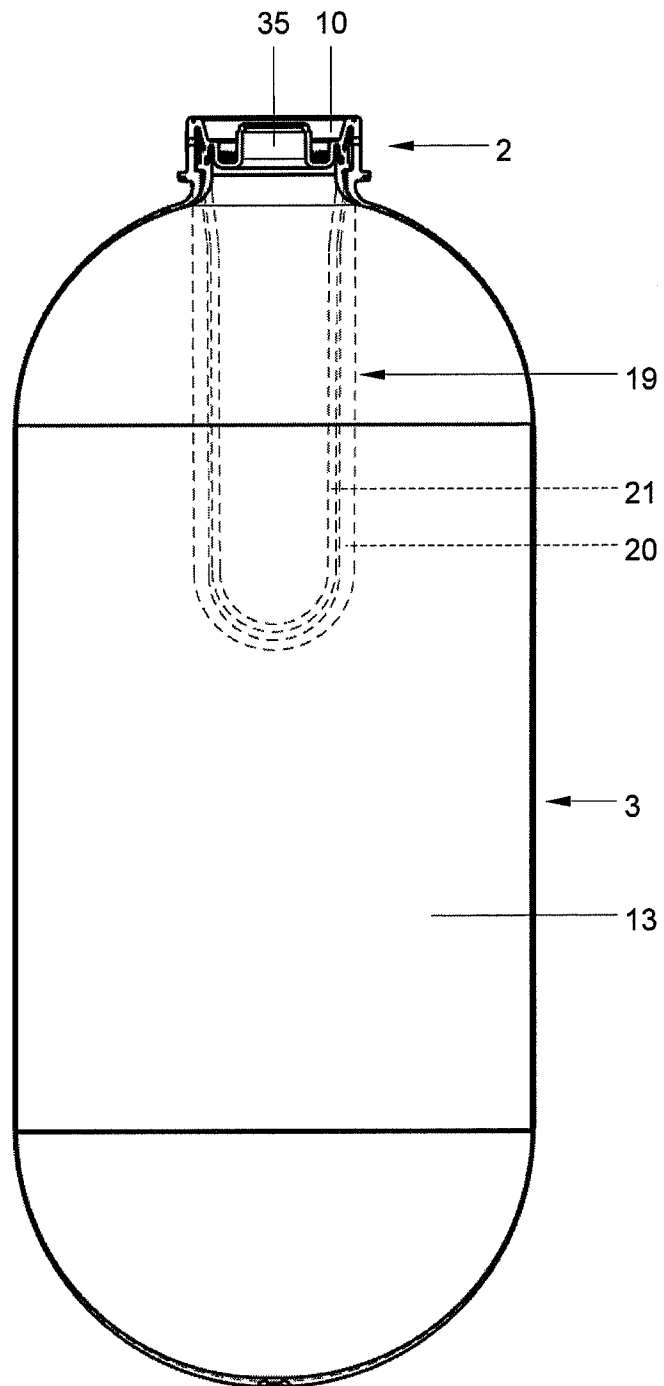


Fig. 10A

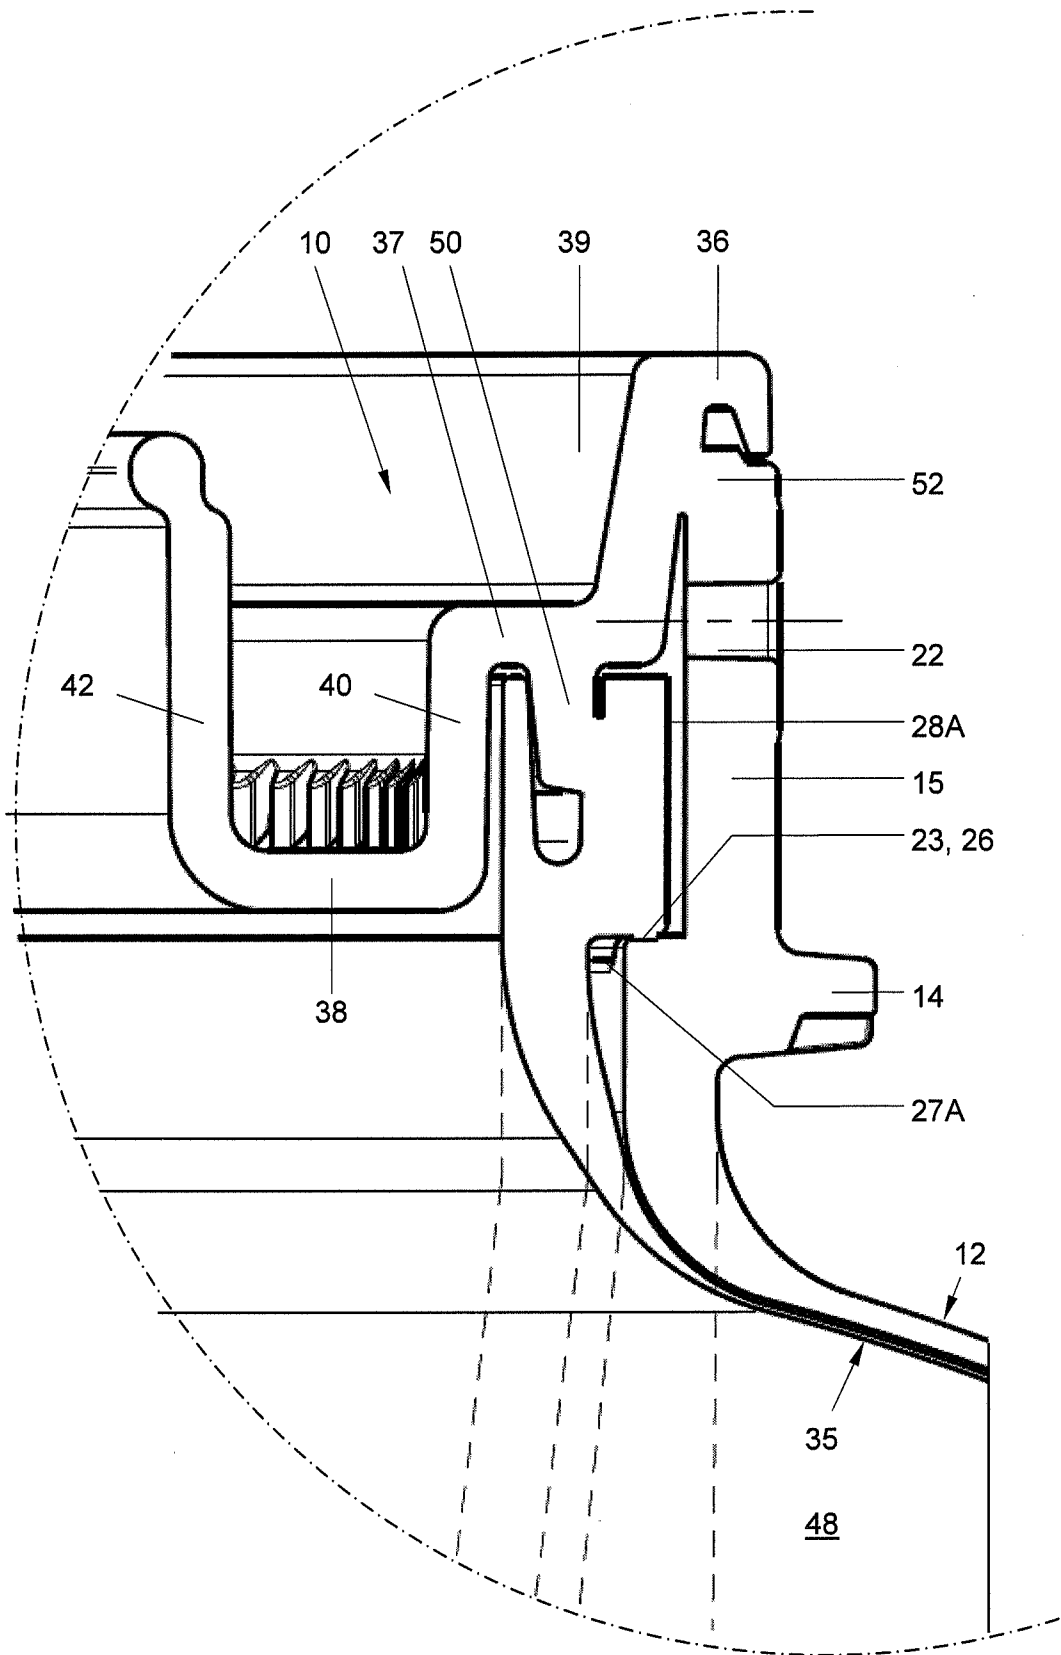


Fig. 11

17/21

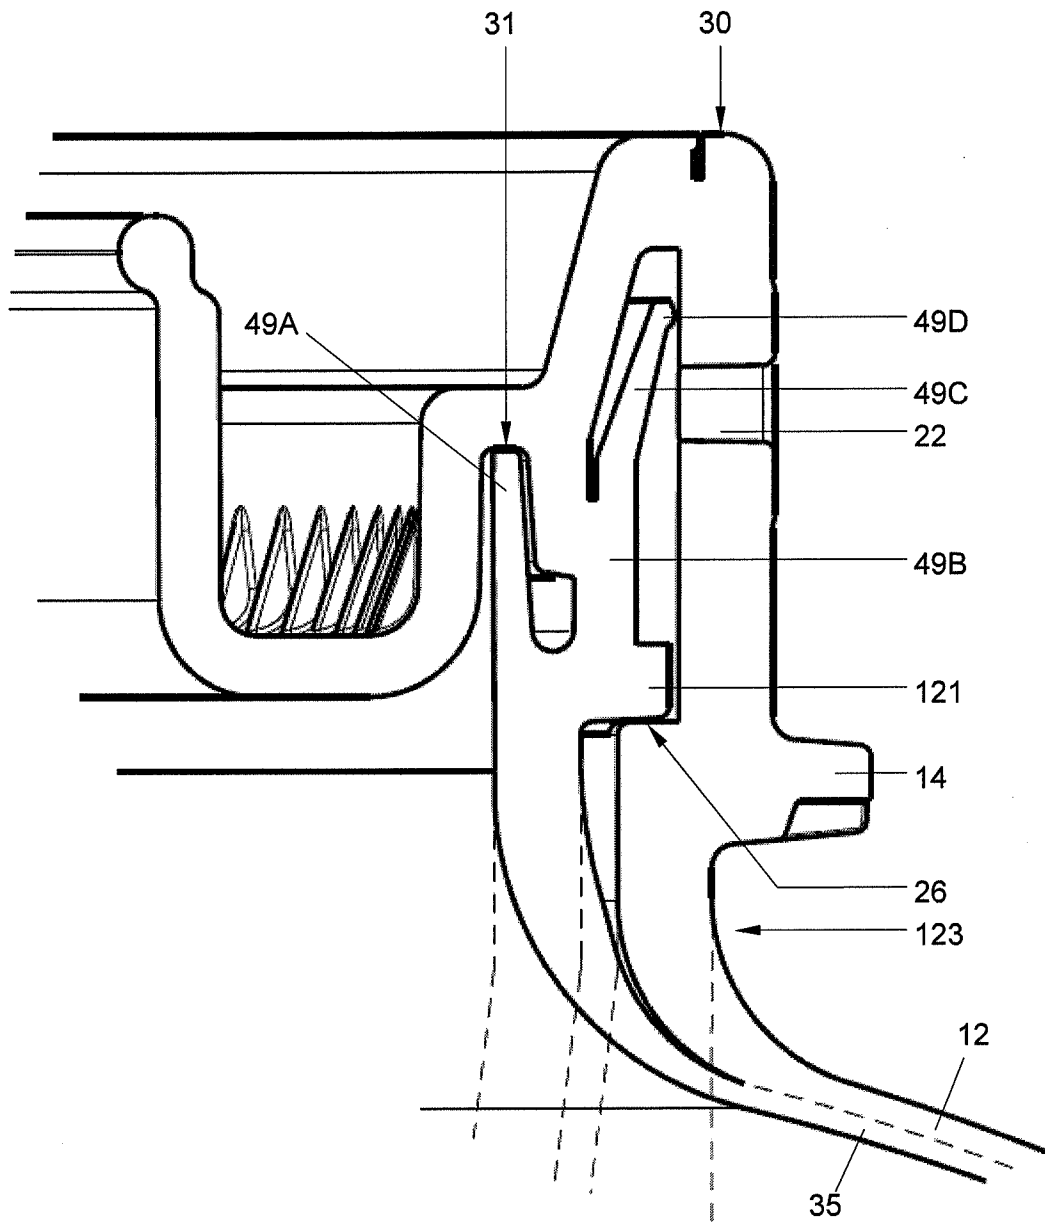


Fig. 11A

18/21

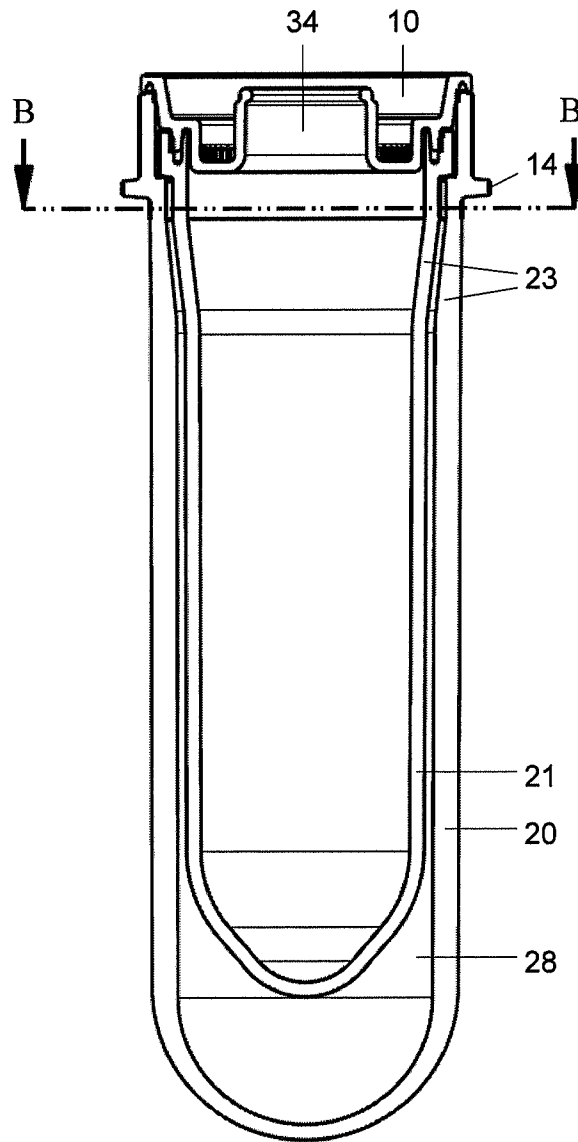


Fig. 12A

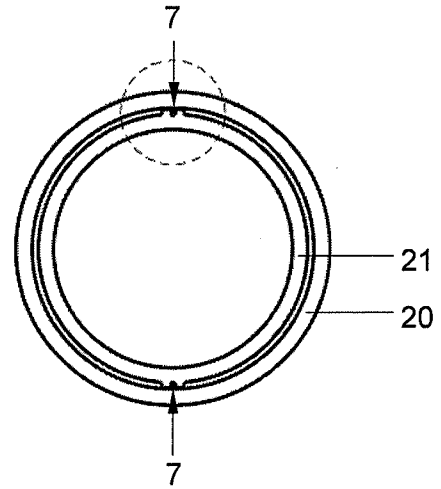
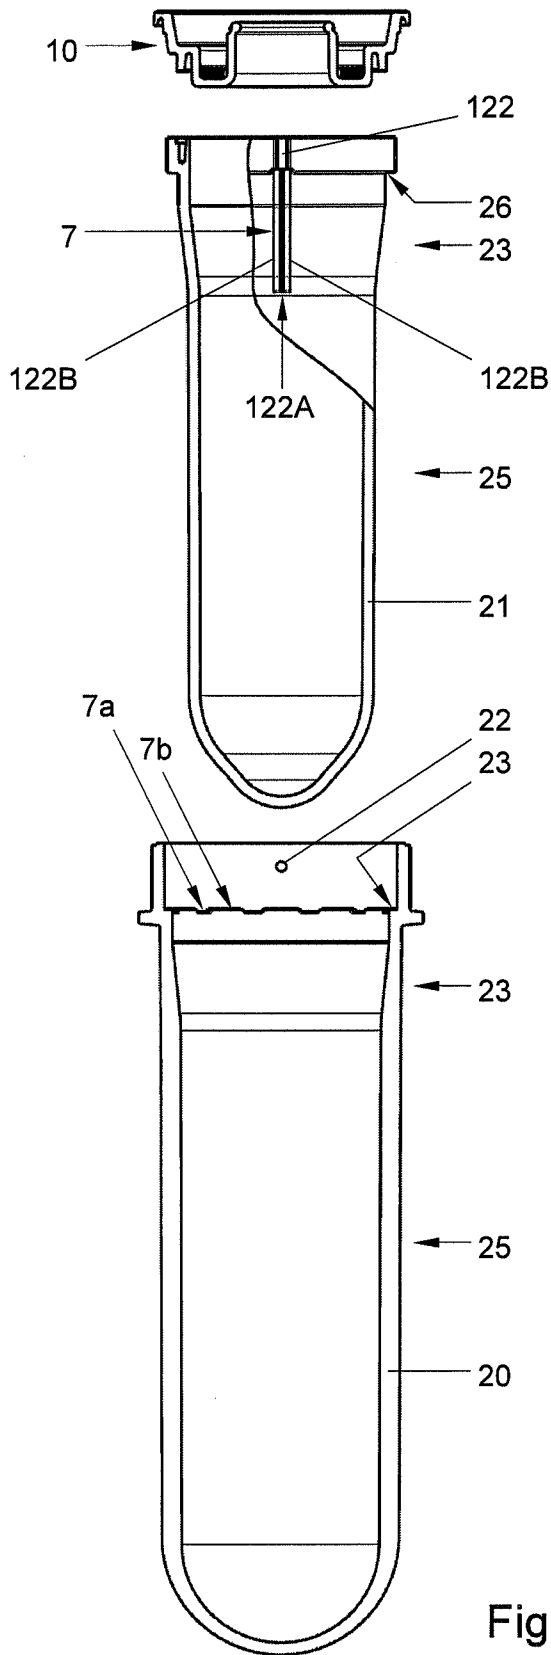


Fig. 12C

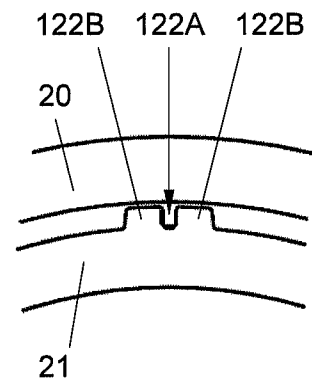


Fig. 12D

20/21

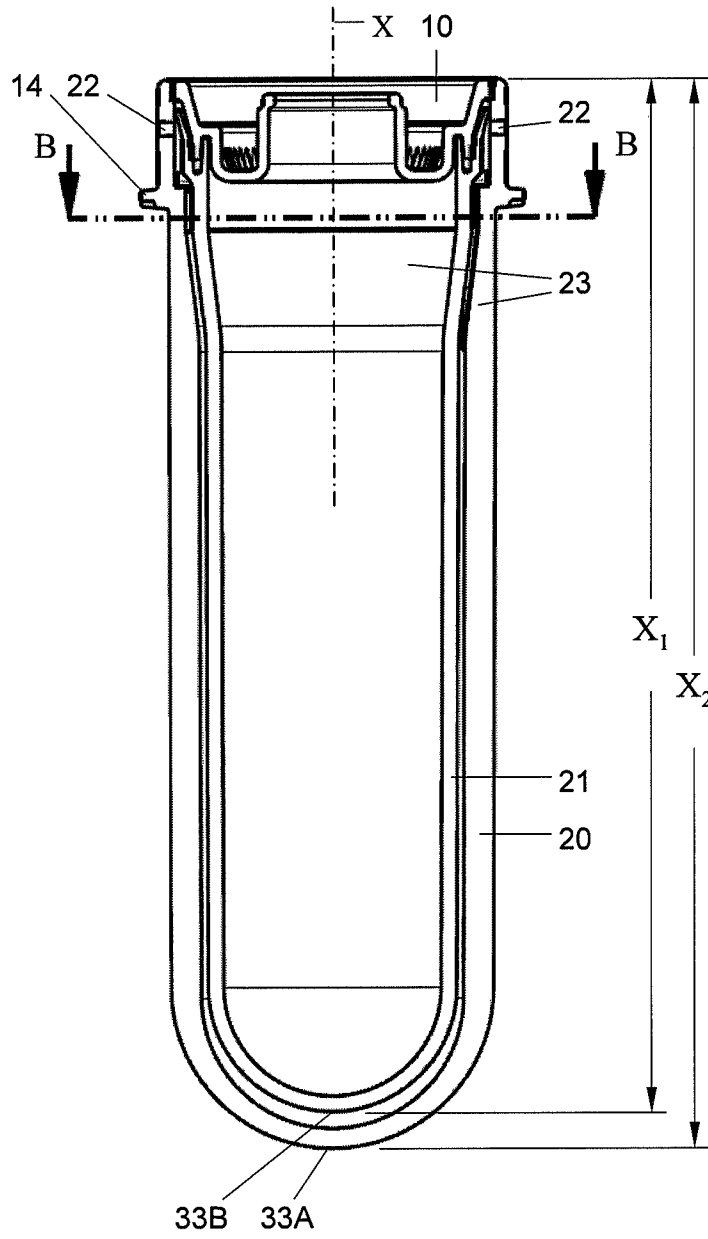


Fig. 13A

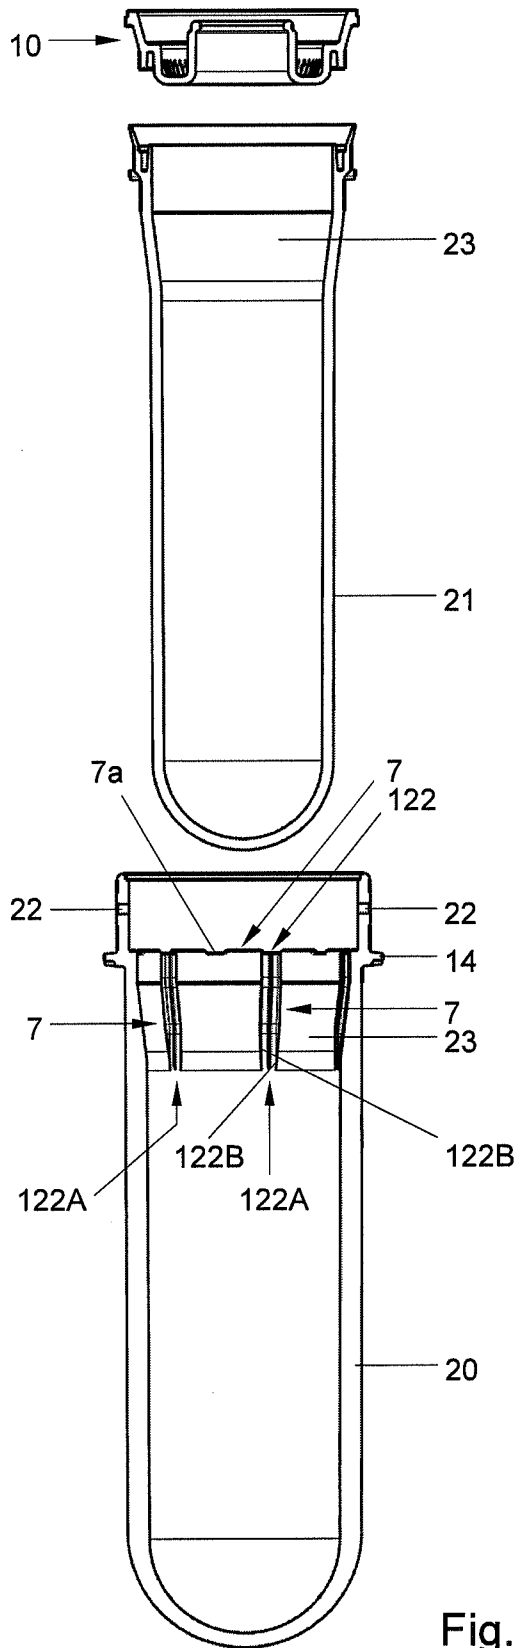


Fig. 13B

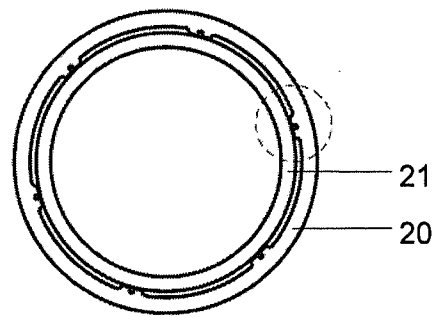


Fig. 13C

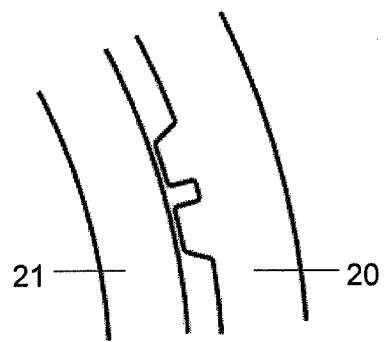


Fig. 13D