



US011424759B2

(12) **United States Patent**
Theivendran et al.

(10) **Patent No.:** **US 11,424,759 B2**

(45) **Date of Patent:** ***Aug. 23, 2022**

(54) **BARREL COMPACTOR SYSTEM, METHOD AND DEVICE**

(71) Applicant: **CAVIUM, LLC**, Santa Clara, CA (US)

(72) Inventors: **Premshanth Theivendran**, Foster City, CA (US); **Weihuang Wang**, Los Gatos, CA (US); **Sowmya Hotha**, Cupertino, CA (US); **Srinath Atluri**, Fremont, CA (US)

(73) Assignee: **Marvell Asia PTE, LTD.**, Singapore (SG)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 175 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **16/786,608**

(22) Filed: **Feb. 10, 2020**

(65) **Prior Publication Data**

US 2020/0177199 A1 Jun. 4, 2020

Related U.S. Application Data

(63) Continuation of application No. 15/917,284, filed on Mar. 9, 2018, now Pat. No. 10,581,455, which is a continuation of application No. 14/675,728, filed on Mar. 31, 2015, now Pat. No. 9,954,551.

(51) **Int. Cl.**
H03M 7/30 (2006.01)

(52) **U.S. Cl.**
CPC **H03M 7/3059** (2013.01); **H03M 7/6011** (2013.01)

(58) **Field of Classification Search**
CPC H04L 69/324; H04L 69/22; H04L 27/20; H04L 27/2618; H04L 45/46; H04L 45/50; H03M 7/3059; H03M 7/6011
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,300,714 B2* 10/2012 Yun H04L 27/2618 375/260
2011/0246955 A1* 10/2011 Ohtsuka G06F 30/394 716/112
2013/0022083 A1* 1/2013 Vasseur H04L 12/4035 375/132


* cited by examiner

Primary Examiner — Wei Zhao

(57) **ABSTRACT**

A packet processing system having a barrel compactor that extracts a desired data subset from an input dataset (e.g. an incoming packet). The barrel compactor is able to selectively shift one or more of the input data units of the input dataset based on individual shift values for those data units. Additionally, in some embodiments one or more of the data units are able to be logically combined to produce a desired logical output unit.

59 Claims, 5 Drawing Sheets

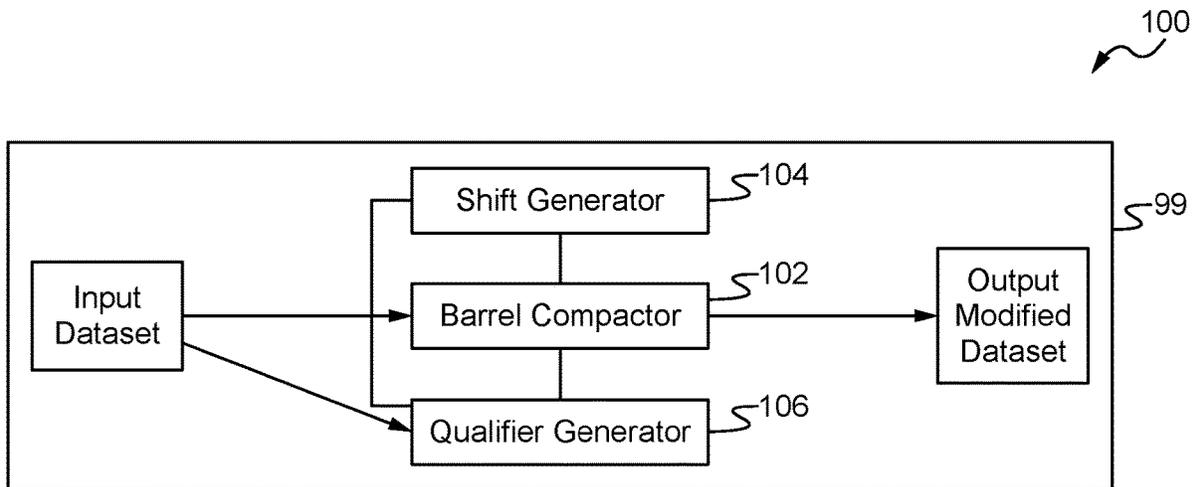

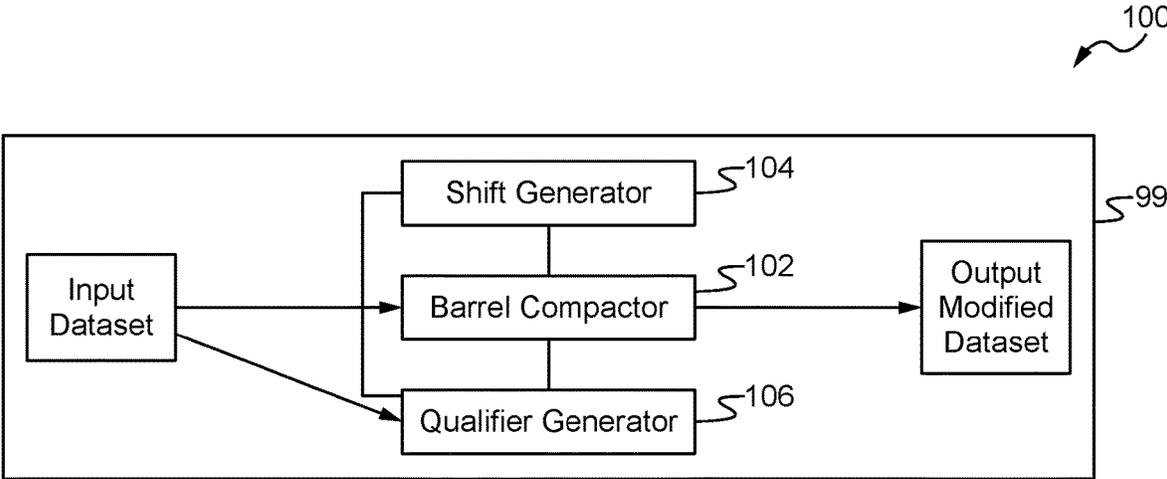


Fig. 1

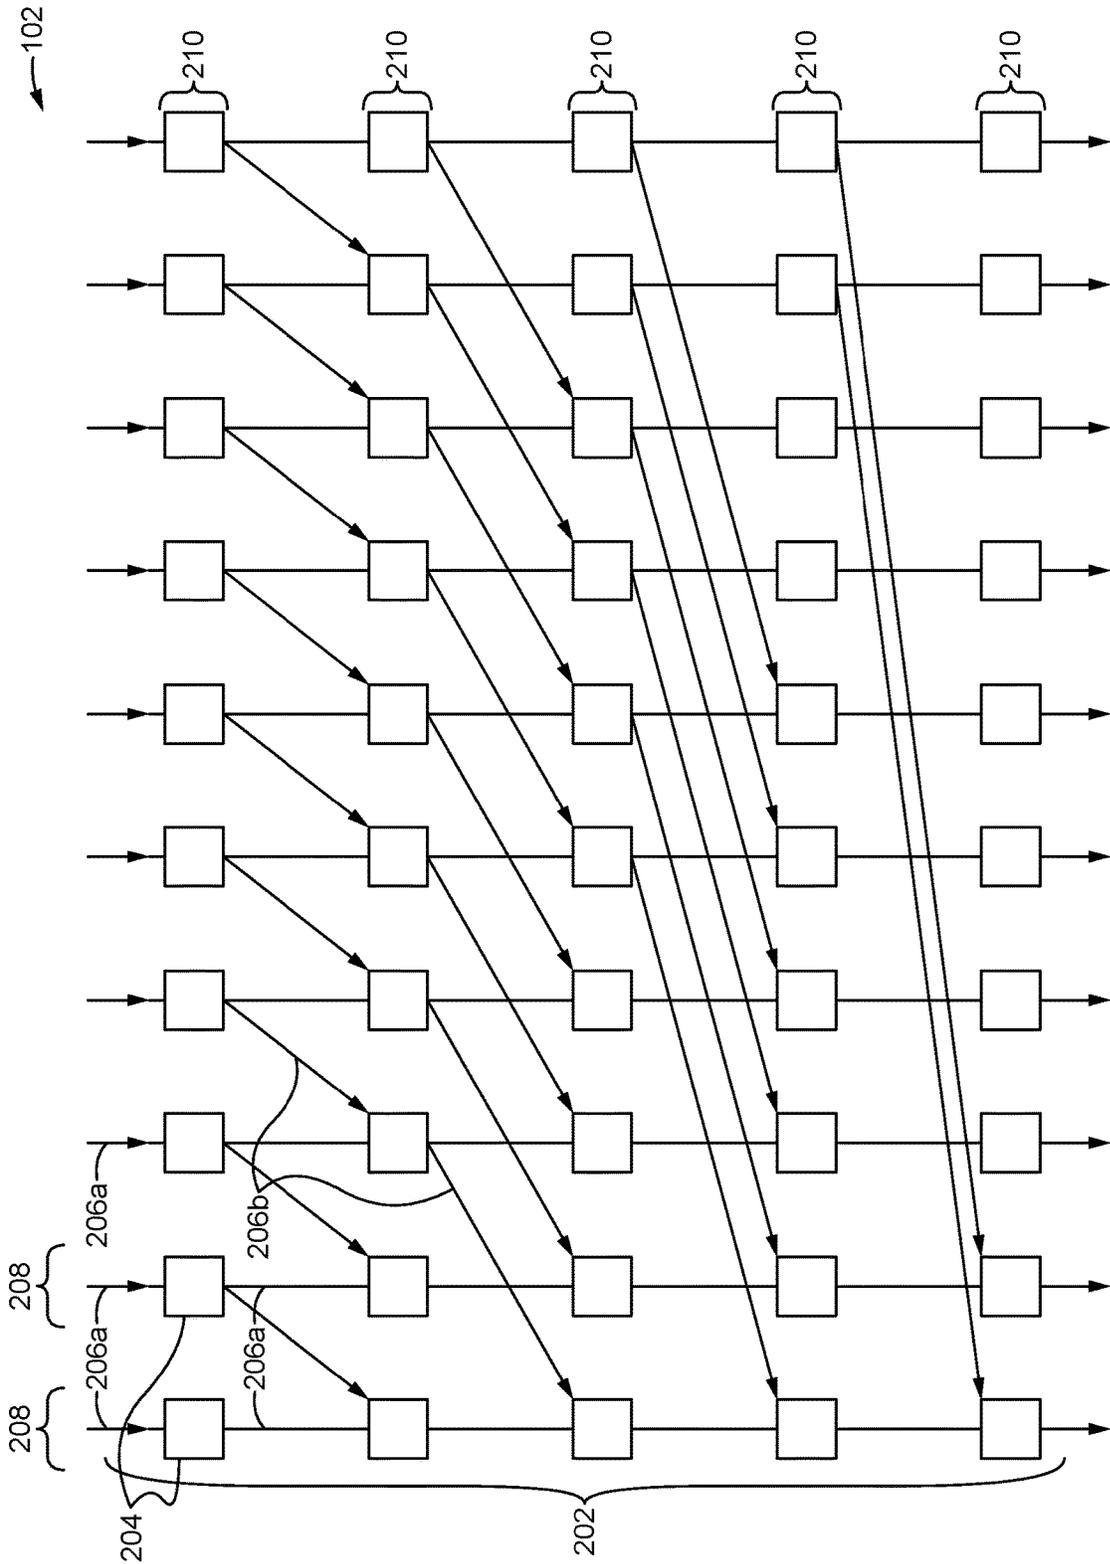


Fig. 2

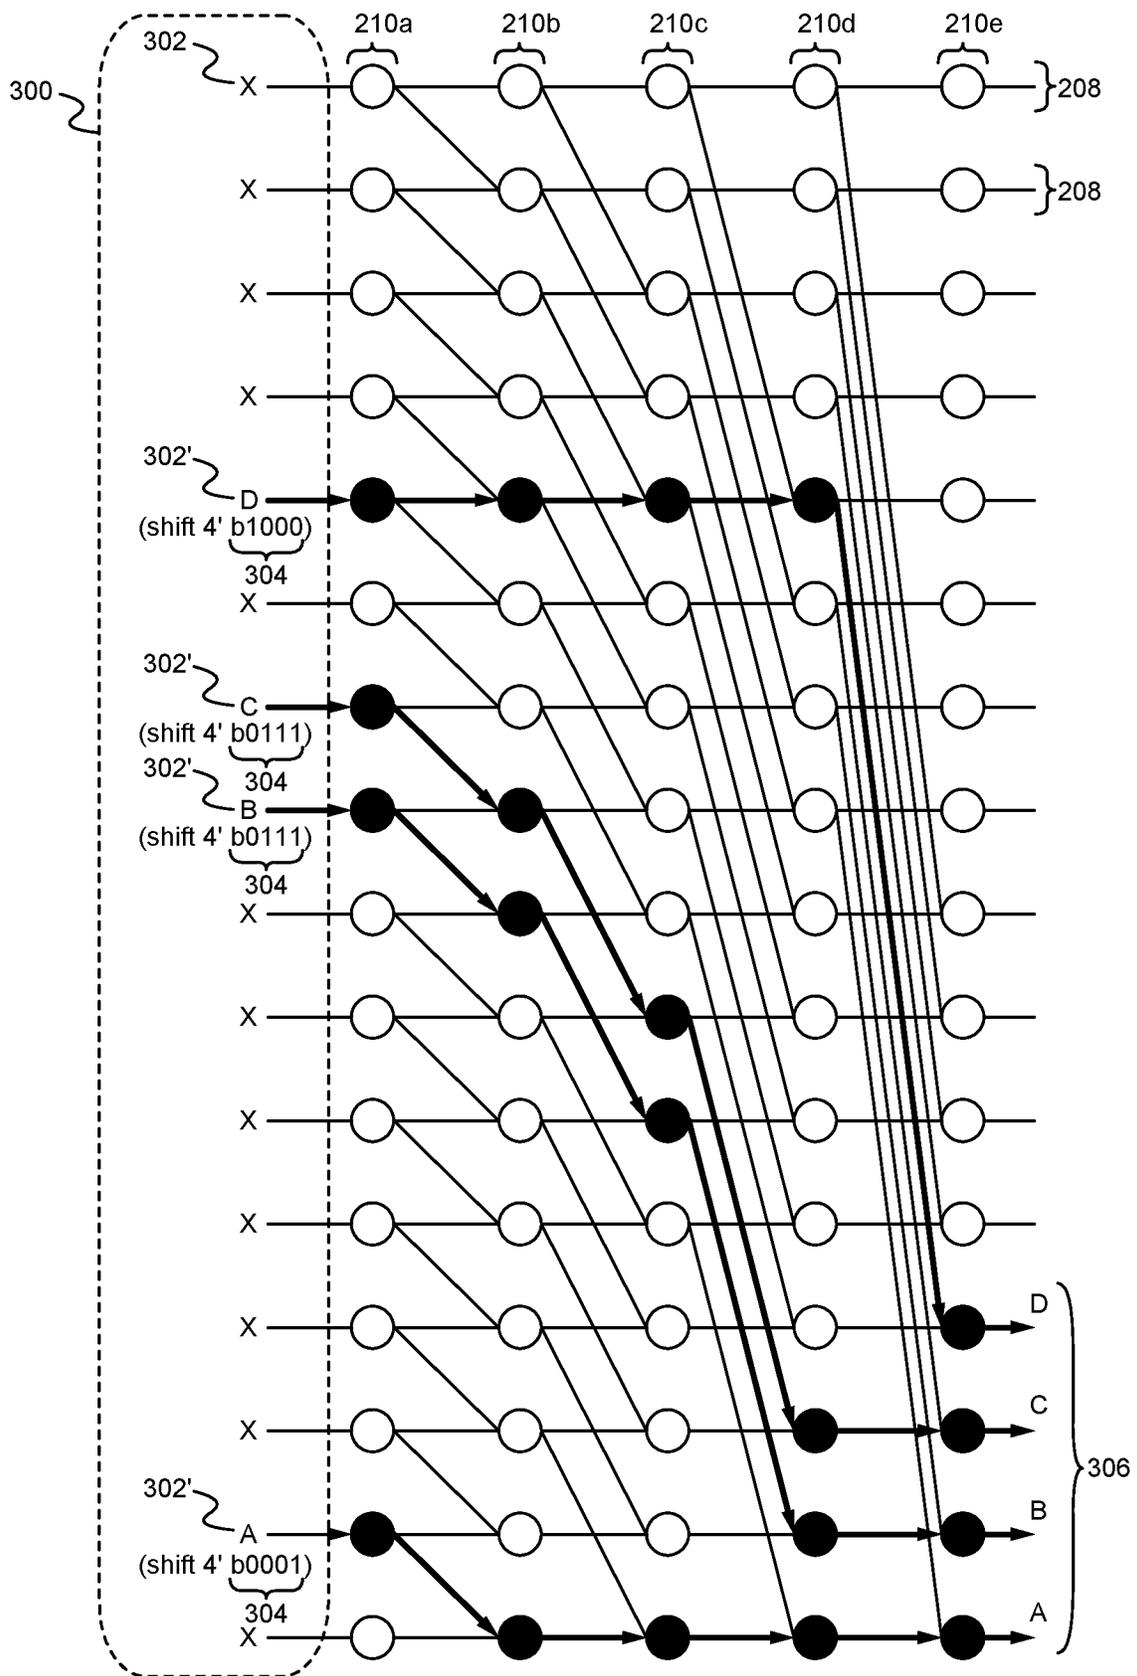


Fig. 3

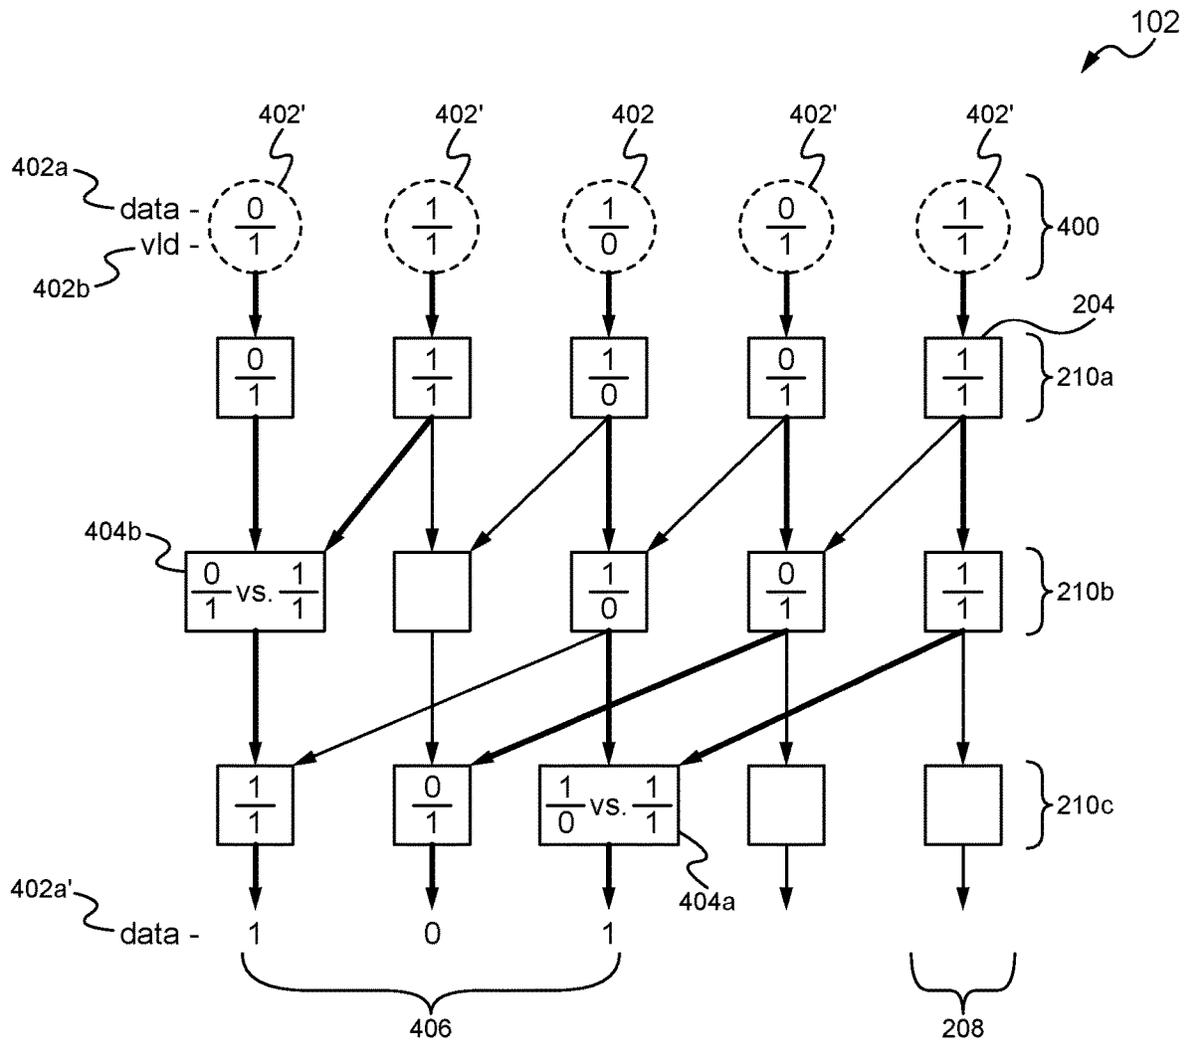
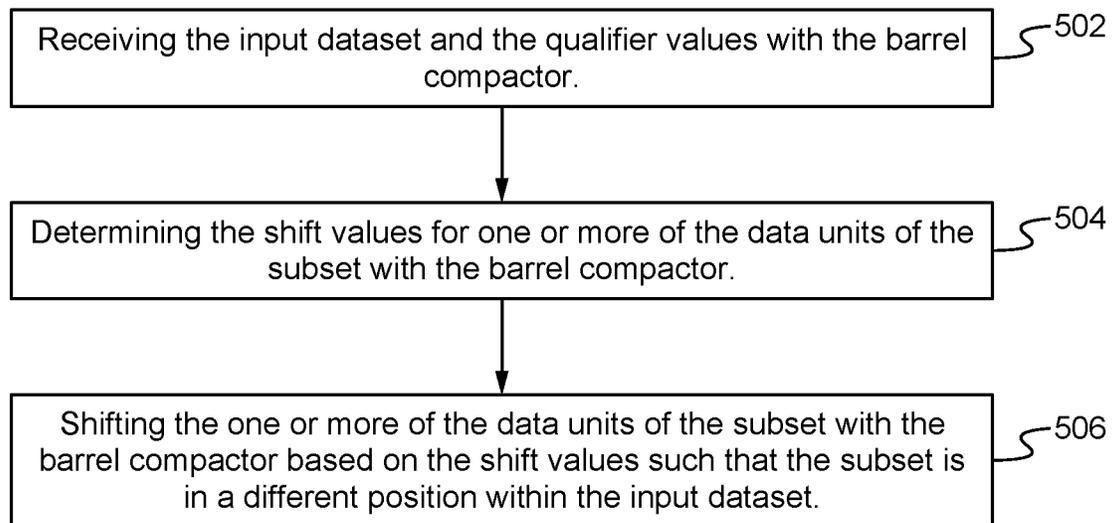


Fig. 4

**Fig. 5**

**BARREL COMPACTOR SYSTEM, METHOD
AND DEVICE**

RELATED APPLICATIONS

This Application is a continuation of U.S. application Ser. No. 15/917,284, filed on Mar. 9, 2018, and entitled "A BARREL COMPACTOR SYSTEM, METHOD AND DEVICE," which is a continuation of U.S. application Ser. No. 14/675,728, filed on Mar. 31, 2015, and entitled "A BARREL COMPACTOR SYSTEM, METHOD AND DEVICE," all of which are hereby incorporated by reference.

FIELD OF INVENTION

The present invention relates to data extraction. More particularly, the present invention relates to a barrel compactor for extracting a desired subset from an input dataset.

BACKGROUND OF THE INVENTION

Data processing devices, such as data packet-processing devices like a switch microchip, generally operate by inputting data, parsing the input data, processing of the data, extracting desired portions of the data and ultimately outputting of desired portions of the data. In particular, the data extraction process is traditionally performed utilizing large multiplexers that each receive all of the input data and output the desired portions of the data. However, these large multiplexers that are capable of receiving and multiplexing between such large quantities of input data are very expensive. As a result, the data processing devices utilizing such large multiplexers as extraction elements are correspondingly expensive.

BRIEF SUMMARY OF THE INVENTION

A packet processing system having a barrel compactor that extracts a desired data subset from an input dataset (e.g. an incoming packet). The barrel compactor is able to selectively shift one or more of the input data units of the input dataset based on individual shift values for those data units. Additionally, in some embodiments one or more of the data units are able to be logically combined to produce a desired logical output unit.

A first aspect is directed to a barrel compactor system for extracting a subset of data from a plurality of data units that together form an input dataset. The system comprises a data unit shift generator that generates an independent shift value for each of the data units within the subset of the input dataset, wherein the independent shift value indicates a number of positions within the input dataset to shift the associated data unit and a barrel compactor comprising a plurality of logic cells arranged in an array, wherein the barrel compactor receives the input dataset, and shifts one or more of the data units of the subset based on the independent shift values such that the subset is in a different position within the input dataset. In some embodiments, when in the different position within the input dataset, all of the data units of the subset are adjacent to each other. In some embodiments, when in the different position within the input dataset, a rightmost data unit of the subset is in a rightmost position of the input dataset or a leftmost data unit of the subset is in a leftmost position of the input dataset. In some embodiments, the array comprises a plurality of rows and a column for each of the plurality of data units of the input

dataset, wherein the logic cells of each of the columns are coupled together in series by a plurality of data pass lines. In some embodiments, for one or more of the rows of one or more of the columns, each of the logic cells of the one or more rows of the one or more columns is coupled with the logic cell of the next row of a different one of the columns via a data shift line. In some embodiments, the different one of the columns is a predetermined number of columns away from the column including the logic cell of the one or more rows of the one or more columns. In some embodiments, the predetermined number of columns away is the same for all of the logic cells in the same one of the rows.

In some embodiments, the barrel compactor receives the input dataset by inputting a different one of the data units with each of the columns such that the input dataset is received by the array in parallel, and further wherein each of the independent shift values is transmitted through the array along with the associated one of the data units. In some embodiments, upon receiving one of the data units and the associated independent shift value from either one of the shift lines or one of the pass lines during a cycle, each of the logic cells transmit the data unit and the associated independent shift value down one of the pass lines to the next logic cell of the column if the independent shift value does not indicate a shift is necessary by the row that the logic cell is a part of and transmit the data unit and the associated independent shift value to the logic cell of the next row of the different one of the columns via the data shift line if the independent shift value indicates that a shift is necessary by the row that the logic cell is a part of. In some embodiments, the system further comprises a data subset identifier that generates a qualifier value for each of the data units of the input dataset. In some embodiments, the qualifier value indicates if the data unit is a part of the subset, wherein each of the qualifier values is transmitted through the array along with the associated one of the data units. In some embodiments, upon receiving both one of the data units and the associated independent shift value from one of the shift lines and one of the data units and the associated independent shift value from one of the pass lines during the same cycle, each of the logic cells discard the one of the data units and the associated independent shift value from the one of the pass lines and select the one of the data units and the associated independent shift value from the one of the shift lines for transmission based on the associated independent shift value.

In some embodiments, upon receiving both one of the data units, the associated independent shift value and the associated qualifier value from one of the shift lines and one of the data units, the associated independent shift value and the associated qualifier value from one of the pass lines during the same cycle, each of the logic cells discard the one of the data units, the associated independent shift value and the associated qualifier value from the one of the pass lines if the associated qualifier value from the one of the pass lines indicates that the one of the data units from the one of the pass lines is not a part of the subset, discard the one of the data units, the associated independent shift value and the associated qualifier value from the one of the shift lines if the associated qualifier value from the one of the shift lines indicates that the one of the data units from the one of the shift lines is not a part of the subset, if the associated qualifier value from the one of the pass lines indicates that the one of the data units from the one of the pass lines is a part of the subset, select the one of the data units, the associated independent shift value and the associated qualifier value from the one of the pass lines for transmission

based on the associated independent shift value from the one of the pass lines and if the associated qualifier value from the one of the shift lines indicates that the one of the data units from the one of the shift lines is a part of the subset, select the one of the data units, the associated independent shift value and the associated qualifier value from the one of the shift lines for transmission based on the associated independent shift value from the one of the shift lines.

In some embodiments, the data shift unit generator inserts a zero in a location between one or more of the data units of the subset as organized in the different position by reducing the independent shift values of all of the data units to either the right or the left of the location by one. In some embodiments, each of the logic cells comprise a multiplexor. In some embodiments, the data unit shift generator generates the independent shift value for each of the data units of the subset based on the qualifier values of the plurality of data units. In some embodiments, the data unit shift generator generates the independent shift value for each of the data units of the subset based on the qualifier values of the plurality of data units by using the qualifier values to identify the data units that are a part of the subset, calculating a first number of the data units that are between one side of the input dataset and a closest one of the data units of the subset to the one side and for each gap between one of the data units of the subset and a next of the data units of the subset, calculating a gap size that is equal to a number of the data units within the gap. In some embodiments, the data unit shift generator determines the independent shift value of each of the data units of the subset by summing the first number and the gap size of each of the gaps between the data unit and the one side of the input dataset. In some embodiments, each of the data units is selected from the group consisting of a bit, a byte or a word. In some embodiments, for each of the rows of the array, each of the independent shift values indicate whether a shift is necessary for the row.

A second aspect is directed to a barrel compactor for extracting a subset of data from a plurality of data units that together form an input dataset, the barrel compactor comprising a plurality of logic cells arranged in an array, wherein the barrel compactor receives the input dataset, and shifts one or more of the data units of the subset such that the subset is in a different position within the input dataset, wherein each of the data units of the subset have a corresponding independent shift value that indicates a number of positions within the input dataset to shift the associated data unit, and further wherein the barrel compactor shifts the one or more of the data units of the subset based on the independent shift values. In some embodiments, when in the different position within the input dataset, all of the data units of the subset are adjacent to each other. In some embodiments, when in the different position within the input dataset, a rightmost data unit of the subset is in a rightmost position of the input dataset or a leftmost data unit of the subset is in a leftmost position of the input dataset. In some embodiments, the array comprises a plurality of rows and a column for each of the plurality of data units of the input dataset, wherein the logic cells of each of the columns are coupled together in series by a plurality of data pass lines. In some embodiments, for one or more of the rows of one or more of the columns, each of the logic cells of the one or more rows of the one or more columns is coupled with the logic cell of the next row of a different one of the columns via a data shift line.

In some embodiments, the different one of the columns is a predetermined number of columns away from the column including the logic cell of the one or more rows of the one

or more columns. In some embodiments, the predetermined number of columns away is the same for all of the logic cells in the same one of the rows. In some embodiments, the barrel compactor receives the input dataset by inputting a different one of the data units with each of the columns such that the input dataset is received by the array in parallel, and further wherein each of the independent shift values is transmitted through the array by the logic cells along with the associated one of the data units. In some embodiments, upon receiving one of the data units and the associated independent shift value from either one of the shift lines or one of the pass lines during a cycle, each of the logic cells transmit the data unit and the associated independent shift value down one of the pass lines to the next logic cell of the column if the independent shift value does not indicate a shift is necessary by the row that the logic cell is a part of and transmit the data unit and the associated independent shift value to the logic cell of the next row of the different one of the columns via the data shift line if the independent shift value indicates that a shift is necessary by the row that the logic cell is a part of. In some embodiments, each of the data units of the input dataset have a qualifier value that indicates if the data unit is a part of the subset. In some embodiments, each of the qualifier values is transmitted by the logic cells through the array along with the associated one of the data units. In some embodiments, upon receiving both one of the data units and the associated independent shift value from one of the shift lines and one of the data units and the associated independent shift value from one of the pass lines during the same cycle, each of the logic cells discard the one of the data units and the associated independent shift value from the one of the pass lines and select the one of the data units and the associated independent shift value from the one of the shift lines for transmission based on the associated independent shift value.

In some embodiments, upon receiving both one of the data units, the associated independent shift value and the associated qualifier value from one of the shift lines and one of the data units, the associated independent shift value and the associated qualifier value from one of the pass lines during the same cycle, each of the logic cells discard the one of the data units, the associated independent shift value and the associated qualifier value from the one of the pass lines if the associated qualifier value from the one of the pass lines indicates that the one of the data units from the one of the pass lines is not a part of the subset, discard the one of the data units, the associated independent shift value and the associated qualifier value from the one of the shift lines if the associated qualifier value from the one of the shift lines indicates that the one of the data units from the one of the shift lines is not a part of the subset, if the associated qualifier value from the one of the pass lines indicates that the one of the data units from the one of the pass lines is a part of the subset, select the one of the data units, the associated independent shift value and the associated qualifier value from the one of the pass lines for transmission based on the associated independent shift value from the one of the pass lines and if the associated qualifier value from the one of the shift lines indicates that the one of the data units from the one of the shift lines is a part of the subset, select the one of the data units, the associated independent shift value and the associated qualifier value from the one of the shift lines for transmission based on the associated independent shift value from the one of the shift lines.

In some embodiments, the barrel compactor inserts a zero in a location between one or more of the data units of the subset as organized in the different position by reducing the

independent shift values of all of the data units to either the right or the left of the location by one. In some embodiments, each of the logic cells comprise a multiplexor. In some embodiments, the barrel compactor generates the independent shift value for each of the data units of the subset based on the qualifier values of the plurality of data units. In some embodiments, the barrel compactor generates the independent shift value for each of the data units of the subset based on the qualifier values of the plurality of data units by using the qualifier values to identify the data units that are a part of the subset, calculating a first number of the data units that are between one side of the input dataset and a closest one of the data units of the subset to the one side and for each gap between one of the data units of the subset and a next of the data units of the subset, calculating a gap size that is equal to a number of the data units within the gap. In some embodiments, the barrel compactor determines the independent shift value of each of the data units of the subset by summing the first number and the gap size of each of the gaps between the data unit and the one side of the input dataset. In some embodiments, each of the data units is selected from the group consisting of a bit, a byte or a word. In some embodiments, for each of the rows of the array, each of the independent shift values indicate whether a shift is necessary for the row.

A third aspect is directed to a method of extracting a subset of data from a plurality of data units that together form an input dataset. The method comprises receiving the input dataset with a barrel compactor comprising a plurality of logic cells arranged in an array and shifting one or more of the data units of the subset with the barrel compactor such that the subset is in a different position within the input dataset, wherein each of the data units of the subset have a corresponding independent shift value that indicates a number of positions within the input dataset to shift the associated data unit, and further wherein the barrel compactor shifts the one or more of the data units of the subset based on the independent shift values. In some embodiments, when in the different position within the input dataset, all of the data units of the subset are adjacent to each other. In some embodiments, when in the different position within the input dataset, a rightmost data unit of the subset is in a rightmost position of the input dataset or a leftmost data unit of the subset is in a leftmost position of the input dataset. In some embodiments, the array comprises a plurality of rows and a column for each of the plurality of data units of the input dataset, wherein the logic cells of each of the columns are coupled together in series by a plurality of data pass lines. In some embodiments, for one or more of the rows of one or more of the columns, each of the logic cells of the one or more rows of the one or more columns is coupled with the logic cell of the next row of a different one of the columns via a data shift line. In some embodiments, the different one of the columns is a predetermined number of columns away from the column including the logic cell of the one or more rows of the one or more columns. In some embodiments, the predetermined number of columns away is the same for all of the logic cells in the same one of the rows.

In some embodiments, the barrel compactor receives the input dataset by inputting a different one of the data units with each of the columns such that the input dataset is received by the array in parallel, and further wherein each of the independent shift values is transmitted through the array by the logic cells along with the associated one of the data units. In some embodiments, the method further comprises, for each of the logic cells, upon receiving one of the data units and the associated independent shift value from either

one of the shift lines or one of the pass lines during a cycle transmitting with the logic cell the data unit and the associated independent shift value down one of the pass lines to the next logic cell of the column if the independent shift value does not indicate a shift is necessary by the row that the logic cell is a part of and transmitting with the logic cell the data unit and the associated independent shift value to the logic cell of the next row of the different one of the columns via the data shift line if the independent shift value indicates that a shift is necessary by the row that the logic cell is a part of. In some embodiments, each of the data units of the input dataset have a qualifier value that indicates if the data unit is a part of the subset. In some embodiments, each of the qualifier values is transmitted by the logic cells through the array along with the associated one of the data units. In some embodiments, the method further comprises, with each of the logic cells, upon receiving both one of the data units and the associated independent shift value from one of the shift lines and one of the data units and the associated independent shift value from one of the pass lines during the same cycle discarding with the logic cell the one of the data units and the associated independent shift value from the one of the pass lines and selecting with the logic cell the one of the data units and the associated independent shift value from the one of the shift lines for transmission based on the associated independent shift value.

In some embodiments, the method further comprises, for each of the logic cells, upon receiving both one of the data units, the associated independent shift value and the associated qualifier value from one of the shift lines and one of the data units, the associated independent shift value and the associated qualifier value from one of the pass lines during the same cycle discarding with the logic cell the one of the data units, the associated independent shift value and the associated qualifier value from the one of the pass lines if the associated qualifier value from the one of the pass lines indicates that the one of the data units from the one of the pass lines is not a part of the subset, discarding with the logic cell the one of the data units, the associated independent shift value and the associated qualifier value from the one of the shift lines if the associated qualifier value from the one of the shift lines indicates that the one of the data units from the one of the shift lines is not a part of the subset, if the associated qualifier value from the one of the pass lines indicates that the one of the data units from the one of the pass lines is a part of the subset, selecting with the logic cell the one of the data units, the associated independent shift value and the associated qualifier value from the one of the pass lines for transmission based on the associated independent shift value from the one of the pass lines and if the associated qualifier value from the one of the shift lines indicates that the one of the data units from the one of the shift lines is a part of the subset, selecting with the logic cell the one of the data units, the associated independent shift value and the associated qualifier value from the one of the shift lines for transmission based on the associated independent shift value from the one of the shift lines.

In some embodiments, the method further comprises inserting with the barrel compactor a zero in a location between one or more of the data units of the subset as organized in the different position by reducing the independent shift values of all of the data units to either the right or the left of the location by one. In some embodiments, each of the logic cells comprise a multiplexor. In some embodiments, the method further comprises generating the independent shift value for each of the data units of the subset with the barrel compactor based on the qualifier values of the

plurality of data units. In some embodiments, the barrel compactor generates the independent shift value for each of the data units of the subset based on the qualifier values of the plurality of data units by using the qualifier values to identify the data units that are a part of the subset, calculating a first number of the data units that are between one side of the input dataset and a closest one of the data units of the subset to the one side and for each gap between one of the data units of the subset and a next of the data units of the subset, calculating a gap size that is equal to a number of the data units within the gap. In some embodiments, the barrel compactor determines the independent shift value of each of the data units of the subset by summing the first number and the gap size of each of the gaps between the data unit and the one side of the input dataset. In some embodiments, each of the data units is selected from the group consisting of a bit, a byte or a word. In some embodiments, for each of the rows of the array, each of the independent shift values indicate whether a shift is necessary for the row.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a packet processing system on a packet processing device according to some embodiments.

FIG. 2 illustrates a barrel compactor according to some embodiments.

FIG. 3 illustrates a barrel compactor compacting an exemplary dataset according to some embodiments.

FIG. 4 illustrates a barrel compactor including cell combination logic and compacting an exemplary dataset according to some embodiments.

FIG. 5 illustrates a method of operating a packet processing system on a packet processing device according to some embodiments.

DETAILED DESCRIPTION OF THE INVENTION

In the following description, numerous details are set forth for purposes of explanation. However, one of ordinary skill in the art will realize that the invention can be practiced without the use of these specific details. Thus, the present invention is not intended to be limited to the embodiments shown but is to be accorded the widest scope consistent with the principles and features described herein.

Embodiments are directed to a packet processing system having a barrel compactor that extracts a desired data subset from an input dataset (e.g. an incoming packet). The barrel compactor is able to selectively shift one or more of the input data units of the input dataset based on individual shift values for those data units. Additionally, in some embodiments one or more of the data units are able to be logically combined to produce a desired logical output unit. Accordingly, the desired subset of the input dataset is able to be shifted to a desired location within the input dataset such that the subset can be easily extracted as a continuous set of extracted data. As a result, the system provides the advantage of minimizing the cost of data extraction by eliminating the need for high cost wide multiplexors.

FIG. 1 illustrates a packet processing system **100** on a packet processing device **99** according to some embodiments. As shown in FIG. 1, the system **100** comprises a barrel compactor **102**, a shift generator **104** and a qualifier generator **106** communicatively coupled together via one or more networks (e.g. buses/interfaces). Specifically, the shift generator **104** and the qualifier generator **106** are coupled to each other and to the barrel compactor **102**. Alternatively,

the shift generator **104** is able to be incorporated into the barrel compactor **102** such that the barrel compactor is able to perform the functions of the shift generator **104** as described herein. In some embodiments, the shift generator **104** and the qualifier generator **106** are able to be incorporated into a single element. Alternatively, the shift generator **104** and the qualifier generator **106** are able to be separate elements. The packet processing device **99** is able to be a packet processing circuit, microchip and/or a die. For example, the device **99** is able to be a switch microchip (e.g. top of rack switch) for a data center or other type of packet processing circuit or application specific integrated circuit. In some embodiments, the device **99** is a software defined network programmable microchip that is able to be programmed or customized to adjust the manner in which packets are processed. Alternatively, the device **99** is able to be other types of data (e.g. data packet) processing devices known in the art. The network is able to comprise a plurality of wide or narrow interfaces or buses that wired and/or wirelessly communicatively couple together the components of the system **100** for transmitting data and/or control signals between the components. The barrel compactor **102**, shift generator **104** and/or qualifier generator **106** are each able to comprise hardware, software or a combination of hardware and software configured to perform the corresponding functions described herein, wherein the software is stored on a non-transitory computer readable medium of the device **99**.

In operation, an input dataset is received and input by one or more of the barrel compactor **102** and/or the qualifier generator **106**. Based on the input dataset, the qualifier generator **106** generates one or more qualifier values that identify a subset of the input data that needs to be extracted. For example, the qualifier generator **106** is able to identify an incoming packet or packets and assign qualifier values to one or more of the data units of the incoming data indicating that those data units need to be extracted (i.e. are a part of the desired subset of the input dataset). The shift generator **104** is able to receive these qualifier values and/or the input dataset and generate shift values for one or more of the data units of the dataset that indicate to the barrel compactor how much each of the data units need to be shifted in order to be extracted from the remainder of the input dataset. For example, the shift generator **104** is able to generate shift values for each of the data units of the dataset whose qualifier values indicate that they are a part of the desired subset. Indeed, the shift values are able to be selected such that after the data units of the subset are shifted the subset will form a single group (e.g. all be adjacent to each other) within the dataset.

The value of each of the shift values is able to be based on the qualifier values and/or the relative position of each of the data units within the input dataset. In particular, the shift values are able to be selected based on one or more gaps of data units that are not a part of the subset (e.g. have qualifier values that indicate that they are not a part of the desired subset) that are in between two or more data units of the subset or between an end position within the dataset and the subset. For example, for each data unit of the desired subset, the shift generator **104** is able to determine the size (e.g. number of data units) of all of the gaps between that data unit and an end of the dataset where the subset is being shifted to. The value of that summation of the size of all of those gaps is equal to the number of positions that the data unit will need to be shifted and thus is able to determine the corresponding shift value for the data units. Accordingly, once this has been performed for all of the data units of the subset, the shift generator **104** is able to generate shift values

for all of the subset that will result in elimination of the gaps in the modified output dataset such that the subset forms an adjacent group of data units. Alternatively, the shift values are able to be otherwise determined by the shift generator **104** based on the input dataset and/or qualifier values.

The shift generator **104** transmits these shift values and qualifier values to the barrel compactor **102** such that along with the input dataset, each of the data units of the dataset received by the barrel compactor **102** have a corresponding shift value and a corresponding qualifier value. In some embodiments, instead of receiving the input dataset directly, the barrel compactor **102** receives the input dataset from the shift generator **104** and/or qualifier generator **106**. In some embodiments, instead of from the qualifier generator **106** directly, the barrel compactor **102** receives the qualifier values from the qualifier generator **106** via the shift generator **104**. The barrel compactor **102**, upon receiving the dataset, the shift values and/or the qualifier values, is able to shift and otherwise process each of the data units of the dataset (including the corresponding shift value and qualifier value) in parallel. In particular, the barrel compactor **102** shifts the data units of the input dataset such that all of the data units of the subset are positioned in an adjacent group within the input dataset (e.g. on the far right or far left positions of the input dataset) thereby forming a modified output dataset that is output by the barrel compactor **102**. As a result, the system **100** is able to provide the advantage of extracting the desired subset into a single group within the input dataset such that the subset is able to be easily removed and used for further processing.

In some embodiments, the barrel compactor **102** is able to logically combine/modify one or more of the data units of the subset according to predetermined logical functions when the shifting and/or qualifier values indicate that such a function should be performed on pairs of the data units of the subset. As a result, in such embodiments the system **100** provides the advantage of selectively performing desired combinatorial logic with one or more pairs of the data units and/or results from prior combinations of data units thereby providing increased processing power in addition to the data extraction. Additionally, in some embodiments the barrel compactor **102** is able to insert one or more zeros (or data units whose value is equal to zero) into the subset such that when the subset is positioned into the adjacent group within the modified output dataset one or more zeros will be added to the subset in between desired portions of the subset. As a result, in such embodiments the system **100** provides the advantage of enabling portions of the subset to be distinguished from each other (e.g. a buffer between a flag and a remainder of the subset) while still grouping the subset as a whole into an adjacent group (including the added zeros) within the modified output dataset.

In some embodiments, the input dataset comprises one or more packets and the associated packet data (e.g. a packet header, a packet body). Alternatively, the input dataset is able to comprise other types of data and/or data formats or signals wherein a subset of the data is able to be extracted from the input dataset. In some embodiments, each data unit of the input dataset is a bit. Alternatively, the data units are able to be bits, bytes, words, files and/or other groups or sizes of data. In other words, the granularity of the data units is able to be as small as a single bit and as large as any number or organization of a plurality of bits (e.g. bytes, words, files).

FIG. 2 illustrates a barrel compactor **102** according to some embodiments. As shown in FIG. 2, the barrel compactor **102** comprises an array or grid **202** of logic cells **204** including a plurality of columns **208** and a plurality of rows

210. Each of the logic cells **204** of a column **208** are coupled together in series by a plurality of unidirectional pass lines or buses **206a**. As a result, each logic cell **204** of a column **208** is able to input a data unit (and the corresponding shift value and/or qualifier value) via an incoming input pass line **206a** and output the data unit (and the corresponding shift value and/or qualifier value) via an outgoing pass line **206a**. Additionally, one or more of logic cells **204** of each row **210** (except for the last row) are additionally coupled to a logic cell **204** in a different column **208** of the next row **210** via a unidirectional shift bus or line **206b**. As a result, one or more of the logic cells **204** are able to input one or two data units (and the corresponding shift values and/or qualifier values) from either an incoming input pass line **206a**, an incoming shift line **206b** or both. Similarly, one or more of the logic cells **204** are able to output the one or a selected one of the two data units, or a logical combination of the two data units (and the corresponding shift values and/or qualifier values) on either an outgoing pass line **206a** or an outgoing shift line **206b**.

Specifically, as described in detail below, each of the logic cells **204** is able to output a received data unit (and the corresponding shift value and/or qualifier value) on the outgoing pass line **206a** unless the corresponding shift value indicates that the logic cell **204** should output the data unit via the outgoing shift line **206b** thereby shifting the data unit (and the corresponding shift value and/or qualifier value). Further, as described in detail below, if two data units are received during the same cycle on the incoming pass line **206a** and the incoming shift line **206b**, the logic cell **204** is able to choose one and discard the other or logically combine the two based on the corresponding qualifier values and/or data of the pair of data units. For example, in some embodiments the logic cell **204** always discards the data unit from the incoming pass line **206a** and selects the data unit from the incoming shift line **206b**. Indeed, in such embodiments the qualifier values are able to be omitted and/or not passed along with the corresponding data units through the array **202**. Alternatively, if one of the data units is a part of the subset and the other one of the data units is not a part of the subset (e.g. as indicated by the corresponding qualifier values), the logic cell **204** is able to discard the data unit that is not a part of the subset and select the data unit that is a part of the subset. Moreover, in some embodiments if both of the data units are a part of the subset (e.g. as indicated by the corresponding qualifier values), the logic cell **204** is able to perform a predetermined logical function that combines the data of the two data units (thereby creating a single modified data unit). In such embodiments, the logic cell **204** is able to select one of the shift values and qualifier to send along with the modified data unit or is able to combine the shift values into a modified shift value to be sent along with the modified data unit and the selected qualifier value.

Although as shown in FIG. 2, the array **202** comprises ten columns **208** by five rows **210** of logic cells **204** where each of the shift lines **206b** shift to the left, any number of columns **208** and/or rows **210** having shift lines **206b** that all shift to the right or all shift to the left are contemplated. As shown in FIG. 2, the rows **210** shift one, two, four and eight columns/positions respectively in binary increasing order (e.g. 1, 2, 4, 8, 16 . . .). Alternatively, each of the rows **210** are able to shift more or less columns/positions and/or be in a different shifting order (e.g. decreasing order, random order, any other order). As shown in FIG. 2, all of the cells **204** of each of the rows **210** shift the same amount. Alter-

natively, in some embodiments one or more of the logic cells **204** within one or more of the same rows **210** are able to shift a differing amounts.

FIG. 3 illustrates a barrel compactor **102** compacting an exemplary input dataset **300** according to some embodiments. As shown in FIG. 3, the input dataset **300** comprises a plurality of data units **302**, **302'**, wherein one or more of the data units **302'** (A, B, C, D) are a part of a desired subset that needs to be extracted from the dataset **300**. In other words, a portion of the data units **302** (X) are able to have qualifier values (e.g. 0) that indicate that they are not a part of the desired subset and a remainder of the data units **302'** (A, B, C, D) are able to have qualifier values (e.g. 1) that indicate that they are a part of the desired subset. The qualifier values are not shown in FIG. 3 for the sake of clarity. As also shown in FIG. 3, each of the data units **302'** of the subset have corresponding shift values **304** that indicate how much the associated data unit **302'** need to be shifted to be positioned within the subset group **306** of the modified output subset. Additionally, it should be noted that adjacent data units **302'** (e.g. B and C) of the subset will have the same shift value **304** such that a single shift value is able to be calculated for one of the adjacent data units **302'** and then that shift value is able to be assigned to all of the adjacent data units **302'**. In some embodiments, the data units **302** that are not a part of the subset do not have shift values. Alternatively, the data units **302** that are not a part of the subset are able to have shift values that indicate to not shift the data unit **302**.

Each of the shift values **304** is able to comprise a plurality of values (e.g. one value for each of the rows **210** including logic cells **204** that are able to selectively shift data units **302**, **302'**) that individually indicate whether a shift should occur for cells **204** of different rows **210**. For example, as shown in FIG. 3 each of the positions of the shift values **304** are associated with one of the rows **210**. Thus, for the shift value of b0111, the first position (e.g. b0111) is able to correspond to the first shifting row **210a**, the second position (e.g. b0111) is able to correspond to the second shifting row **210b** and so on. As a result, each of the logic cells **204** of one of the rows **210** is able to either shift or pass the data unit **302**, **302'** based on the corresponding value of the shift value **304** (e.g. if=1 then shift, if=0 then pass). Each of the shift values **304** is able to comprise a single value (or a plurality of values, but less than the number of rows **210**) wherein the same value or values are able to be used by a plurality of the rows **210** to determine if the data unit **302**, **302'** should be shifted. In any case, when combined with an understanding of the amount of columns **208** that each of the rows **210** is configured to shift a data unit **302**, **302'**, the compactor **102** and/or shift generator **104** is/are able to generate shift values **304** that shift the data units **302**, **302'** a desired total amount of columns **208** once they traverse the entire array **202**.

In operation in the example shown in FIG. 3, the input dataset **302** is input by the columns **208** of the barrel compactor **102** in parallel and upon receipt by the logic cells **204** of the first row **210a**, the logic cells **204** receiving data units **302'** A, B and C determine that a shift is needed based on the first position of the corresponding shift values **304** whereas the logic cell **204** receiving data unit **302'** D (and the logic cells **204** receiving the other data units **302**) determines that a shift is not needed. Thus, data units **302'** A, B and C are output on shifting lines to different columns **208** of the next row **210b** and the data unit **302'** D (and the logic cells **204** receiving the other data units **302**) is output on the pass line to the logic cell **204** of the next row **210b** of the same column **208**. Further, it should be noted that along with the

data of the data units **302**, **302'**, the associated shift values **304** and/or qualifier values are also able to be output on the shift or pass lines **206a**, **206b**. As a result, the logic cells **204** of row **210b** that receive the data units **302'** A, B and C from the incoming shift line also receive a data unit **302** from the incoming pass line during that cycle.

In some embodiments, upon receiving two data units **302**, **302'** during the same cycle, the logic cells **204** always discard the data unit **302** from the incoming pass line **206a** and selects the data unit **302'** from the incoming shift line **206b** to output (based on the corresponding shift value **304**). Indeed, in such embodiments the qualifier values (not shown) are able to be omitted and/or not transmitted with the data units **302**, **302'** through the array **202**. Alternatively, if one of the data units **302'** is a part of the subset and the other one of the data units **302** is not a part of the subset (e.g. as indicated by the corresponding qualifier values), the logic cell **204** is able to discard the data unit **302** that is not a part of the subset and select the data unit **302'** (e.g. A, B and C) that is a part of the subset. In some embodiments, as shown in FIG. 4 below, if both of the received data units **302'** are a part of the subset (e.g. as indicated by the corresponding qualifier values), the logic cell **204** is able to perform a predetermined logical function that combines the data of the two data units **302'** thereby creating a single modified data unit that is output by the logic cell **204**.

In any case, the process then repeats for the logic cells **204** of the second row **210b**, wherein in this case the shift values **304** indicate that data units **302'** B and C need to be output on the shift lines **206b** whereas data units **302'** A and D (and the logic cells **204** receiving the other data units **302**) need to be output on the pass lines **206a**. Subsequently, after all of the logic cells **204** of all of the rows **210** of the array **202** have completed the process the resulting output will include all of the data units **302'** of the subset repositioned adjacent to each other in a group **306** at one end of the array **202** (and/or modified output dataset). Therefore, the compactor **102** provides the advantages of cheaply enabling the extraction of desired subsets of input datasets **300** and enabling each of the data units **302**, **302'** to have a unit shift value **304** and thus be shifted uniquely to any of the other data units **302**, **302'**. In some embodiments, this group **306** is able to include one or more zeros in columns **208**/positions between one or more of the data units **302'** of the subset based on the configuration of the barrel compactor **102** and/or the shift generator **104**. For example, as described above, if the shift values of one or more of the data units **302'** (e.g. B, C and D) are configured to shift the data units **302'** one less column **208**/position, the result will be a zero in the second column **208** of the group **306** between the data unit **302'** A and the data units **302'** B, C and D. Thus, the compactor **102** provides the advantage of enabling portions of the subset to be distinguished from each other (e.g. a buffer between a flag and a remainder of the subset) while still grouping the subset as a whole into an adjacent group (including the added zeros) within the modified output dataset.

FIG. 4 illustrates a barrel compactor **102** including cell combination logic and compacting an exemplary dataset **400** of data units **402'** that are a part of a desired subset and data units **402** that are not a part of the subset according to some embodiments. In particular, the barrel compactor **102** of FIG. 4 is able to be substantially similar to the barrel compactor **102** of FIG. 3, except that one or more of the logic cells **204** are able to include one or more logical combination elements that are able to logically combine the data **402a** of from two data units **402**, **402'** received at the logic cell **204** during the same cycle. In some embodiments,

all of the logic cells **204** of the array **202** have the same logical combination elements such that they all are able to perform the same logical combination functions between the data **402a** of two input data units **402**, **402'**. Alternatively, one or more of the logic cells **204** are able to have no logical combination elements or different logical combination elements that perform different logical combination functions between the data **402a** of two input data units **402**, **402'**. The logical functions performed by the logical combination elements are able to be an XOR function, an AND function, an OR function, a NOR function, a NAND function, other logic design functions known in the art, and/or combinations of these functions.

In operation, each of the data units **402**, **402'** of the input dataset **400** follow the bold paths through the array **202** based on their corresponding shift values (not shown) wherein the numerator of the values within each cell **204** indicate the data value **402a** of the data unit **402**, **402'** and the denominator of the values indicate the qualifier value **402b** of the data unit **402**, **402'** input and output by that logic cell **204**. As shown in FIG. 4, most of the logic cells **204** only receive a single data unit **402**, **402'** during a cycle. However, two of the logic cells **404a**, and **404b** receive two data units **402**, **402'** during the same cycle. As a result, these logic cells **404** are able to selectively utilize their logical combination elements to combine the data **402a** of the two received data units **402**, **402'** and thereby create a single combined data of a combined data unit to output. Alternatively, these logic cells **404** are able to forgo use of their logical combination elements and instead select one or neither of the input data units **402**, **402'** for output in the same manner as described above in FIG. 3. In some embodiments, the logic cells **404** determine whether to use their logical combination elements based on the qualifier values **402b** of the input data units **402**, **402'**. Alternatively, the logic cells **404** are able to determine whether to use their logical combination elements based on the qualifier values **402b** of the input data units **402**, **402'**, the data values **402a** of the input data units **402**, **402'**, the shift values of the input data units **402**, **402'** or a combination thereof.

For example, as shown in FIG. 4, the logic cells **404** only use their logical combination elements if both of the qualifier values **402b** indicate that both the first data unit **402'** and the second data unit **402'** are a part of the subset. Thus, in logic cell **404a**, the combination function is not performed because only one of the data units **402'** is a part of the subset (as indicated by the qualifier values **402b**). Instead, the logic cell **404a** selects the data unit **402'** that is a part of the subset and/or that was received from the incoming shift line **206b**. In contrast, the logic cell **404b** performs the logical combination function with the logical combination elements because the two qualifier values **402b** indicate that the two received data units **402'** are both a part of the subset. Therefore, if the logical combination function is an XOR function, the logic cell **404b** will XOR the data value 0 with the data value 1 of the two data units **402'** which results in a combined data value of 1. As a result, the logic cell **404b** outputs a modified data unit **402'** having a data value **402a** equal to 1 down the pass line (or shift line) based one or more of the shift values of the two data units **402'**.

In some embodiments, the logic cell **404b** is able to select one of the two shift values (not shown) and/or one of the two qualifier values **402b** to determine which line to send the modified data unit on and to send along with the modified data unit, or is able to combine the shift values and/or qualifier values **402b** into a modified shift value and/or qualifier value to determine which line to send the modified

data unit on and to be sent along with the modified data unit. Therefore, the compactor **102** provides the advantage of selectively performing desired combinatorial logic with one or more pairs of the data units **402**, **402'** and/or results from prior combinations of data units (e.g. previously created modified data units) thereby providing increased processing power in addition to the data extraction. It should be noted, as described above, although the data **402a** of the data units **402**, **402'** of FIG. 4 is a single bit, the data **402a** is able to comprise a plurality of bits, bytes, words or any other denomination or group of data. Additionally, in some embodiments the combination function is able to be performed on the two shift values in addition to or in lieu of performing the function on the data values **402a**. Further,

FIG. 5 illustrates a method of operating a packet processing system on a packet processing device according to some embodiments. As shown in FIG. 5, the barrel compactor **102** receives the input dataset and the qualifier values at the step **502**. For example, the barrel compactor **102** is able to receive the input dataset by inputting a different one of the data units with each of the columns **208** such that the input dataset is received by the array **202** in parallel. In some embodiments, the qualifier values and/or the input dataset are received from the qualifier generator **106**. In some embodiments, the qualifier values and/or the input dataset are able to be received along with the shift values from the shift generator **104**. The barrel compactor **102** identifies the shift values for one or more of the data units of the subset at the step **504**. In some embodiments, the shift values are received from the shift generator **104**. Alternatively, the shift generator **104** is able to be incorporated in to the barrel compactor **102**. The barrel compactor **102** shifts the one or more of the data units of the subset based on the shift values such that the subset is in a different position within the input dataset at the step **504**. For example, as one of the data units is received by one of the logic cells **204** within the array **202**, the logic cell **204** is able to shift the data unit (and the associated qualifier and shift values) down the shift line if the shift value indicates that the logic cell **204** (or row **210** in which the logic cell **204** resides) should shift the data unit. Otherwise, the logic cell **204** is able to simply pass the data unit (and the associated qualifier and shift values) down the pass line out of the compactor **102** or to the next logic cell **204** within the array **202**. As a result, the method provides the benefit of extracting the desired subset into a single group within the input dataset such that the subset is able to be easily removed and used for further processing.

In some embodiments, the subset is shifted such that all of the data units of the subset are adjacent to each other (e.g. at the rightmost or leftmost positions of the input dataset). In some embodiments, the shifting includes the transmitting of the corresponding shift value and the qualifier values with each of the data units as they are passed or shifted through the array **202**. As a result, the method provides the advantage of enabling each of the data units to have a unit shift value and thus be shifted uniquely to any of the other data units. In some embodiments, if a logic cell **204** receives two data units during the same cycle, the logic cell **204** always discards the data unit from the incoming pass line **206a** and selects the data unit from the incoming shift line **206b**. Alternatively, if one of the data units is a part of the subset and the other one of the data units is not a part of the subset (e.g. as indicated by the corresponding qualifier values), the logic cell **204** is able to discard the data unit that is not a part of the subset and select the data unit that is a part of the subset. In some embodiments, if both of the received data units are a part of the subset (e.g. as indicated by the

15

corresponding qualifier values), the logic cell **204** is able to perform a predetermined logical function that combines the data of the two data units (thereby creating a single modified data units). In such embodiments, the logic cell **204** is able to select one of the shift values and qualifier to send along with the modified data unit or is able to combine the shift values into a modified shift value to be sent along with the modified data unit and the selected qualifier value. As a result, the method provides the advantage of selectively performing desired combinatorial logic with one or more pairs of the data units and/or results from prior combinations of data units thereby providing increased processing power in addition to the data extraction.

Additionally, in some embodiments the method further comprises the barrel compactor **102** inserting one or more zeros in a location between one or more of the data units of the subset as organized in the different position. Specifically, the barrel compactor **102** is able to modify the shift values by reducing the shift values of all of the data units to either the right or the left of the location by the desired number of zeros. Thus, the method provides the advantage of enabling portions of the subset to be distinguished from each other (e.g. a buffer between a flag and a remainder of the subset) while still grouping the subset as a whole into an adjacent group (including the added zeros) within the modified output dataset. In some embodiments, the method further comprises the barrel compactor **102** and/or the shift generator **104** automatically generating the shift values based on the input dataset and the qualifier values. For example, the barrel compactor **102** and/or shift generator **104** is/are able to use the qualifier values to identify the data units that are a part of the subset, calculating a first number of the data units that are between one side of the input dataset and a closest one of the data units of the subset to the one side, and for each gap between one of the data units of the subset and a next one of the data units of the subset, calculating a gap size that is equal to a number of the data units within the gap. As a result, the barrel compactor **102** and/or shift generator **104** is/are able to determine the shift value of each of the data units of the subset as the summation of the first number and the gap size of each of the gaps between the data unit and the one side of the input dataset. Thus, the method provides the advantage of not requiring shift values be supplied to the barrel compactor **102** and/or shift generator **104**.

The packet processing system, method and device described herein has numerous advantages. In particular, the system, method and device provides the advantage of extracting the desired subset into a single group within the input dataset such that the subset is able to be easily removed and used for further processing. Further, the system, method and device provides the advantage of selectively performing desired combinatorial logic with one or more pairs of the data units and/or results from prior combinations of data units thereby providing increased processing power in addition to the data extraction. Moreover, the system, method and device provides the advantage of enabling portions of the subset to be distinguished from each other (e.g. a buffer between a flag and a remainder of the subset) while still grouping the subset as a whole into an adjacent group (including the added zeros) within the modified output dataset. Additionally, the system method and device provide the advantage of enabling each of the data units to have a unit shift value and thus be shifted uniquely to any of the other data units.

While the invention has been described with reference to numerous specific details, one of ordinary skill in the art will recognize that the invention can be embodied in other

16

specific forms without departing from the spirit of the invention. For example, although the different methods and operations described herein describe a particular order of steps, other orders are contemplated as well as the omission of one or more of the steps and/or the addition of one or more new steps. Moreover, although the methods and operations above are described herein separately, one or more of the methods and operations are able to be combined (in whole or part). Thus, one of ordinary skill in the art will understand that the invention is not to be limited by the foregoing illustrative details, but rather is to be defined by the appended claims.

We claim:

1. A barrel compactor system for extracting a subset of data from a plurality of data units that together form an input dataset, the system comprising:

a data unit shift generator that generates a shift value for one or more of the data units within the subset of the input dataset; and

a barrel compactor comprising a plurality of logic cells arranged in an array, wherein the array comprises a plurality of rows and a column for each of the plurality of data units of the input dataset, wherein the logic cells of each of the columns are coupled together in series by a plurality of data pass lines.

2. The system of claim **1**, wherein the barrel compactor receives the input dataset, and shifts one or more of the data units of the subset such that the subset is in a different position within the input dataset, and further wherein when in the different position within the input dataset, all of the data units of the subset are adjacent to each other.

3. The system of claim **2**, wherein when in the different position within the input dataset, a rightmost data unit of the subset is in a rightmost position of the input dataset or a leftmost data unit of the subset is in a leftmost position of the input dataset.

4. The system of claim **3**, wherein for one or more of the rows of one or more of the columns, each of the logic cells of the one or more rows of the one or more columns is coupled with the logic cell of the next row of a different one of the columns via a data shift line.

5. The system of claim **4**, wherein the different one of the columns is a predetermined number of columns away from the column including the logic cell of the one or more rows of the one or more columns.

6. The system of claim **5**, wherein the predetermined number of columns away is the same for all of the logic cells in the same one of the rows.

7. The system of claim **6**, wherein the barrel compactor receives the input dataset by inputting a different one of the data units with each of the columns such that the input dataset is received by the array in parallel, and further wherein each of the shift values is transmitted through the array along with the associated one of the data units.

8. The system of claim **7**, wherein upon receiving one of the data units and the associated shift value from either one of the shift lines or one of the pass lines during a cycle, each of the logic cells:

transmit the data unit and the associated shift value down one of the pass lines to the next logic cell of the column if the shift value does not indicate a shift is necessary by the row that the logic cell is a part of; and

transmit the data unit and the associated shift value to the logic cell of the next row of the different one of the columns via the data shift line if the shift value indicates that a shift is necessary by the row that the logic cell is a part of.

17

9. The system of claim 8, further comprising a data subset identifier that generates a qualifier value for each of the data units of the input dataset.

10. The system of claim 9, wherein the qualifier value indicates if the data unit is a part of the subset, wherein each of the qualifier values is transmitted through the array along with the associated one of the data units.

11. The system of claim 10, wherein upon receiving both one of the data units and the associated shift value from one of the shift lines and one of the data units and the associated shift value from one of the pass lines during the same cycle, each of the logic cells:

discard the one of the data units and the associated shift value from the one of the pass lines; and

select the one of the data units and the associated shift value from the one of the shift lines for transmission based on the associated shift value.

12. The system of claim 10, wherein upon receiving both one of the data units, the associated shift value and the associated qualifier value from one of the shift lines and one of the data units, the associated shift value and the associated qualifier value from one of the pass lines during the same cycle, each of the logic cells:

discard the one of the data units, the associated shift value and the associated qualifier value from the one of the pass lines if the associated qualifier value from the one of the pass lines indicates that the one of the data units from the one of the pass lines is not a part of the subset;

discard the one of the data units, the associated shift value and the associated qualifier value from the one of the shift lines if the associated qualifier value from the one of the shift lines indicates that the one of the data units from the one of the shift lines is not a part of the subset;

if the associated qualifier value from the one of the pass lines indicates that the one of the data units from the one of the pass lines is a part of the subset, select the one of the data units, the associated shift value and the associated qualifier value from the one of the pass lines for transmission based on the associated shift value from the one of the pass lines; and

if the associated qualifier value from the one of the shift lines indicates that the one of the data units from the one of the shift lines is a part of the subset, select the one of the data units, the associated shift value and the associated qualifier value from the one of the shift lines for transmission based on the associated shift value from the one of the shift lines.

13. The system of claim 11, wherein the data shift unit generator inserts a zero in a location between one or more of the data units of the subset as organized in the different position by reducing the shift values of all of the data units to either the right or the left of the location by one.

14. The system of claim 13, wherein each of the logic cells comprise a multiplexor.

15. The system of claim 14, wherein the data unit shift generator generates the shift value for each of the data units of the subset based on the qualifier values of the plurality of data units.

16. The system of claim 15, wherein the data unit shift generator generates the shift value for each of the data units of the subset based on the qualifier values of the plurality of data units by:

using the qualifier values to identify the data units that are a part of the subset;

calculating a first number of the data units that are between one side of the input dataset and a closest one of the data units of the subset to the one side; and

18

for each gap between one of the data units of the subset and a next of the data units of the subset, calculating a gap size that is equal to a number of the data units within the gap.

17. The system of claim 16, wherein the data unit shift generator determines the shift value of each of the data units of the subset by summing the first number and the gap size of each of the gaps between the data unit and the one side of the input dataset.

18. The system of claim 17, wherein each of the data units is selected from the group consisting of a bit, a byte or a word.

19. The system of claim 18, wherein, for each of the rows of the array, each of the shift values indicate whether a shift is necessary for the row.

20. A circuit forming a barrel compactor for extracting a subset of data from a plurality of data units that together form an input dataset, the barrel compactor comprising a plurality of logic cells arranged in an array, wherein the array comprises a plurality of rows and a column for each of the plurality of data units of the input dataset, wherein the logic cells of each of the columns are coupled together in series by a plurality of data pass lines, wherein one or more of the logic cells comprise a multiplexor.

21. The circuit of claim 20, wherein the barrel compactor receives the input dataset, and shifts one or more of the data units of the subset such that the subset is in a different position within the input dataset, and further wherein when in the different position within the input dataset, all of the data units of the subset are adjacent to each other.

22. The circuit of claim 21, wherein when in the different position within the input dataset, a rightmost data unit of the subset is in a rightmost position of the input dataset or a leftmost data unit of the subset is in a leftmost position of the input dataset.

23. The circuit of claim 22, wherein for one or more of the rows of one or more of the columns, each of the logic cells of the one or more rows of the one or more columns is coupled with the logic cell of the next row of a different one of the columns via a data shift line.

24. The circuit of claim 23, wherein the different one of the columns is a predetermined number of columns away from the column including the logic cell of the one or more rows of the one or more columns.

25. The circuit of claim 24, wherein the predetermined number of columns away is the same for all of the logic cells in the same one of the rows.

26. The circuit of claim 25, wherein the barrel compactor receives the input dataset by inputting a different one of the data units with each of the columns such that the input dataset is received by the array in parallel, and further wherein each of the shift values is transmitted through the array by the logic cells along with the associated one of the data units.

27. The circuit of claim 26, wherein upon receiving one of the data units and the associated shift value from either one of the shift lines or one of the pass lines during a cycle, each of the logic cells:

transmit the data unit and the associated shift value down one of the pass lines to the next logic cell of the column if the shift value does not indicate a shift is necessary by the row that the logic cell is a part of; and

transmit the data unit and the associated shift value to the logic cell of the next row of the different one of the columns via the data shift line if the shift value indicates that a shift is necessary by the row that the logic cell is a part of.

19

28. The circuit of claim 27, wherein each of the data units of the input dataset have a qualifier value that indicates if the data unit is a part of the subset.

29. The circuit of claim 28, wherein each of the qualifier values is transmitted by the logic cells through the array along with the associated one of the data units.

30. The circuit of claim 29, wherein upon receiving both one of the data units and the associated shift value from one of the shift lines and one of the data units and the associated shift value from one of the pass lines during the same cycle, each of the logic cells:

discard the one of the data units and the associated shift value from the one of the pass lines; and

select the one of the data units and the associated shift value from the one of the shift lines for transmission based on the associated shift value.

31. The circuit of claim 29, wherein upon receiving both one of the data units, the associated shift value and the associated qualifier value from one of the shift lines and one of the data units, the associated shift value and the associated qualifier value from one of the pass lines during the same cycle, each of the logic cells:

discard the one of the data units, the associated shift value and the associated qualifier value from the one of the pass lines if the associated qualifier value from the one of the pass lines indicates that the one of the data units

from the one of the pass lines is not a part of the subset; discard the one of the data units, the associated shift value

and the associated qualifier value from the one of the shift lines if the associated qualifier value from the one of the shift lines indicates that the one of the data units

from the one of the shift lines is not a part of the subset; if the associated qualifier value from the one of the pass

lines indicates that the one of the data units from the one of the pass lines is a part of the subset, select the one of the data units, the associated shift value and the associated qualifier value from the one of the pass lines for transmission based on the associated shift value

from the one of the pass lines; and if the associated qualifier value from the one of the shift

lines indicates that the one of the data units from the one of the shift lines is a part of the subset, select the one of the data units, the associated shift value and the associated qualifier value from the one of the shift lines for transmission based on the associated shift value from the one of the shift lines.

32. The circuit of claim 30, wherein the barrel compactor inserts a zero in a location between one or more of the data units of the subset as organized in the different position by reducing the shift values of all of the data units to either the right or the left of the location by one.

33. The circuit of claim 32, wherein the barrel compactor generates the shift value for each of the data units of the subset based on the qualifier values of the plurality of data units.

34. The circuit of claim 33, wherein the barrel compactor generates the shift value for each of the data units of the subset based on the qualifier values of the plurality of data units by:

using the qualifier values to identify the data units that are a part of the subset;

calculating a first number of the data units that are between one side of the input dataset and a closest one of the data units of the subset to the one side; and

20

for each gap between one of the data units of the subset and a next of the data units of the subset, calculating a gap size that is equal to a number of the data units within the gap.

35. The circuit of claim 34, wherein the barrel compactor determines the shift value of each of the data units of the subset by summing the first number and the gap size of each of the gaps between the data unit and the one side of the input dataset.

36. The circuit of claim 35, wherein each of the data units is selected from the group consisting of a bit, a byte or a word.

37. The circuit of claim 36, wherein, for each of the rows of the array, each of the shift values indicate whether a shift is necessary for the row.

38. A method of extracting a subset of data from a plurality of data units that together form an input dataset, the method comprising:

receiving the input dataset with a barrel compactor comprising a plurality of logic cells arranged in an array, wherein the array comprises a plurality of rows and a column for each of the plurality of data units of the input dataset, wherein the logic cells of each of the columns are coupled together in series by a plurality of data pass lines; and

shifting one or more of the data units of the subset with the barrel compactor using the data pass lines such that the subset is in a different position within the input dataset.

39. The method of claim 38, wherein when in the different position within the input dataset, all of the data units of the subset are adjacent to each other.

40. The method of claim 39, wherein when in the different position within the input dataset, a rightmost data unit of the subset is in a rightmost position of the input dataset or a leftmost data unit of the subset is in a leftmost position of the input dataset.

41. The method of claim 40, wherein for one or more of the rows of one or more of the columns, each of the logic cells of the one or more rows of the one or more columns is coupled with the logic cell of the next row of a different one of the columns via a data shift line.

42. The method of claim 41, wherein the different one of the columns is a predetermined number of columns away from the column including the logic cell of the one or more rows of the one or more columns.

43. The method of claim 42, wherein the predetermined number of columns away is the same for all of the logic cells in the same one of the rows.

44. The method of claim 43, wherein the barrel compactor receives the input dataset by inputting a different one of the data units with each of the columns such that the input dataset is received by the array in parallel, and further wherein each of the shift values is transmitted through the array by the logic cells along with the associated one of the data units.

45. The method of claim 44, further comprising, for each of the logic cells, upon receiving one of the data units and the associated shift value from either one of the shift lines or one of the pass lines during a cycle:

transmitting with the logic cell the data unit and the associated shift value down one of the pass lines to the next logic cell of the column if the shift value does not indicate a shift is necessary by the row that the logic cell is a part of; and

transmitting with the logic cell the data unit and the associated shift value to the logic cell of the next row

21

of the different one of the columns via the data shift line if the shift value indicates that a shift is necessary by the row that the logic cell is a part of.

46. The method of claim 45, wherein each of the data units of the input dataset have a qualifier value that indicates if the data unit is a part of the subset.

47. The method of claim 46, wherein each of the qualifier values is transmitted by the logic cells through the array along with the associated one of the data units.

48. The method of claim 47, further comprising, with each of the logic cells, upon receiving both one of the data units and the associated shift value from one of the shift lines and one of the data units and the associated shift value from one of the pass lines during the same cycle:

discarding with the logic cell the one of the data units and the associated shift value from the one of the pass lines; and

selecting with the logic cell the one of the data units and the associated shift value from the one of the shift lines for transmission based on the associated shift value.

49. The method of claim 47, further comprising, for each of the logic cells, upon receiving both one of the data units, the associated shift value and the associated qualifier value from one of the shift lines and one of the data units, the associated shift value and the associated qualifier value from one of the pass lines during the same cycle:

discarding with the logic cell the one of the data units, the associated shift value and the associated qualifier value from the one of the pass lines if the associated qualifier value from the one of the pass lines indicates that the one of the data units from the one of the pass lines is not a part of the subset;

discarding with the logic cell the one of the data units, the associated shift value and the associated qualifier value from the one of the shift lines if the associated qualifier value from the one of the shift lines indicates that the one of the data units from the one of the shift lines is not a part of the subset;

if the associated qualifier value from the one of the pass lines indicates that the one of the data units from the one of the pass lines is a part of the subset, selecting with the logic cell the one of the data units, the associated shift value and the associated qualifier value from the one of the pass lines for transmission based on the associated shift value from the one of the pass lines; and

if the associated qualifier value from the one of the shift lines indicates that the one of the data units from the one of the shift lines is a part of the subset, selecting with the logic cell the one of the data units, the associated shift value and the associated qualifier value from the one of the shift lines for transmission based on the associated shift value from the one of the shift lines.

50. The method of claim 48, further comprising inserting with the barrel compactor a zero in a location between one or more of the data units of the subset as organized in the different position by reducing the shift values of all of the data units to either the right or the left of the location by one.

51. The method of claim 50, wherein each of the logic cells comprise a multiplexor.

52. The method of claim 51, further comprising generating the shift value for each of the data units of the subset with the barrel compactor based on the qualifier values of the plurality of data units.

22

53. The method of claim 52, wherein the barrel compactor generates the shift value for each of the data units of the subset based on the qualifier values of the plurality of data units by:

using the qualifier values to identify the data units that are a part of the subset;

calculating a first number of the data units that are between one side of the input dataset and a closest one of the data units of the subset to the one side; and

for each gap between one of the data units of the subset and a next of the data units of the subset, calculating a gap size that is equal to a number of the data units within the gap.

54. The method of claim 53, wherein the barrel compactor determines the shift value of each of the data units of the subset by summing the first number and the gap size of each of the gaps between the data unit and the one side of the input dataset.

55. The method of claim 54, wherein each of the data units is selected from the group consisting of a bit, a byte or a word.

56. The method of claim 55, wherein, for each of the rows of the array, each of the shift values indicate whether a shift is necessary for the row.

57. A barrel compactor system for extracting a subset of data from a plurality of data units that together form an input dataset, the system comprising:

a data unit shift generator that generates a shift value for one or more of the data units within the subset; and

a barrel compactor comprising an array of a plurality of logic cells that are each associated with a logical function, wherein the barrel compactor receives the input dataset, performs the logical function of one or more of the logic cells on pairs of the data units of the input dataset based on qualifier values of the pairs of the data units.

58. An electrical circuit forming a barrel compactor for extracting a subset of data from a plurality of data units that together form an input dataset, the barrel compactor comprising an array of a plurality of logic cells that are each associated with a separate logical function, wherein one or more of the logic cells comprise a multiplexor, wherein the barrel compactor:

receives the input dataset including the subset, wherein each of the data units of the subset have an independent shift value that indicates a number of positions within the input dataset to shift the associated data unit; and performs the separate logical function of one or more of the logic cells on pairs of the data units of the input dataset; and

shifts one or more of the data units of the subset based on the independent shift values such that the subset is output in a different position within the input dataset.

59. A method of extracting a subset of data from a plurality of data units that together form an input dataset, the method comprising:

receiving the input dataset including the subset with a barrel compactor comprising an array of a plurality of logic cells that are each associated with a separate logical function, wherein each of the data units of the subset have an independent shift value that indicates a number of positions within the input dataset to shift the associated data unit;

performing the separate logical function of one or more of the logic cells on pairs of the data units of the input dataset with the one or more of the logic cells of the barrel compactor; and

shifting one or more of the data units of the subset with the barrel compactor based on the independent shift values such that the subset is output in a different position within the input dataset.

* * * * *