



US 20040238660A1

(19) **United States**

(12) **Patent Application Publication**

**Fan et al.**

(10) **Pub. No.: US 2004/0238660 A1**

(43) **Pub. Date: Dec. 2, 2004**

(54) **EXTERNAL SUPPLY SYSTEM**

(52) **U.S. Cl.** ..... **239/310; 239/289; 239/315; 4/623; 222/192; 222/383.1**

(76) Inventors: **Huan-Chang Fan, Taichung (TW); Tzu-Chieh Chan, Taichung (TW)**

Correspondence Address:  
**Huan-Chang Fan**  
**58, MA YUAN WEST ST.**  
**TAICHUNG (TW)**

(57) **ABSTRACT**


(21) Appl. No.: **10/452,595**


(22) Filed: **May 29, 2003**

**Publication Classification**

(51) **Int. Cl.<sup>7</sup>** ..... **A47K 5/12; E03C 1/05**

An external supply system includes a sensing device to provide flush water automatically, and a supply device to provide cleaning liquid. The supply device is connected to the sensing device to provide the flush water and the cleaning liquid. Thus, the supply device co-operates with the sensing device to provide the cleaning agent and the flush water synchronously, thereby facilitating the user washing and cleaning the object.

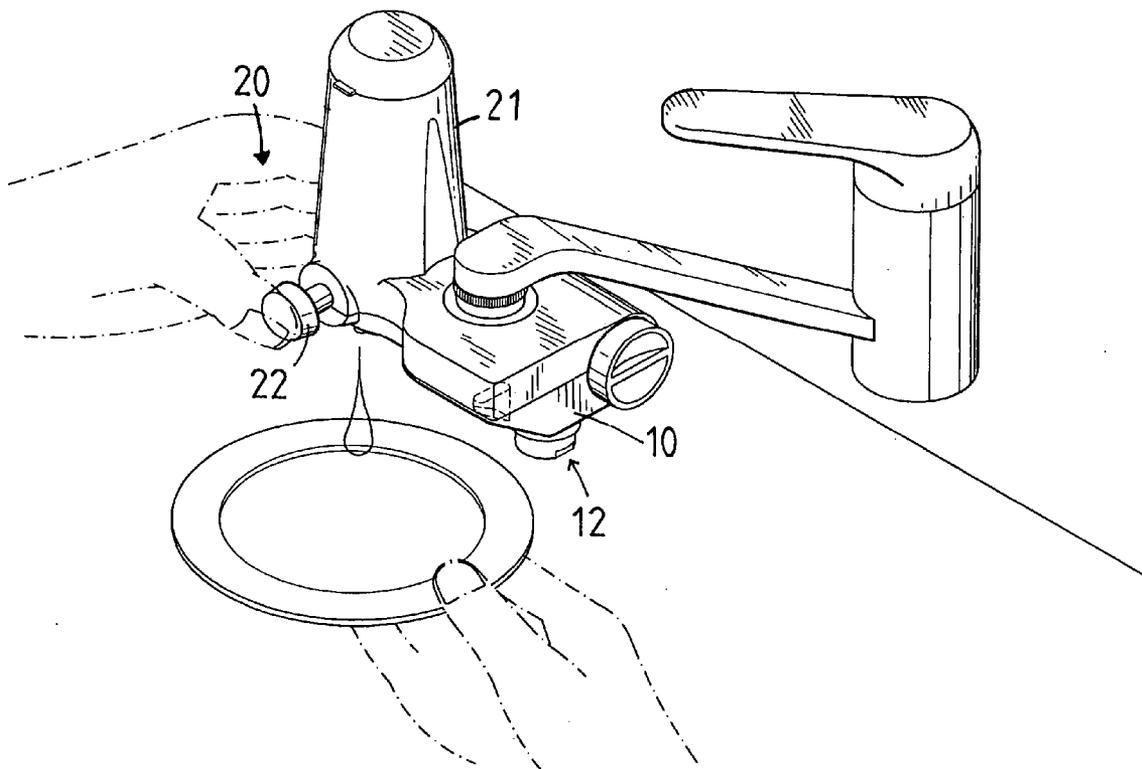

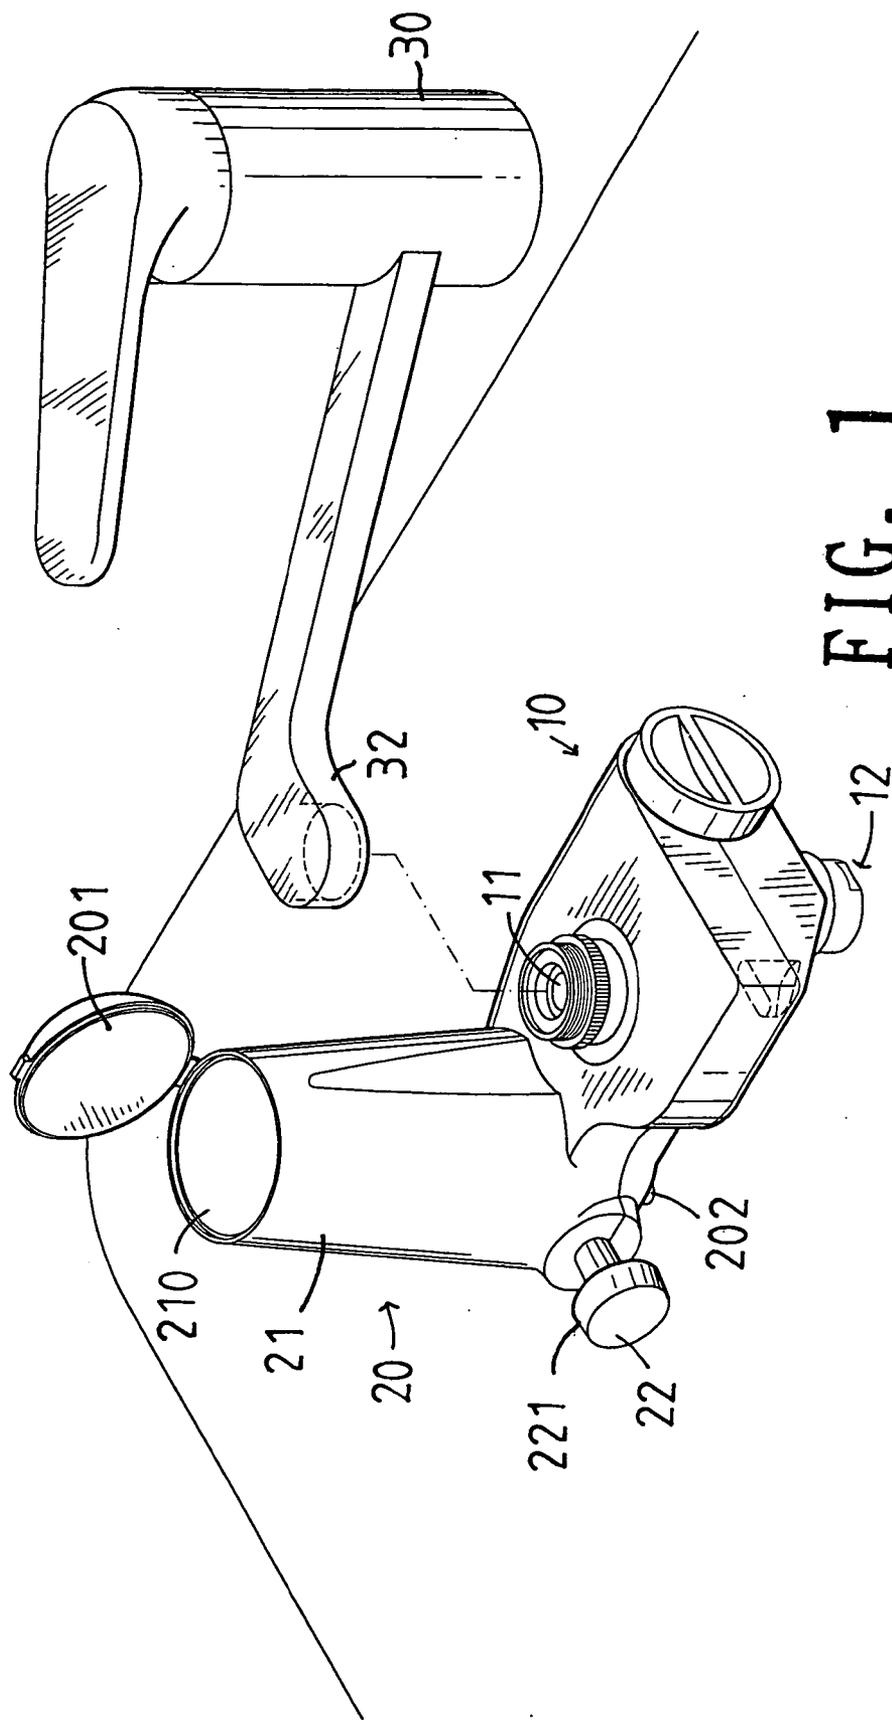

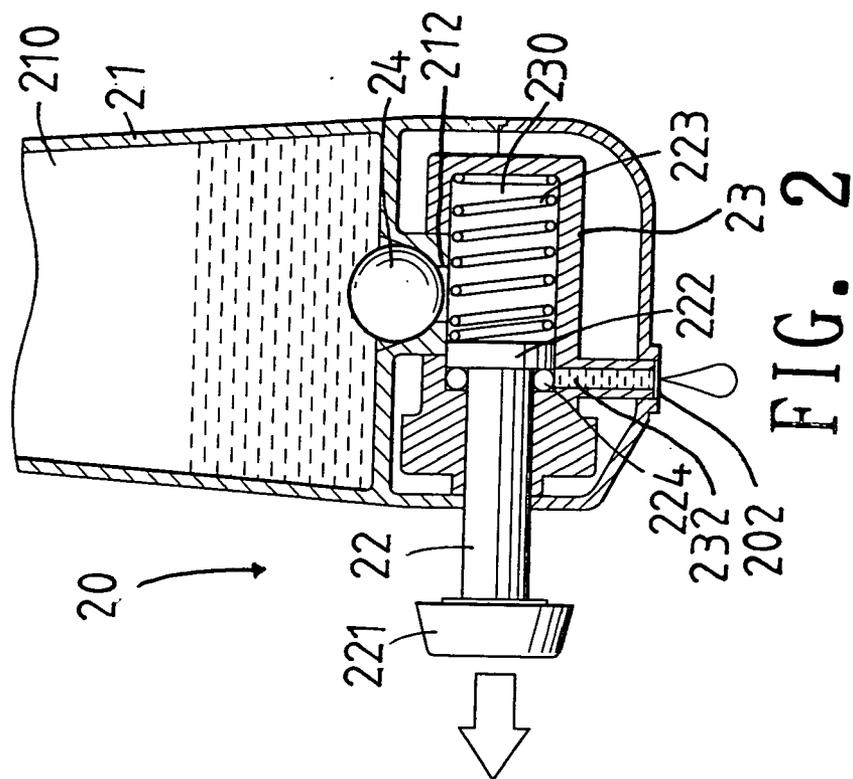


FIG. 2

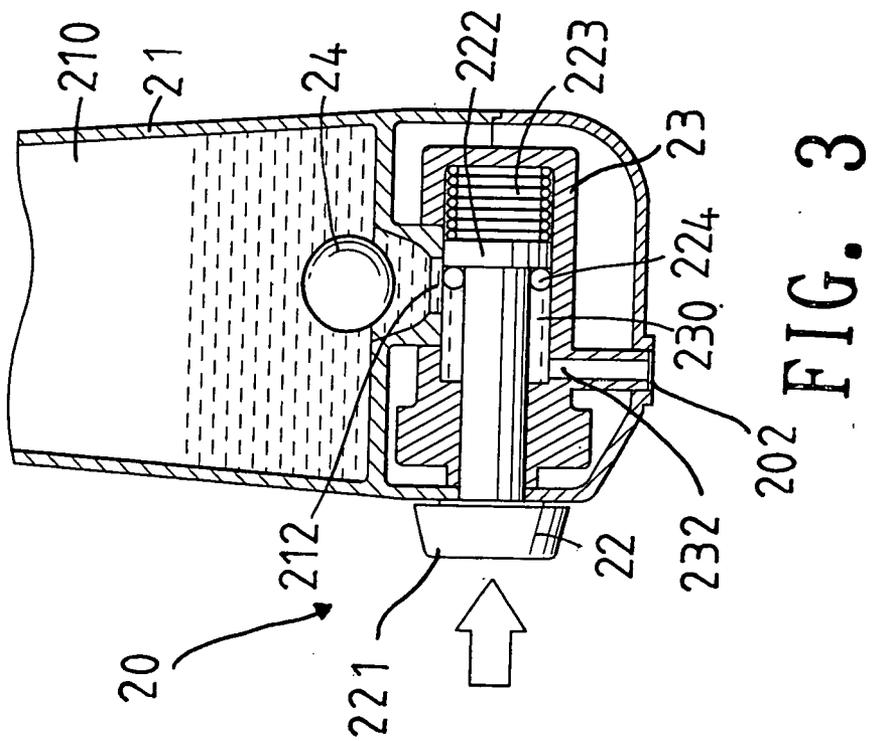


FIG. 3

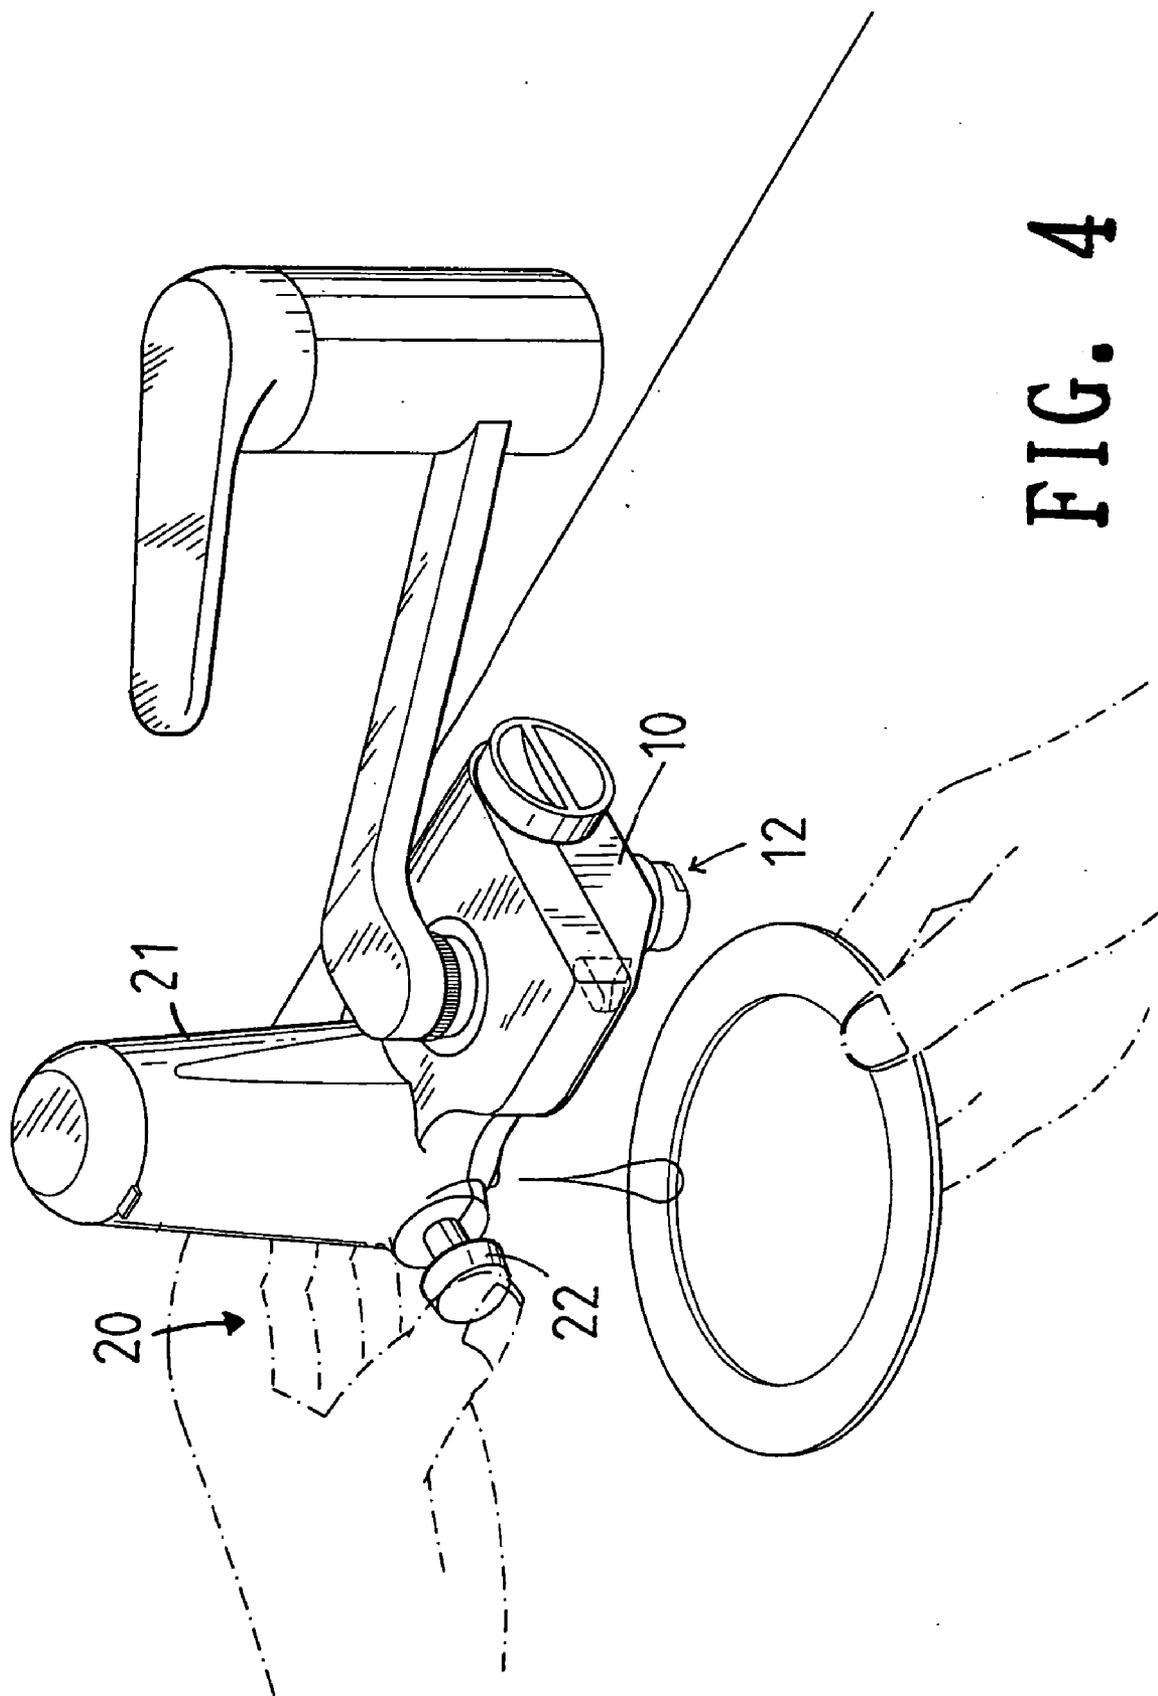


FIG. 4

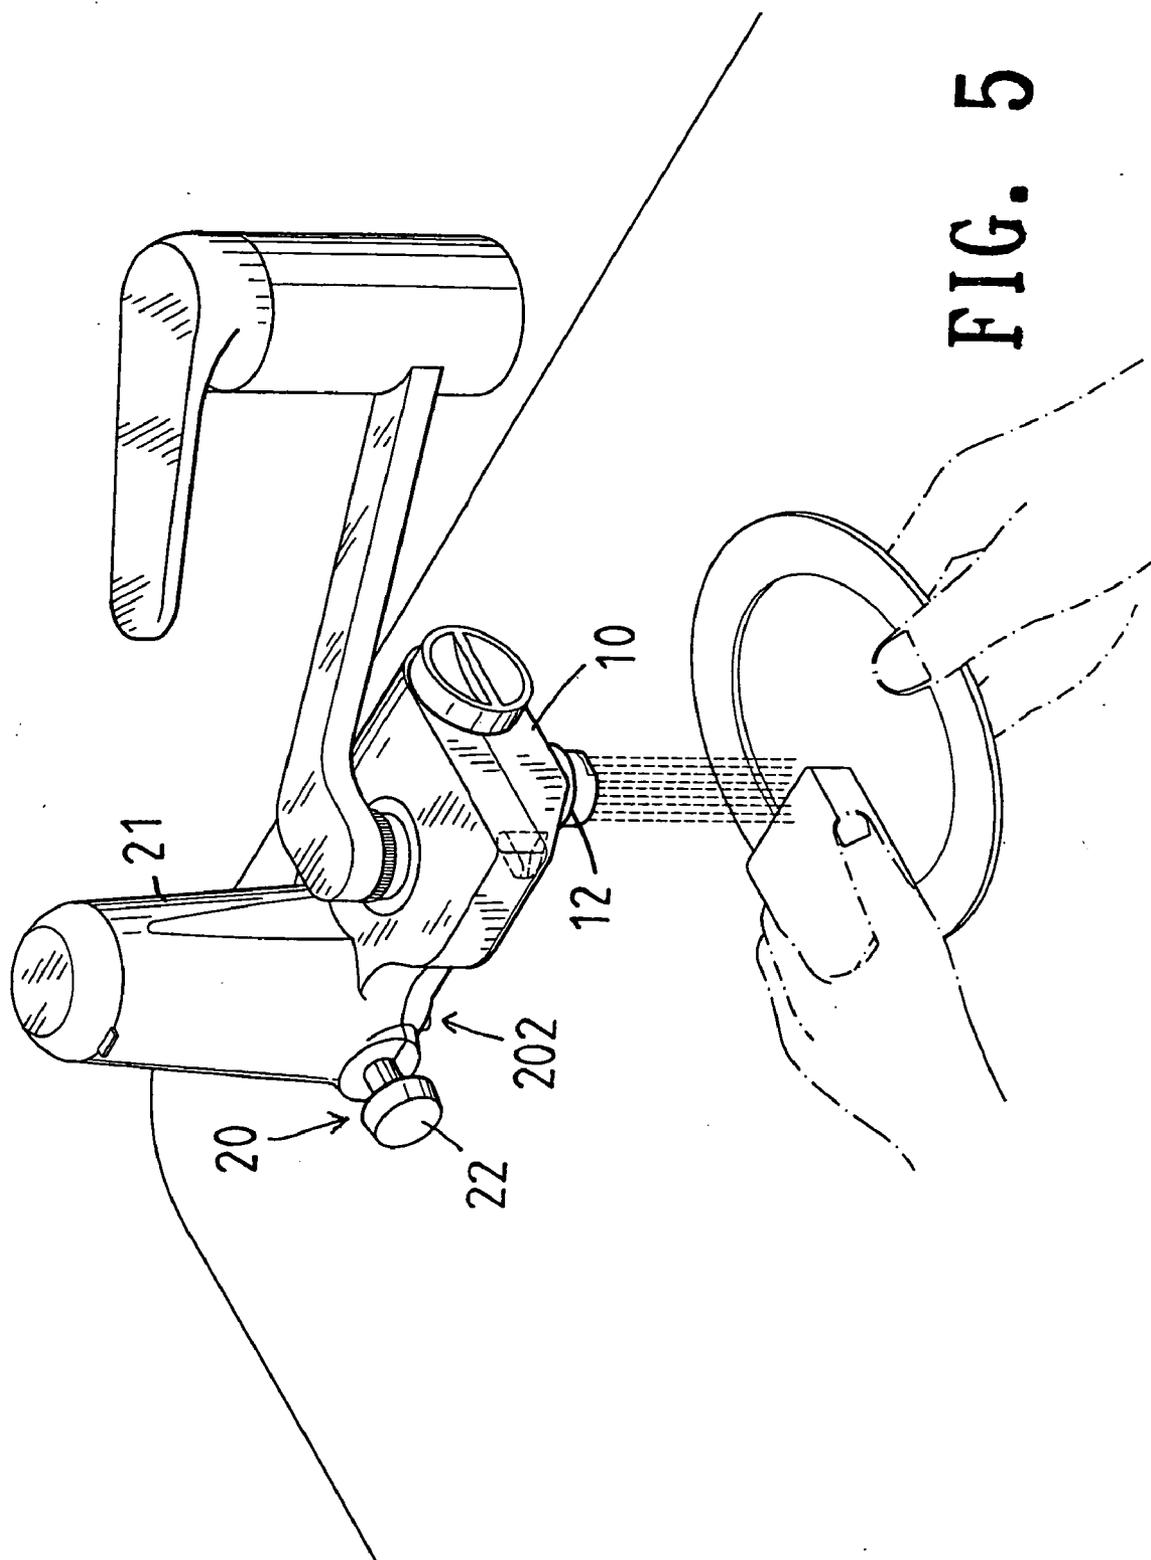
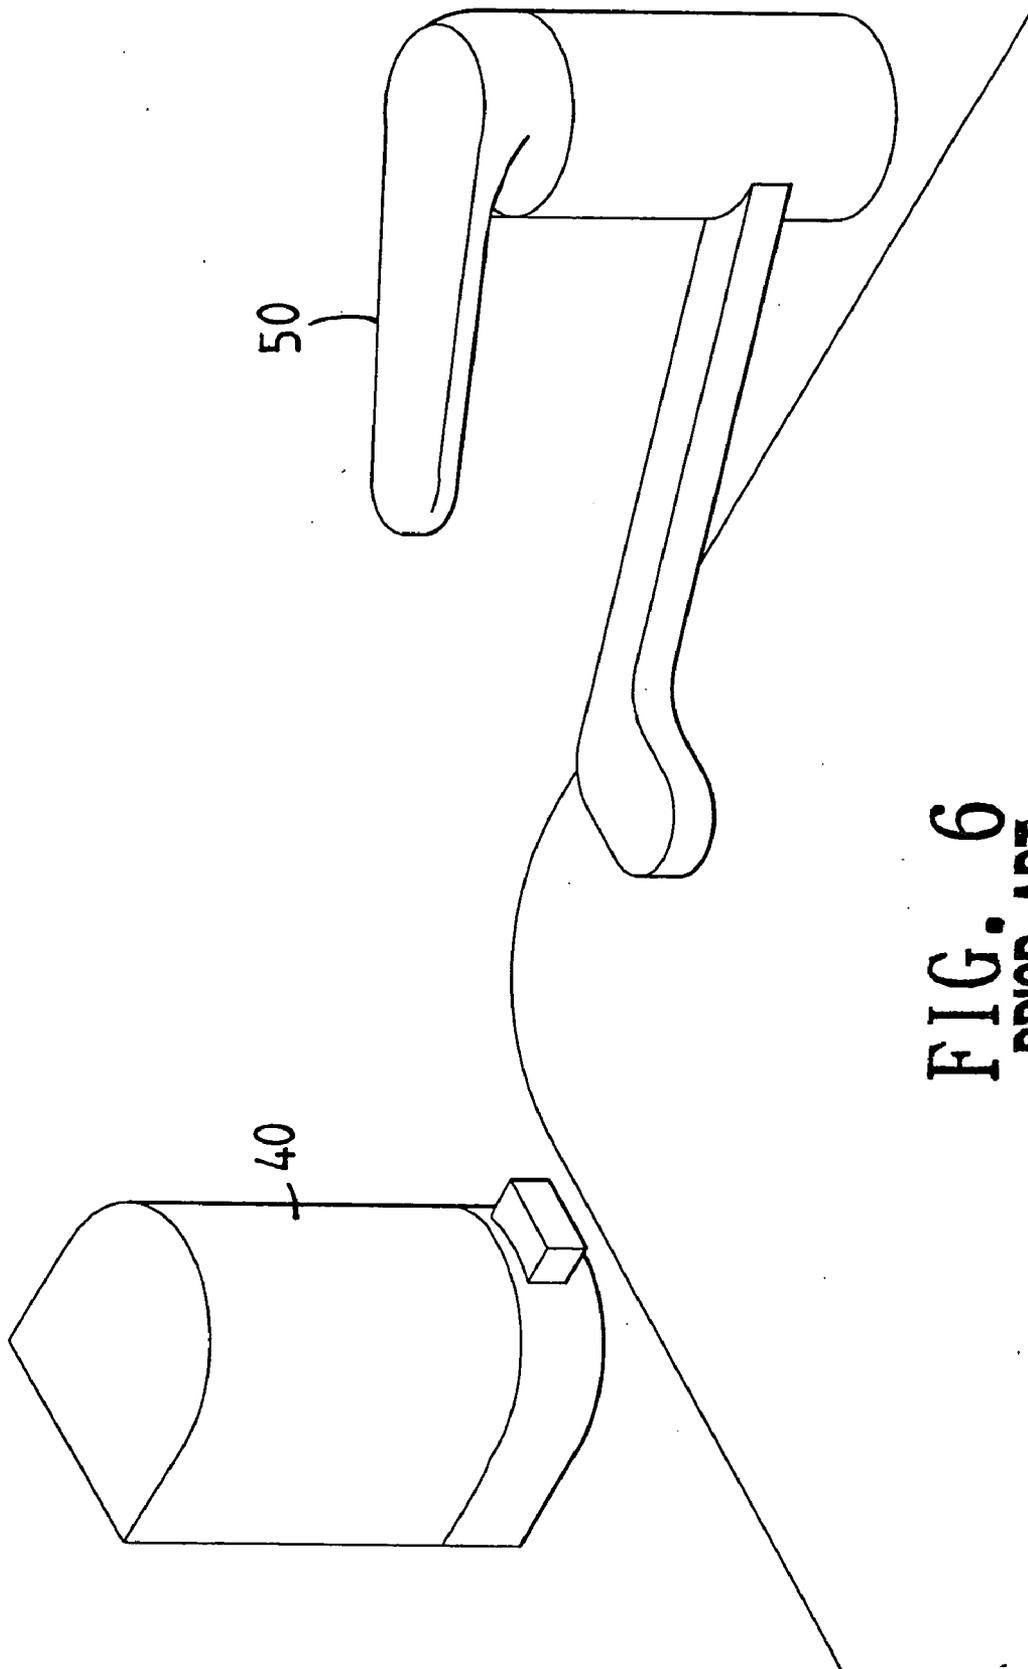


FIG. 5



**FIG. 6**  
**PRIOR ART**

## EXTERNAL SUPPLY SYSTEM

### BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to an external supply system, and more particularly to an external supply system, wherein the supply device co-operates with the sensing device to provide the cleaning agent and the flush water synchronously, thereby facilitating the user washing and cleaning the object.

[0003] 2. Description of the Related Art

[0004] A conventional supply device **40** in accordance with the prior art shown in **FIG. 6** contains liquid, such as the cleaning agent or the like therein. In arrangement, the supply device **40** is spaced away from the faucet **50**, so that the user has to take the cleaning agent from the supply device **40** and then clean his hands by water released from the faucet **50** that is located far away from the supply device **40**, thereby causing inconvenience to the user.

### SUMMARY OF THE INVENTION

[0005] The primary objective of the present invention is to provide an external supply system comprising a supply device for providing the cleaning agent, and a sensing device for providing the flush water automatically.

[0006] Another objective of the present invention is to provide an external supply system, wherein the supply device is connected to the sensing device, so that the water flowing outward from the water outlet of the sensing device can synchronously co-operate with the cleaning agent flowing outward from the supply device to wash and clean the object.

[0007] A further objective of the present invention is to provide an external supply system, wherein the supply device co-operates with the sensing device to provide the cleaning agent and the flush water synchronously, thereby facilitating the user washing and cleaning the object.

[0008] In accordance with the present invention, there is provided an external supply system, comprising a sensing device to provide flush water automatically, and a supply device to provide cleaning liquid, wherein:

[0009] the supply device is connected to the sensing device to provide the flush water and the cleaning liquid synchronously.

[0010] Further benefits and advantages of the present invention will become apparent after a careful reading of the detailed description with appropriate reference to the accompanying drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0011] **FIG. 1** is a perspective view of an external supply system in accordance with the preferred embodiment of the present invention;

[0012] **FIG. 2** is a partially cut-away side plan cross-sectional view of the external supply system as shown in **FIG. 1**;

[0013] **FIG. 3** is a schematic operational view of the external supply system as shown in **FIG. 2** in use;

[0014] **FIG. 4** is a schematic operational view of the external supply system as shown in **FIG. 1** in use;

[0015] **FIG. 5** is a schematic operational view of the external supply system as shown in **FIG. 1** in use; and

[0016] **FIG. 6** is a perspective view of a conventional supply device in accordance with the prior art.

### DETAILED DESCRIPTION OF THE INVENTION

[0017] Referring to the drawings and initially to **FIGS. 1-3**, an external supply system in accordance with the preferred embodiment of the present invention comprises a sensing device **10**, and a supply device **20**.

[0018] The sensing device **10** has a first side provided with a water inlet **11** and a second side provided with a water outlet **12**. The water inlet **11** of the sensing device **10** is locked on an outlet **32** of a faucet **30**.

[0019] The supply device **20** is connected to the sensing device **10**. The supply device **20** includes a body **21**, a press member **22**, an O-shaped sealing member **224**, an elastic member **223**, and a stop ball **24**. The body **21** of the supply device **20** is substantially cylindrical shaped. The body **21** of the supply device **20** has an inside formed with a receiving chamber **210** containing liquid, such as the cleaning agent or the like therein. The body **21** of the supply device **20** has a bottom formed with a drop hole **202** and has a top provided with a transparent cover **201** to facilitate the user replenishing the cleaning agent. The receiving chamber **210** of the body **21** of the supply device **20** has a bottom formed with a connecting hole **212**.

[0020] The body **21** of the supply device **20** has a lower portion provided with a cylinder **23** having an inside formed with an operation space **230**. The operation space **230** of the cylinder **23** has a first side communicating with the receiving chamber **210** through the connecting hole **212** of the receiving chamber **210** and a second side formed with a passage **232** communicating with the drop hole **202** of the body **21**.

[0021] The press member **22** of the supply device **20** is movably mounted on the body **21** and has a first end **221** protruded outward from the body **21** and a second end **222** slidably mounted in the operation space **230** of the cylinder **23**. The second end **222** of the press member **22** has a diameter flush with that of the operation space **230** of the cylinder **23**.

[0022] The sealing member **224** of the supply device **20** is mounted on the press member **22** to move therewith and is rested on a first side of the second end **222** of the press member **22**.

[0023] The elastic member **223** of the supply device **20** is mounted in the operation space **230** of the cylinder **23** and is rested on the press member **22** to press the press member **22** to move the sealing member **224**.

[0024] Thus, the sealing member **224** is driven by the press member **22** to move between a first position as shown in **FIG. 2** where the sealing member **224** closes and seals the passage **232**, thereby disconnecting the operation space **230** of the cylinder **23** with the drop hole **202** of the body **21**, and a second position as shown in **FIG. 3** where the sealing member **224** is detached from the passage **232**, thereby

connecting the operation space 230 of the cylinder 23 with the drop hole 202 of the body 21.

[0025] The elastic member 223 of the supply device 20 has a first end rested on a second side of the second end 222 of the press member 22 and a second end rested on a side of the operation space 230 of the cylinder 23.

[0026] The stop ball 24 of the supply device 20 is movably mounted in the connecting hole 212 of the receiving chamber 210 of the body 21.

[0027] In operation, the press member 22 is initially pressed by the elastic member 223 to move outward, so that the sealing member 224 is driven by the press member 22 to move to the first position as shown in FIG. 2 where the sealing member 224 closes and seals the passage 232, thereby disconnecting the operation space 230 of the cylinder 23 with the drop hole 202 of the body 21, thereby preventing the cleaning agent from flowing outward through the passage 232 and the drop hole 202. At the same time, the stop ball 24 seals the connecting hole 212 of the receiving chamber 210 of the body 21, so that the cleaning agent contained in the receiving chamber 210 of the body 21 will not enter the operation space 230 of the cylinder 23.

[0028] On the contrary, when the press member 22 is pressed by the user to move inward, the sealing member 224 is driven by the press member 22 to move to the second position as shown in FIG. 3 where the sealing member 224 is detached from the passage 232, thereby connecting the operation space 230 of the cylinder 23 with the drop hole 202 of the body 21.

[0029] At the same time, the operation space 230 of the cylinder 23 produces a pressure to push the stop ball 24 upward during movement of the press member 22, thereby detaching the stop ball 24 from the connecting hole 212 of the receiving chamber 210 of the body 21 and thereby connecting the receiving chamber 210 of the body 21 with the operation space 230 of the cylinder 23, so that the cleaning agent contained in the receiving chamber 210 of the body 21 can enter the operation space 230 of the cylinder 23 through the connecting hole 212.

[0030] After the press force applied on the press member 22 is removed, the press member 22 is pressed by the restoring force of the elastic member 223 to move outward, so that the sealing member 224 and the cleaning agent are pressed by the second end 222 of the press member 22 to move to the first position as shown in FIG. 2, thereby squeezing the cleaning agent outward through the passage 232 and the drop hole 202 as shown in FIGS. 2 and 4.

[0031] When the sensing device 10 detects existence of an object, the sensing device 10 sends a signal to an electromagnetic valve (not shown) which controls the water to flow outward from the water outlet 12 of the sensing device 10 as shown in FIG. 5, so as to co-operate with the cleaning agent flowing outward from the supply device 20 to wash and clean the object.

[0032] Although the invention has been explained in relation to its preferred embodiment(s) as mentioned above, it is to be understood that many other possible modifications and variations can be made without departing from the scope of the present invention. It is, therefore, contemplated that the appended claim or claims will cover such modifications and variations that fall within the true scope of the invention.

1-12. (Cancelled)

13. An external supply system, comprising a sensing device to provide flush water automatically, and a supply device to provide cleaning liquid, wherein

the supply device is connected to the sensing device to provide the flush water and the cleaning liquid synchronously;

the supply device includes a body having an inside formed with a receiving chamber containing the cleaning liquid and having a bottom formed with a drop hole, and a press member movably mounted on the body to connect or disconnect the receiving chamber with the drop hole;

the body of the supply device has a lower portion provided with a cylinder having an inside formed with an operation space, the operation space of the second side communicating with the drop hole of the body, and the press member of the supply device has a first end protruded outward from the body and a second end slidably mounted in the operation space of the cylinder;

the first side of the operation space of the cylinder communicates with the receiving chamber through the connecting hole of the receiving chamber;

the second side of the operation space of the cylinder is formed with a passage communicating with the drop hole of the body;

the second end of the press member has a diameter with that of the operation space of the cylinder;

the supply device further includes a sealing member mounted on the press member to move therewith and rested on a first side of the second end of the press member; so that the sealing member is driven by the press member to move between a first position where the sealing member closes and seals the drop hole of the body, thereby disconnecting the operation space of the cylinder with the drop hole of the body, and a second position where the sealing member is detached from the drop body, thereby disconnecting the operation space of the cylinder with the drop hole of the body;

the supply device further includes an elastic member mounted in the operation space of the cylinder and rested on the press member to press the press member to move the sealing member;

the elastic member of the supply device has a first end rested on a second side of the second end of the press member and a second end rested on a side of the operation space of the cylinder;

the receiving chamber of the body of the supply device has a bottom formed with a connecting hole communicating with the operation space of the cylinder, and the supply device further includes a stop ball movably mounted in the connecting hole of the receiving chamber of the body;

the body of the supply device has a top provided with a transparent cover to facilitate the user replenishing the cleaning agent; and

the sensing device has a first side provided with a water inlet and a second side provided with a water outlet.