

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 June 2006 (22.06.2006)

PCT

(10) International Publication Number
WO 2006/065457 A1

(51) International Patent Classification:
B65D 5/06 (2006.01)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:
PCT/US2005/042136

(22) International Filing Date:
10 November 2005 (10.11.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/011,689 14 December 2004 (14.12.2004) US
11/163,657 26 October 2005 (26.10.2005) US

(71) Applicant (for all designated States except US): **TETRA
LAVAL HOLDINGS & FINANCE, S.A. [CH/CH]**; Avenue General - Guisan 70, CH-1009 Pully (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KORTSMIT, Peter** [NL/US]; 445 Hidden Oaks Court, Mahtomedi, Minnesota 55115 (US). **LJUNGSTROM, Tommy** [SE/SE]; Ribbgrand 1, S-24333 Hoor (SE).

(74) Agents: **WEINSTEIN, Mitchell, J.** et al.; TETRA PAK, U.S. Intellectual Property Department, 101 Corporate Woods Parkway, Vernon Hills, Illinois 60061 (US).



(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CARTON WITH FOLDED-IN GUSSET TIPS

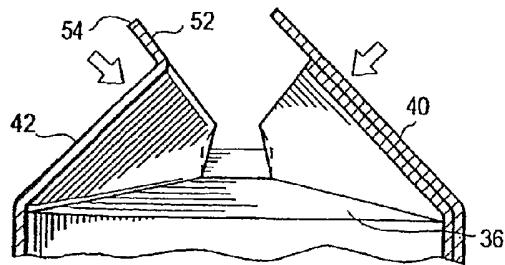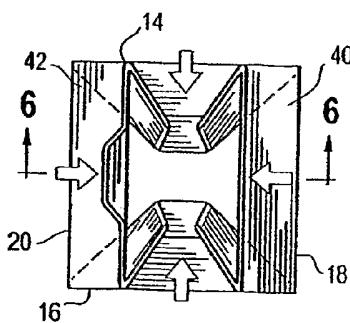

(57) Abstract: A package (10) having a bottom wall with in-folded gusset tips includes a plurality of upstanding side walls (14, 16, 18, 20), each side wall contiguous or sealed to its adjacent side walls, a sealed top (12) and a sealed bottom wall (32). The sealed bottom wall (32) is formed from opposing leading (40) and trailing panels (42), intermediate, opposing gusset panels and a sixth panel (52). The gusset panels are folded inwardly toward one another to form triangular panels (36, 38). The triangular panels (36, 38) are disposed interior of the leading (40) and trailing panels (42). The ends of the gusset panels (26, 28) define triangular tips that are folded away from one another. The sixth panel (52) has a length that is less than or equal to the distance between the gusset tips.

WO 2006/065457 A1

TITLE OF THE INVENTION
CARTON WITH FOLDED-IN GUSSET TIPS

CROSS-REFERENCE TO RELATED APPLICATION DATA

[0001] This application is a continuation-in-part of U.S. Patent Application Serial No. 11/011,689, filed December 14, 2004.

BACKGROUND OF THE INVENTION

[0002] The present invention pertains to a carton having a folded and sealed bottom wall. More particularly, the present invention pertains to a carton having a bottom wall having folded-in gusset tips.

[0003] One common form of container for milk, juice and the like is the gable top carton. Recently, packaging technology has made enormous strides vis-à-vis these gable top cartons, as well as other types of packages. At present, technology permits packaging perishable food items for non-refrigerated extended shelf lives. These packages provide the ability to bring these food items into parts of the world that have limited transportation, distribution and storage infrastructure.

[0004] In view of this, efforts have been made to increase the high standards of cleanliness in the formed, filled and sealed containers to provide the highest quality product and to provide the greatest product shelf life. And, in conjunction with this, the demands on the overall packaging processes have been maintained vis-à-vis machine operating speeds. Such machines must form, fill and seal packages, in a sterile environment, at high operating speeds.

[0005] In order to maintain the integrity of the package after it is filled and sealed, advanced technologies have been applied to the carton materials, as well as the processing operations. Many such packaging materials are formed from paperboard or fiberboard-based materials formed in a composite structure. Typically, one or more layers, such as polymeric coatings, foil coatings and the like, are applied to the paperboard or fiberboard substrate to reduce or eliminate the gas and liquid permeability of the substrate material.

[0006] It has been found that one avenue for providing an environment that reduces the shelf life is wicking of the food product into the package material. Wicking occurs at the edges of the material that are exposed to the food product. Typically, wicking occurs at the raw or exposed edges of the bottom wall panels as

they are folded to form the bottom wall. To this end, it has been found desirable to reduce the amount or extent of exposed edges, and in particular at the bottom wall. It has also been found that the foil at the tips of the gussets (the in-folded triangular panels) can crack thus exposing the paperboard substrate material.

[0007] One package that has affected a reduction in wicking is disclosed in U.S. Patent No. 6,328,204 to Stacy-Ryan and an apparatus to form such an over-folded bottom is disclosed in U.S. Patent No. 6,385,950 to Anderson, both of which patents are commonly assigned with the present application and are incorporated herein by reference. While this over-folded bottom served to "cover" the exposed edges from the bottom front or rear panel, the increase in material required was undesirable.

[0008] Accordingly, there exists a need for a carton bottom folding configuration that reduces or eliminates the raw (exposed) paper edges within the carton product storage region. Desirably, such a carton uses, for the most part, a traditional creasing, folding and sealing configuration. Most desirably, such a carton can be formed on known form, fill and seal packaging machines (with minimal modification) and using less packaging material than known over-folded bottom arrangements.

BRIEF SUMMARY OF THE INVENTION

[0009] A package having a bottom wall with in-folded gusset tips includes a plurality of, preferably four, upstanding side walls, each side wall contiguous or sealed to its adjacent side walls. The package has a sealed top, such as the familiar gable top, and a sealed bottom wall. The sealed bottom wall is formed from opposing leading and trailing panels and intermediate, opposing gusset panels. The gusset panels are folded inwardly toward one another to form triangular panels. The triangular panels are disposed interior of the leading and trailing panels. The ends of the gusset panels define triangular tips that are folded away from one another.

[0010] In a present package, the triangular tips are disposed between the triangular gusset panels and the leading and trailing panels, and the leading panel is sealed over the trailing panel. The triangular tips are spaced a predetermined distance from one another.

[0011] A sixth panel is contiguous with the trailing panel. The sixth panel is folded rearwardly so as to lie between the leading and trailing panels. The

sixth panel has a length that is less than the distance between the triangular panel tips. A blank for forming the package is also disclosed.

[0012] These and other features and advantages of the present invention will be apparent from the following detailed description, in conjunction with the appended claims.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0013] The benefits and advantages of the present invention will become more readily apparent to those of ordinary skill in the relevant art after reviewing the following detailed description and accompanying drawings, wherein:

[0014] FIG. 1 is a perspective view of an exemplary carton embodying the principles of the present invention;

[0015] FIG. 2 is a view of the bottom wall of the carton as viewed from the inside of the carton;

[0016] FIG. 3 is a view of the bottom of the carton as the gusset panels are being folded inward and as the gusset tip is urged outward as in-folding occurs;

[0017] FIG. 4 is a cross-sectional view taken along line 4--4 of FIG. 3;

[0018] FIG. 5 is a further view of the bottom of the carton, similar to FIG. 3, showing the gusset panels folded further inward (than FIG. 3) and as the gusset tip further urged or held outward as in-folding occurs;

[0019] FIG. 6 is a cross-sectional view taken along line 6--6 of FIG. 5;

[0020] FIG. 7 is a view of the carton bottom with the leading panel removed for clarity of illustration, showing the folded-in gusset tips and the tab panel;

[0021] FIG. 8 is a plan view of a blank for the carton;

[0022] FIG. 9 is an enlarged view of the tab panel; and

[0023] FIG. 10 is an enlarged view of the creases on the carton for forming the folded-in gusset tips.

DETAILED DESCRIPTION OF THE INVENTION

[0024] While the present invention is susceptible of embodiment in various forms, there is shown in the drawings and will hereinafter be described a presently preferred embodiment with the understanding that the present disclosure is to be considered an exemplification of the invention and is not intended to limit the invention to the specific embodiment illustrated.

[0025] It should be further understood that the title of this section of this specification, namely, "Detailed Description Of The Invention", relates to a requirement of the United States Patent Office, and does not imply, nor should be inferred to limit the subject matter disclosed herein.

[0026] An embodiment of the package 10 in accordance with the principles of the present invention is illustrated in FIG. 1. The package 10 can include an optional closure, such as a threaded cap or flip-type cap (not shown). The package 10 appears to be a conventional package having a gable top 12, first and second side walls 14, 16, a front wall 18, a rear wall 20, front and rear top panels 22, 24, top infolded or side gable panels 26, 28 and a top fin 30. The bottom wall 32, likewise appears as a conventional bottom wall. A longitudinal side seal wall 34 (or fifth panel, shown in blank form in FIG. 8) is formed adjacent one of the side walls 16 for sealing to, for example the front wall 18, to form the tubular carton form.

[0027] The bottom wall 32 is formed from in-folded side gusset panels 36, 38 and front and rear or leading and trailing panels 40, 42. As seen in FIG. 2, as viewed from the inside of the carton 10, the tips 44, 46 of the infolded triangular or gusset panels 36, 38 are folded over or folded in, so that they lie under the triangular panels. That is, the tips 44, 46 are folded over so that they lie between the triangular panels 36, 38 and the leading and trailing bottom panels 40, 42. As seen from the inside of the package 10, the gusset panels 36, 38 appear to have a truncated triangular shape, thus defining a folded over edge (indicated at 48, 50), rather than leaving a raw or uncoated edge portion within the inside (product storage region) of the carton 10. In this arrangement, when the bottom panels 36-42 are heated and sealed, the tips 44, 46 lie within a sealed region and as such are isolated from the product storage region (or wetted region if used for liquid food packaging) of the carton 10. Those skilled in the art will recognize that the polymer coating on the paperboard softens and melts during the sealing process thus fusing the panels (coatings) to one another.

[0028] A tab or sixth panel 52 is folded over so that the raw or uncoated edge of the trailing panel 42 is also outside of the product storage or wetted region. That is, the uncoated edge is "shifted" from the end of the trailing panel 42 to the end of the tab panel 52 and, because the tab panel is folded over, the uncoated edge (indicated at 54) is thus, like the gusset tips 44, 46, sealed between the triangular panels 36, 38 and the bottom panels 40, 42. In a present package, the sixth panel 52

has a width (as at w_{52}) and a length (as at l_{52}). This configuration results in less material (about 3 percent less than known configurations) which provides a material cost savings.

[0029] A blank 110 for the package 10 is shown in FIG. 8. The blank 110 has a plurality of panels that correspond to the front wall 18, the rear wall 20 and the side walls 14, 16. The panels 14-20 are partitioned from one another by a plurality of vertical score or crease lines 112. Those skilled in the art will recognize that the score or crease lines are those areas in the packaging material that facilitate folding the material along a predetermined, desired line. The lines are formed by, for example, embossing and the like. For purposes of the present disclosure, the terms score line and crease line are to be considered interchangeable.

[0030] A plurality of corresponding bottom panels 32-38 are partitioned from the corresponding or respective front, rear and side panels 14-20 by a lower horizontal score line 114. A plurality of lower diagonal score lines 116 further define the bottom gusset panels 36, 38 and are for folding purposes. The bottom or tab panel 52 (also referred to as the sixth panel) is separated from the trailing panel 42 by a score line 118.

[0031] In known carton blanks, the diagonal score lines extend fully from the horizontal score line separating the side panels from the bottom panels to the edge of the bottom panels (indicated at 120), and the score lines meet at the edge to form the triangular panels.

[0032] In the present blank 110, the diagonal score lines 116 (referred to herein as major diagonal score lines) terminate at a folding region 122 that includes a rectangular area 124 having smaller triangular areas 126 adjacent to the sides of the rectangular area 124. The areas 124, 126 are defined by a first horizontal score line 128 contiguous with a pair of spaced apart vertical score lines 130 (forming an upside-down U). The major diagonal score lines 116 terminate at the corners 132 of the U or at the respective junctures of the horizontal and vertical score lines 128, 130.

[0033] To accommodate the in-folding of the tips, 44, 46 each of the bottom gusset panels 36, 38 includes a pair of minor diagonal score lines 134 that extend from the edge 120 of the panel to the respective junctures (corners) 132 of the horizontal and vertical score lines 128, 130 with the major diagonal score lines 116.

[0034] FIGS. 3-6 illustrate the carton bottom 32 as it is being folded. The bottom side (gusset) panels 36, 38 are slightly infolded at the triangular portions

36a, 38a, of the panels 36, 38. In addition, the folding regions 122 are folded or pulled outwardly (see arrow A in FIG. 3) relative to the in-folding of the triangular portions 36a, 38a of the panels 36, 38. This forms the truncation of the gusset panels 36, 38 by folding the tips 44, 46 of the panels 36, 38.

[0035] FIG. 7 illustrates the bottom 32 (exterior) of the carton with portions of the leading and trailing bottom panels 40, 42 cut away to better view the in-folded gusset tips 44, 46 and the optimized sixth panel 52. In these views, it can be seen that the sixth panel 52 is folded into the folds of the 44, 46. To this end, the sixth panel 52 has a length l_{52} (at the base of the panel 52, at score line 118) that is slightly less than the distance d_{44-46} between the triangular tips of panels 44, 46 (see FIG. 7). In addition, the angle α formed by the folding of the tips 44, 46 (formed by or along crease lines 134) is less than or preferably about equal to the angle β formed by the edge 52a of panel 52. In this manner, the panel 52 lies wholly within a “footprint” that is defined by the folded tips 44, 46, and the leading and trailing bottom panels 40, 42. Accordingly, this configuration prevents an excessive number of “layers” of material. It has been found that this configuration provides the necessary area for proper sealing, while minimizing the amount of material needed.

[0036] Referring now to FIGS. 1 and 8, the top or gable portion 12 of the carton 10 is formed as in a traditional manner. The front panel 22 is partitioned from the front wall 18 by an upper horizontal score line 136. Likewise, side top panels 26, 28 are partitioned by the score line 136 from their respective side wall panels 14, 16. The rear wall panel 20 corresponds to top panel 24 which is likewise partitioned therefrom by the upper horizontal score line 136. The top fin 30 of the package 10 is formed by a plurality of fin panels, indicated generally at 138 in FIG. 8. The fin panels 138 are partitioned from their corresponding top panels by horizontal score lines. Those skilled in the art will recognize the configuration and folding/assembly of the top (gable) 12 and fin 30.

[0037] All patents referred to herein, are hereby incorporated herein by reference, whether or not specifically done so within the text of this disclosure.

[0038] In the present disclosure, the words “a” or “an” are to be taken to include both the singular and the plural. Conversely, any reference to plural items shall, where appropriate, include the singular.

[0039] From the foregoing it will be observed that numerous modifications and variations can be effectuated without departing from the true spirit

and scope of the novel concepts of the present invention. It is to be understood that no limitation with respect to the specific embodiments illustrated is intended or should be inferred. The disclosure is intended to cover by the appended claims all such modifications as fall within the scope of the claims.

CLAIMS

What is claimed is:

1. A package having a bottom wall with in-folded gusset tips, comprising:
 - a plurality of upstanding side walls, each side wall contiguous or sealed to its adjacent side walls;
 - a sealed top; and
 - a sealed bottom wall, the sealed bottom wall being formed from opposing leading and trailing panels, intermediate, opposing gusset panels, and a sixth panel contiguous with the trailing panel, the gusset panels being folded inwardly toward one another to form triangular panels, the triangular panels being disposed interior of the leading and trailing panels, ends of the gusset panels defining triangular tips folded away from one another, the sixth panel being folded rearwardly so as to lie between the leading and trailing panels and within the ends of the gusset panels,
wherein the triangular tips, when folded, are spaced a predetermined distance from one another and wherein the sixth panel has a length that is equal to or slightly less than the distance between the triangular tips and within a footprint defined by the triangular tips, and the leading and trailing bottom panels.
2. The package in accordance with claim 1 wherein the triangular tips are disposed between the triangular gusset panels and the leading and trailing panels.
3. The package in accordance with claim 1 wherein the leading panel is sealed over the trailing panel.
4. The package in accordance with claim 1 wherein the package has a gable-formed top.
5. The package in accordance with claim 1 wherein the triangular panels define an angle α as they overlie their respective gusset panels and wherein side edges of the sixth panel define an angle β as the sixth panel overlies the trailing panel, and wherein the angle α is less than or equal to the angle β .

6 A blank for a carton of the type having a plurality of upstanding side walls, each contiguous or sealed to its adjacent side wall and a sealed bottom wall with in-folded gusset tips, the blank comprising:

a rear wall panel, a front wall panel and opposing side wall panels, a vertical crease line partitioning each of the panels from adjacent panels;

a plurality of top panels adjacent to and contiguous with the front, rear and side wall panels, the top panels partitioned from their adjacent top panels by the vertical crease lines and separated from their respective side wall panels by a horizontal crease line;

a plurality of bottom wall panels adjacent to and contiguous with the front, rear and side wall panels, the bottom wall panels partitioned from their adjacent bottom wall panels by the vertical crease lines and separated from their respective side wall panels by a horizontal crease line, the bottom wall panels including a leading panel, a pair of opposing gusset panels, a trailing panel and a sixth panel contiguous with the trailing panel, the sixth panel having a length measured at a juncture with the trailing panel,

the gusset panels each having a major diagonal crease line terminating at a folding region, each folding region defined by a rectangular area having minor diagonal crease lines extending from the rectangular area to an edge of the gusset panel, the major diagonal crease lines terminating at the folding region spaced from an edge of the gusset panel,

wherein when the blank is folded and sealed to form the carton, the gusset panels are in-folded to form a pair of opposing triangular tip that are spaced a predetermined distance from one another and wherein the sixth panel length is equal to or slightly less than the distance between the triangular tips and within a footprint defined by the triangular tips, and the leading and trailing bottom panels.

7. The blank in accordance with claim 6 wherein the folding region rectangular area is defined by a crease line parallel to an edge of the gusset panel and spaced from the edge a predetermined distance, and a pair of spaced perpendicular crease lines.

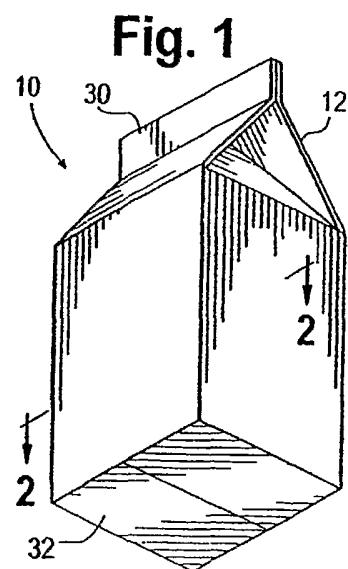


Fig. 1

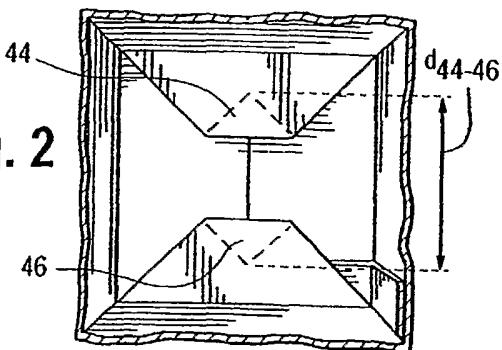


Fig. 2

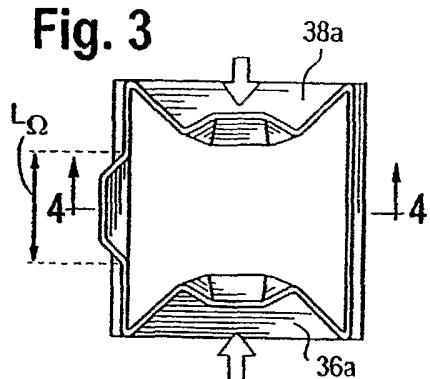


Fig. 3

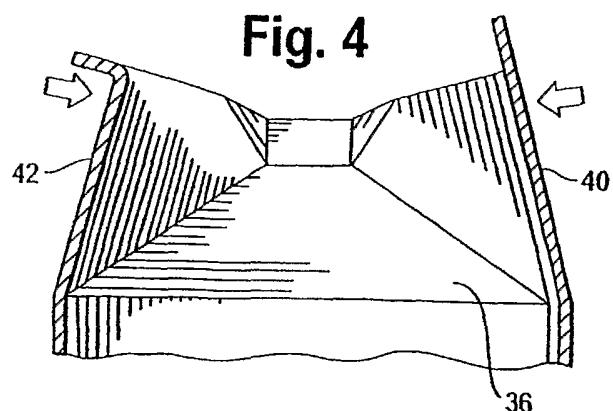


Fig. 4

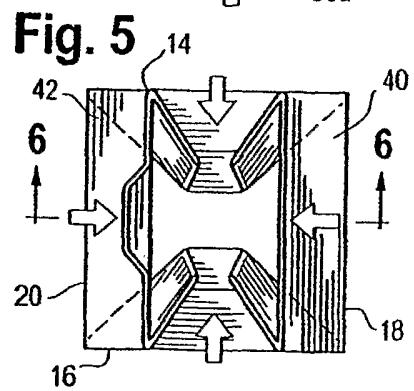


Fig. 5

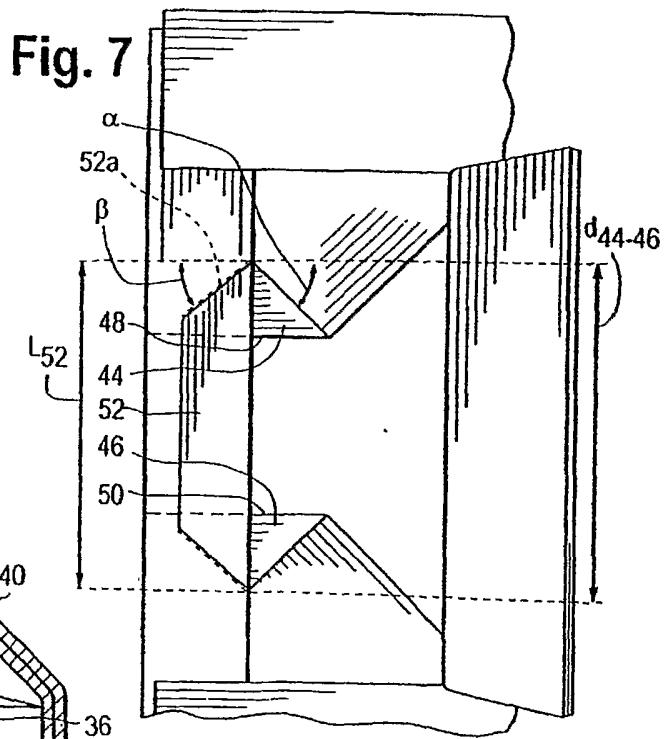


Fig. 7

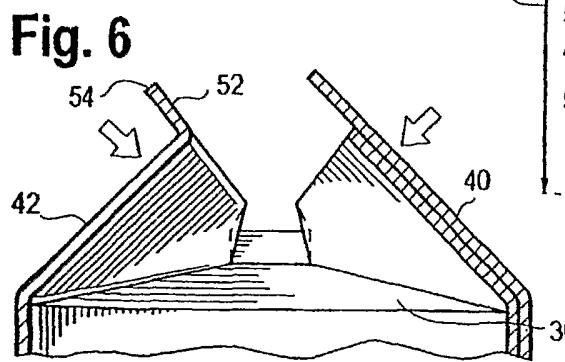
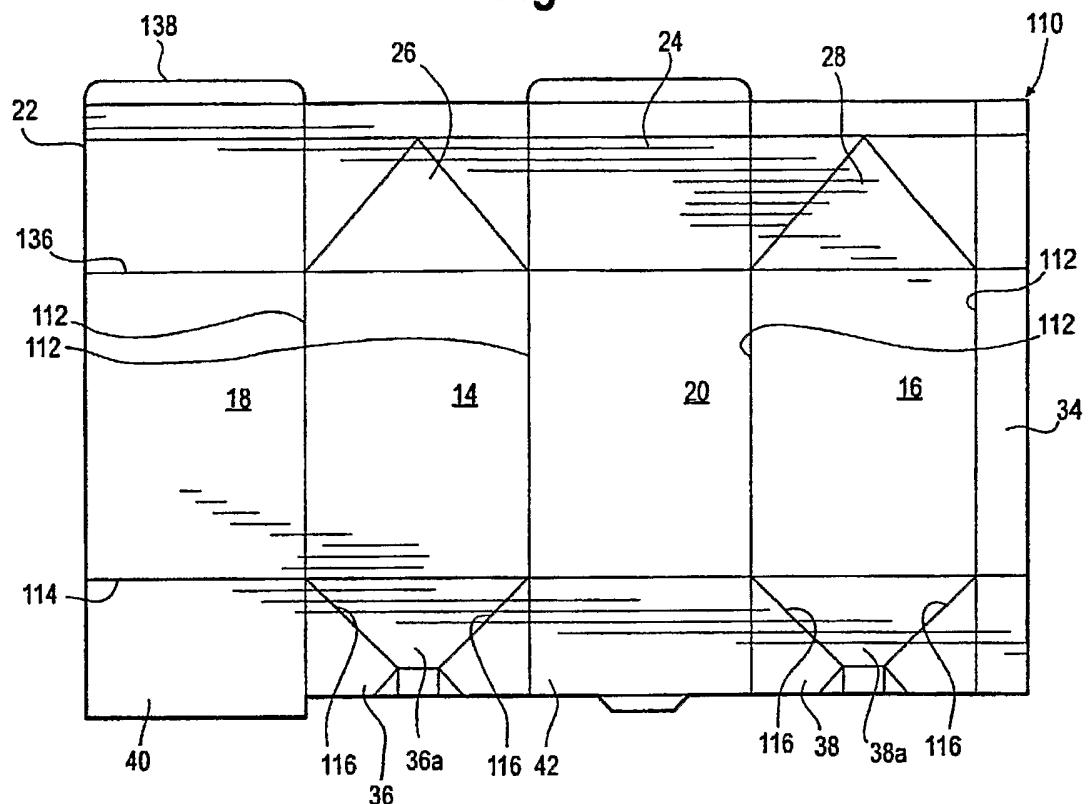
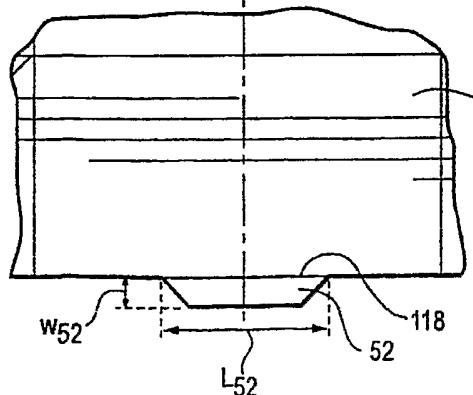
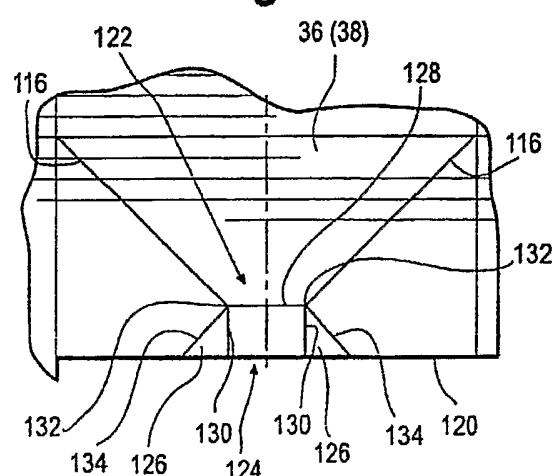


Fig. 6

2/2

Fig. 8**Fig. 10****Fig. 9**

INTERNATIONAL SEARCH REPORT

Inte application No
PCT/US2005/042136

A. CLASSIFICATION OF SUBJECT MATTER
INV. B65D5/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 702 410 A (DERVING ET AL) 27 October 1987 (1987-10-27)	1-3, 6, 7
Y	the whole document -----	4
Y	US 5 636 785 A (KALBERER ET AL) 10 June 1997 (1997-06-10)	4
A	the whole document -----	1, 6
A	US 4 819 865 A (LISIECKI ET AL) 11 April 1989 (1989-04-11)	1-7
A	the whole document -----	1-7
A	US 6 328 204 B1 (STACY-RYAN RUSSELL) 11 December 2001 (2001-12-11) cited in the application the whole document -----	1-7
		-/-

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"&" document member of the same patent family

Date of the actual completion of the international search 12 April 2006	Date of mailing of the international search report 24/04/2006
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Pernice, C

INTERNATIONAL SEARCH REPORT

Inte..... application No
PCT/US2005/042136

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 019 279 A (TYWONIUK ET AL) 1 February 2000 (2000-02-01) the whole document -----	1-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internl application No
PCT/US2005/042136

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 4702410	A	27-10-1987		AU 583605 B2 AU 5579886 A CA 1268745 A1 DE 3681615 D1 DK 158386 A EP 0197614 A2 FI 861509 A JP 1956217 C JP 6088592 B JP 61287531 A NO 861345 A SE 451126 B SE 8501720 A SU 1526573 A3	04-05-1989 16-10-1986 08-05-1990 31-10-1991 10-10-1986 15-10-1986 10-10-1986 28-07-1995 09-11-1994 17-12-1986 10-10-1986 07-09-1987 10-10-1986 30-11-1989
US 5636785	A	10-06-1997		NONE	
US 4819865	A	11-04-1989		NONE	
US 6328204	B1	11-12-2001		AU 7594201 A EP 1313646 A1 JP 2005503293 T WO 0208069 A1	05-02-2002 28-05-2003 03-02-2005 31-01-2002
US 6019279	A	01-02-2000		AT 175638 T AT 248104 T AU 708791 B2 AU 4631996 A BR 9607321 A CA 2214113 A1 CN 1182397 A CN 1257815 A CZ 9702647 A3 DE 69601356 D1 DE 69601356 T2 DE 69629722 D1 DE 69629722 T2 EP 0810948 A1 ES 2127619 T3 FI 973513 A GR 3029802 T3 HU 9901185 A2 WO 9626865 A1 JP 11502490 T NO 973898 A PL 322020 A1 ZA 9601602 A	15-01-1999 15-09-2003 12-08-1999 18-09-1996 30-12-1997 06-09-1996 20-05-1998 28-06-2000 16-06-1999 25-02-1999 26-08-1999 02-10-2003 08-07-2004 10-12-1997 16-04-1999 27-08-1997 30-06-1999 30-08-1999 06-09-1996 02-03-1999 28-10-1997 05-01-1998 16-09-1996