



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2584439 C 2013/12/17

(11)(21) **2 584 439**

(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2005/10/26
(87) Date publication PCT/PCT Publication Date: 2006/05/26
(45) Date de délivrance/Issue Date: 2013/12/17
(85) Entrée phase nationale/National Entry: 2007/04/18
(86) N° demande PCT/PCT Application No.: US 2005/038719
(87) N° publication PCT/PCT Publication No.: 2006/055204
(30) Priorité/Priority: 2004/11/12 (US10/987,618)

(51) Cl.Int./Int.Cl. *A61B 17/3207* (2006.01)


(72) Inventeurs/Inventors:
BENCE, STEVEN W., US;
ASCONEGUY, ALEXANDER J., US

(73) Propriétaire/Owner:
BOSTON SCIENTIFIC LIMITED, BB

(74) Agent: CASSAN MACLEAN

(54) Titre : CATHETER A BALLON COUPANT MUNI D'ATHEROTOMES SOUPLES

(54) Title: CUTTING BALLOON CATHETER HAVING FLEXIBLE ATHEROTOMES

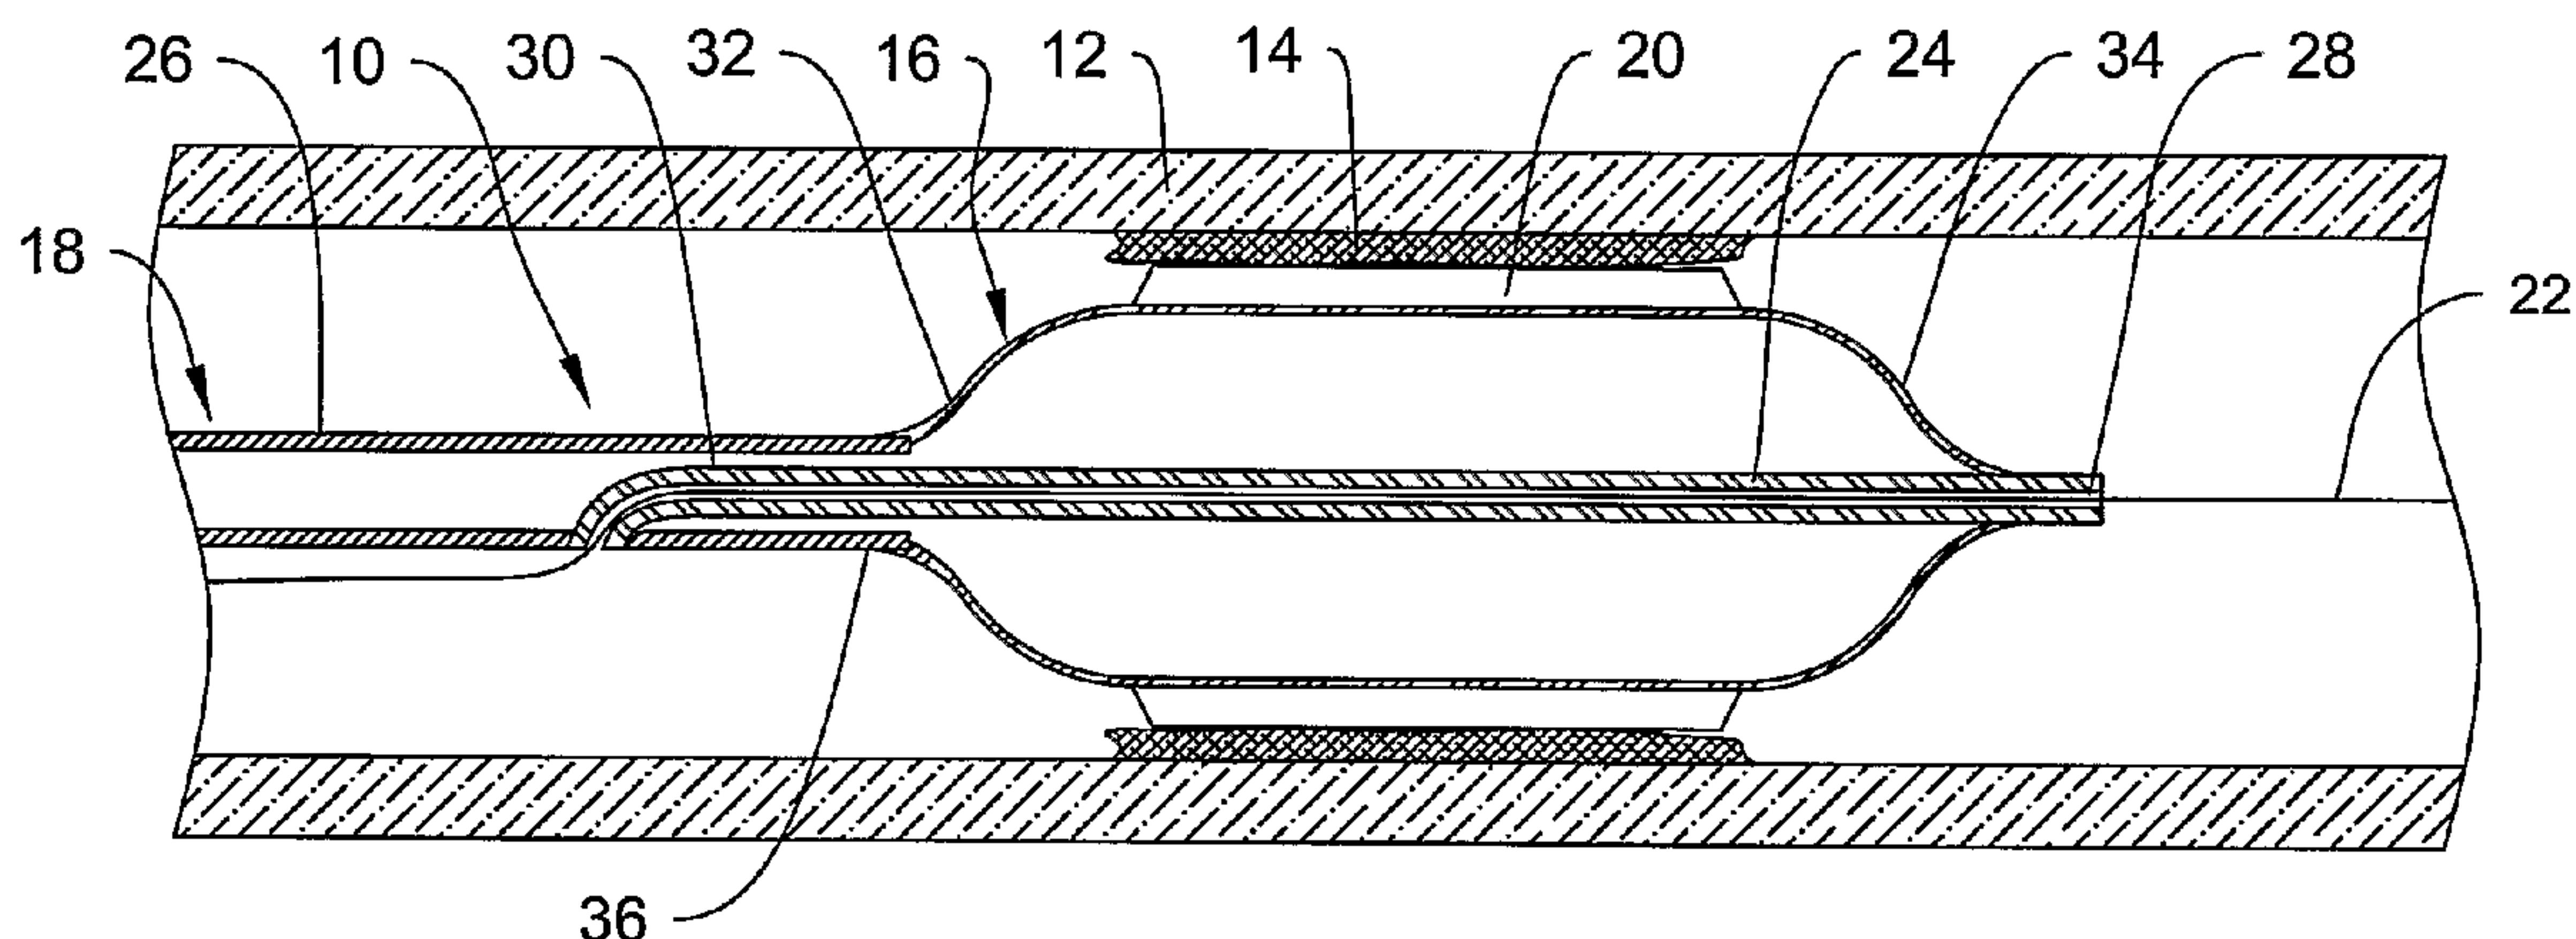

(57) Abrégé/Abstract:

A cutting balloon catheter and method of making and using the same. The cutting balloon catheter may include a catheter shaft having a balloon coupled thereto. One or more cutting members or blades may be coupled to the balloon. The cutting members may be configured to be more flexible.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
26 May 2006 (26.05.2006)

PCT

(10) International Publication Number
WO 2006/055204 A1(51) International Patent Classification:
A61B 17/22 (2006.01)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:
PCT/US2005/038719

(22) International Filing Date: 26 October 2005 (26.10.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/987,618 12 November 2004 (12.11.2004) US

(71) Applicant (for all designated States except US): BOSTON SCIENTIFIC SCIMED, INC. [US/US]; One Scimed Place, Maple Grove, Minnesota 55311 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BENCE, Steven W. [US/US]; 448 Dorsey Way, Vista, California 92083 (US). ASCONEGUY, Alexander J. [US/US]; 37674 Silver Breeze Court, Murrieta, California 92563 (US).

(74) Agent: CROMPTON, David M.; CROMPTON, SEAGER & TUFTE, LLC, 1221 Nicollet Avenue, Suite 800, Minneapolis, Minnesota 55403 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CUTTING BALLOON CATHETER HAVING FLEXIBLE ATHEROTOMES

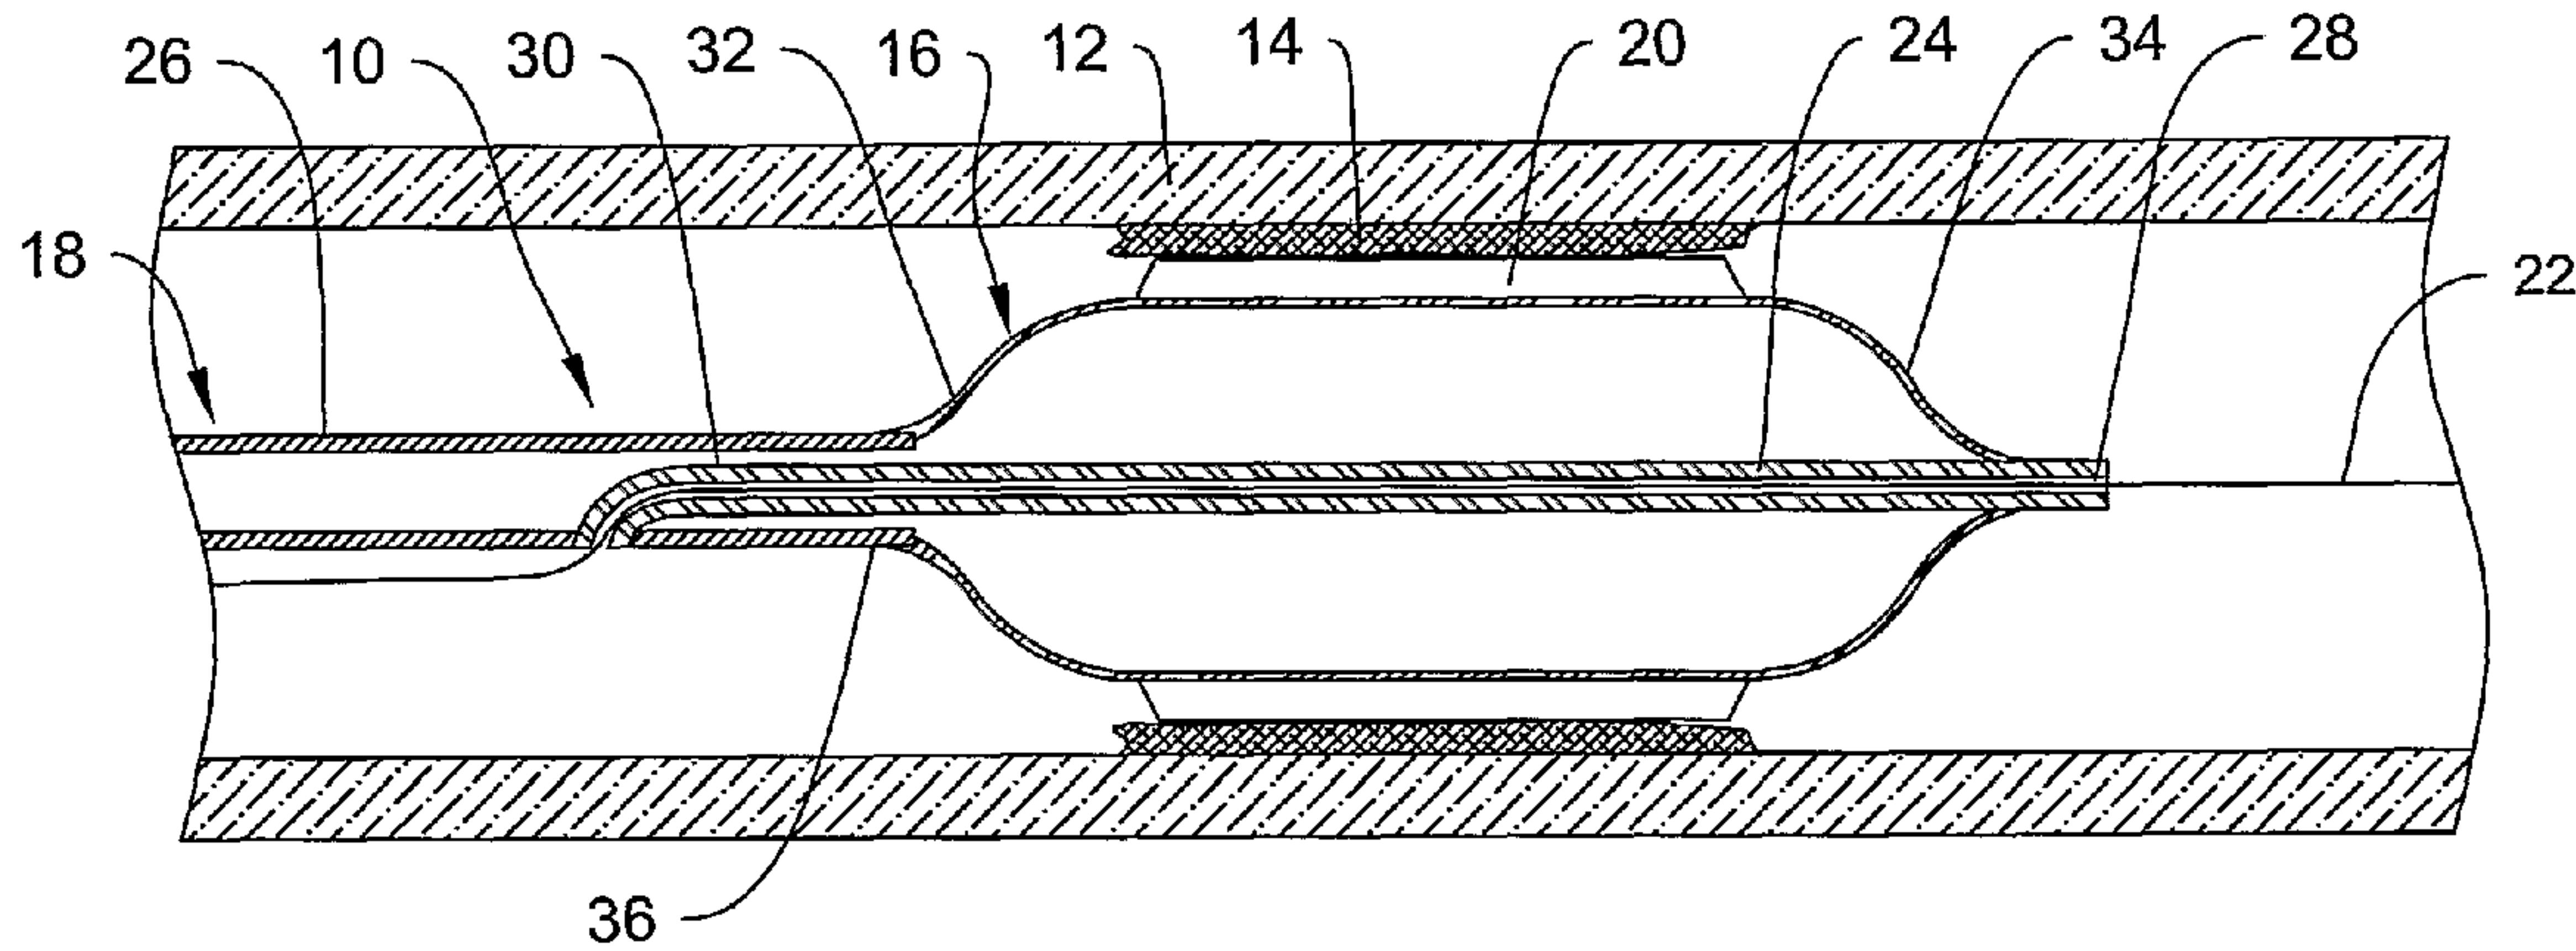

(57) Abstract: A cutting balloon catheter and method of making and using the same. The cutting balloon catheter may include a catheter shaft having a balloon coupled thereto. One or more cutting members or blades may be coupled to the balloon. The cutting members may be configured to be more flexible.

WO 2006/055204 A1

CUTTING BALLOON CATHETER HAVING FLEXIBLE ATHEROTOMESField of the Invention

5 The present invention pertains to angioplasty and angioplasty balloon catheters. More particularly, the present invention pertains to angioplasty balloon catheters that include one or more cutting edges coupled to the angioplasty balloon.

Background

10 Heart and vascular disease are major problems in the United States and throughout the world. Conditions such as atherosclerosis result in blood vessels becoming blocked or narrowed. This blockage can result in lack of oxygenation of the heart, which has significant consequences since the heart muscle must be well oxygenated in order to maintain its blood pumping action.

15 Occluded, stenotic, or narrowed blood vessels may be treated with a number of relatively non-invasive medical procedures including percutaneous transluminal angioplasty (PTA), percutaneous transluminal coronary angioplasty (PTCA), and atherectomy. Angioplasty techniques typically involve the use of a balloon catheter. The balloon catheter is advanced over a guidewire so that the balloon is positioned adjacent a stenotic lesion. The balloon is then inflated, and the restriction of the 20 vessel is opened.

One of the major obstacles in treating coronary artery disease and/or treating 25 blocked blood vessels is re-stenosis. Evidence has shown that cutting the stenosis, for example, with an angioplasty balloon equipped with a cutting blade, during treatment can reduce incidence of re-stenosis. Additionally, cutting the stenosis may reduce trauma at the treatment site and/or may reduce the trauma to adjacent healthy tissue. Cutting blades may also be beneficial additions to angioplasty procedures when the targeted occlusion is hardened or calcified. It is believed typical angioplasty balloons, alone, may not be able to expand certain of these hardened lesions. Thus, angioplasty balloons equipped with cutting edges have been developed to attempt to enhance 30 angioplasty treatments. There is an ongoing need for improved angioplasty devices, including cutting angioplasty balloons, and improved methods of treating intravascular stenoses and occlusions.

Brief Summary

The present invention relates to angioplasty balloon catheters. In at least some embodiments, an example balloon catheter may include a catheter shaft having a balloon coupled thereto. One or more cutting members or blades may be coupled to the 5 balloon. The cutting members may be configured to be more flexible. These and other features are described in more detail below.

In one embodiment, the invention provides for a cutting balloon catheter. The cutting balloon catheter comprising: an elongate catheter shaft; a balloon coupled to the catheter shaft; one or more flexible joining members coupled to the balloon; and one or 10 more cutting members coupled to the joining members; wherein the cutting members include a cutting surface and a base; wherein a slot is formed in the cutting surface, and at least a portion of the slot is embedded within the joining members.

In another embodiment, the invention provides for a cutting balloon catheter. The cutting balloon catheter comprising: an elongate catheter shaft; a balloon coupled 15 to the shaft; one or more atherotomes coupled to the balloon by a flexible joining member; and means for increasing the flexibility of the atherotomes; wherein the atherotomes include a cutting surface and wherein the means for increasing flexibility of the atherotomes includes one or more slots formed in the cutting surface; wherein at least a portion of the one or more slots is embedded within the joining member.

20 In another embodiment, the invention provides for a method for manufacturing a cutting balloon catheter. The method comprising the steps of: providing an atherotome, the atherotome having a cutting surface; forming one or more slots in the cutting surface; and coupling the atherotome to one or more joining members coupled to a balloon, the balloon being coupled to a catheter shaft; wherein at least a portion of 25 the slots is embedded within the joining members.

In another embodiment, the invention provides for a cutting balloon catheter. The cutting balloon catheter comprising: an elongate catheter shaft; a balloon coupled to the catheter shaft; one or more flexible joining members coupled to the balloon; and one or more pairs of cutting members coupled to the joining members; wherein the 30 pairs of cutting members include a cutting surface and a base; wherein a slot is formed in the cutting surface, and at least a portion of the slot is embedded within the joining members.

Brief Description of the Drawings

Figure 1 is a partial cross-sectional side view of an example cutting balloon catheter disposed in a blood vessel;

5 Figure 2 is a partial perspective view of a cutting member and joining member for connecting the cutting member to a balloon in a manner that allows the cutting member to have greater flexibility;

Figure 3 is a perspective view of a portion of another example cutting balloon catheter, showing an alternative arrangement for enhancing the flexibility of the cutting members;

10 Figure 4 is a perspective view of another example cutting member;

Figure 5 is a cutaway perspective view of a portion of the cutting member shown in Figure 4 attached to a balloon;

15 Figure 6 is an enlarged view of a portion of the cutting member attached to the balloon as shown in Figure 5, but where the cutting member is broken at a selected location; and

Figure 7 is a perspective view of another example cutting member.

Detailed Description

The following description should be read with reference to the drawings 20 wherein like reference numerals indicate like elements throughout the several views. The detailed description and drawings illustrate example embodiments of the claimed invention.

Figure 1 is a partial cross-sectional side view of an example catheter 10 disposed in a blood vessel 12 and positioned adjacent an intravascular lesion 14. 25 Catheter 10 may include a balloon 16 coupled to a catheter shaft 18. One or more cutting members or blades 20 may be coupled to balloon 16. In general, catheter 10 may be advanced over a guidewire 22, through the vasculature, to a target area. Balloon 16 can then be inflated to expand lesion 14, and cutting members 20 may cut

lesion 14. The target area may be within any suitable peripheral or cardiac vessel lumen location.

Cutting members 20 may vary in number, position, and arrangement about balloon 16. For example, catheter 10 may include one, two, three, four, five, six, or 5 more cutting members 20 that are disposed at any position along balloon 16 and in a regular, irregular, or any other suitable pattern. In general, cutting members 20 may be configured to have enhanced flexibility. Increasing the flexibility of cutting members 20 may desirably impact a number of characteristics and features of catheter 10. For example, increasing the flexibility may improve the tracking ability and 10 general deliverability of catheter 10 through the often tortuous anatomy. Additionally, increasing the flexibility may allow catheter 10 to be navigable to a larger number of intravascular locations, including some that may not be readily 15 reachable by other, less flexible, cutting balloon catheters. In general, the enhanced flexibility is the result of a structural feature of cutting members 20 or a structural modification to cutting members 20 or other components of catheter 10 that increases the flexibility of cutting members 20. Some examples of these features and modifications are described in more detail below.

Balloon 16 may be made from typical angioplasty balloon materials including polymers such as polyethylene terephthalate (PET), polyetherimid (PEI), polyethylene (PE), etc. Some other examples of suitable polymers, including lubricious polymers, 20 may include polytetrafluoroethylene (PTFE), ethylene tetrafluoroethylene (ETFE), fluorinated ethylene propylene (FEP), polyoxymethylene (POM), polybutylene terephthalate (PBT), polyether block ester, polyurethane, polypropylene (PP), polyvinylchloride (PVC), polyether-ester (for example, a polyether-ester elastomer 25 such as ARNITEL® available from DSM Engineering Plastics), polyester (for example, a polyester elastomer such as HYTREL® available from DuPont), polyamide (for example, DURETHAN® available from Bayer or CRISTAMID® available from Elf Atochem), elastomeric polyamides, block polyamide/ethers, polyether block amide (PEBA, for example, available under the trade name 30 PEBAK®), silicones, Marlex high-density polyethylene, Marlex low-density polyethylene, linear low density polyethylene (for example, REXELL®), polyetheretherketone (PEEK), polyimide (PI), polyphenylene sulfide (PPS), polyphenylene oxide (PPO), polysulfone, nylon, perfluoro(propyl vinyl ether) (PFA), other suitable materials, or mixtures, combinations, copolymers thereof,

polymer/metal composites, and the like. In some embodiments, it may be desirable to use high modulus or generally stiffer materials so as to reduce balloon elongation. The above list of materials includes some examples of higher modulus materials. Some other examples of stiffer materials include polymers blended with liquid crystal 5 polymer (LCP) as well as the materials listed above. For example, the mixture can contain up to about 5% LCP.

Balloon 16 may be configured so that it includes one or more “wings” or wing-shaped regions when balloon 16 is deflated. These wings may appear as a plurality of alternating inward and outward radial deflections in balloon 16 when 10 balloon 16 is deflated. These wings may be desirable for a number of reasons. For example, by including balloon 16 with wings, balloon 16 may have more predictable and consistent re-folding characteristics. Additionally, the wings may be configured so that cutting members 20 can be positioned at the inward-most positions of the deflated balloon 16. This arrangement allows cutting members 20 to be positioned 15 more closely to shaft 18 when balloon 16 is deflated. Accordingly, cutting members 20 can be moved away from the vessel walls where they might otherwise result in contact and, possibly, damage to healthy tissue during movement of catheter 10 within a body lumen. Additionally, alternating the wings and cutting members 20 as well as positioning cutting members 20 relatively close to shaft 18 may allow the 20 wings to fold over and cover cutting members 20 when balloon 16 is deflated. Again, this feature may reduce the exposure of cutting members 20 to the blood vessel.

Shaft 18 may be a catheter shaft, similar to typical catheter shafts. For example, shaft 18 may include an inner tubular member 24 and outer tubular member 26. Tubular members 24/26 may be manufactured from a number of different 25 materials. For example, tubular members 24/26 may be made of metals, metal alloys, polymers, metal-polymer composites or any other suitable materials. Some examples of suitable metals and metal alloys include stainless steel, such as 300 series stainless steel (including 304V, 304L, and 316L; 400 series martensitic stainless steel; tool steel; nickel-titanium alloy such as linear-elastic or super-elastic Nitinol, nickel-chromium alloy, nickel-chromium-iron alloy, cobalt alloy, tungsten or tungsten 30 alloys, MP35-N (having a composition of about 35% Ni, 35% Co, 20% Cr, 9.75% Mo, a maximum 1% Fe, a maximum 1% Ti, a maximum 0.25% C, a maximum 0.15% Mn, and a maximum 0.15% Si), hastelloy, monel 400, inconel 825, or the like; or other suitable material. Some examples of suitable polymers include those described

above in relation to balloon 16. Of course, any other polymer or other suitable material including ceramics may be used without departing from the spirit of the invention. The materials used to manufacture inner tubular member 24 may be the same as or be different from the materials used to manufacture outer tubular member 5 26. Those materials listed herein may also be used for manufacturing other components of catheter 10 including cutting members 20.

Tubular members 24/26 may be arranged in any appropriate way. For example, in some embodiments inner tubular member 24 can be disposed coaxially within outer tubular member 26. According to these embodiments, inner and outer 10 tubular members 24/26 may or may not be secured to one another along the general longitudinal axis of shaft 18. Alternatively, inner tubular member 24 may follow the inner wall or otherwise be disposed adjacent the inner wall of outer tubular member 26. Again, inner and outer tubular members 24/26 may or may not be secured to one 15 another. For example, inner and outer tubular members 24/26 may be bonded, welded (including tack welding or any other welding technique), or otherwise secured at a bond point. In some embodiments, the bond point may be generally disposed near the distal end of shaft 18. However, one or more bond points may be disposed at any position along shaft 18. The bond may desirably impact, for example, the stability 20 and the ability of tubular members 24/26 to maintain their position relative to one another. In still other embodiments, inner and outer tubular member 24/26 may be adjacent to and substantially parallel to one another so that they are non-overlapping. In these embodiments, shaft 18 may include an outer sheath that is disposed over tubular members 24/26.

Inner tubular member 24 may include an inner lumen 28. In at least some 25 embodiments, inner lumen 28 is a guidewire lumen. Accordingly, catheter 10 can be advanced over guidewire 22 to the desired location. The guidewire lumen may extend along essentially the entire length of catheter shaft 18 so that catheter 10 resembles traditional “over-the-wire” catheters. Alternatively, the guidewire lumen may extend along only a portion of shaft 18 so that catheter 10 resembles “single-operator- 30 exchange” or “rapid-exchange” catheters. Regardless of which type of catheter is contemplated, catheter 10 may be configured so that balloon 16 is disposed over at least a region of inner lumen 28. In at least some of these embodiments, inner lumen 28 (i.e., the portion of inner lumen 28 that balloon 16 is disposed over) may be substantially coaxial with balloon 16.

Shaft 18 may also include an inflation lumen 30 that may be used, for example, to transport inflation media to and from balloon 16. The location and position of inflation lumen 30 may vary, depending on the configuration of tubular members 24/26. For example, when outer tubular member 26 is disposed over inner tubular member 24, inflation lumen 30 may be defined within the space between tubular members 24/26. Moreover, depending on the position of inner tubular member 24 within outer tubular member 26, the shape of lumen 30 (i.e., the shape adjacent shaft 18) may vary. For example, if inner tubular member 24 is attached to or disposed adjacent to the inside surface of outer tubular member 26, then inflation lumen 30 may be generally half-moon in shape; whereas if inner tubular member 24 is generally coaxial with outer tubular member 26, then inflation lumen 30 may be generally ring-shaped or annular in shape. It can be appreciated that if outer tubular member 26 is disposed alongside inner tubular member 24, then lumen 30 may be the lumen of outer tubular member 26 or it may be the space defined between the outer surface of tubular members 24/26 and the outer sheath disposed thereover.

Balloon 16 may be coupled to catheter shaft 18 in any of a number of suitable ways. For example, balloon 16 may be adhesively or thermally bonded to shaft 18. In some embodiments, a proximal waist 32 of balloon 16 may be bonded to shaft 18, for example, at outer tubular member 26, and a distal waist 34 may be bonded to shaft 18, for example, at inner tubular member 24. The exact bonding positions, however, may vary. It can be appreciated that a section of proximal waist 32 may not have sections 36 extending therefrom in order for suitable bonding between balloon 16 and outer tubular member 30.

In addition to some of the structures described above, shaft 18 may also include a number of other structural elements, including those typically associated with catheter shafts. For example, shaft 18 may include a radiopaque marker coupled thereto that may aid a user in determining the location of catheter 10 within the vasculature. In addition, catheter 10 may include a folding spring (not shown) coupled to balloon 16, for example, adjacent proximal waist 32, which may further help in balloon folding and refolding. A description of a suitable folding spring can be found in U.S. Patent No. 6,425,882.

As described above, cutting members 20 may be configured to have increased flexibility. Increasing the flexibility of cutting members 20 may occur in a number of different manners. For example, a flexible joining member 38 may be coupled to

cutting member 20 and to balloon 16 as shown in Figure 2 (and depicted in an exploded view). Joining member 38 may be formed from a generally flexible or soft material that allows the interface between cutting member 20 and balloon 16 to be somewhat elastic or pliable. For example, joining member 38 may be manufactured 5 from a low durometer polyurethane or any other suitable material (including any of the polymers and other materials disclosed herein). Accordingly, cutting member 20 may be able to move laterally about eight degrees or less. In addition, different portions of cutting member 20 may be able to bend or flex, while other portions remain essentially unchanged.

10 In at least some embodiments, joining member 38 can be attached to and disposed between cutting member 20 and balloon 16. For example, joining member 38 can be attached to an outer surface 40 of balloon 16 and to a base 42 of the cutting member 20. The attachment of joining member 38 with cutting member 20 and balloon 16 may be achieved in any appropriate manner, such as by adhesive bonding, 15 casting, thermal bonding, mechanically connecting, welding, brazing, and the like, or in any other suitable way. The attachment means need not be the same for the attachment between cutting member 20 and joining member 38 as the means used to attach balloon 16 and joining member 38.

Figure 3 depicts a partial perspective view of another catheter 110 that is 20 similar to catheter 10. Catheter 110 includes cutting members 120 that are disposed about balloon 16 in pairs that are arranged in tandem. This embodiment may increase the flexibility of cutting members 120 by dividing what might otherwise be a single cutting blade into multiple parts or segments. Thus, the segmented cutting members 120, by virtue of their shortened length, are more amenable to bending or flexing. In 25 addition, the flexibility of cutting members 120 may be increased by including joining member 38. It can be appreciated that the precise arrangement of cutting members 120 is not intended to be limited to being in tandem. For example, pairs of cutting members 120 may have an arrangement that is longitudinally offset. Moreover, catheter 110 is not intended to be limited to just pairs of cutting members 120, as any 30 suitable number of cutting members 120 may be used without departing from the spirit of the invention.

It can also be seen in Figure 3 that cutting members 120 may also include a series of alternating tabs 144 and holes or openings 146 that are disposed along the base 142 of cutting members 120. Tabs 144 and openings 146 may have a number of

functions. For example, openings 146 (or, more precisely, the portions of cutting member 120 adjacent openings) may provide a location for adhesive (e.g., polyurethane or any other suitable material) to flow into so as to improve the bonding of cutting member 120 with balloon 16. This bonding media may encapsulate the 5 base 142 of cutting member 120. In addition, tabs 144 and openings 146 may also desirably impact the flexibility of cutting member 120. The shape, size, and number of tabs 144 and opening 146 may vary. For example, tabs 144 may have a shape similar to an inverted T (when viewed from the side) or otherwise have a splayed pillar-like shape, and openings 146 may be somewhat rounded or oval. It can be 10 appreciated, however, that tabs 144 and openings 146 are not intended to be limited to these or any other particular shape. Additionally, the size and number of tabs 144 and openings 146 may also vary, typically in relation to the length of cutting members 120. For example, openings 146 may have a height in the range of about 0.002 to about 0.010 inches or so and a width in the range of about 0.007 to about 0.015 inches 15 or so.

Figure 4 illustrates another example cutting member 320 that can be used with any of the catheter embodiments disclosed herein or any other suitable balloon catheter device, including those with joining member 38. Cutting member 320 is similar to any of the other cutting members disclosed herein except that a slot 348 is 20 formed along or adjacent the cutting edge 350.

By including slot 348, cutting member 320 may have increased flexibility by defining a region that is thinned or narrowed. Additionally, because slot 348 is formed in cutting member 320 it can be appreciated that slot 348 creates an increase in flexibility that is localized within the cutting member 320 itself. This feature may 25 be desirable for a number of reasons. For example, because the increase in flexibility is localized within cutting member 320, the desired flexibility characteristics can be incorporated into essentially any cutting balloon catheter by simply substituting cutting member 320 for the cutting blade used on the existing balloon catheter.

Another desirable feature of slot 348 is that slot 348 may cause a flex point F 30 of cutting member 320 to be located at or near the bottom or base 342 of cutting member 320. In some embodiments, base 342 may be fully encapsulated within polyurethane or another suitable adhesive or transition material 352 as shown in Figure 5. Transition material 352 may be made from any suitable material (including those disclosed herein) and may function as an attachment means for attaching cutting

member 320 to balloon 16. In some embodiments, transition material 352 may be joining member 38 or any other suitable structure, while in other embodiments, transition material 352 may be used alone or in combination with joining member 38.

Breaks that might occur within cutting member 320 during use or delivery can 5 be isolated at the bottom of the flex point F and, thus, the bottom of cutting member 320. Therefore, transition material 352 at the base 342 of cutting member 320 can surround the broken segments 354 of cutting member 320 and shield balloon 16, other portions of the catheter, and surrounding tissue from unintentional damage as shown in Figure 6. It can be appreciated that if cutting member 320 were to break, the 10 flexibility of the broken cutting member 320 would be greater than when intact. Thus, the shielding feature provided by encapsulating broken segments 354 in a polyurethane transition material 352 at base 342 of cutting member may be utilized by the clinician to further enhance the flexibility of cutting member 320. For example, the clinician may be able to intentionally break cutting member 320 in order to 15 increase flexibility to an even greater extent, while maintaining confidence that broken segments 354 of cutting member 320 are properly contained and shielded.

As the length of cutting member 320 (or other cutting member disclosed herein) changes, the number and position of slots 348 may vary. For example, the 20 length of any of the cutting members disclosed herein may range from about 4 millimeters to about 20 millimeter or so. Generally, as the length increases, the number of slots that may be desirable increases. Accordingly, relatively short cutting members (e.g., about 4-7 millimeters or so) may not have any slots. Slightly longer cutting members (e.g., about 7-14 millimeters or so) may include one slot similar to slot 348 in cutting member 320. Even longer cutting members (e.g., about 12 millimeters or longer) may include more than one slot. For example, Figure 7 25 illustrates cutting member 420 that has two slots 448a/b disposed along cutting edge 450. Of course, a number of addition embodiments of cutting members are contemplated that have a variety of lengths and numbers of slots.

It should be understood that this disclosure is, in many respects, only 30 illustrative. Changes may be made in details, particularly in matters of shape, size, and arrangement of steps without exceeding the scope of the invention. The invention's scope is, of course, defined in the language in which the appended claims are expressed.

What is claimed is:

1. A cutting balloon catheter, comprising:
an elongate catheter shaft;
a balloon coupled to the catheter shaft;
one or more flexible joining members coupled to the balloon; and
one or more cutting members coupled to the joining members;
wherein the cutting members include a cutting surface and a base;
wherein a slot is formed in the cutting surface, and at least a portion of the slot is embedded within the joining members.
2. The medical device of claim 1, wherein at least one of the cutting members includes a plurality of notches along the base.
3. The cutting balloon of claim 1, wherein the joining members include a polymeric material.
4. The cutting balloon of claim 1, wherein the cutting members include a second slot formed in the cutting surface.
5. The cutting balloon of claim 1, wherein at least one of the cutting members includes a plurality of tabs defined along the base.
6. A cutting balloon catheter, comprising:
an elongate catheter shaft;
a balloon coupled to the shaft;
one or more atherotomes coupled to the balloon by a flexible joining member;
and
means for increasing the flexibility of the atherotomes;

wherein the atherotomes include a cutting surface and wherein the means for increasing flexibility of the atherotomes includes one or more slots formed in the cutting surface;

wherein at least a portion of the one or more slots is embedded within the joining member.

7. A method for manufacturing a cutting balloon catheter, comprising the steps of:

providing an atherotome, the atherotome having a cutting surface;

forming one or more slots in the cutting surface; and

coupling the atherotome to one or more joining members coupled to a balloon, the balloon being coupled to a catheter shaft;

wherein at least a portion of the slots is embedded within the joining members.

8. A cutting balloon catheter, comprising:

an elongate catheter shaft;

a balloon coupled to the catheter shaft;

one or more flexible joining members coupled to the balloon; and

one or more pairs of cutting members coupled to the joining members;

wherein the pairs of cutting members include a cutting surface and a base;

wherein a slot is formed in the cutting surface, and at least a portion of the slot is embedded within the joining members.

9. The cutting balloon catheter of claim 1, wherein the cutting balloon catheter includes a pair of cutting members.

10. The cutting balloon catheter of claim 9, wherein the pair of cutting members is coupled to a single joining member.

11. The cutting balloon catheter of claim 9, wherein the pair of cutting members is disposed in tandem.
12. The medical device of claim 11, wherein the slot is defined by a space between the pair of cutting members disposed in tandem.

1/7

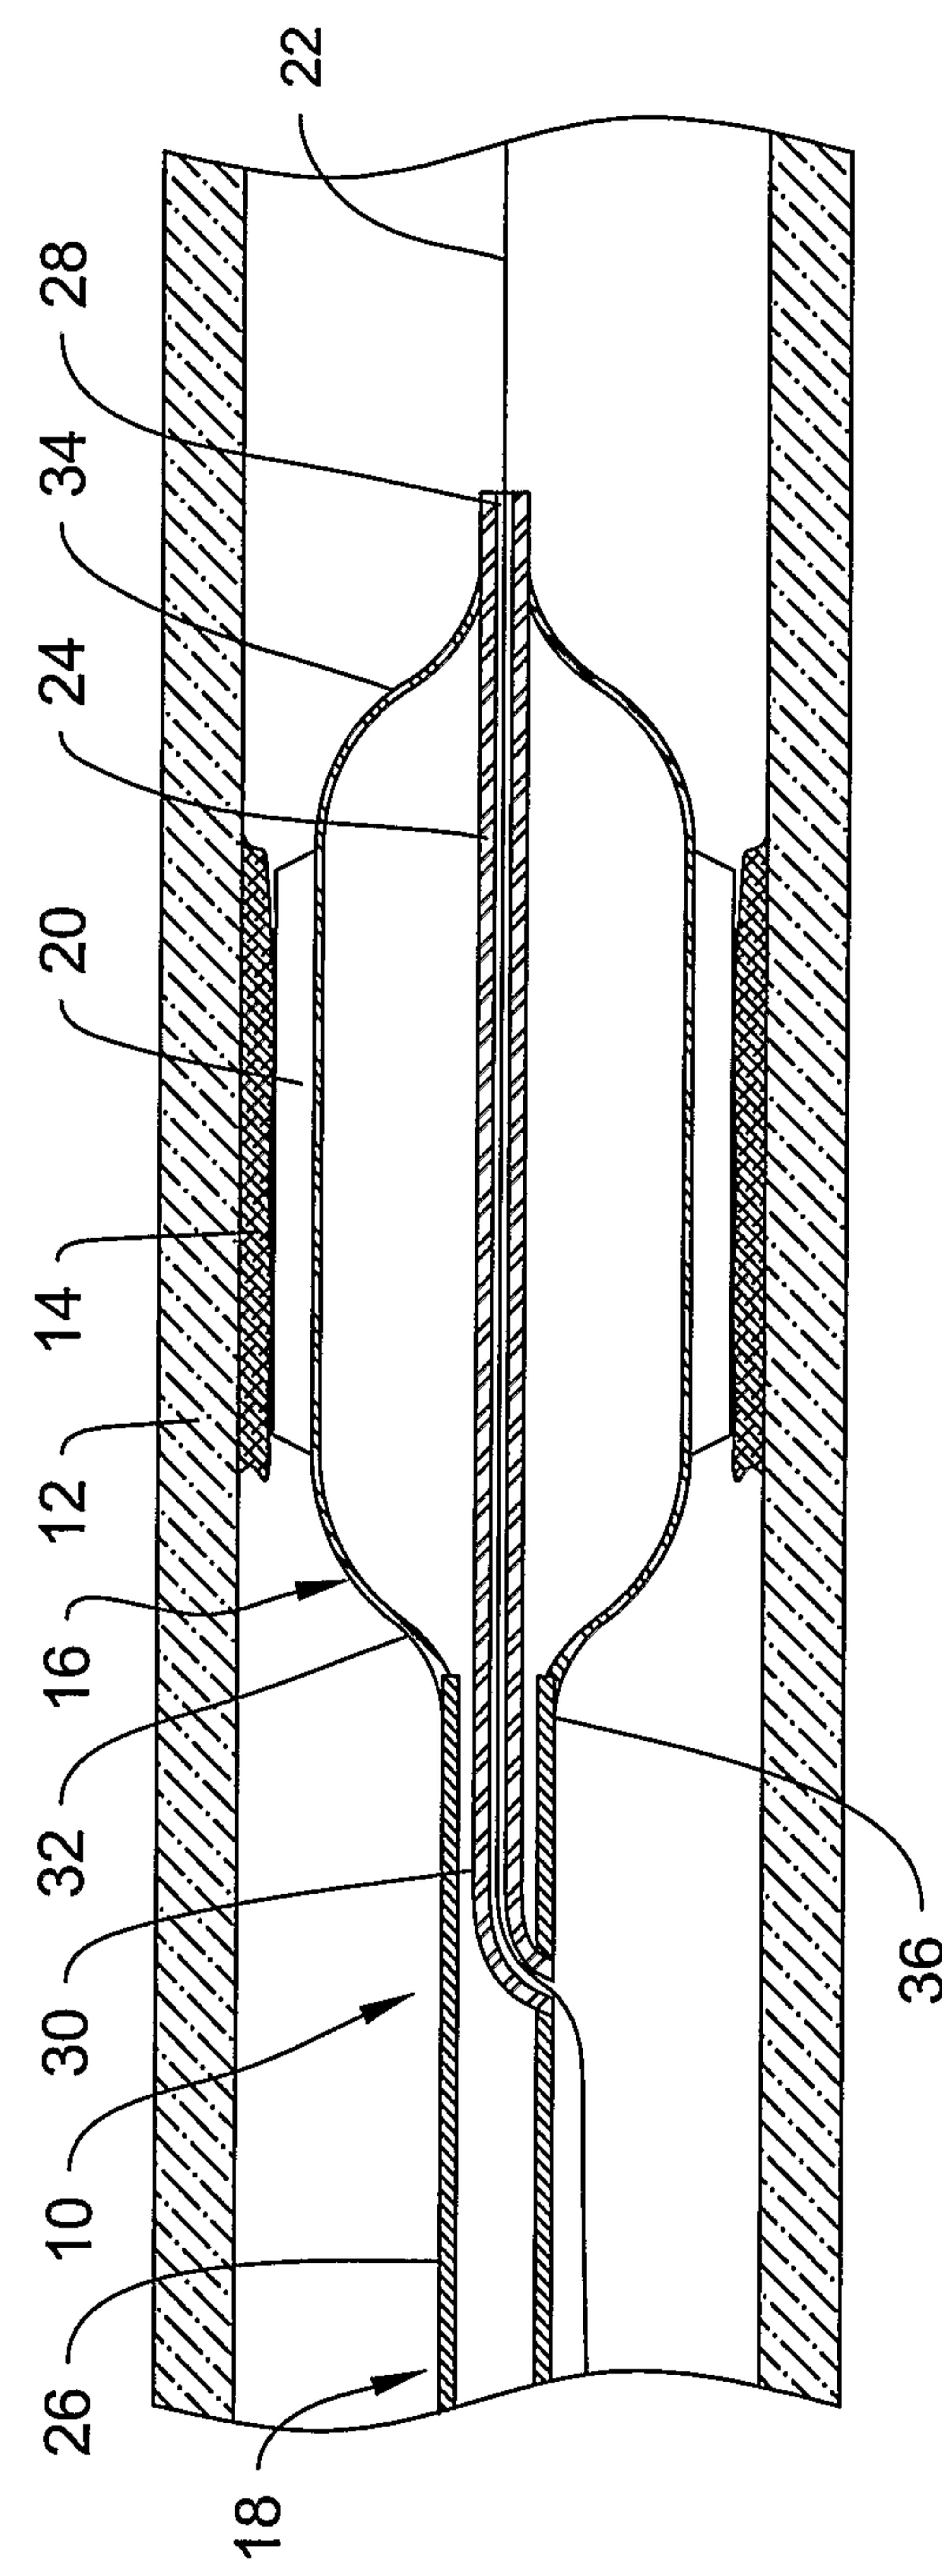
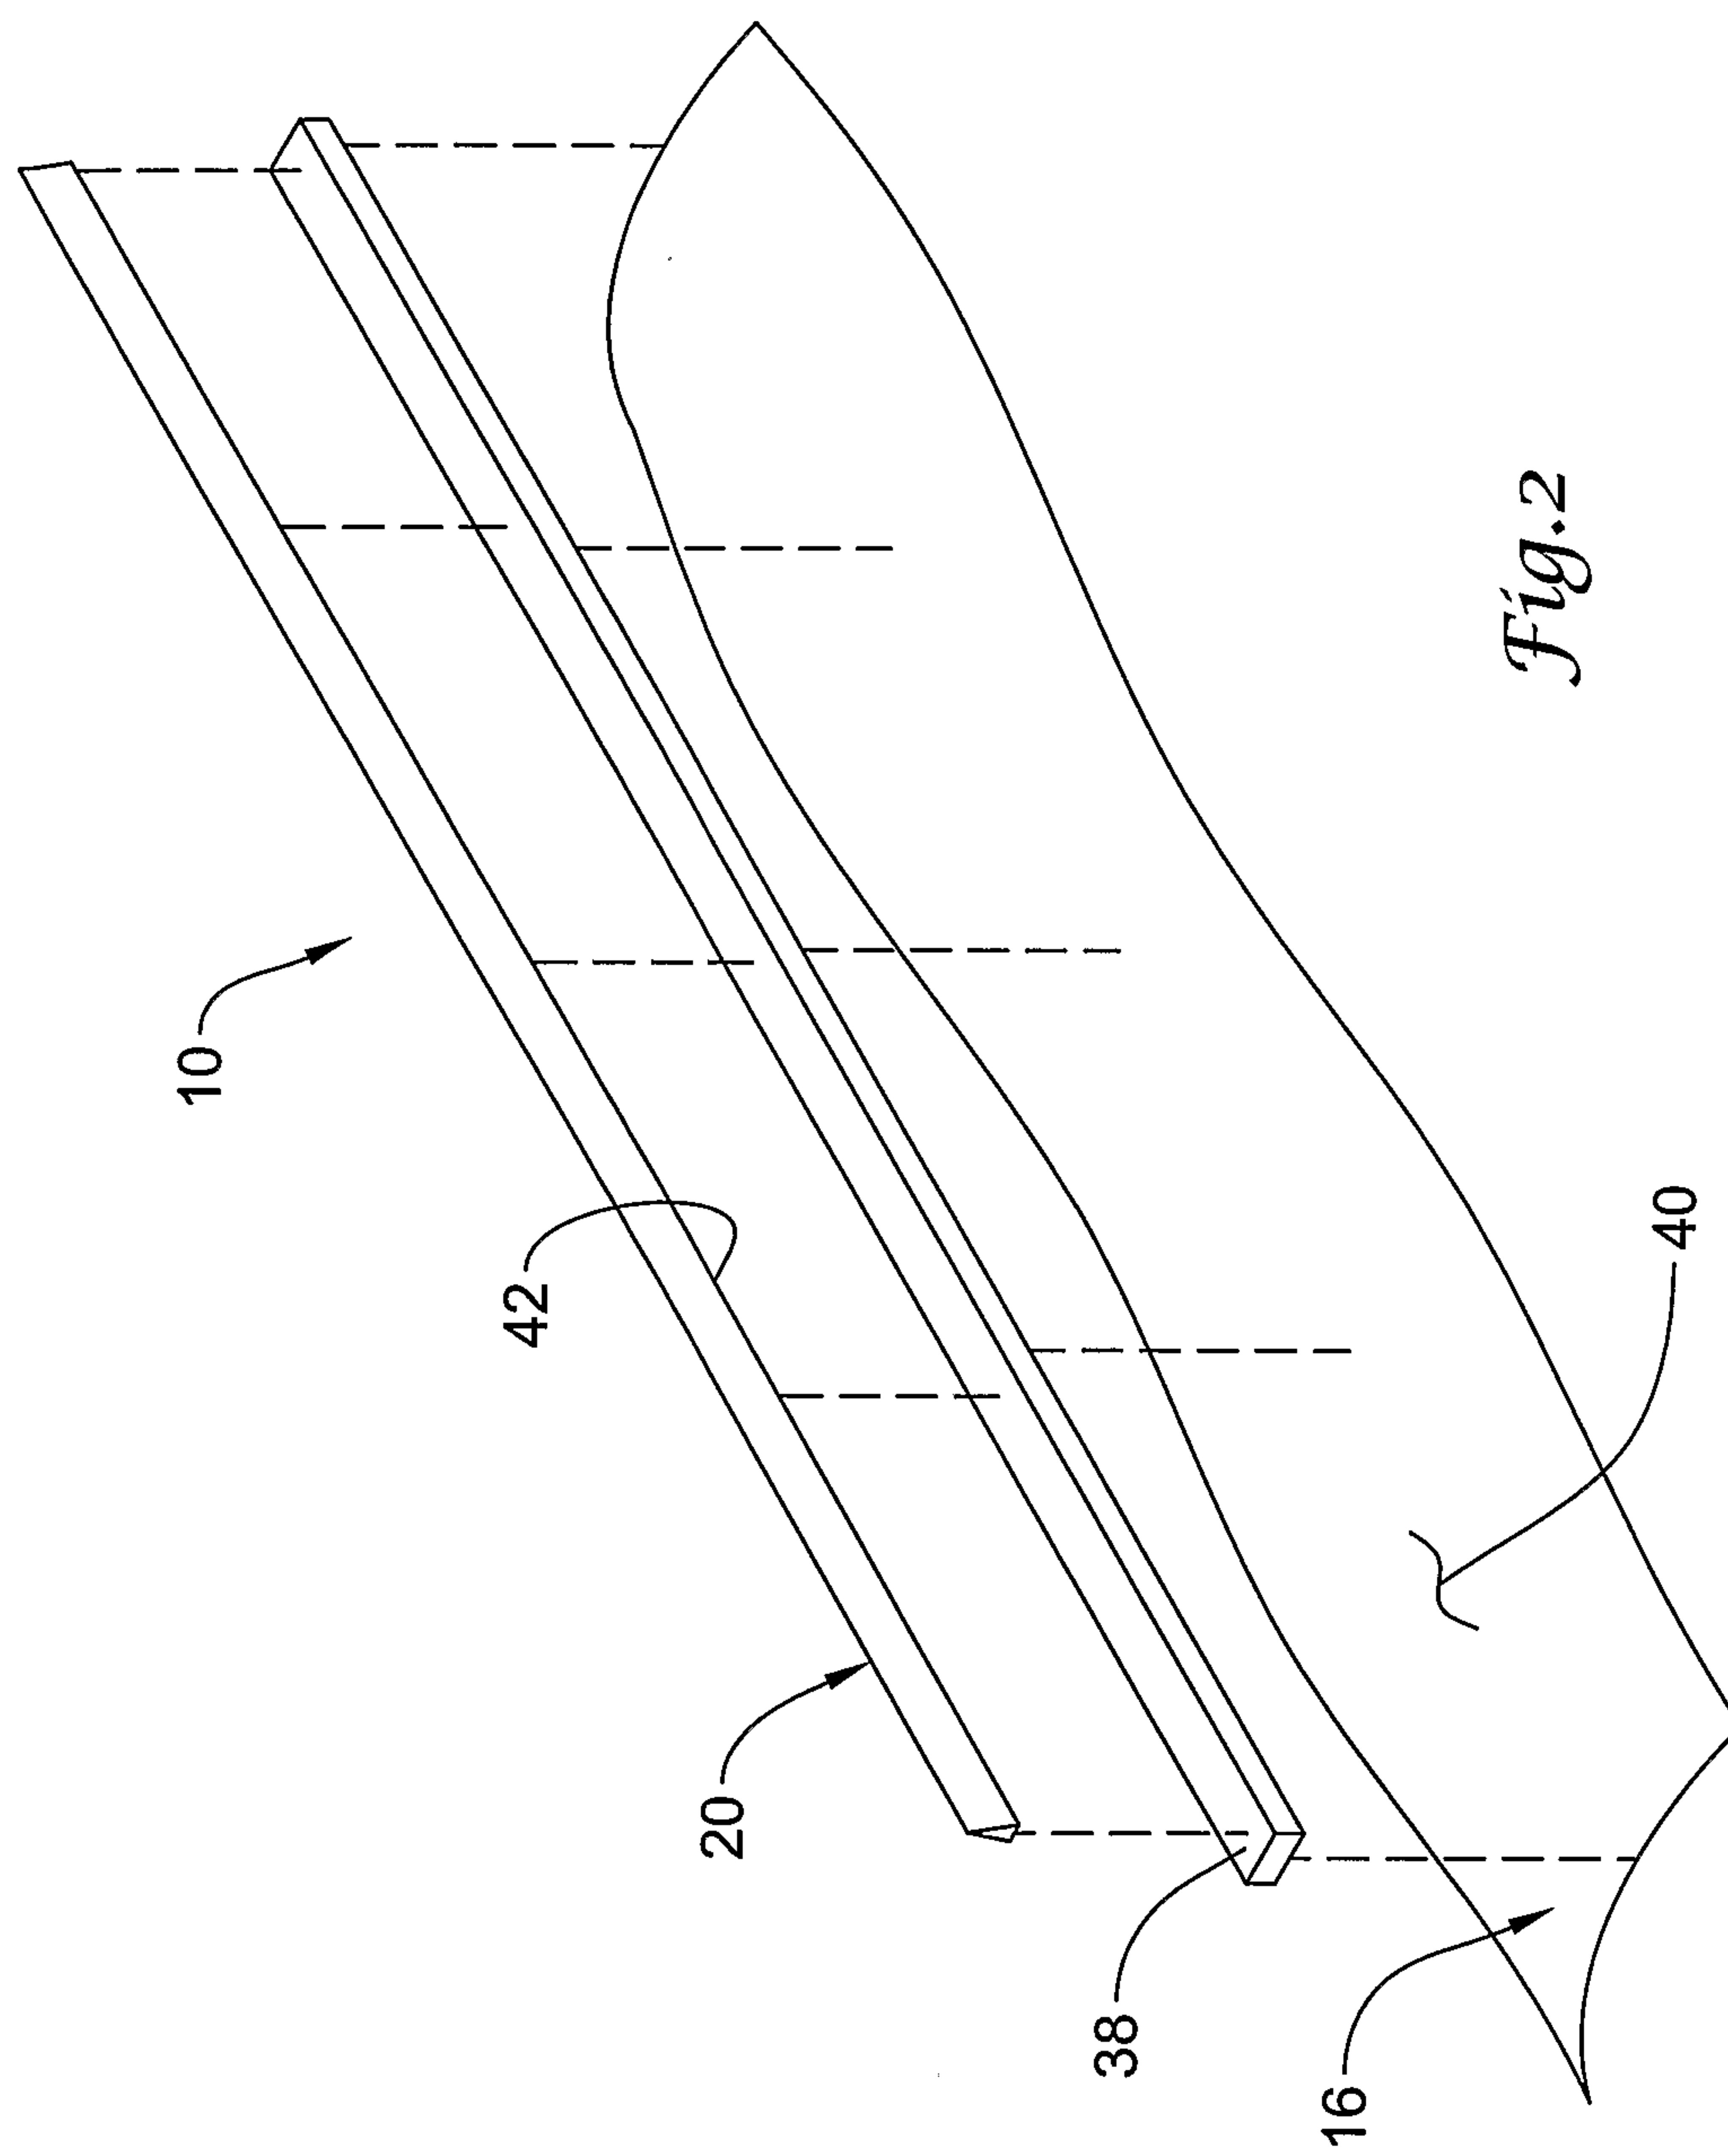



Fig.1

2/7

*Fig.2*

3/7

Fig.3

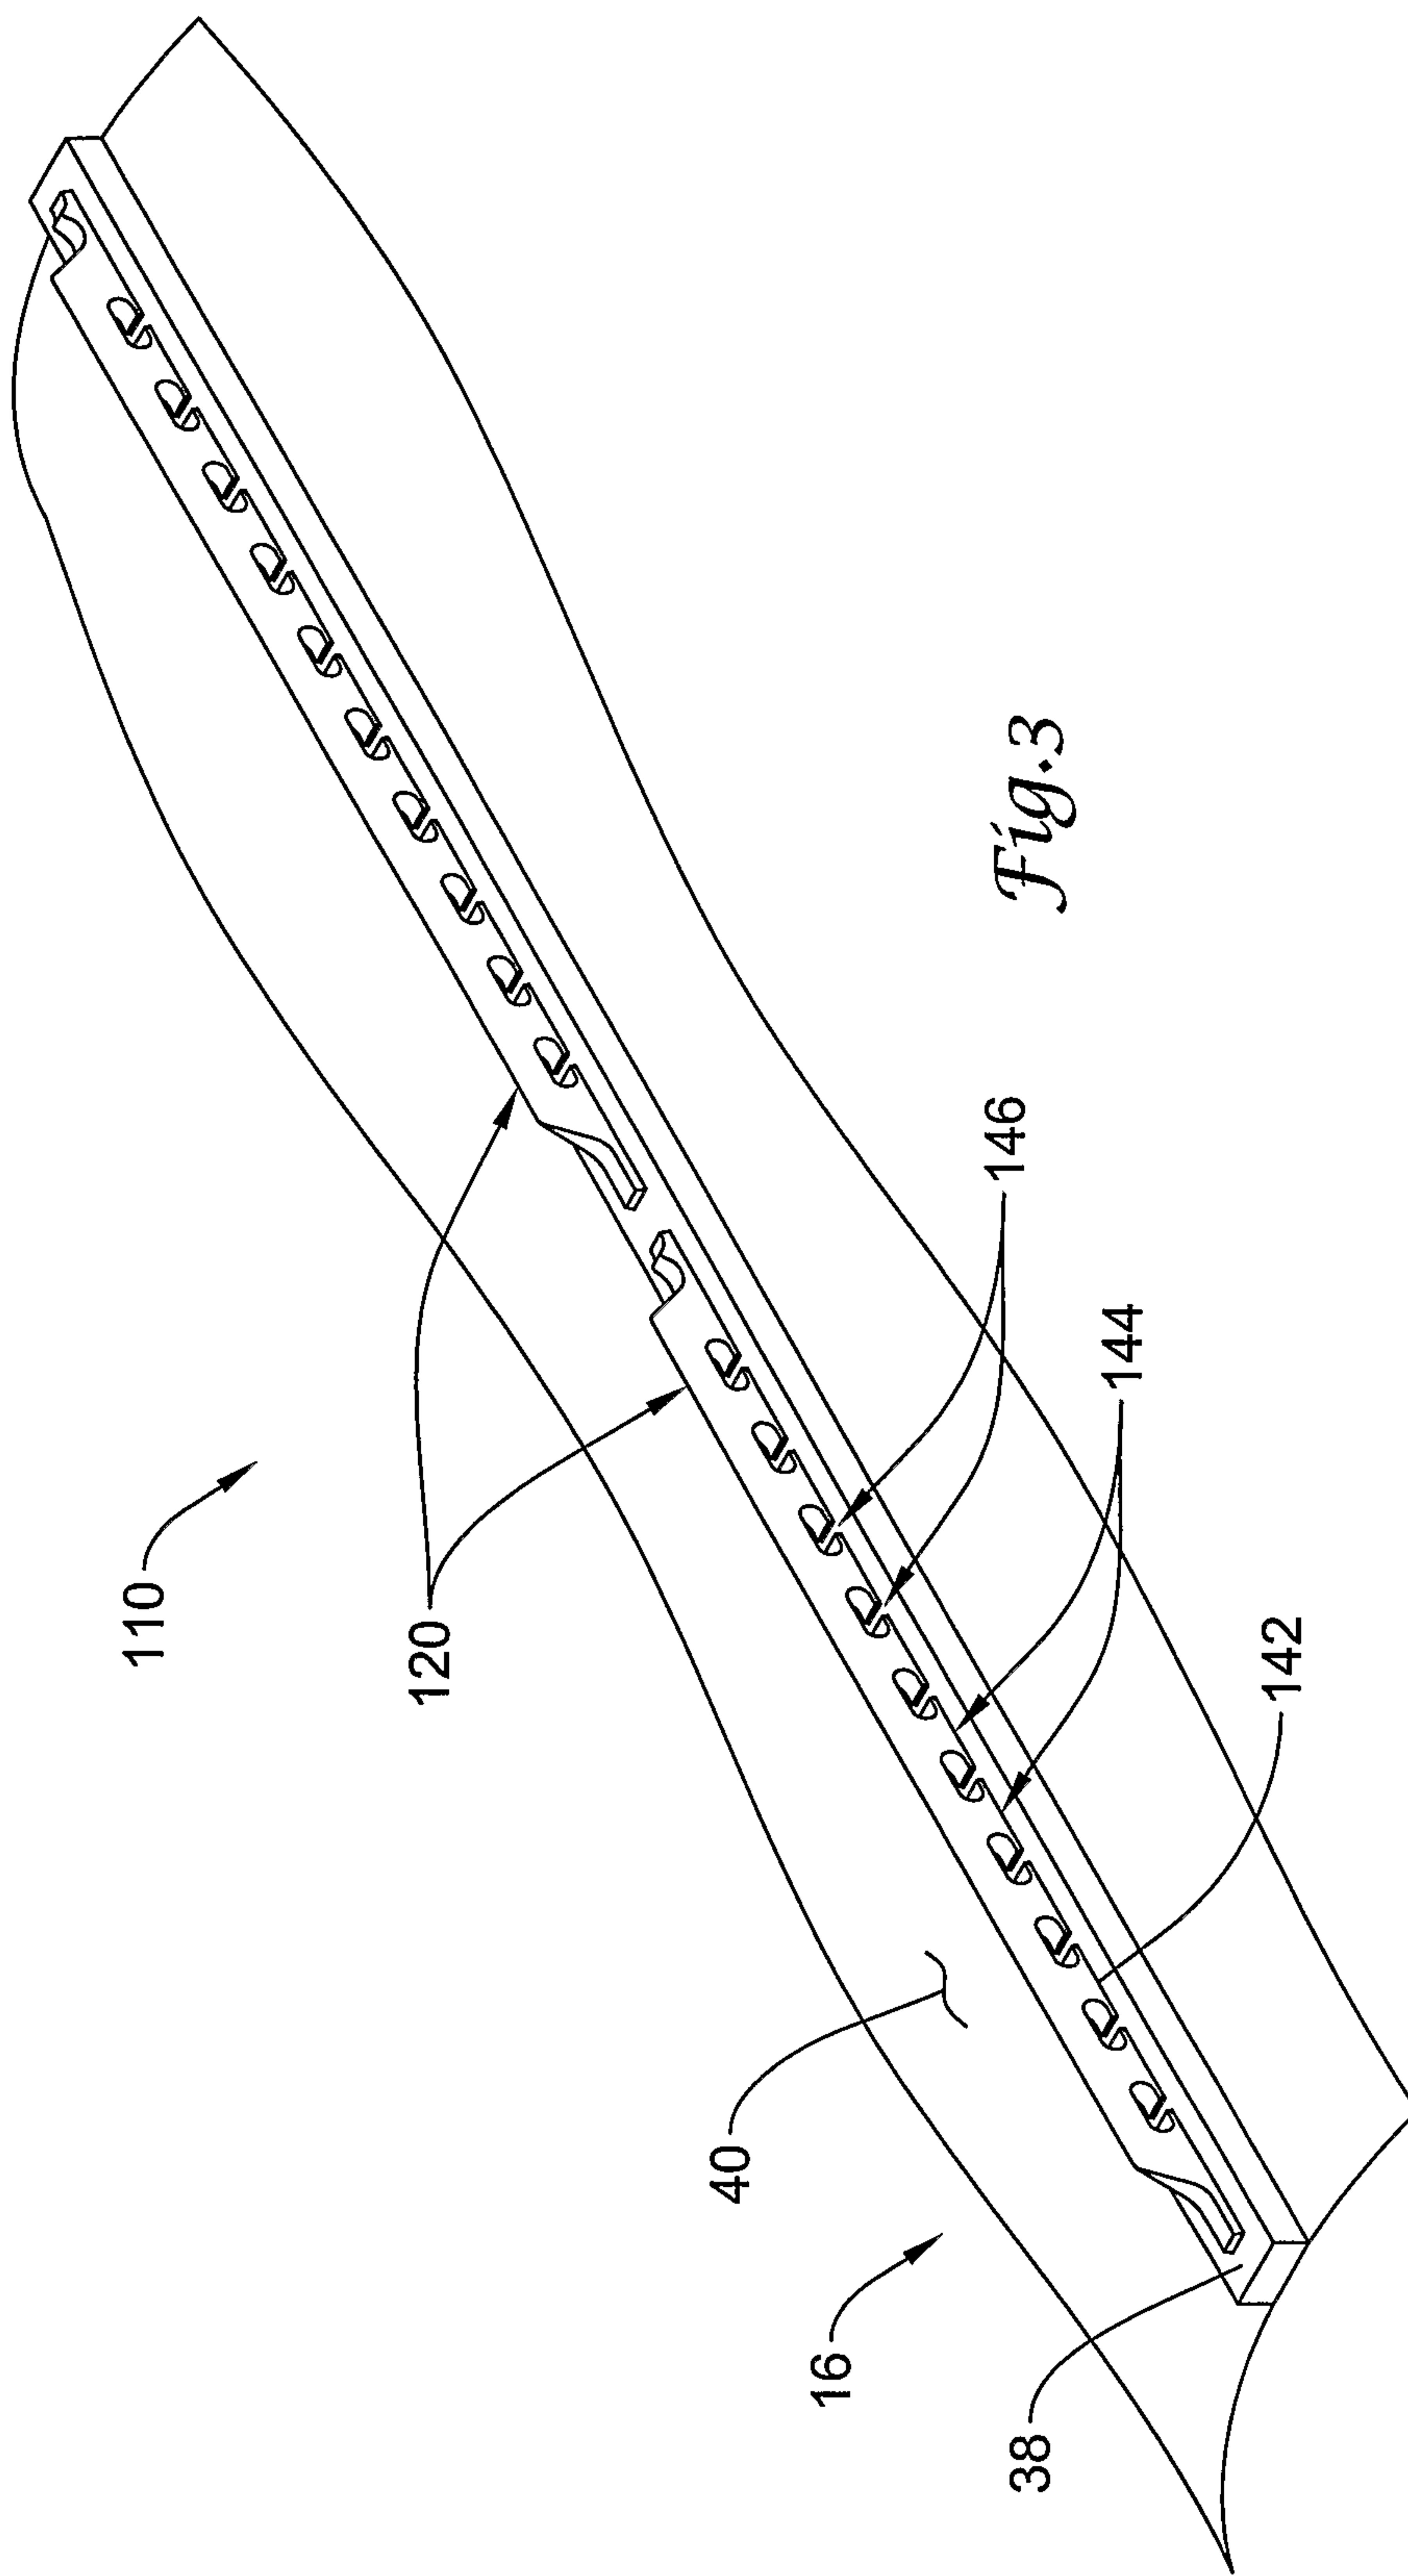

4/7

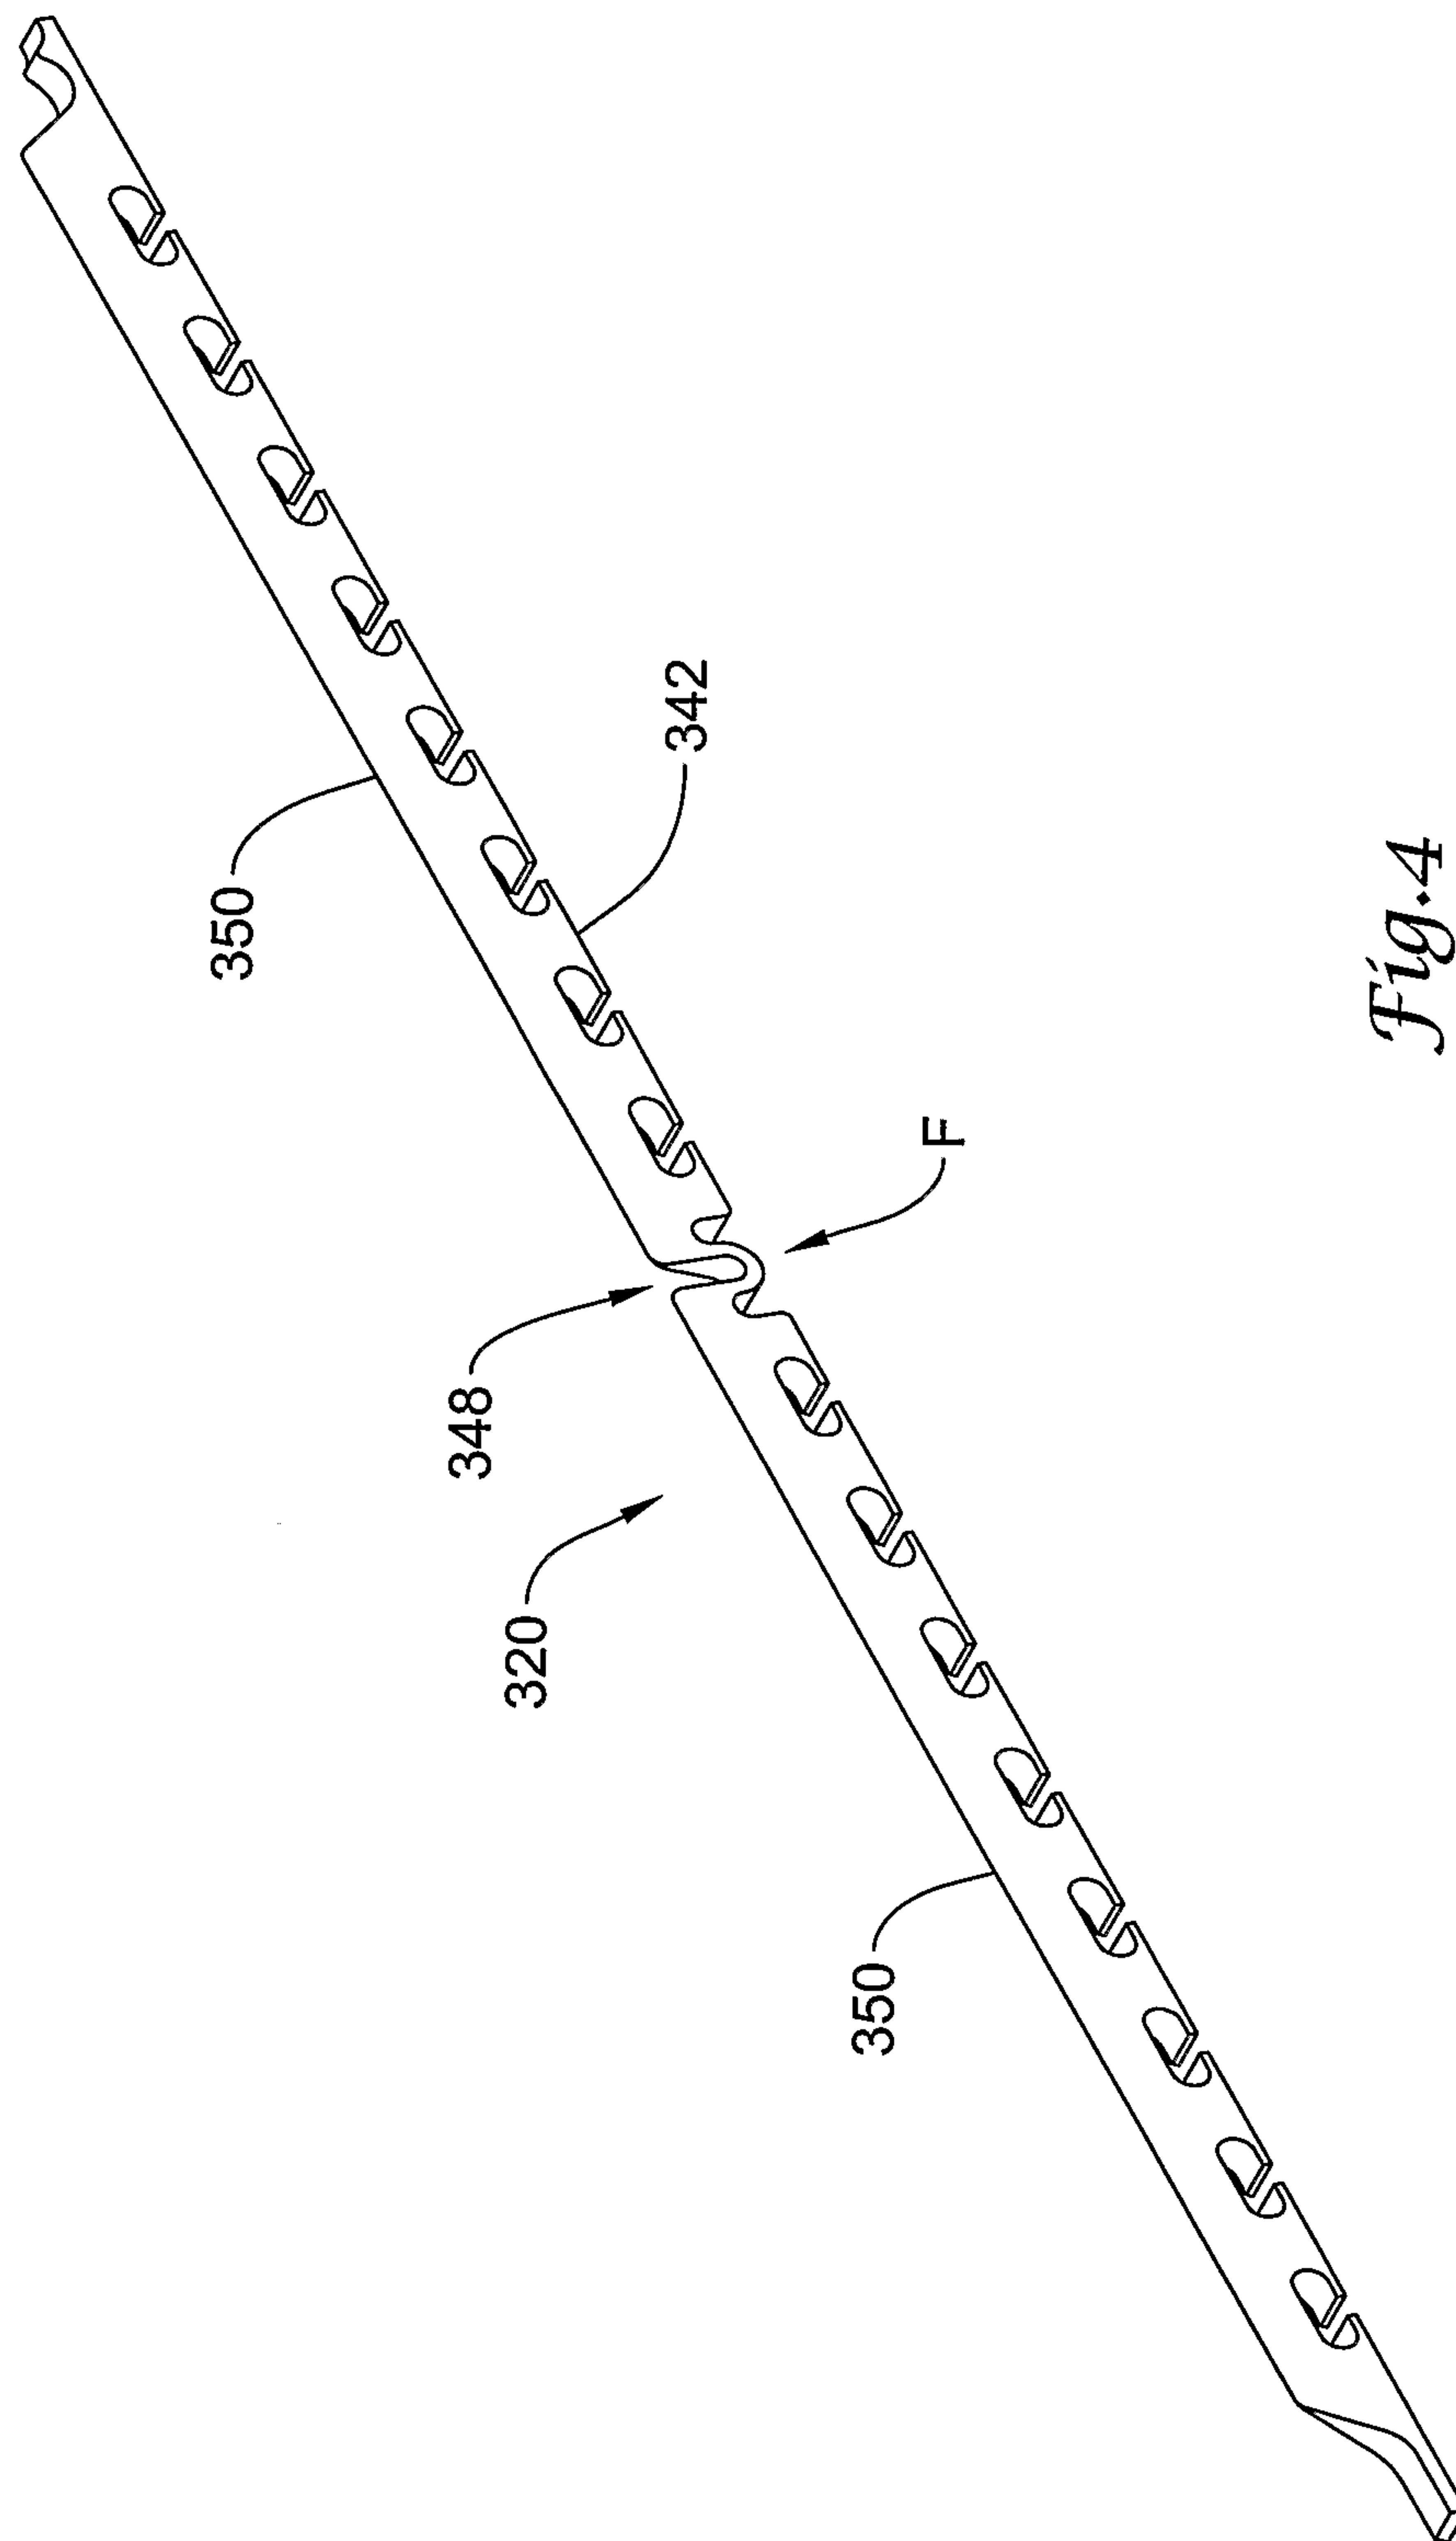
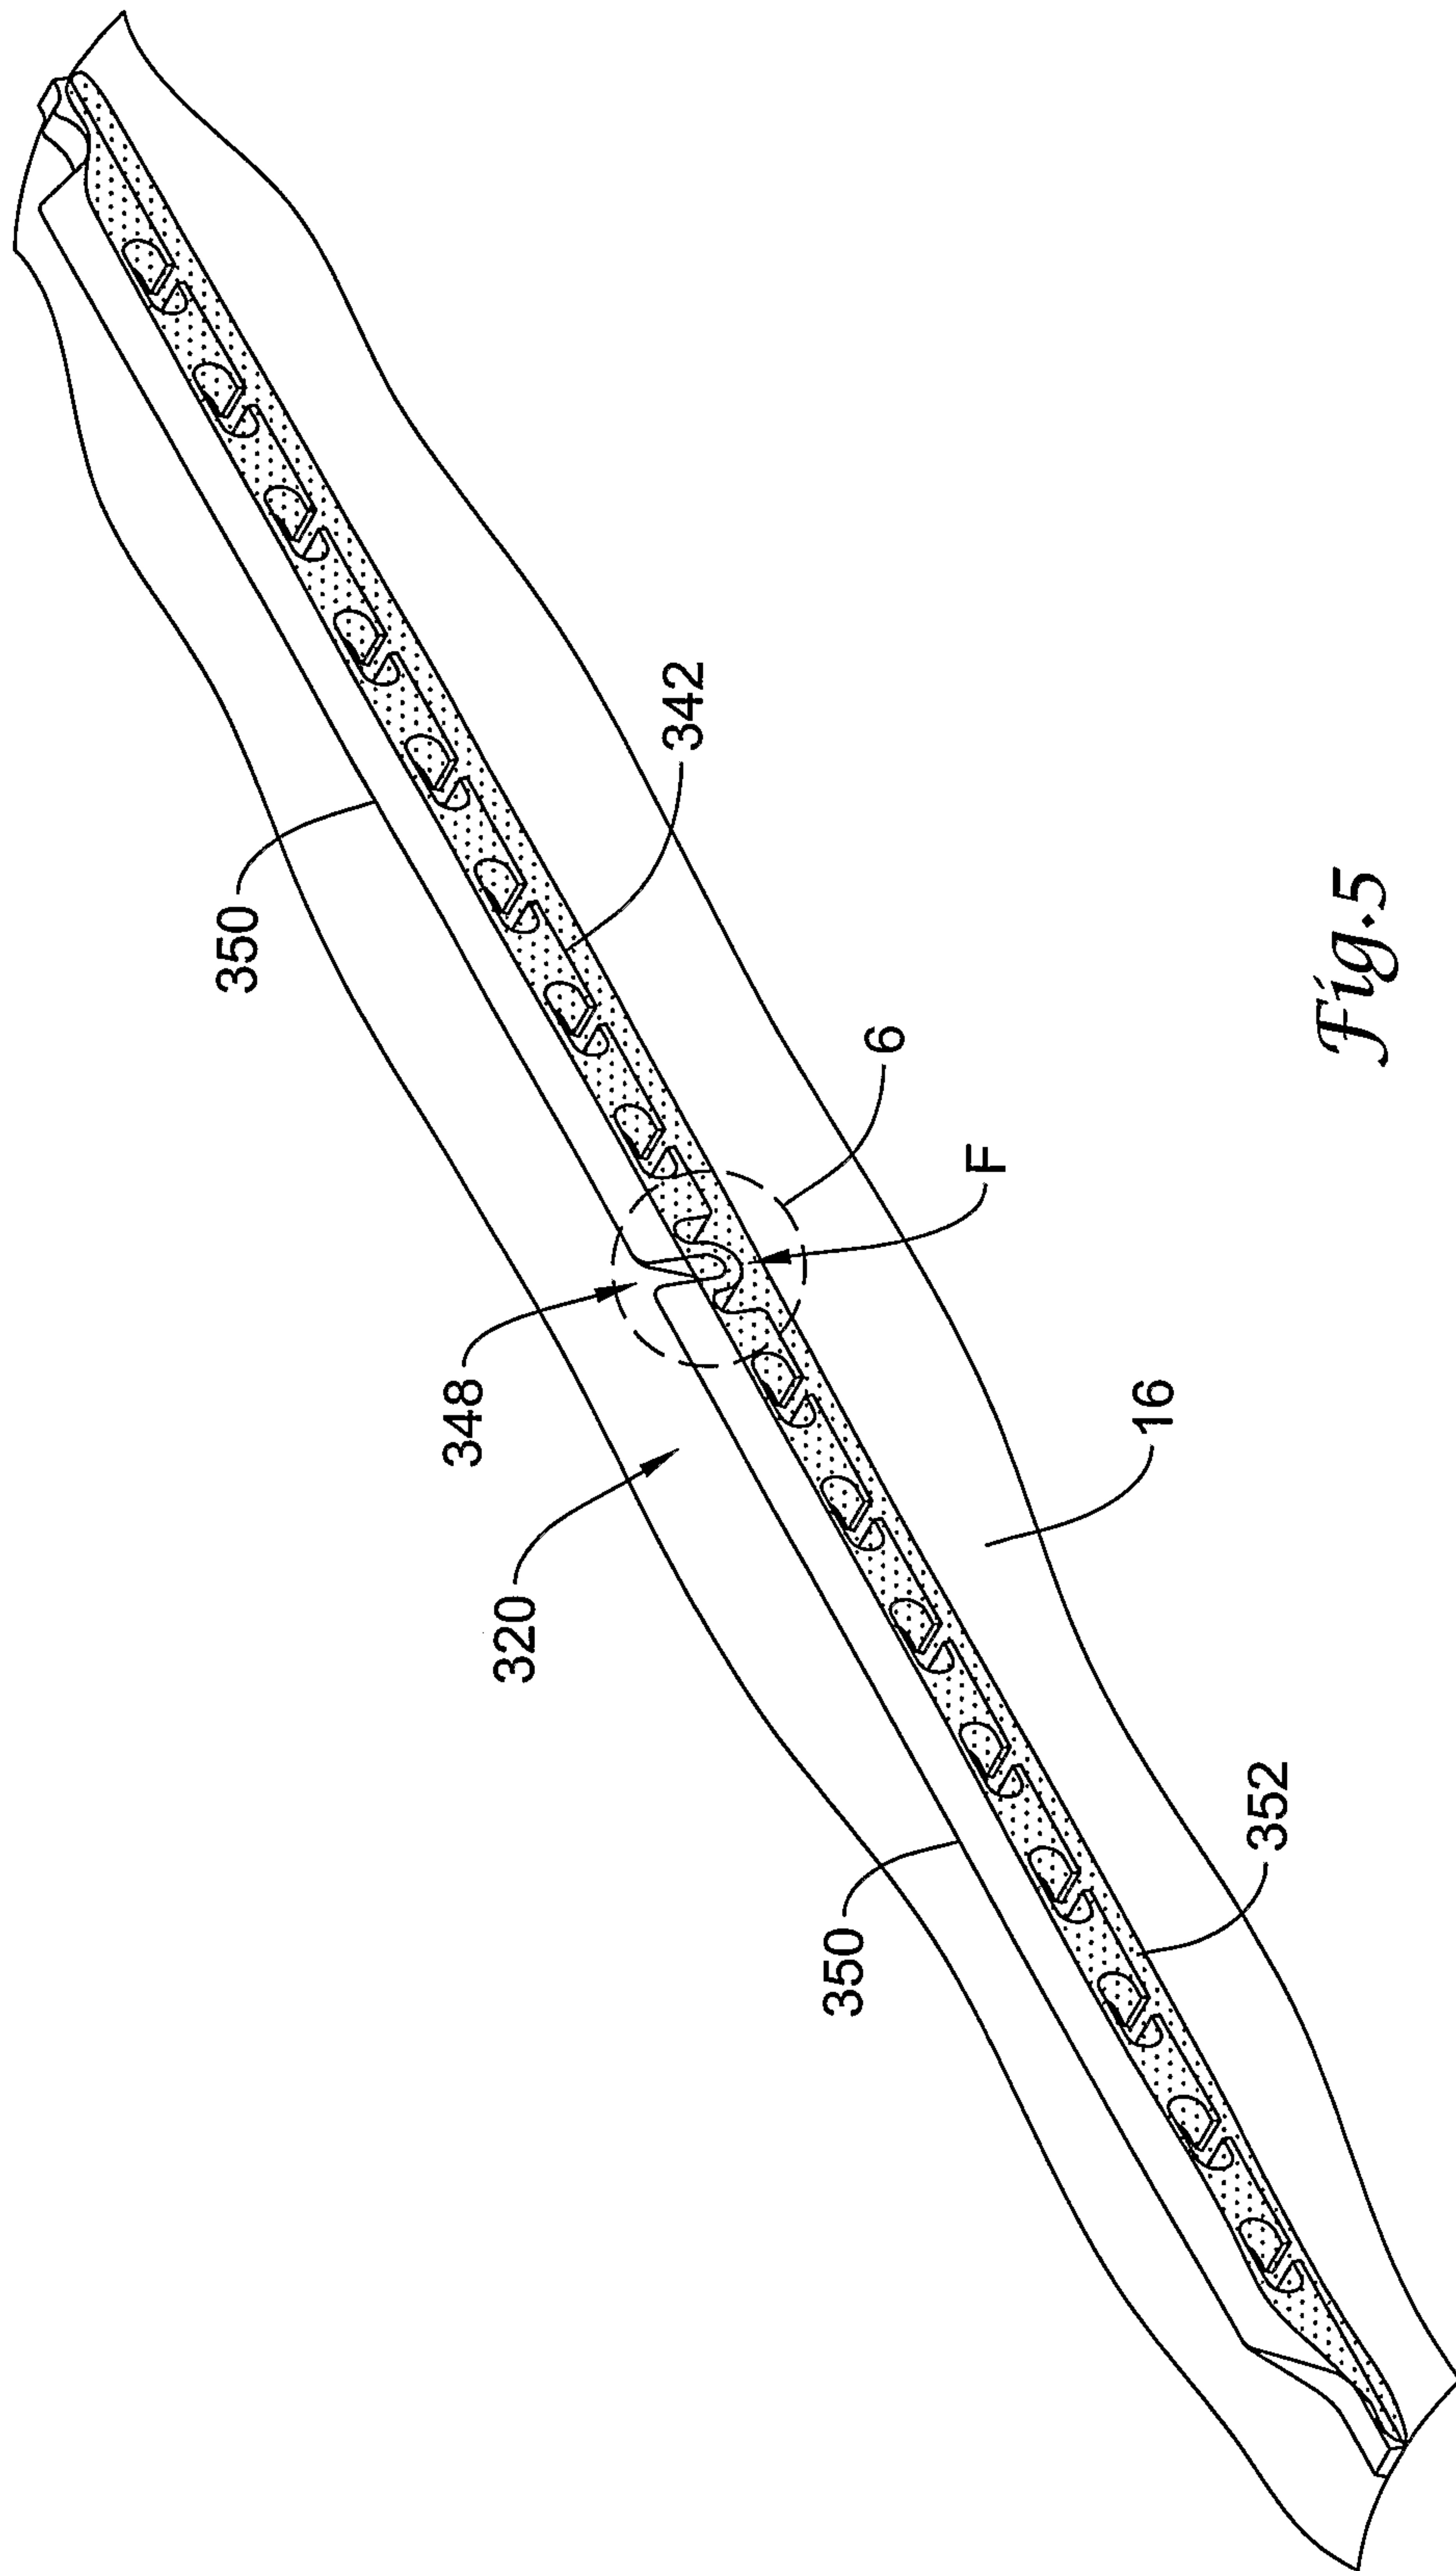
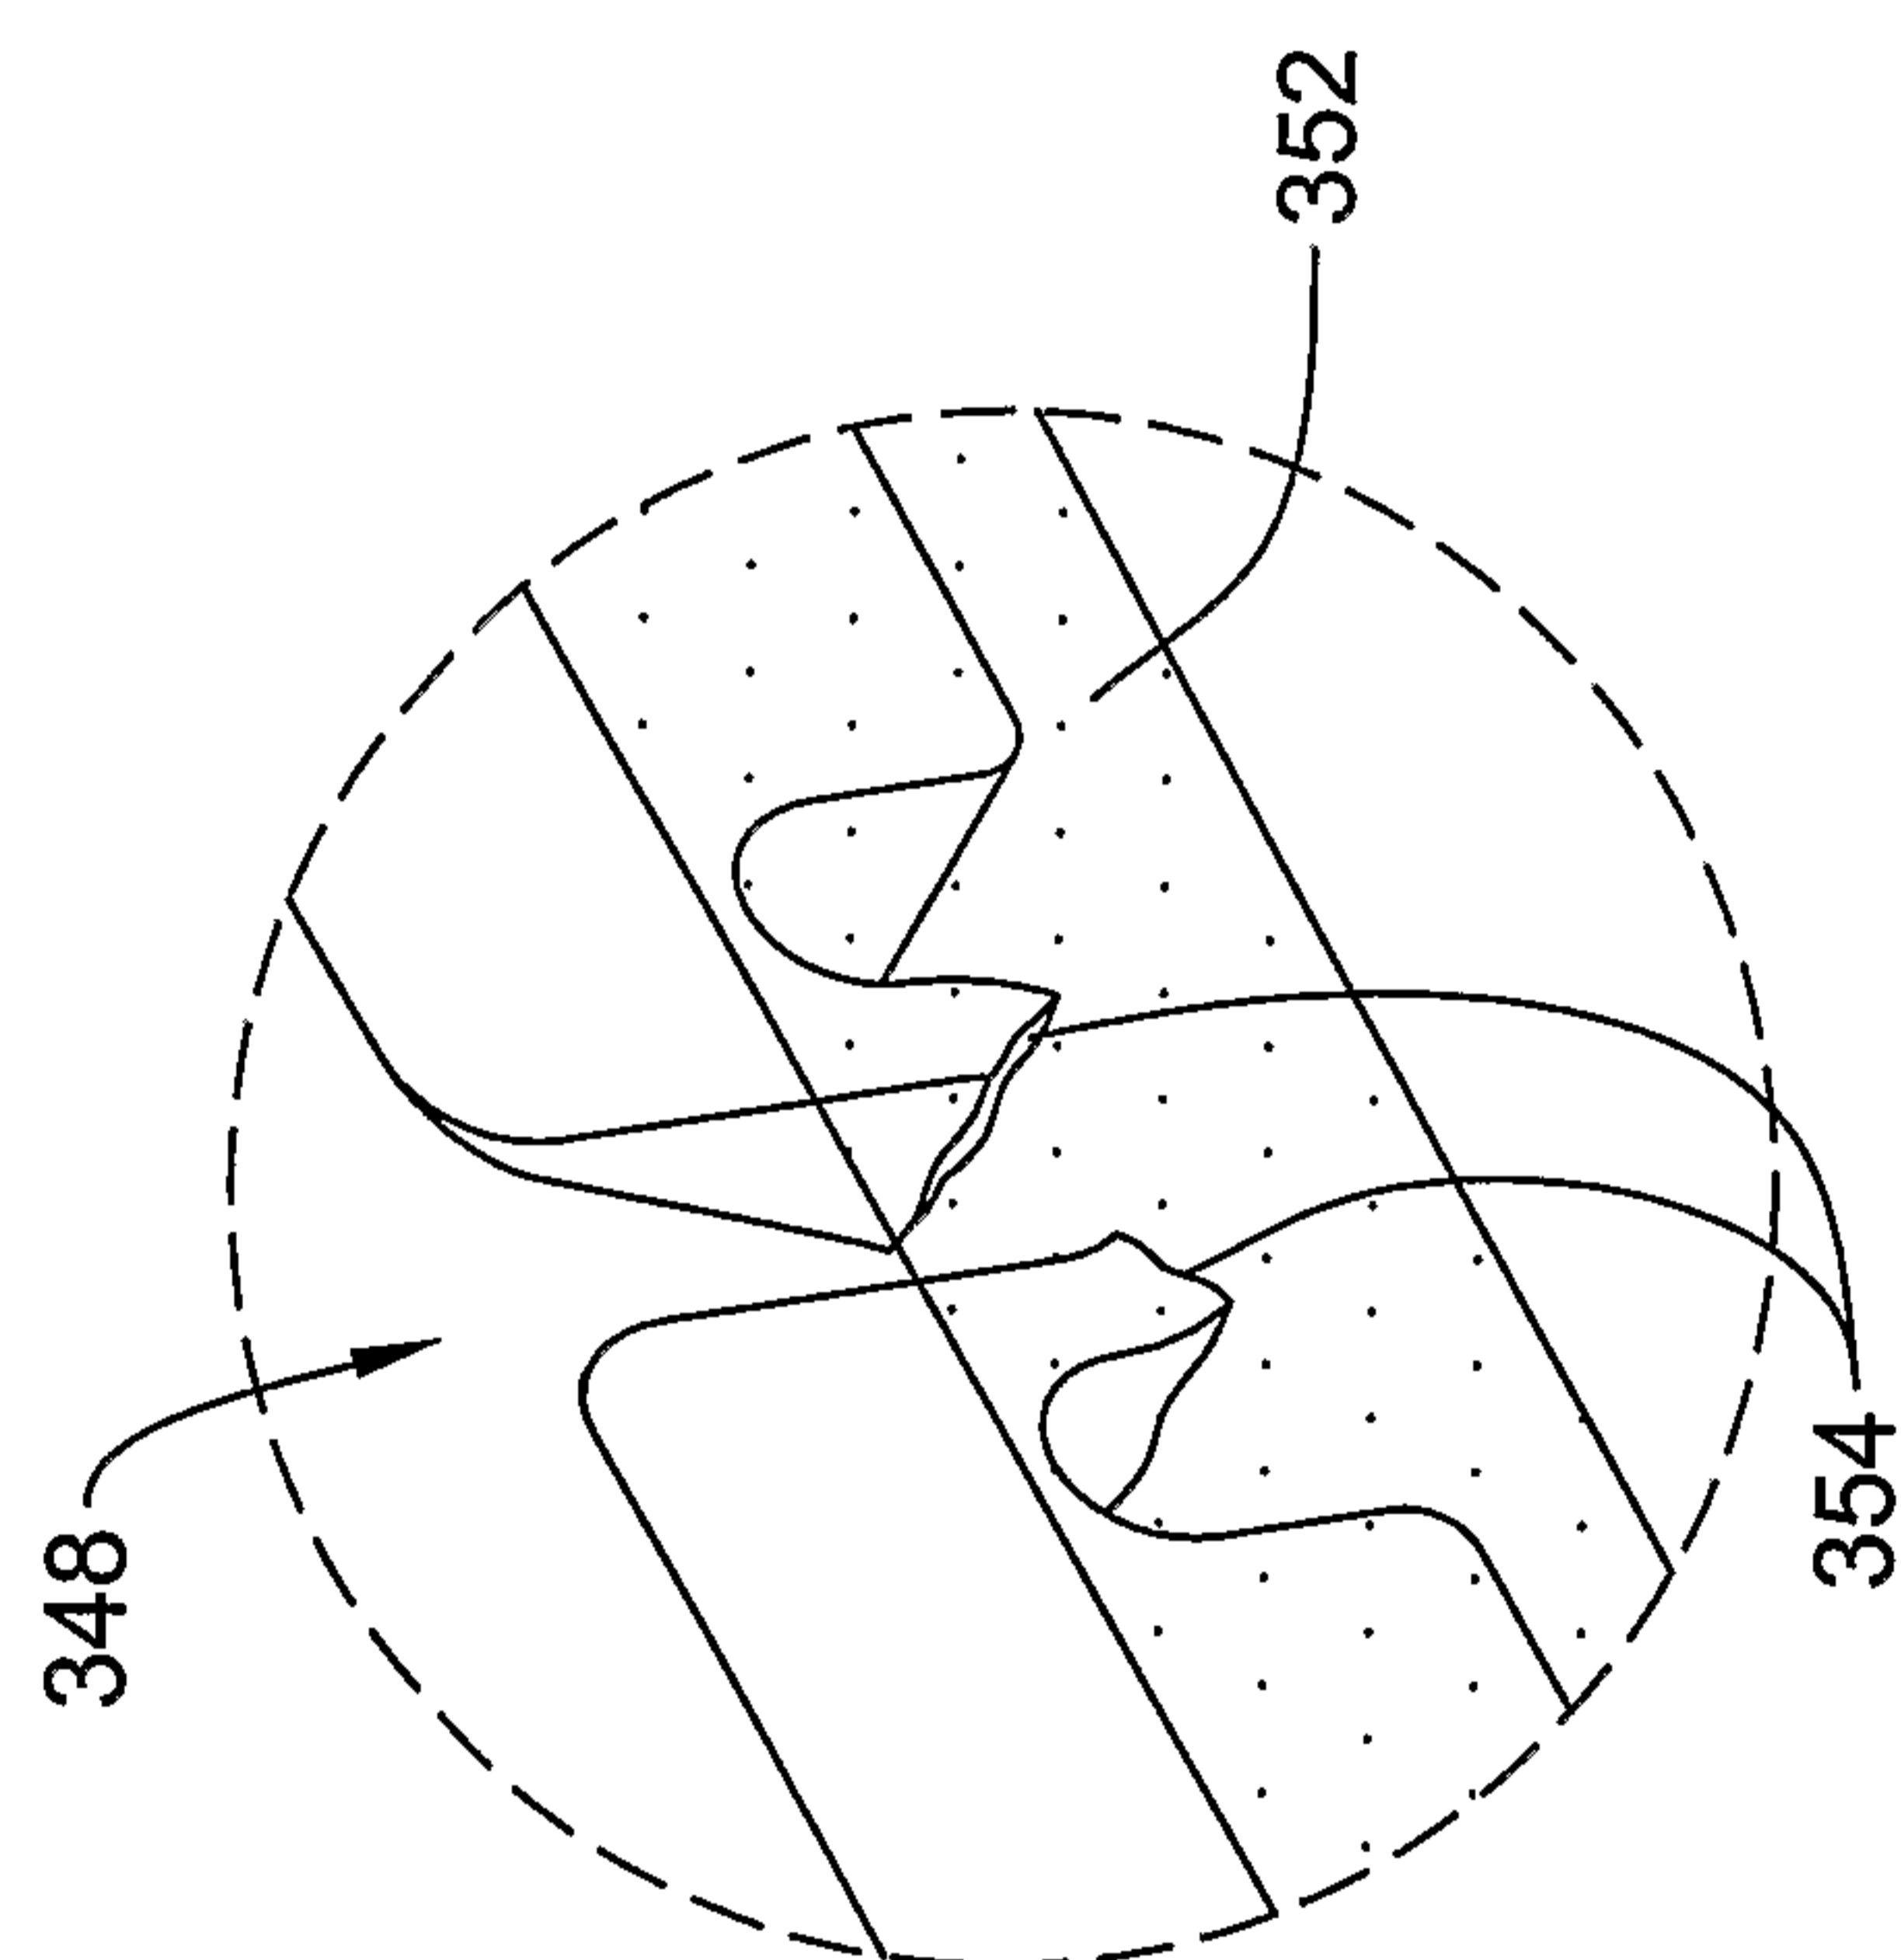


Fig.4

5/7

*Fig.5*

6/7

*Fig. 6*

7/7

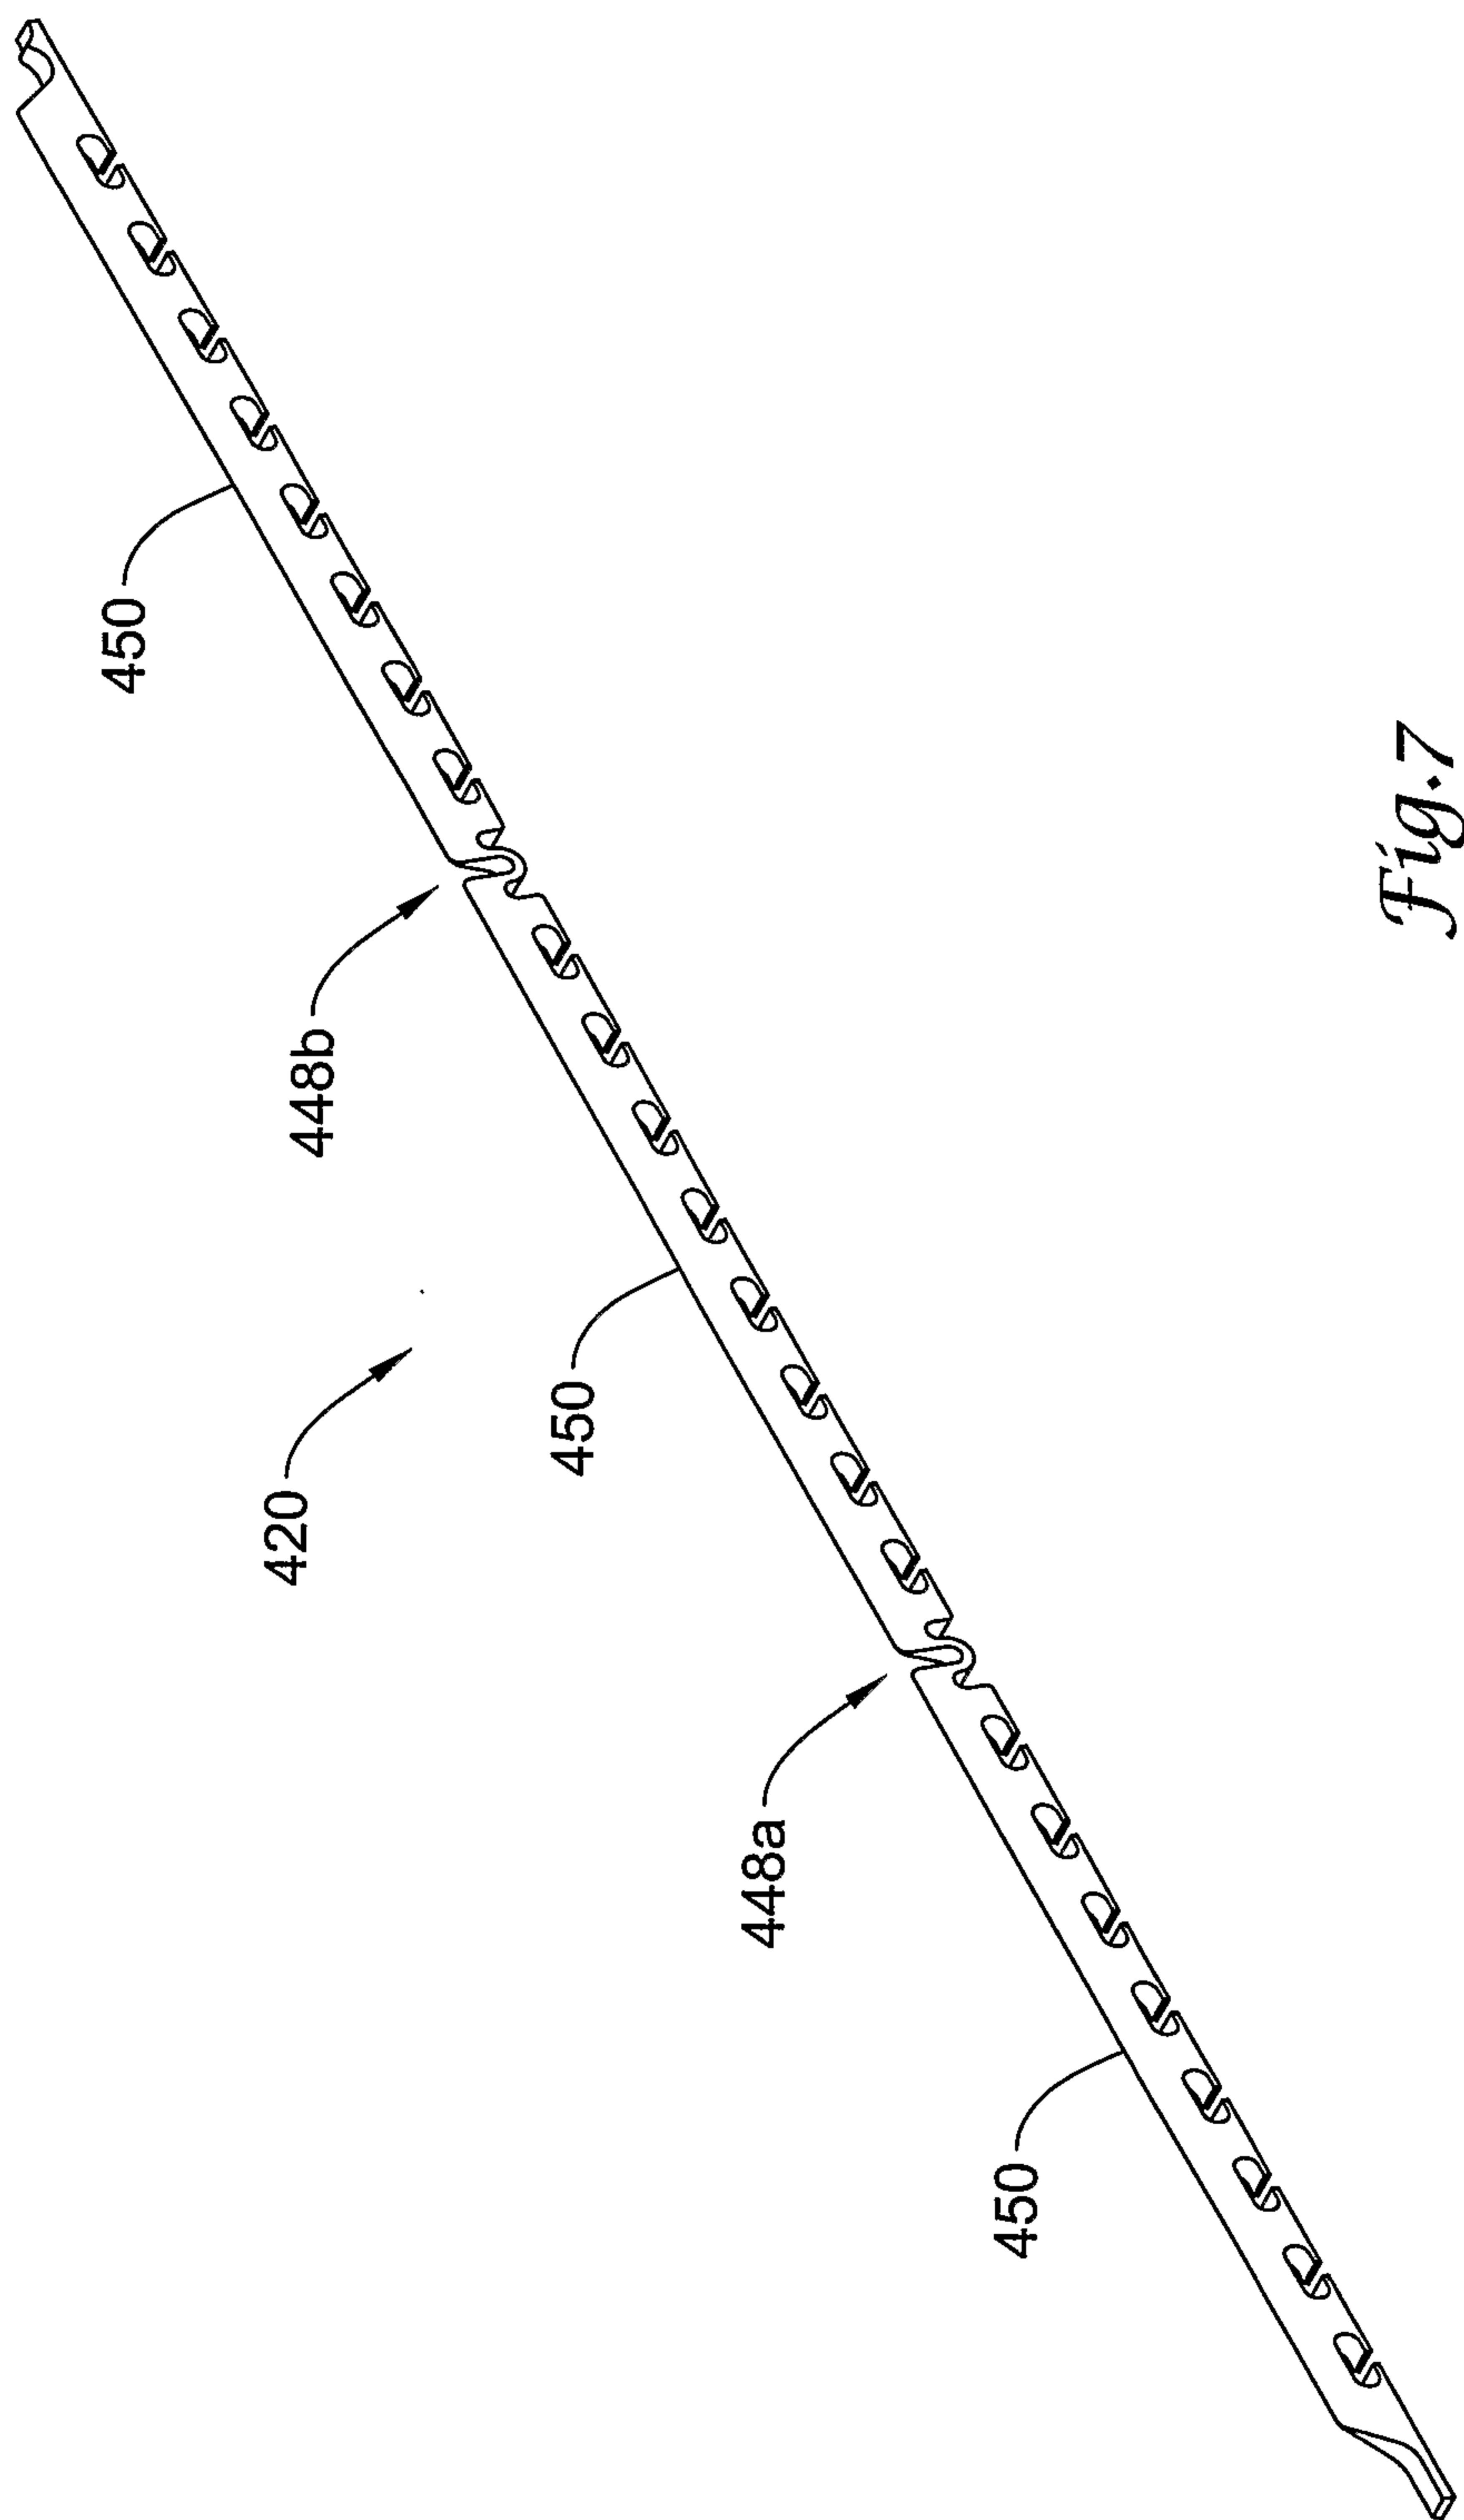


Fig.7

