



US00RE50246E

(19) **United States**  
(12) **Reissued Patent**  
**Wahl et al.**

(10) **Patent Number:** **US RE50,246 E**  
(45) **Date of Reissued Patent:** **\*Dec. 31, 2024**

(54) **GOLF CLUB HEAD**

(71) Applicant: **Taylor Made Golf Company, Inc.**,  
Carlsbad, CA (US)

(72) Inventors: **Bret H. Wahl**, Escondido, CA (US);  
**Peter L. Larsen**, San Marcos, CA  
(US); **Loren Stowe**, Coeur d'Alene, ID  
(US)

(73) Assignee: **Taylor Made Golf Company, Inc.**,  
Carlsbad, CA (US)

(\*) Notice: This patent is subject to a terminal disclaimer.

(21) Appl. No.: **17/976,001**

(22) Filed: **Oct. 28, 2022**

#### Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **9,265,995**  
Issued: **Feb. 23, 2016**  
Appl. No.: **14/465,587**  
Filed: **Aug. 21, 2014**

U.S. Applications:

(60) Continuation of application No. 17/975,150, filed on  
Oct. 27, 2022, which is a continuation of application  
(Continued)

(51) **Int. Cl.**  
**A63B 53/04** (2015.01)  
**A63B 53/08** (2015.01)  
(Continued)

(52) **U.S. Cl.**

CPC ..... **A63B 53/0475** (2013.01); **A63B 53/047**  
(2013.01); **A63B 53/08** (2013.01);  
(Continued)

(58) **Field of Classification Search**

CPC ... **A63B 53/047**; **A63B 52/0475**; **A63B 60/00**;  
**A63B 53/0454**; **A63B 60/42**;  
(Continued)

(56) **References Cited**

#### U.S. PATENT DOCUMENTS

4,523,759 A 6/1985 Igarashi  
5,007,643 A 4/1991 Okumoto et al.  
(Continued)

#### FOREIGN PATENT DOCUMENTS

JP 4109973 4/1992  
JP H06154368 6/1994  
(Continued)


*Primary Examiner* — William C Doerrler

(74) *Attorney, Agent, or Firm* — Dawsey Co., LPA;  
David J. Dawsey

(57) **ABSTRACT**

An iron-type golf club head is disclosed having a heel portion, a sole portion, a toe portion, a top-line portion, a front portion, a rear portion, and a striking face. A back wall is also disclosed in the rear portion enclosing a portion of the rear portion to create an enclosed cavity. The cavity is defined by at least a rear surface of the striking face, an inner back wall surface, and the sole portion. A plug and a filler material is located within the enclosed cavity. The filler material surrounds the plug and is configured to hold the plug in place. The plug is lighter than the filler material.

**64 Claims, 9 Drawing Sheets**

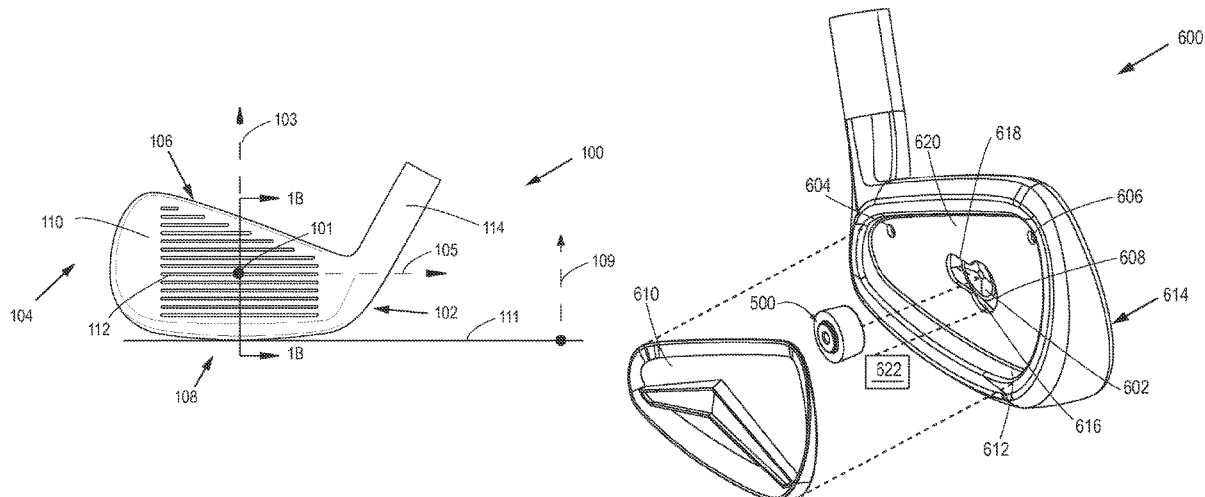

# US RE50,246 E

Page 2

## Related U.S. Application Data

No. 16/656,356, filed on Oct. 17, 2019, now Pat. No. Re. 49,326, which is a continuation of application No. 15/904,245, filed on Feb. 23, 2018, now Pat. No. Re. 47,653, which is an application for the reissue of Pat. No. 9,265,995, which is a continuation of application No. 13/960,554, filed on Aug. 6, 2013, now Pat. No. 8,814,725, which is a division of application No. 13/709,876, filed on Dec. 10, 2012, now Pat. No. 8,517,863, which is a continuation of application No. 13/327,638, filed on Dec. 15, 2011, now Pat. No. 8,328,663, which is a continuation of application No. 12/462,198, filed on Jul. 29, 2009, now Pat. No. 8,088,025.

### (51) Int. Cl.

*A63B 60/00* (2015.01)  
*A63B 60/42* (2015.01)  
*B23P 17/04* (2006.01)

### (52) U.S. Cl.

CPC ..... *A63B 60/00* (2015.10); *B23P 17/04*  
 (2013.01); *A63B 53/0454* (2020.08); *A63B*  
*53/0462* (2020.08); *A63B 2053/0491*  
 (2013.01); *A63B 60/42* (2015.10); *Y10T*  
*29/49993* (2015.01)

### (58) Field of Classification Search

CPC ..... *A63B 2053/0491*; *A63B 53/0462*; *B23P*  
*17/04*; *Y10T 29/49993*  
 See application file for complete search history.

### (56) References Cited

#### U.S. PATENT DOCUMENTS



5,104,123	A	4/1992	Okitsu et al.
5,135,227	A	8/1992	Okumoto et al.
5,277,423	A	1/1994	Artus
5,348,302	A	9/1994	Sasamoto et al.
5,465,969	A	11/1995	Cadorniga
5,499,819	A *	3/1996	Nagamoto ..... 473/346
5,529,543	A	6/1996	Beaumont, Sr.

5,649,873	A	7/1997	Fuller
5,697,855	A	12/1997	Aizawa
5,766,092	A	6/1998	Mimeur et al.
6,306,048	B1	10/2001	McCabe et al.
6,743,117	B2	6/2004	Gilbert
6,835,144	B2	12/2004	Best
6,918,840	B2	7/2005	Stites et al.
6,921,343	B2	7/2005	Solheim
6,921,344	B2	7/2005	Gilbert et al.
6,923,732	B2	8/2005	Stites et al.
6,991,559	B2	1/2006	Yabu
7,004,852	B2	2/2006	Billings
7,022,029	B2	4/2006	Caldwell
7,140,974	B2	11/2006	Chao et al.
7,147,571	B2	12/2006	Best et al.
7,189,165	B2	3/2007	Yamamoto
7,207,899	B2	4/2007	Imamoto
7,232,377	B2	6/2007	Gilbert et al.
7,267,620	B2	9/2007	Chao et al.
7,288,030	B2	10/2007	Blankenship
7,300,361	B2	11/2007	Stites et al.
7,303,486	B2	12/2007	Imamoto
7,316,623	B2	1/2008	Imamoto
7,476,162	B2	1/2009	Stites et al.
7,481,719	B2	1/2009	Imamoto
7,628,712	B2	12/2009	Chao et al.
9,265,995	B2	2/2016	Wahl et al.
RE47,653	E *	10/2019	Wahl ..... A63B 53/0475
RE49,326	E *	12/2022	Wahl ..... A63B 53/047
2005/0075191	A1	4/2005	Bennett
2007/0049417	A1	3/2007	Shear
2007/0129162	A1	6/2007	Pan et al.
2007/0129166	A1	6/2007	Shimazaki et al.
2007/0155533	A1	7/2007	Solheim et al.
2008/0004134	A1	1/2008	Roach et al.
2008/0032813	A1	2/2008	Hagood et al.
2008/0032815	A1	2/2008	Yamamoto
2008/0058117	A1	3/2008	Roach
2014/0364248	A1	12/2014	Wahl et al.


#### FOREIGN PATENT DOCUMENTS

JP	9117537	5/1997
JP	2005-218510	8/2005
JP	2006-167033	6/2006
WO	WO2006/017605	2/2006


\* cited by examiner

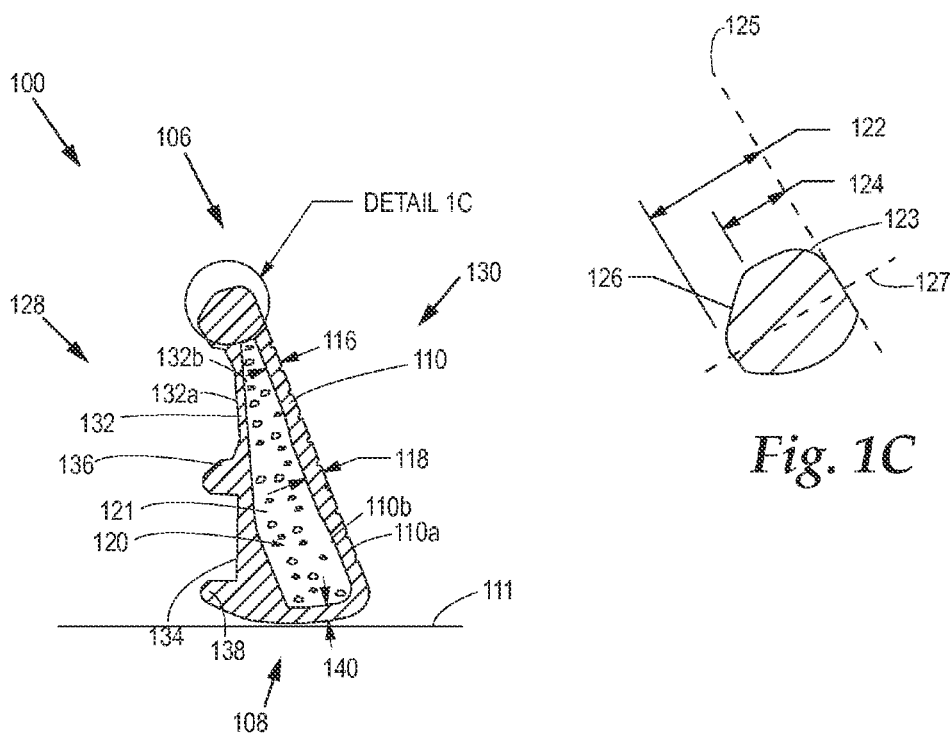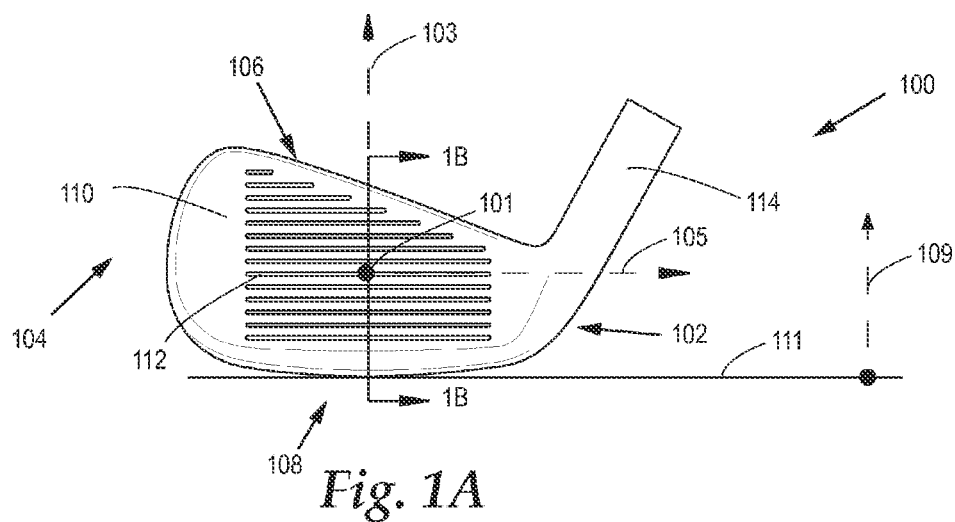


*Fig. 1B*

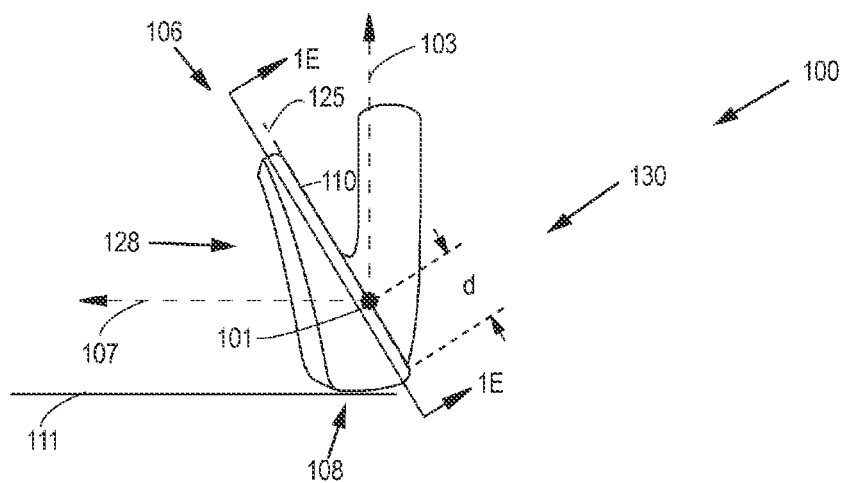


*Fig. 1D*

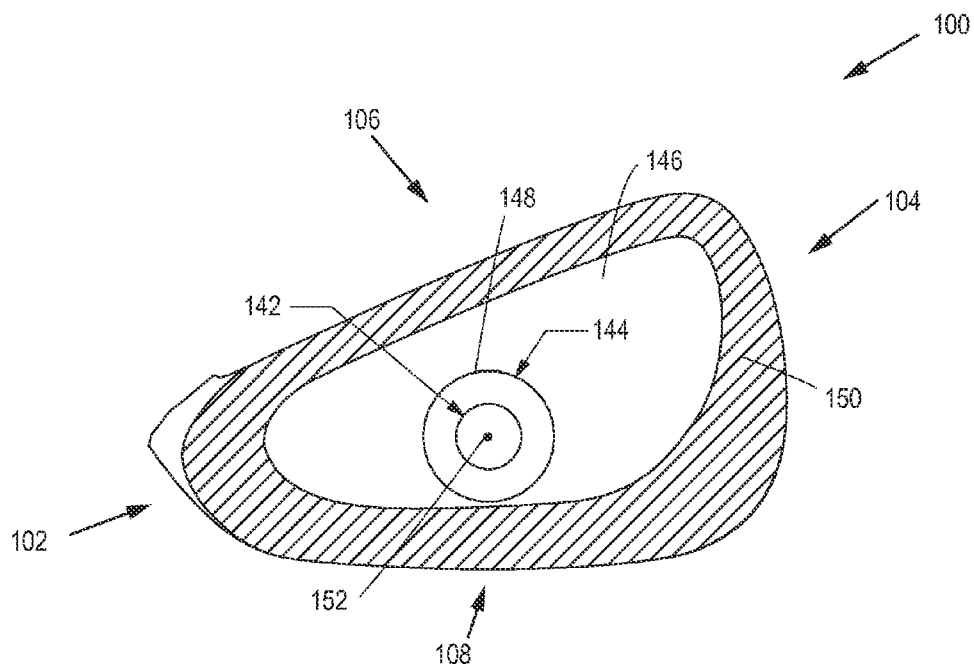


*Fig. 1E*

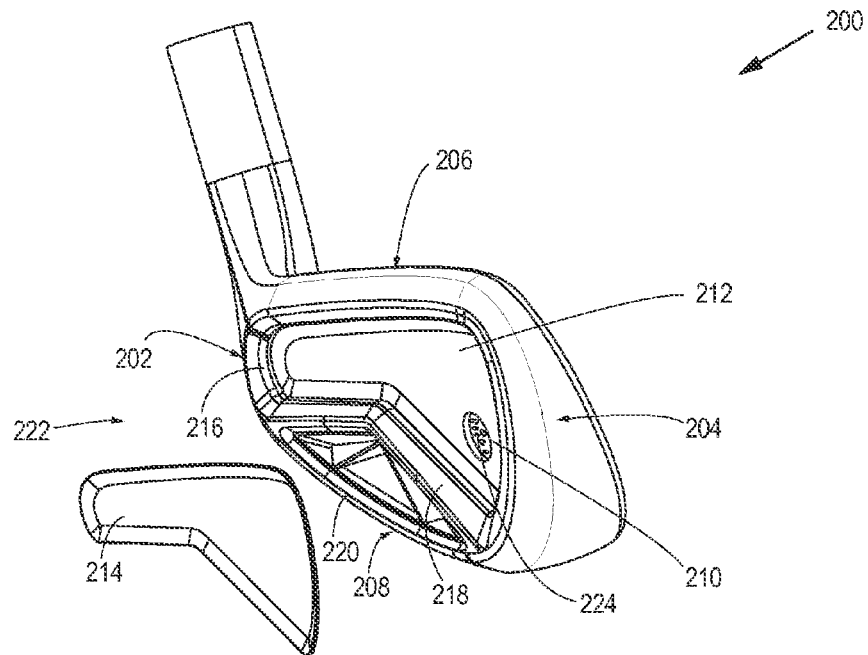


*Fig. 2A*

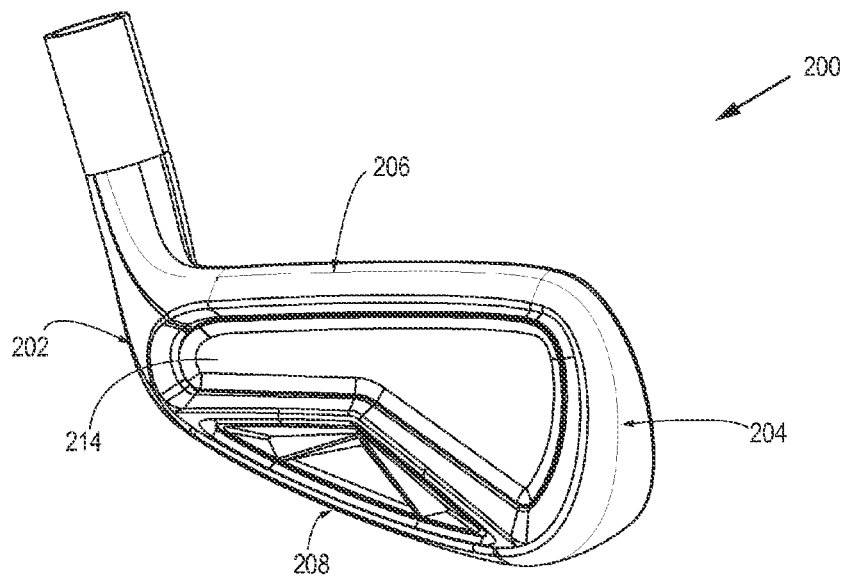


*Fig. 2B*

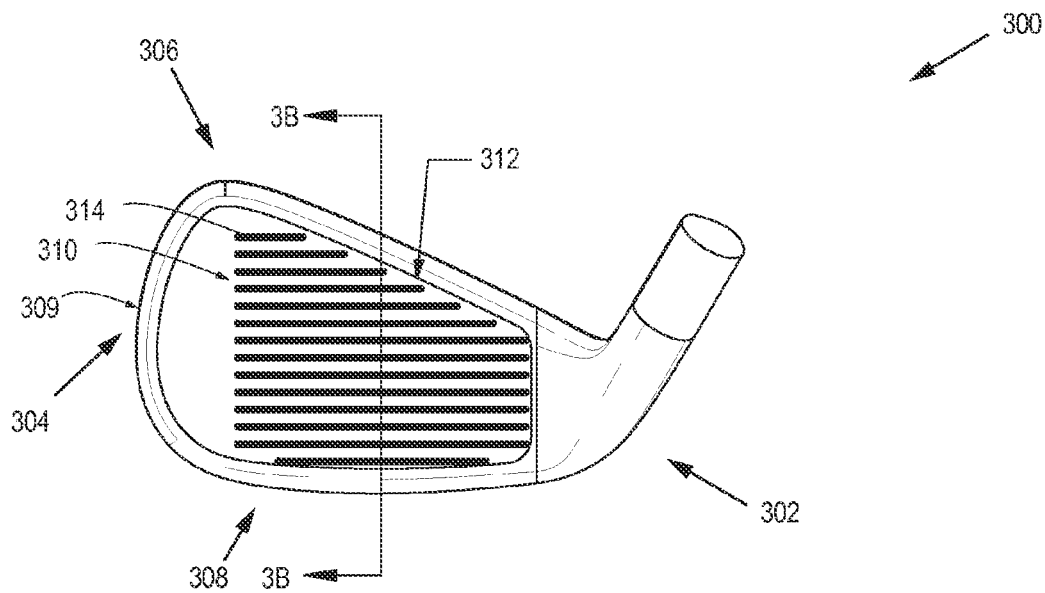


*Fig. 3A*

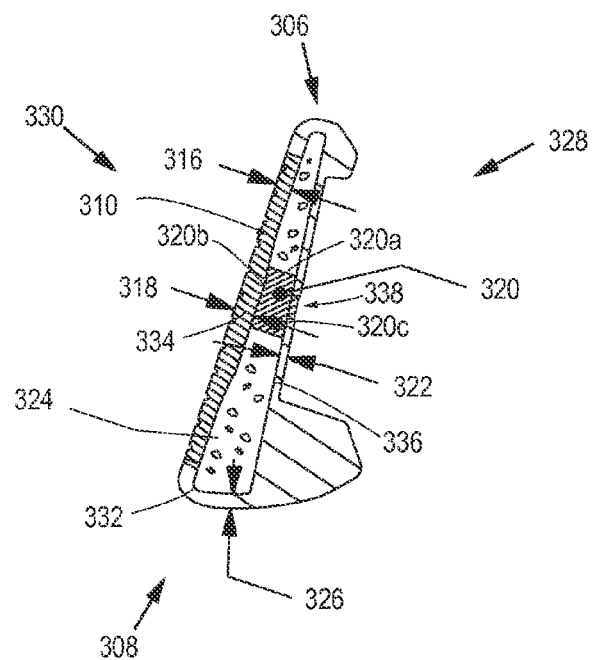


*Fig. 3B*

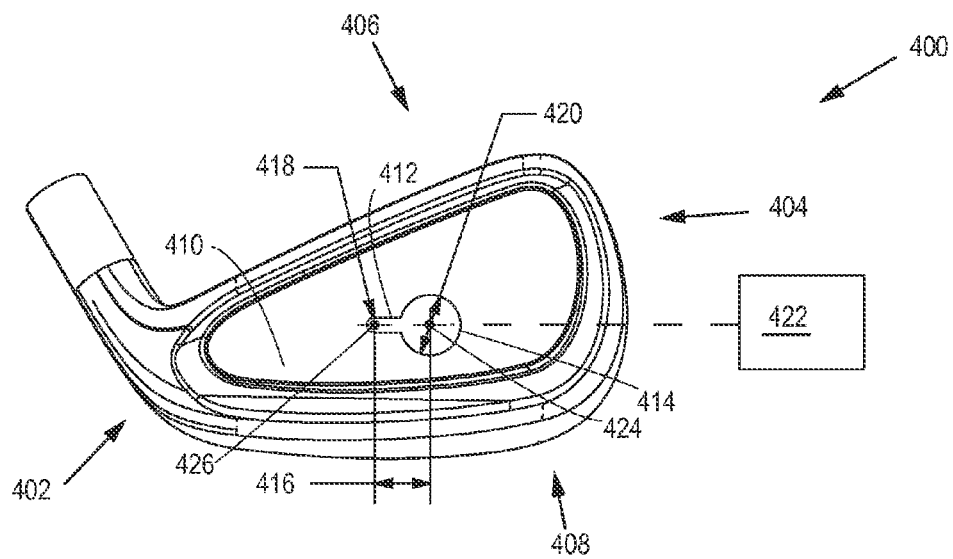

*Fig. 4*

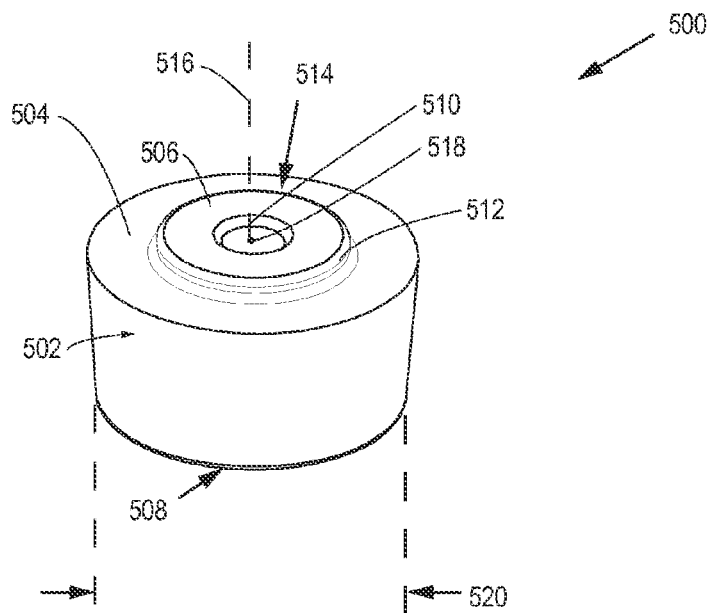


*Fig. 5A*

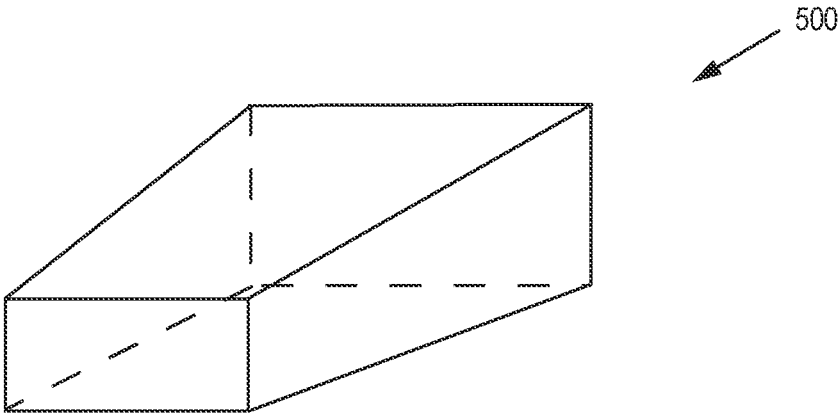


*Fig. 5B*




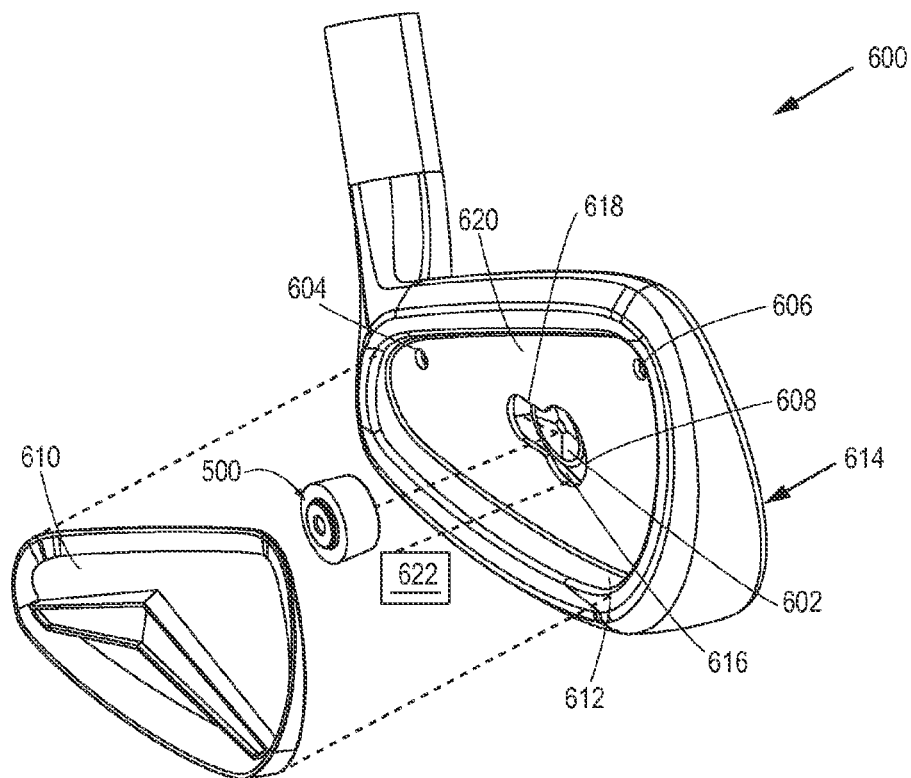

*Fig. 6A*

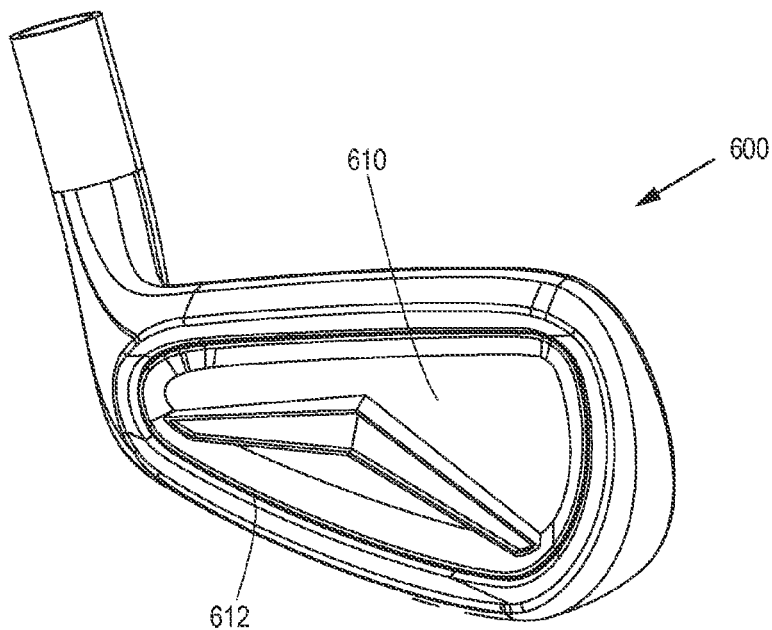

*Fig. 6B*

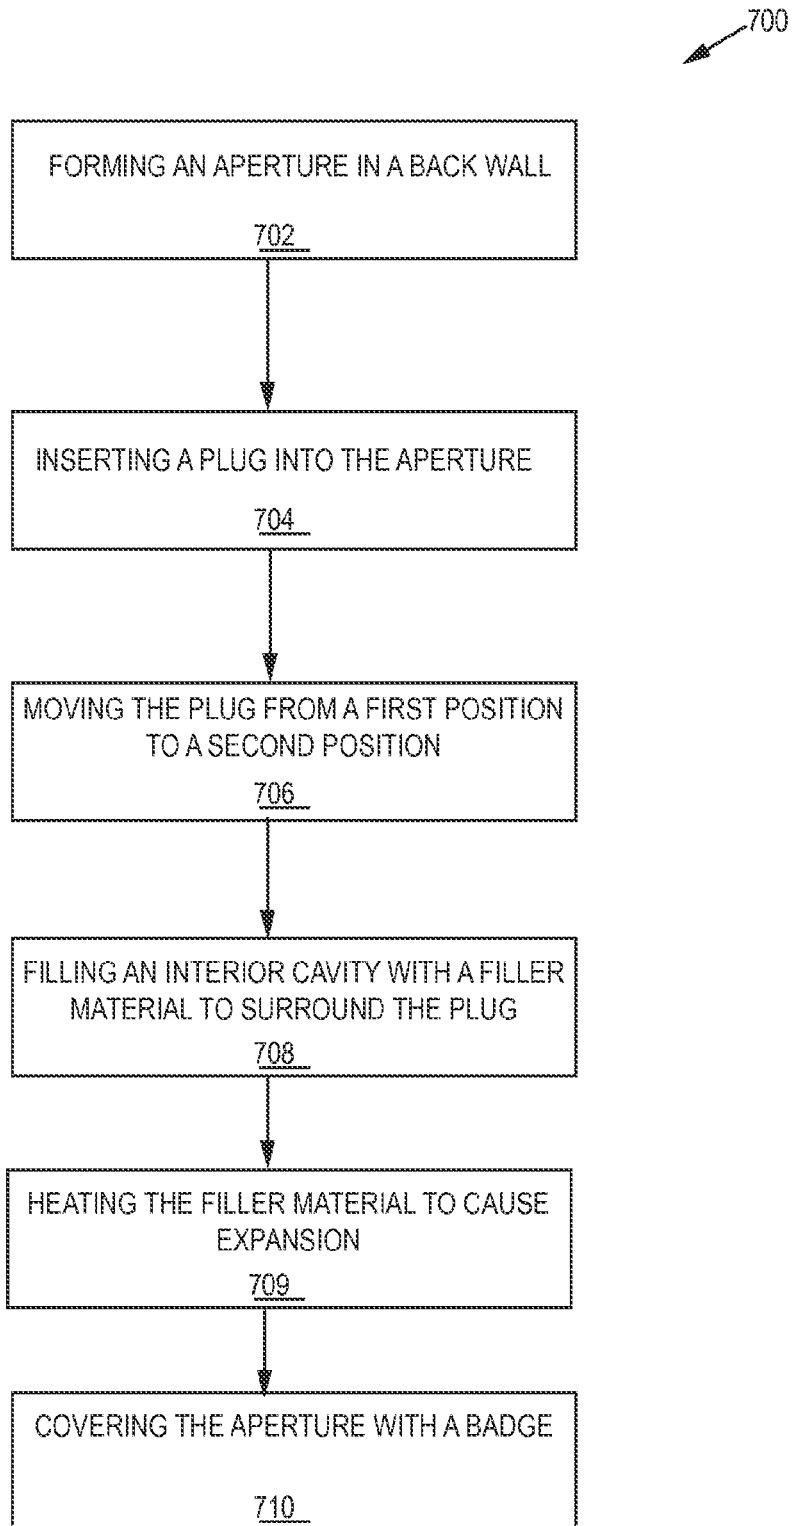*Fig. 7*

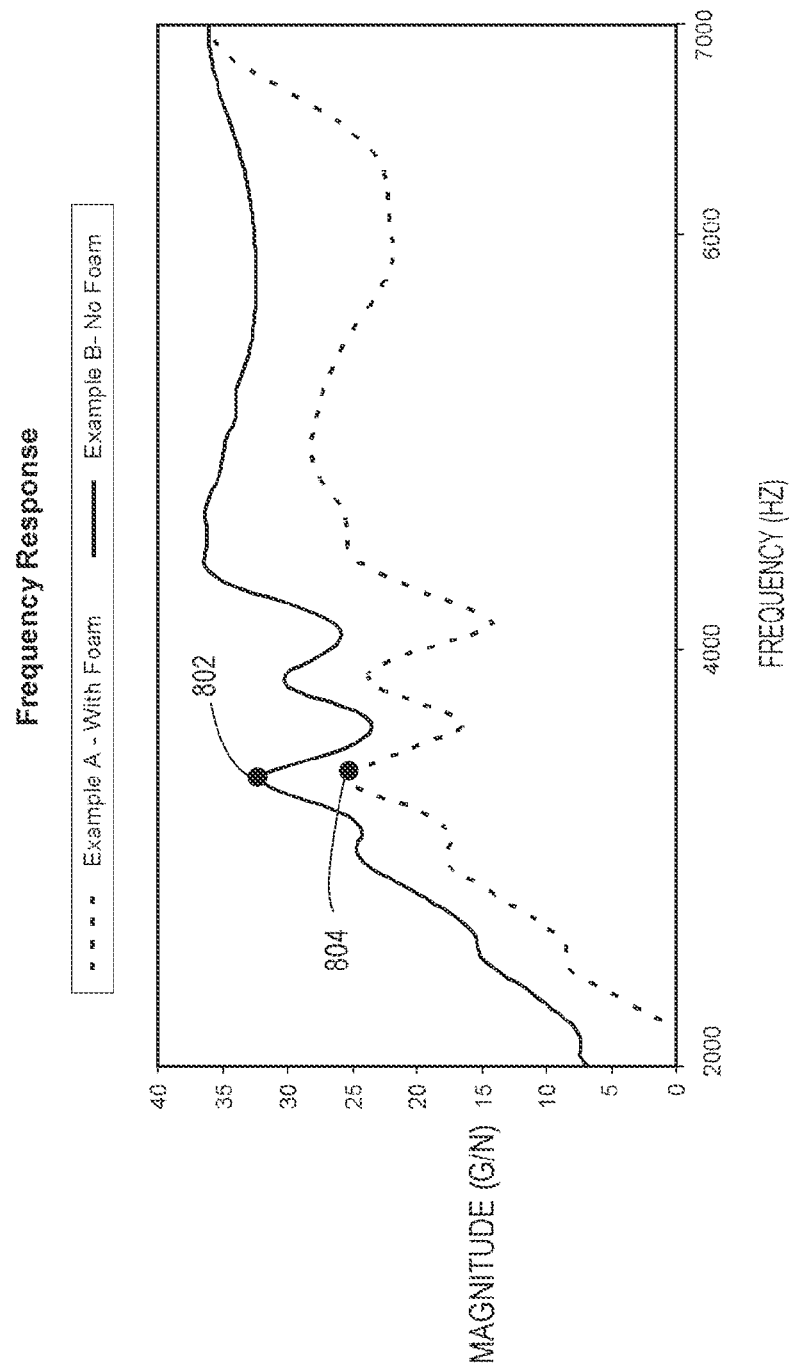


Fig. 8

## GOLF CLUB HEAD

**Matter enclosed in heavy brackets [ ] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.**

## CROSS-REFERENCE TO RELATED APPLICATION

This application is a *continuation reissue application of application Ser. No. 17/975,150, filed on Oct. 27, 2022, which is a continuation reissue application of application Ser. No. 16/656,356, filed on Oct. 17, 2019, which is a continuation reissue application of reissue application Ser. No. 15/904,245, filed on Feb. 23, 2018, now U.S. Pat. No. RE 47,653, which is an application for reissue of U.S. Pat. No. 9,265,995, issued Feb. 23, 2016, which is a continuation of application Ser. No. 13/960,554, filed on Aug. 6, 2013, now U.S. Pat. No. 8,814,725, which is a division of application Ser. No. 13/709,876, filed Dec. 10, 2012, now U.S. Pat. No. 8,517,863, which is a continuation of application Ser. No. 13/327,638, filed on Dec. 15, 2011, now U.S. Pat. No. 8,328,663, which is a continuation of application Ser. No. 12/462,198, filed on Jul. 29, 2009, now U.S. Pat. No. 8,088,025.*

## FIELD

The present disclosure relates to a golf club head. More specifically, the present disclosure relates to a golf club head filled with a dampening material.

## BACKGROUND

A golf set includes various types of clubs for use in different conditions or circumstances in which a ball is hit during a golf game. A set of clubs typically includes a “driver” for hitting the ball the longest distance on a course. A fairway “wood” can be used for hitting the ball shorter distances than the driver. A set of irons are used for hitting the ball within a range of distances typically shorter than the driver or woods.

An iron has a flat face that normally contacts the ball whenever the ball is being hit with the iron. Irons have angled faces for achieving lofts ranging from about 18 degrees to about 60 degrees.

Every club has a “sweet spot” that represents the best hitting zone on the face for maximizing the probability of the golfer achieving the best and most predictable shot using the particular club. Most golfers strive to make contact with the ball inside the sweet spot to achieve a desired trajectory. However, a golf club head may have a tendency to cause undesirable sounds and vibrations upon impact.

## SUMMARY OF THE DESCRIPTION

The present disclosure describes a golf club head comprising a heel portion, a toe portion, a crown, a sole, and a face.

The foregoing and other objects, features, and advantages of the invention will become more apparent from the following detailed description, which proceeds with reference to the accompanying figures.

According to one aspect of an embodiment of the present invention, a hollow iron-type golf club head is described including a heel portion, a sole portion, a toe portion, a top-line portion, a front portion, a rear portion, and a striking face. A back wall is located in the rear portion enclosing a substantial portion of the rear portion to create a substantially enclosed cavity. The enclosed cavity is defined by at least a rear surface of the striking face, an inner back wall surface, and the sole portion. At least one plug and a filler material located within the enclosed cavity are described. The filler material substantially surrounding the plug and is configured to hold the at least one plug in place.

In one example, the enclosed cavity has a volume between about 1 cc and 200 cc and an unsupported face area between about 300 mm<sup>2</sup> to about 4,000 mm<sup>2</sup> is described.

In another example, the unsupported face area includes a thickened central region and the plug is positioned to be in contact with at least a portion of the thickened central region. The at least one plug contacts the inner back wall surface.

In yet another example, the striking face includes a welded striking plate and a total striking face area is between about 2,700 mm<sup>2</sup> and 5,000 mm<sup>2</sup>.

In one example, an aperture into the enclosed cavity is provided for filling the cavity with the filler material. The filler material is an expanding foam material having a density between about 0.03 g/cc and about 0.19 g/cc.

In another example, the filler material occupies about 50% to about 99% of the total enclosed cavity volume. The filler material completely fills a remaining cavity volume around the at least one plug. The filler material contacts an entire first side surface of the at least one plug.

In yet another example, the filler material and the at least one plug have a combined weight of less than about 10 g or about 5 g.

In one example, the filler material and plug have a combined weight of less than about 20% of the total club head weight, or less than about 5%.

In another example, the back wall includes a first aperture having at least a first diameter and a slot configured to match at least a keying portion of the at least one plug and the coefficient of restitution of the club is greater than about 0.8.

In yet another example, the striking face includes a striking plate formed of a steel, such as maraging steels, maraging stainless steels, and PH stainless steels.

In one example, the plug is in direct contact with a rear surface of the striking face and at least a portion of the filler material is in direct contact with a rear surface of the striking face.

In another example, the back wall includes at least a first aperture. The first aperture is configured to allow the at least one plug to be inserted into the first aperture and is configured to allow the at least one plug to move from a first position to a second position.

In yet another example, the back wall includes at least one slot, the at least one slot being connected to the first aperture and is configured to secure the at least one plug.

According to one aspect of one embodiment of the present invention, a method of manufacturing a hollow iron-type golf club with a plug and filler material is described. A body including a heel portion, a sole portion, a toe portion, a top-line portion, a front portion, and a rear portion having a back wall is disclosed. An aperture is formed on the body. A striking face is formed and attached to the front portion of the body to form a cavity defined by a rear surface of the striking face, an inner surface of the back wall, and the sole portion. At least one plug is inserted into the aperture. The

at least one plug is in direct contact with the rear surface of the striking face and the inner surface of the back wall. The plug is moved from a first position to a second position. A filler material is inserted into the aperture. The filler material substantially surrounds the plug and is configured to hold the plug in place. The aperture is covered with a badge in the rear portion of the body.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example and not limitation in the figures of the accompanying drawings in which like references indicate similar elements.

FIG. 1A is a front view of an embodiment of a golf club head.

FIG. 1B is a cross-sectional view taken along section lines 1B-1B in FIG. 1A.

FIG. 1C is a magnified view of DETAIL 1C in FIG. 1B.

FIG. 1D is an elevated toe perspective view of a golf club head.

FIG. 1E is a cross-sectional view taken along section lines 1E-1E in FIG. 1D.

FIG. 2A is an exploded assembly view of a golf club head according to an embodiment.

FIG. 2B is an assembled view of a golf club head according to an embodiment.

FIG. 3A is a front view of another embodiment of a golf club head.

FIG. 3B is a cross-sectional view taken along section lines 3B-3B in FIG. 3A.

FIG. 4 is a rear view of a golf club head according to an embodiment.

FIG. 5A is an isometric view of a golf club head insert.

FIG. 5B is an isometric view of a golf club head insert.

FIG. 6A illustrates an exploded assembly view of a golf club head according to an embodiment.

FIG. 6B illustrates an assembled view of a golf club head according to an embodiment.

FIG. 7 illustrates a flow chart of a golf assembly operation.

FIG. 8 illustrates a graph of a frequency response of exemplary golf club heads.

#### DETAILED DESCRIPTION

Various embodiments and aspects of the inventions will be described with reference to details discussed below, and the accompanying drawings will illustrate the various embodiments. The following description and drawings are illustrative of the invention and are not to be construed as limiting the invention. Numerous specific details are described to provide a thorough understanding of various embodiments of the present invention. However, in certain instances, well-known or conventional details are not described in order to provide a concise discussion of embodiments of the present inventions.

FIG. 1A illustrates a hollow iron golf club head **100** including a heel **102**, toe **104**, sole portion **108**, and top line portion **106**. The striking face **110** includes grooves **112** that are designed for impact with the golf ball. In some embodiments, the golf club head **100** can be a single unitary cast piece, while in other embodiments, a striking plate can be formed separately to be adhesively or mechanically attached to the golf club head **100**.

FIGS. 1A and 1D also show a center point **101** being an ideal striking point in the center of the striking face **110** and respective orthogonal CG axes. A CG x-axis **105**, CG y-axis

**107**, and CG z-axis **103** intersect at the center point **101**. In addition, a CG z-up axis **109** is defined as an axis perpendicular to the ground plane **111** and having an origin at the ground plane **111**. The ground plane **111** is assumed to be a perfectly flat plane.

In certain embodiments, a desirable CG-x location is between about 5 mm (heel side) and about -5 mm (toe side) along the CG x-axis **105**. A desirable CG-y location is between about 0.25 mm to about 20 mm along the CG y-axis **107** toward the rear portion of the club head. Additionally, a desirable CG-z location is between about 12 mm to about 25 mm along the CG z-up axis **109**, as previously described.

FIG. 1B shows a cross sectional side view of the hollow iron golf club head **100** along the cross-section lines 1B-1B shown in FIG. 1A. The cross-section lines 1B-1B are taken through an ideal striking point **101** in the center of the striking face **110**. The ideal striking point **101** is located in a striking face plane **125** at the intersection of a first axis (within the face plane **125**) passing through the midpoint of the longest score-line groove and a second horizontal axis (within the face plane **125**) offset from the leading edge (defined as the intersection of the sole portion and the face plane **125**) by a distance *d* of about 16.5 mm within the face plane **125**, as shown in FIG. 1D. The striking face **110** includes a front surface **110a** and a rear surface **110b**. The hollow iron golf club head **100** further includes a back portion **128** and a front portion **130**. The striking face **110** located in the front portion **130** has an inverted cone profile or thickened central region that provides multiple thicknesses across the striking face **110**. The thickened central region can be a variety of profile shapes and is not restricted to a cone shape.

The striking face **110** has a first thickness **116** and a second thickness **118**. The second thickness is greater than the first thickness **116**. In certain embodiments, the first thickness **116** can be between about 1.5 mm and about 2.5 mm, with a preferred thickness of about 2 mm or less. The second thickness **118** can be between about 1.7 mm and about 2.5 mm or less than about 2.7 mm. Furthermore, the sole portion **108** has a sole thickness dimension **140** that extends within a region between a rear protrusion **138** and the striking face **110**. In certain embodiments, the sole thickness dimension **140** is between about 1 mm and about 2 mm, or less than about 2 mm. In one embodiment, a preferred sole thickness **140** is about 1.8 mm or less. A recess **134** is located above the rear protrusion **138** in the back portion **128** of the club head. A back wall **132** encloses the entire back portion **128** of the club head to define a cavity **120** that is primarily filled with a filler material **121**.

In one embodiment, the filler material **121** can be an expandable foam such as Expancel® 920 DU **40** which is an acrylic copolymer encapsulating a blowing agent, such as isopentane. A copolymer is greater than about 75 weight percent of the composition and the blowing agent is about 15-20 weight percent. The unexpanded particle size of the filler material **121** can be between about 2  $\mu$ m and about 90  $\mu$ m depending on the context.

In one embodiment, the density of the filler material **121** is between about 0.16 g/cc and about 0.19 g/cc or between about 0.03 g/cc and about 0.19 g/cc. In certain embodiments, the density of the filler material **121** is in the range of about 0.03 g/cc to about 0.2 g/cc, or about 0.04-0.10 g/cc. The density of the filler material **121** impacts the COR, durability, strength, and filling capacity of the club head. In general, a lower density material will have less of an impact on the COR of a club head. The filler material **121** can have a

5

hardness range of about 15-85 Shore OO hardness or about 80 Shore OO hardness or less.

In one embodiment, the filler material **121** is subject to heat for expansion of about 150° C. +/-10° C. for about 30 minutes. In some embodiments, the expansion of the filler material **121** can begin at about 125° C. to about 140° C. A maximum expansion temperature range can be between about 160° C. to about 190° C. The temperature at which the expansion of the filler material **121** begins is critical in preventing unwanted expansion after the club head is assembled. For example, a filler material that begins expanding at about 120° C. will not cause unwanted expansion when the club is placed in the trunk of a car (where temperatures can reach up to about 83° C.). Thus, a filler material **121** that has a beginning expansion temperature of greater than about 80° C. is preferred.

Some other examples of materials that can be used as a filler material or plug material include, without limitation: viscoelastic elastomers; vinyl copolymers with or without inorganic fillers; polyvinyl acetate with or without mineral fillers such as barium sulfate; acrylics; polyesters; polyurethanes; polyethers; polyamides; polybutadienes; polystyrenes; polyisoprenes; polyethylenes; polyolefins; styrene/isoprene block copolymers; metallized polyesters; metallized acrylics; epoxies; epoxy and graphite composites; natural and synthetic rubbers; piezoelectric ceramics; thermoset and thermoplastic rubbers; foamed polymers; ionomers; low-density fiber glass; bitumen; silicone; and mixtures thereof. The metallized polyesters and acrylics can comprise aluminum as the metal. Commercially available materials include resilient polymeric materials such as Scotchdamp™ from 3M, Sorbothane® from Sorbothane, Inc., DYAD and GPS from Soundcoat Company Inc., Dynamat from Dynamat Control of North America, Inc., NoViFlex™ Sylomer® from Pole Star Maritime Group, LLC, Isoplast® from The Dow Chemical Company, and Legetolex™ from Piqua Technologies, Inc. In one embodiment the filler material may have a modulus of elasticity ranging from about 0.001 GPa to about 25 GPa, and a durometer ranging from about 5 to about 95 on a Shore D scale. In other examples, gels or liquids can be used, and softer materials which are better characterized on a Shore A or other scale can be used. The Shore D hardness on a polymer is measured in accordance with the ASTM (American Society for Testing and Materials) test D2240.

FIG. 1B further shows an optional ridge **136** extending across a portion of the outer back wall surface **132a** forming an upper concavity and a lower concavity. An inner back wall surface **132b** defines a portion of the cavity **120** and forms a thickness between the outer back wall surface **132a** and the inner back wall surface **132b**. In some embodiments, the back wall thickness varies between a thickness of about 1 mm to about 3 mm.

FIG. 1C is a magnified view of the top line **106** DETAIL 1C shown in FIG. 1B. FIG. 1C shows the top line **106** and a striking plane **125** that is parallel to and contains the front striking surface **110**. A second plane **127** is shown being perpendicular to the striking plane **125** and the striking surface **110**. The top line **106** includes a return surface **123** immediately adjacent to the striking face **110** in the top line portion **106**. The return surface **123** extends from the strik-

6

ing face **110** toward the back portion **128** and a majority of the return surface **123** is generally parallel with the second plane **127**. A transition surface **126** connects the return surface **123** to the outer back wall surface **132a**.

In certain embodiments, the return surface **123** extends from the striking face **110** a return distance **124** (or “effective top line thickness”) of between about 3.5 mm and 5 mm, or about 4.8 mm or less, as measured along the second plane **127** and perpendicular to the striking plane **125**. In some embodiments, the return surface **123** extends less than 60% of the total top line thickness **122**. In certain embodiments, the total top line thickness **122** is between about 6 mm and about 9 mm, or about 8.5 mm or less, as measured along the second plane **127** and perpendicular to the striking plane **125**.

A small effective top line thickness **124** of the return surface **123** creates the perception to a golfer that the entire top line **106** of the club head **100** is thin. A perceived thin top line **106** can enhance the aesthetic appeal to a golf player.

FIG. 1D illustrates an elevated toe view of the golf club head **100** including a back portion **128**, a front portion **130**, a sole portion **108**, a top line portion **106**, and a striking face **110**, as previously described.

FIG. 1E illustrates a cross-sectional view taken along cross-sectional lines 1E-1E of FIG. 1D. FIG. 1E shows a rear unsupported face region **146**, an inverted cone technology region **148** (hereinafter, “ICT region” or “Thickened Central Region”) and a rear supported face region **150**. The unsupported face region **146** is a region of the striking face **110** where the thickness of the face is thin (i.e. less than about 3 mm or less than about 5 mm) and is not supported by any separate or integrated metallic structure having a significant impact on the stiffness of the striking face **110**. The ICT region **148** can be considered a sweet spot where an ideal impact can occur at the center point **152** of the ICT. Variable thickness configurations or inverted cone configurations are discussed in, for example, U.S. Pat. Nos. 6,800,038, 6,824,475, 6,904,663, and 6,997,820, all incorporated herein by reference.

The rear supported face region **150** is located about a periphery of the unsupported face region **146**. The inverted cone region **148** is centered about an ideal impact location **152** located in a central location of the unsupported face region **146**. The inverted cone region **148** includes an outer span **144** and an inner span **142**. In some embodiments, the outer span **144** is between about 15 mm and about 25 mm, or at least 20 mm. The inner span **142** of the inverted cone region **148** represents the thickest portion of the unsupported face region **146**. In certain embodiments, the inner diameter **142** is between about 5 mm and about 15 mm, or at least about 10 mm.

The tabulated values in Tables 1-7 are total face area, thin face thickness, thickened central region (or ICT region area), and the unsupported surface area.

The “total face area” is defined as the area of face contained within a face plane on a front striking portion of the club head. The “thin face thickness” is the nominal thickness of the striking surface in its thinnest location (such as dimension **116**, in FIG. 1B). The ICT region **148** area is the surface area contained by the variable thickness region or inverted cone area. Furthermore, the “Unsupported Surface Area” is the unsupported rear surface area **146** of the striking face (including an ICT region **148**).

7  
EXAMPLE 1

TABLE 1

Club head	Total Face Area (mm <sup>2</sup> )	Thin Face Thickness (mm)	Thickened Central Region Area (mm <sup>2</sup> )	Unsupported Surface Area (mm <sup>2</sup> )
3-iron	2,825	2.1	541	2,175
6-iron	2,964	2.1	541	2,276
9-iron	3,116	2.1	541	2,094
Wedge	3,452	2.1	541	2,345

EXAMPLE 2

TABLE 2

Club head	Total Face Area (mm <sup>2</sup> )	Thin Face Thickness (mm)	ICT Region (mm <sup>2</sup> )	Unsupported Surface Area (mm <sup>2</sup> )
3-iron	2,824	2.4	527	2,403
6-iron	2,962	2.4	527	2,473
9-iron	3,113	2.4	527	2,245
Wedge	3,451	2.4	527	2,540

EXAMPLE 3

TABLE 3

Club head	Total Face Area (mm <sup>2</sup> )	Thin Face Thickness (mm)	ICT Region (mm <sup>2</sup> )	Unsupported Surface Area (mm <sup>2</sup> )
3-iron	2,792	2.5	388	1,631
6-iron	2,965	2.5	388	1,608
9-iron	3,151	2.5	388	1,597
Wedge	3,304	2.5	388	1,519

EXAMPLE 4

TABLE 4

Club head	Total Face Area (mm <sup>2</sup> )	Thin Face Thickness (mm)	ICT Region (mm <sup>2</sup> )	Unsupported Surface Area (mm <sup>2</sup> )
3-iron	2,796	2.2	247	1,560
6-iron	2,934	2.2	247	1,529
9-iron	3,084	2.4	247	1,479
Wedge	3,421	2.4	247	1,711

EXAMPLE 5

TABLE 5

Club head	Total Face Area (mm <sup>2</sup> )	Thin Face Thickness (mm)	ICT Region (mm <sup>2</sup> )	Unsupported Surface Area (mm <sup>2</sup> )
3-iron	2,763	2.4	314	2,220
6-iron	2,974	2.4	314	2,206

8

TABLE 5-continued

Club head	Total Face Area (mm <sup>2</sup> )	Thin Face Thickness (mm)	ICT Region (mm <sup>2</sup> )	Unsupported Surface Area (mm <sup>2</sup> )
9-iron	3,376	2.4	314	2,240
Wedge	3,421	2.4	314	2,055

EXAMPLE 6

TABLE 6

Club head	Total Face Area (mm <sup>2</sup> )	Thin Face Thickness (mm)	ICT Region (mm <sup>2</sup> )	Unsupported Surface Area (mm <sup>2</sup> )
3-iron	2,790	2.5	239	1,567
6-iron	2,958	2.5	292	1,719
9-iron	3,150	2.5	308	1,621
Wedge	3,301	2.5	313	1,627

EXAMPLE 7

TABLE 7

Club head	Total Face Area (mm <sup>2</sup> )	Thin Face Thickness (mm)	ICT Region (mm <sup>2</sup> )	Unsupported Surface Area (mm <sup>2</sup> )
3-iron	3,177	2.0	700	3,175
6-iron	3,231	2.0	700	3,260
9-iron	3,384	2.0	315	2,244
Wedge	3,436	2.0	315	2,104

The tabulated values are representative and other configurations can be provided as described herein. It should be noted, in the above examples, one advantage of the Unsupported Surface Area is that a mass savings is achieved while also providing a durable and high COR striking face.

In the examples provided in Tables 1-7, a total face area can be in a range of about 2,700 mm<sup>2</sup> to about 4,000 mm<sup>2</sup>. The Unsupported Surface Area can be within a range of about 300 mm<sup>2</sup> to about 4,000 mm<sup>2</sup>, or preferably 450 mm<sup>2</sup> to about 3,500 mm<sup>2</sup>. In some embodiments, the Unsupported Surface Area is at least greater than about 2,000 mm<sup>2</sup>. The thin face thickness can be within a range of about 1.0 mm-3.0 mm, preferably 1.5-2.5 mm, and also preferably in a range of about 1.6-2.0 mm. In certain embodiments, the thin face thickness is less than about 2.0 mm. In embodiments having an ICT region, the ICT region surface area can range from about 230 mm<sup>2</sup> to about 2,000 mm<sup>2</sup>.

FIG. 2A illustrates one embodiment of a hollow iron golf club head **200** having a top line portion **206**, a toe portion **204**, a heel portion **202**, a rear portion **222**, and a sole portion **208**. The golf club head **200** includes a back wall **212** located within a cavity region **216** or recess in the rear portion **222** of the club head **200**. The cavity region **216** includes side walls around a periphery of the back wall **212** creating a first recess or cavity region **216** where a badge **214** can be inserted and adhesively attached to the back wall **212**. An aperture **210** is located in the back wall **212** and can be used for filling the hollow iron **200** with a sound dampening filler material **224** as previously described. A second recess **220** is located below the first recess **216** and can also be configured to receive a second badge.

After the hollow iron **200** is filled with the filler material **224**, the badge **214** is adhesively or mechanically attached to the back wall **212** to cover or occlude the aperture **210** to prevent filler material from leaving the cavity and also to achieve a desired aesthetic and further dampening.

FIG. **2B** shows the golf club head **200** fully assembled after the filler material **224** is inserted and the badge **214** is attached to the back wall **212**.

FIG. **3A** illustrates another embodiment of a golf club head **300** including a heel portion **302**, a toe portion **304**, a top line portion **306**, a sole portion **308**, a body portion **309** and a striking plate **310** located on a striking surface. The striking plate **310** includes grooves **314**.

In one embodiment, the striking plate **310** is mechanically attached to a front portion of the body portion **309**. Specifically, a weld line **312** is formed about a periphery of the striking plate **310**.

The weld is created by a welding device, such as a laser or plasma weld. In one embodiment, the weld is applied on the front face of the golf club head **300** from a frontward to rearward direction. The weld can be any type of weld including (but not limited to) bead, groove, fillet, surfacing, tack, plug, slot, friction, and resistance welds.

Compared to TIG welding and other welding techniques, laser welding can be advantageous by concentrating more energy at the weld site. Laser welding also produces a smaller heat affected zone and more localized melt, less material interdiffusion, and reduced material fatigue during subsequent use.

After completion of the welding, the club head is subjected to a heat treatment for aging. The post-weld heat treatment is generally at 480-540° C. for four hours. The club head is also machine finished as required, such as grinding, polishing, or sandblasting, to smooth and topologically blend the surface of the weldment into the face plane. Finish machining is desirably followed by passivation. After completing finish-machining, it may be desirable to apply a suitable surface treatment of the club head, such as plating, painting, coating, or the like. Plating may be performed to produce a surface plating layer that protects against corrosion and is strong, durable, relatively inert, and aesthetically pleasing. Exemplary materials for forming a plating layer are Cr, Ni, and Cu. Exemplary techniques for forming the plating layer are electrode plating, electroless plating, physical vapor deposition (PVD), chemical vapor deposition (CVD), ion plating, and ion-beam-enhanced diffusion. An intermediate sublayer can be applied prior to the plating layer such as soft nickel, soft copper, and oxides.

In some embodiments, the COR is greater than 0.790. Preferably, the COR is at least 0.80 as measured according to the USGA Rules of Golf based on a 160 ft./s ball speed test and the USGA calibration plate. The COR can even be as high as 0.83.

In certain embodiments, the striking plate **310** can be formed of forged maraging steel, maraging stainless steel, or precipitation-hardened (PH) stainless steel. In general, maraging steels have high strength, toughness, and malleability. Being low in carbon, they derive their strength from precipitation of inter-metallic substances other than carbon. The principle alloying element is nickel (15% to nearly 30%). Other alloying elements producing inter-metallic precipitates in these steels include cobalt, molybdenum, and titanium. In one embodiment, the maraging steel contains 18% nickel. Maraging stainless steels have less nickel than maraging steels but include significant chromium to inhibit rust. The chromium augments hardenability despite the reduced nickel content, which ensures the steel can trans-

form to martensite when appropriately heat-treated. In another embodiment, a maraging stainless steel C455 is utilized as the striking plate. In other embodiments, the striking plate is a precipitation hardened stainless steel such as 17-4, 15-5, or 17-7.

The striking plate can be forged by hot press forging using any of the described materials in a progressive series of dies. After forging, the striking plate is subjected to heat-treatment. For example, 17-4 PH stainless steel forgings are heat treated by 1040° C. for 90 minutes and then solution quenched. In another example, C455 or C450 stainless steel forgings are solution heat-treated at 830° C. for 90 minutes and then quenched.

In one embodiment, the body portion **309** is made from 17-4 steel. However another material such as carbon steel (e.g., 1020, 1030, 8620, or 1040 carbon steel), chrome-molybdenum steel (e.g., 4140 Cr—Mo steel), Ni—Cr—Mo steel (e.g., 8620 Ni—Cr—Mo steel), austenitic stainless steel (e.g., 304, N50, or N60 stainless steel (e.g., 410 stainless steel) can be used.

The components of the described components disclosed in the present specification can be formed from any of various suitable metals or metal alloys.

In addition to those noted above, some examples of metals and metal alloys that can be used to form the components of the parts described include, without limitation: titanium alloys (e.g., 3-2.5, 6-4, SP700, 15-3-3-3, 10-2-3, or other alpha/near alpha, alpha-beta, and beta/near beta titanium alloys), aluminum/aluminum alloys (e.g., 3000 series alloys, 5000 series alloys, 6000 series alloys, such as 6061-T6, and 7000 series alloys, such as 7075), magnesium alloys, copper alloys, and nickel alloys.

The body portion **309** can include various features such as weighting elements, cartridges, and/or inserts or applied bodies as used for CG placement, vibration control or damping, or acoustic control or damping. For example, U.S. Pat. No. 6,811,496, incorporated herein by reference in its entirety, discloses the attachment of mass altering pins or cartridge weighting elements.

After forming striking plate **310** and the body portion **309**, the striking plate **310** and body portion **309** contact surfaces can be finish-machined to ensure a good interface contact surface is provided prior to welding. In one embodiment, the contact surfaces are planar for ease of finish machining and engagement.

The thickness profiles and low thickness values of the striking plate can be achieved during the forging of the striking plate. In one embodiment, a 0.3 mm to 1.0 mm machine stock plate can be added to the striking plate to increase tolerance control. After forging, the striking plate can be slightly milled and engraved with score-lines. A key advantage of being able to forge such a thin face is the freeing up of discretionary mass (up to about 20 g) that can be placed elsewhere in the club head (such as the rear piece) for manipulation of the moment of inertia or center of gravity location.

The thickness of the striking plate in the thin face area is generally consistent in thickness and non-variable. Of course, manufacturing tolerances may cause some variation in the thin face area. The thin face area and the ICT region can be considered the "unsupported" face area of the striking face because the thickness dimensions are relatively thin in those areas. In certain embodiments, the thin face area is about 50% or more of the unsupported surface area.

FIG. **3B** illustrates a cross-sectional view taken along cross section lines **3B-3B** shown in FIG. **3A**. FIG. **3B** further shows the front portion **330** and the back portion **328** in



11

addition to the sole portion **308** and top line portion **306**. The welded striking plate **310** includes a thickened central region **334**, a first thickness **316**, and a second thickness **318** as previously described. The sole portion **308** includes a minimum sole thickness **326** of about 2 mm or less, or within the ranges described herein, such as about 1 mm to about 2 mm or less than 3 mm.

A filler material **324** fills an entire interior cavity **332** and surrounds a plug **320** located near or at least in partial contact with the thickened central region **334**. It is understood that more than one plug **320** can be provided. In certain embodiments, a plurality of plugs such as two, three, or four plugs can be used. The plug **320** includes a first surface (or first side surface) **320a** contacting the filler material **324**. The filler material **324** directly contacts the entire first surface **320a** to hold and prevent the plug **320** from shifting out of position. In other words, the filler material **324** completely surrounds the plug **320** within a plane parallel to the striking plate **310**. A second surface **320b** of the plug **320** directly contacts at least a portion of the inverted cone region or thickened region **334** of the striking plate **310**. Furthermore, a third surface **320c** of the plug **320** directly contacts at least a portion of a back wall **336**. In other words, the filler material **324** does not surround the plug **320** within a plane perpendicular to the striking plate **310**. The back wall **336** includes an inner back wall and an outer back wall having certain dimensional thicknesses as previously described.

An aperture **338** is located in the back wall **336** to allow the plug **320** to be inserted into the fully enclosed cavity **332**. Upon insertion through the aperture **338**, the plug is compressed slightly so that a frictional engagement occurs between the second surface **320b** of the plug and the rear surface of the striking plate **310**. In addition, a frictional engagement also occurs between the third surface **320c** of the plug and a portion of the back wall **336**. Optionally, the aperture **338** can be located anywhere on the club head body surface other than the front striking face. For example, the aperture **338** can be located on the sole, toe, heel, or top line surfaces.

After the plug **320** is frictionally engaged in a position, the filler material **324** can be inserted into the cavity **332**. In certain embodiments, the plug **320** is a polymeric material.

In one embodiment, the plug **320** material is a urethane or silicone material having a density of about 0.95 g/cc to about 1.75 g/cc, or about 1 g/cc. The plug **320** can have a hardness of about 10 to about 70 shore A hardness. In certain embodiments, a shore A hardness of about 40 or less is preferred. In certain embodiments, a shore D hardness of up to about 40 or less is preferred.

The filler material **324** can be an expanding foam material that is expanded by a certain amount of heat as previously described. The filler material **324** expands and fills a relatively large volume, greater than the volume occupied by the plug **320**. In some embodiments, the volume of the cavity **332** is between about 1 cc and about 200 cc, or preferably between about 10 cc and about 20 cc. For the purposes of measuring the cavity **332** volume herein, the aperture **338** is assumed to be removed from the back wall **336** and an imaginary continuous back wall **336** or substantially planar back wall is utilized to calculate the cavity volume.

In some embodiments, the filler material **324** occupies about 50% to about 99% of the total club head cavity volume while the plug **320** occupies between about 0% to about 20% of the total cavity volume. In specific embodiments, the plug **320** occupies between about 0.1 cc and 1 cc with the remainder of the cavity volume being filled by the filler

12

material **324**. It is understood that any of the embodiments described herein can be provided without a plug and filler material only.

In order to achieve a desirable CG location, the filler material **324** and plug **320** must be lightweight. In certain embodiments, the total mass of the filler material **324** and plug **320** is less than about 5 g or between about 2 g and about 4 g. In one embodiment, the total weight of the filler material **324** and the plug **320** is 10 g or less, or about 3 g or less. In certain embodiments, the total weight of the filler material **324** and plug **320** is less than 2% of the total weight of the club head **300** (excluding any badges, filler material/plug, and ferrule ring). In other embodiments, the total weight of the filler material **324** and plug **320** is less than about 10% of the total weight of the club head **300**.

Table 8, shows exemplary golf club heads and the respective weight ratios between the filler material **324** and plug **320** and the total club head weight **300**, as described above.

## EXAMPLE 8

TABLE 8

Club head	Total Weight of Filler Mat. And Plug (g)	Total Weight of Club Head (g)	Weight Ratio (%)
3-iron	3.7	229.9	1.6
4-iron	3.6	236.1	1.5
5-iron	3.6	242.1	1.5
6-iron	3.5	248.5	1.4

As shown in Table 8, the total weight of the filler material **324** and plug **320** is between about 1% and about 5% of the total weight of the club head (excluding the badges, filler material/plug, and ferrule ring). Thus, a desirable CG location is still attainable while improving the sound and feel of the golf club head. In certain embodiments, the plug **320** can weigh about 0.5 g to about 1 g and the filler material can weigh about 5 grams or less. In some embodiments, the plug **320** weighs about 0.7 g or less. In other embodiments, the plug **320** can be equal to or heavier than the total filler material weight.

In yet other embodiments, the filler material **324** and the plug **320** have a combined weight of less than 20% of the total club head weight (excluding badges, filler material/plug, and ferrule ring). In one embodiment, the combined weight of the filler material **324** and plug **320** is less than 5%.

FIG. 4 illustrates a rear view of an exemplary embodiment of a golf club head **400** including a heel portion **402**, a toe portion **404**, a top line portion **406**, a sole portion **408**, and a back wall **410**. FIG. 4 further shows an aperture **414** having an aperture diameter **420** of about 10 mm to about 15 mm, or less than 30 mm. The aperture **414** is connected with a slot **412** that extends away from the aperture **414** in a horizontal direction toward the heel portion **402**. The aperture **414** has an opening at the slot connection portion and is configured to allow a plug **422** to move from a first position to a second position.

It is understood that the slot **412** could extend in the opposite horizontal direction toward the toe region **404** or in any direction needed. The slot includes a rounded end portion **418** having a diameter between about 2 mm to 5 mm, or preferably about 3 mm.

A sliding distance **416** defines the distance between a first center point **424** of the aperture **414** to a second center point **426** of the rounded end portion **418**. In certain embodiments,

13

the sliding distance **416** is between about 1 mm and 70 mm, or between about 5 mm and about 15 mm. In one embodiment, the sliding distance **416** is about 11 mm, the aperture diameter is about 12 mm, and the rounded end portion **418** of the slot **412** is about 3 mm.

A plug **422** is initially inserted into the aperture **414** and then moved by an amount equal to the sliding distance **416**. A portion of the plug **422** is keyed to the slot **412** and thereby restricts the movement of the plug **422** in a sole **408** to top line **406** direction.

FIG. 5A illustrates an exemplary embodiment of a plug **500**. The plug **500** has an overall cylindrical shape having a first surface (or side wall) **502**, a second surface (or bottom surface) **508**, and a third surface (or top surface) **514**. In one embodiment, the side wall **502** is the continuous, curved, and circular wall of the cylindrical shaped plug **500**. The top surface **514** includes an engagement surface **504** and a keying portion **506** that is elevated above the engagement surface **504**. The keying portion **506** includes a raised side engagement wall **512** forming the keying portion **506** and a recessed center portion **510**. In some embodiments, the center portion **510** can be used for engagement with an applicator during the insertion and movement of the plug **500**. The tip of an applicator can be inserted into the recessed center portion **510**.

The keying portion **506** includes a center point **518** which is located along a central axis **516** of the cylindrical shaped plug **500**. When the plug **500** is inserted into the aperture **414**, the overall diameter **520** of the side wall **502** of the cylindrical plug **500** is less than the diameter **420** of the aperture **414** to allow easy insertion of the plug **500**. Once the bottom surface **508** of the plug **500** engages a rear surface of the striking plate, the plug **500** can be moved a sliding distance **416** from a first position to a second position. The first position is characterized by the central axis **516** of the plug **500** being aligned with the first center point **424** of the aperture **414** across a plane parallel to the back wall **410**. The second position is characterized by the central axis **516** of the plug **500** being aligned with the second center point **426** of the rounded portion **418** of the slot **412**. It is understood that the plug **500** is not limited to cylindrical shapes and can be cubical, rectangular, elliptical, spherical, egg shaped, pyramidal, tapered, trapezoidal, or any known three dimensional shape.

In certain embodiments, the keying portion **506** and raised side engagement wall **512** can be eliminated, thus relying purely on the compression of the plug to hold it in place.

When the plug **500** is moved to the second position or the engaged position, the plug **500** is slightly compressed between the rear wall of the striking plate and the back wall **410**. In the second position, the engagement surface **504** of the plug **500** engages the interior wall of the back wall **410**. The raised side engagement wall **512** of the keying portion **506** engages side walls of the slot **412** to prevent significant movement of the plug in at least a sole-to-top line direction. It is understood that frictional engagement between the plug **500** and the back wall **410** will also reduce the amount of movement of the plug in a heel-to-toe direction, even before a filler material is introduced.

FIG. 5B illustrates another exemplary plug **522** of a general wedge shape. The wedge shaped plug **522** is configured to be compressed between the rear wall of the striking plate and the back wall. A side view of the plug **522** shows a generally trapezoidal shape. The aperture **414** can be any shape including a rectangular or trapezoidal shape to accommodate the shape of the plug **522**. The wedge shaped

14

plug **522** is inserted into the aperture **414** and moved to a wedge position as previously described.

FIG. 6A illustrates an exploded assembly of an exemplary club head **600** embodiment utilizing a plug **500** and filler material **622**, as previously described. The club head **600** includes a striking face **614**, an interior rear striking face surface **616**, an inverted cone or thickened central region **602**, an aperture **608**, a slot **618**, a back wall surface **620**, a recess **612**, and a badge **610**.

FIG. 6A further illustrates a heel side vent hole **604** and a toe side vent hole **606** located in the back wall surface **620**. The vent holes **604,606** enables air to escape the interior cavity during the expansion process of the filler material **622** or expanding foam.

FIG. 6B illustrates a fully assembled club head after the plug **500** and filler material **622** have been inserted into the interior cavity of the club head **600**. The badge **610** is inserted into the recess **612** and covers the entire back wall surface **620** while obscuring the aperture **608**, slot **618**, plug **500**, and vent holes **604,606**.

FIG. 7 illustrates a series of operations **700** that are accomplished in inserting a plug into an interior cavity of a club head. Initially, a weld is placed on the face of an iron-type golf club to attach a striking plate. A weld bead likely occurs on the front face portion and within a rear cavity portion of the golf club head. If the striking plate is cast instead of welded, a weld operation on the face of the club head is not required.

In a first operation **702**, an aperture is formed in the back wall of a hollow iron. The aperture can be created through machining or casting or other manufacturing processes. A plug, as described above, is then inserted into the aperture in a second operation **704** so that the plug is primarily located within an interior cavity of the club head.

In a third operation **706**, the plug is moved from a first position to a second position so that the plug is relatively secured in place in the second position. Once the plug is moved to the second position, a filler material is introduced, in a fourth operation **708**, into the cavity interior to provide sound and vibration dampening and to hold the plug securely in the second position by surrounding the plug. In a fifth operation **709**, the filler material is heated to cause expansion within the interior cavity and completely filling the remaining cavity volume surrounding the plug. In a sixth operation **710**, a badge is attached to a rear portion of the club head to cover or occlude the aperture. It is understood that the heating operation **709** can be excluded in embodiments utilizing non-expanding foam such as injection foam, urethane, two part foam, or chemical initiated expansion foam.

At least one advantage of the embodiments described is that sound is dampened upon impact with a golf ball while maintaining a hollow iron construction.

At least another advantage of the embodiments described is that unwanted vibrations can be absorbed by the filler material and plug so that a golfer perceives a softer feel upon impact with the ball.

FIG. 8 illustrates the frequency response function of two example golf club heads. Examples A and B are similar in construction to the embodiment shown in

FIGS. 6A and 6B. Each example was impacted at center face with a hammer to observe an individual frequency response.

Example B did not include any filler material or plug within the interior cavity (hereinafter, "unfilled example"). Example A includes the plug and surrounding filler material, as described above (hereinafter, "filled example"). As shown

15

in FIG. 8, the first mode frequency response peak **802** of the unfilled example B is noticeably higher in comparison to the first mode frequency response peaks **804** of the filled example A. Therefore, the acceleration of the unfilled example B is higher than the magnitude or amplitude of acceleration of the filled example A. Thus, the filler material or expanding foam significantly dampens the acceleration amplitude of the filled example A to less than about 30 G/N (which is acceleration/input force). The acceleration amplitude describes the structure's acceleration relative to the input force as a function of frequency. In certain embodiments, an acceleration reduction of between about 5% to about 50% between the first mode frequency responses **802,804** of the unfilled example and filled example is achieved.

At least another advantage of the embodiments described is that a lightweight filler material arrangement is created allowing the center of gravity of the hollow iron construction to remain low while improving the sound and feel of the club during use.

The embodiments described herein conform with the USGA (United States Golf Association) Rules of Golf and Appendix II, 5c related to the Determination of Groove Conformance (issued in August 2008). For example, clubs having a loft of 25 degrees or higher meets the groove width, groove depth, groove separation, groove consistency, area limitations, and edge radius requirements set forth by the USGA. In the embodiments described herein, less than 50% of measured values of Area/(Width+Separation) are greater than 0.0030 in<sup>2</sup>/in and no single measured value of Area/(Width+Separation) value for any single groove is greater than 0.0032 in<sup>2</sup>/in.

With respect to a groove edge radius, the groove edges are in the form of a radius conforming with the USGA Rules of Golf as described by the two circles method. In addition, the effective radius is not greater than 0.020". In the embodiments described, less than 50% of the upper groove edges or lower groove edges fails the two circles method subject to a 10 degree angular allowance as described in the USGA rules. No single groove edge protrudes more than 0.0003" outside the outer circle.

In view of the many possible embodiments to which the principles of the disclosed invention may be applied, it should be recognized that the illustrated embodiments are only preferred examples of the invention and should not be taken as limiting the scope of the invention. It will be evident that various modifications may be made thereto without departing from the broader spirit and scope of the invention as set forth. The specification and drawings are, accordingly, to be regarded in an illustrative sense rather than a restrictive sense.

We claim:

[1. A hollow iron-type golf club head comprising:

- a heel portion, a sole portion, a toe portion, a top-line portion, a front portion, a rear portion, and a striking face having an unsupported face area of between about 300 mm<sup>2</sup> to about 4,000 mm<sup>2</sup>;
- a back wall in the rear portion enclosing a substantial portion of the rear portion to create a substantially enclosed cavity, the enclosed cavity being defined by at least a rear surface of the striking face, an inner back wall surface, and the sole portion,
- at least one plug located within the enclosed cavity, the at least one plug being compressed between the rear surface of the striking face and the back wall in the rear portion;

16

- a filler material located within the enclosed cavity, the filler material substantially surrounding the at least one plug and being configured to hold the at least one plug in place, the golf club head defining an aperture into the enclosed cavity, the aperture being configured to allow the cavity to be filled with the filler material;
- wherein the unsupported face area includes a thickened central region;
- wherein the at least one plug is positioned to be in contact with at least a portion of the thickened central region; and
- wherein the at least one plug occupies less than 20% of the total club head cavity volume in the enclosed cavity.]

[2. The iron-type golf club head of claim 1, wherein the enclosed cavity has a volume between about 1 cc and 200 cc.]

[3. The iron-type golf club head of claim 1, wherein the enclosed cavity has a volume between about 10 cc and 20 cc.]

[4. The iron-type golf club head of claim 1, wherein the at least one plug has a volume between about 0.1 cc and about 1 cc.]

[5. The iron-type golf club head of claim 1, wherein the at least one plug occupies between about 1% to about 10% of the total club head cavity volume in the enclosed cavity.]

[6. The iron-type golf club head of claim 1, wherein the at least one plug occupies between about 0.5% to about 5% of the total club head cavity volume in the enclosed cavity.]

[7. The iron-type golf club head of claim 1, wherein the filler material is an expanding foam material having a density between about 0.03 g/cc and about 0.19 g/cc.]

[8. The iron-type golf club head of claim 1, wherein the filler material occupies about 50% to about 99% of the total club head cavity volume in the enclosed cavity.]

[9. The iron-type golf club head of claim 1, wherein the back wall includes at least a first aperture, the first aperture being configured to allow the at least one plug to be inserted into the first aperture and is configured to allow the at least one plug to move from a first position to a second position.]

[10. The iron-type golf club head of claim 9, wherein the back wall includes at least one slot, the at least one slot being connected to the first aperture and is configured to secure the at least one plug.]

[11. A hollow iron-type golf club head comprising:

- a heel portion, a sole portion, a toe portion, a top-line portion, a front portion, a rear portion, and a striking face having an unsupported face area of between about 300 mm<sup>2</sup> to about 4,000 mm<sup>2</sup>;
- a back wall in the rear portion enclosing a substantial portion of the rear portion to create a substantially enclosed cavity, the enclosed cavity being defined by at least a rear surface of the striking face, an inner back wall surface, and the sole portion;
- at least one plug located within the enclosed cavity, the at least one plug being compressed between the rear surface of the striking face and the back wall in the rear portion;
- wherein the at least one plug occupies less than 20% of the total club head cavity volume in the enclosed cavity, and
- wherein the back wall includes at least a first aperture, the first aperture being configured to allow the at least one plug to be inserted into the first aperture and being configured to allow the at least one plug to move from a first position to a second position.]

17

[12. The iron-type golf club head of claim 11, wherein the enclosed cavity has a volume between about 1 cc and 200 cc.]

[13. The iron-type golf club head of claim 11, wherein the enclosed cavity has a volume between about 10 cc and 20 cc.]

[14. The iron-type golf club head of claim 11, wherein the at least one plug has a volume between about 0.1 cc and about 1 cc.]

[15. The iron-type golf club head of claim 11, wherein the at least one plug occupies between about 1% to about 10% of the total club head cavity volume in the enclosed cavity.]

[16. The iron-type golf club head of claim 11, wherein the at least one plug occupies between about 0.5% to about 5% of the total club head cavity volume in the enclosed cavity.]

[17. The iron-type golf club head of claim 11, further comprising a filler material located within the enclosed cavity, the filler material substantially surrounding the at least one plug and being configured to hold the at least one plug in place.]

[18. The iron-type golf club head of claim 17, wherein the filler material is an expanding foam material having a density between about 0.03 g/cc and about 0.19 g/cc.]

[19. The iron-type golf club head of claim 17, wherein the filler material occupies about 50% to about 99% of the total club head cavity volume in the enclosed cavity.]

[20. The iron-type golf club head of claim 17, wherein the filler material completely fills a remaining cavity volume around the at least one plug.]

[21. The iron-type golf club head of claim 11, wherein the coefficient of restitution of the club is greater than about 0.8.]

[22. The iron-type golf club head of claim 11, wherein the back wall includes at least one slot, the at least one slot being connected to the first aperture and is configured to secure the at least one plug.]

23. An iron-type golf club head comprising:

a body having a heel portion, a toe portion, a top-line portion, a sole portion, a striking face joining the top-line portion to the sole portion, and a rear portion joined to the striking face by the sole portion;

a badge attached to the body;

a polymeric plug in contact with a rear surface of the striking face and a portion of the body;

wherein the rear portion extends upward from the sole portion toward the top-line portion to create an enclosed cavity bounded at least in part by a portion of the rear portion, a portion of the sole portion, a portion of the striking face, and a portion of the badge, wherein the enclosed cavity has a cavity volume;

wherein a first portion of the sole portion, located closer to the striking face than the rear portion, and bounding the enclosed cavity has a first portion sole thickness of less than 3 mm;

wherein the top-line portion has a total top line thickness of less than 9 mm;

wherein a portion of striking face has a face thickness of less than 2.5 mm;

wherein (a) the striking face has a center point, (b) an upper portion of the enclosed cavity is located at an elevation above the center point and has an upper portion cavity depth measured from an interior surface of the striking face to an interior surface of the enclosed cavity in a direction perpendicular to an exterior surface of the striking face, (c) a lower portion of the enclosed cavity is located at an elevation below the center point and has a lower portion cavity depth

18

measured from the interior surface of the striking face to the interior surface of the enclosed cavity in a direction perpendicular to the exterior surface of the striking face, and (d) the enclosed cavity has a cavity depth measured from the interior surface of the striking face to the interior surface of the enclosed cavity in a direction perpendicular to the exterior surface of the striking face, and the cavity depth varies;

wherein at least a portion of the polymeric plug is located in the upper portion;

wherein the striking face has an unsupported face surface area within a range of between 450 mm<sup>2</sup> to 3500 mm<sup>2</sup>; and

wherein the club head has a center of gravity located at an elevation between 12 mm and 25 mm above the ground plane.

24. The iron-type golf club head of claim 23, wherein the total top line thickness is less than 8.5 mm, the polymeric plug has a density of less than 1.75 g/cc, and at least one weighting element is attached to the body portion.

25. The iron-type golf club head of claim 24, wherein the polymeric plug has a plug volume that is no more than 20% of the cavity volume.

26. The iron-type golf club head of claim 25, wherein the polymeric plug occupies between 1% to 10% of the cavity volume.

27. The iron-type golf club head of claim 24, wherein the first portion sole thickness is less than 2 mm.

28. The iron-type golf club head of claim 27, wherein the unsupported face surface area is less than 3260 mm<sup>2</sup>, and the face thickness of a portion of striking face is less than 2 mm.

29. The iron-type golf club head of claim 28, wherein the polymeric plug has a shore D hardness of 40 or less.

30. The iron-type golf club head of claim 29, wherein the polymeric plug has a shore A hardness of 10-70.

31. The iron-type golf club head of claim 29, wherein the polymeric plug density is at least 0.95 g/cc.

32. The iron-type golf club head of claim 29, wherein the unsupported face surface area is less than 3175 mm<sup>2</sup>, and a coefficient of restitution of the club head is greater than 0.79.

33. The iron-type golf club head of claim 32, wherein the unsupported face surface area is greater than 2000 mm<sup>2</sup>.

34. The iron-type golf club head of claim 29, wherein the cavity volume is 20 cc or less.

35. The iron-type golf club head of claim 34, wherein the cavity volume is at least 10 cc, and a coefficient of restitution of the club head is greater than 0.79.

36. The iron-type golf club head of claim 29, wherein the polymeric plug has a mass of less than 1 g.

37. The iron-type golf club head of claim 29, wherein the badge covers the polymeric plug and the portion of the body in contact with the polymeric plug.

38. The iron-type golf club head of claim 29, wherein the lower portion cavity depth is different at two elevations above the ground plane, and the enclosed cavity extends to the top-line portion.

39. The iron-type golf club head of claim 38, wherein the upper portion cavity depth is different at two elevations above the ground plane.

40. The iron-type golf club head of claim 38, wherein the badge has a badge thickness that varies.

41. The iron-type golf club head of claim 40, wherein the badge has a ridge that extends from a heel side to a toe side.

19

42. The iron-type golf club head of claim 29, wherein the polymeric plug has a face contact surface in contact with the rear surface of the striking face, and the face contact surface is circular.

43. The iron-type golf club head of claim 42, wherein the polymeric plug has a tapering sidewall.

44. The iron-type golf club head of claim 28, wherein the striking face comprises a striking plate welded to a portion of the heel portion, a portion of the toe portion, and a portion of the top-line portion, with the striking plate formed of a striking plate material different than a material forming a portion of the sole portion.

45. The iron-type golf club head of claim 44, wherein the striking plate material comprises carbon steel, and the total top line thickness is at least 6 mm.

46. The iron-type golf club head of claim 45, wherein the striking face thickness varies, and a coefficient of restitution of the club head is greater than 0.79.

47. The iron-type golf club head of claim 46, wherein at least a portion of the polymeric plug is located in the lower portion.

48. The iron-type golf club head of claim 46, wherein the coefficient of restitution of the club head is greater than 0.8.

49. The iron-type golf club head of claim 46, wherein a portion of the heel portion, a portion of the toe portion, a portion of the top-line portion, and at least a portion of the sole portion are formed of 17-4 stainless steel.

50. The iron-type golf club head of claim 46, further including a filler material is located within the enclosed cavity and in contact with the polymeric plug.

51. The iron-type golf club head of claim 46, wherein the rear portion includes a back wall surface extending upward from the rear portion to the top-line portion, the polymeric plug contacts the back wall surface and the rear surface of the striking face, at least a portion of the back wall surface is separated from the toe portion by a toe hole, at least a portion of the back wall surface is separated from the heel portion by a heel hole, and the badge covers the polymeric plug, the back wall surface, the toe hole, and the heel hole.

52. The iron-type golf club head of claim 51, wherein the polymeric plug has a face contact surface in contact with the rear surface of the striking face, and the face contact surface is circular.

53. The iron-type golf club head of claim 52, wherein the polymeric plug has a tapering sidewall.

54. An iron-type golf club head comprising:

a body having a heel portion, a toe portion, a top-line portion, a sole portion, a striking face joining the top-line portion to the sole portion, and a rear portion joined to the striking face by the sole portion;

a badge attached to the body;

a polymeric plug in contact with a rear surface of the striking face and a portion of the body;

at least one weighting element is attached to the body portion;

wherein the rear portion extends upward from the sole portion toward the top-line portion to create an enclosed cavity bounded at least in part by a portion of the rear portion, a portion of the sole portion, a portion of the striking face, and a portion of the badge, wherein the enclosed cavity has a cavity volume;

wherein a first portion of the sole portion, located closer to the striking face than the rear portion, and bounding the enclosed cavity has a first portion sole thickness of less than 3 mm;

wherein the top-line portion has a total top line thickness of less than 9 mm;

20

wherein a portion of striking face has a face thickness of less than 2.0 mm;

wherein (a) the striking face has a center point, (b) an upper portion of the enclosed cavity is located at an elevation above the center point and has an upper portion cavity depth measured from an interior surface of the striking face to an interior surface of the enclosed cavity in a direction perpendicular to an exterior surface of the striking face, (c) a lower portion of the enclosed cavity is located at an elevation below the center point and has a lower portion cavity depth measured from the interior surface of the striking face to the interior surface of the enclosed cavity in a direction perpendicular to the exterior surface of the striking face, and (d) the enclosed cavity has a cavity depth measured from the interior surface of the striking face to the interior surface of the enclosed cavity in a direction perpendicular to the exterior surface of the striking face, and the cavity depth varies;

wherein at least a portion of the polymeric plug is located in the upper portion;

wherein the striking face has an unsupported face surface area within a range of between 450 mm<sup>2</sup> to 3500 mm<sup>2</sup>;

wherein the club head has a center of gravity located at an elevation between 12 mm and 25 mm above the ground plane; and

wherein a coefficient of restitution of the club head is greater than 0.79.

55. The iron-type golf club head of claim 54, wherein the badge covers the polymeric plug and the portion of the body in contact with the polymeric plug, and the enclosed cavity extends to the top-line portion.

56. The iron-type golf club head of claim 55, wherein the total top line thickness is less than 8.5 mm, and the cavity volume is 20 cc or less.

57. The iron-type golf club head of claim 56, wherein the polymeric plug has a shore D hardness of 40 or less.

58. The iron-type golf club head of claim 57, wherein the first portion sole thickness is less than 2 mm.

59. The iron-type golf club head of claim 58, wherein the cavity volume is at least 10 cc, and the lower portion cavity depth is different at two elevations above the ground plane, the upper portion cavity depth is different at two elevations above the ground plane, and the badge has a badge thickness that varies.

60. The iron-type golf club head of claim 59, wherein the badge has a plurality of ridges that intersect.

61. The iron-type golf club head of claim 59, wherein the polymeric plug has a plug volume that is no more than 20% of the cavity volume.

62. The iron-type golf club head of claim 61, wherein the polymeric plug occupies between 1% to 10% of the cavity volume.

63. The iron-type golf club head of claim 59, wherein the polymeric plug has a shore A hardness of 10-70, the badge has a badge thickness that varies, and the polymeric plug has a density of less than 1.75 g/cc.

64. The iron-type golf club head of claim 58, wherein the polymeric plug has a face contact surface in contact with the rear surface of the striking face, and the face contact surface is circular.

65. The iron-type golf club head of claim 58, wherein the polymeric plug has a tapering sidewall.

66. The iron-type golf club head of claim 58, wherein the striking face comprises a striking plate welded to a portion of the heel portion, a portion of the toe portion, and a

21

portion of the top-line portion, with the striking plate formed of a striking plate material different than a material forming a portion of the sole portion.

67. The iron-type golf club head of claim 66, wherein at least a portion of the polymeric plug is located in the lower 5 portion.

68. The iron-type golf club head of claim 66, wherein the coefficient of restitution of the club head is greater than 0.8.

69. The iron-type golf club head of claim 66, wherein the rear portion includes a back wall surface extending upward 10 from the rear portion to the top-line portion, the polymeric plug contacts the back wall surface and the rear surface of the striking face, at least a portion of the back wall surface is separated from the toe portion by a toe hole, at least a 15 portion of the back wall surface is separated from the heel portion by a heel hole, and the badge covers the polymeric plug, the back wall surface, the toe hole, and the heel hole.

70. The iron-type golf club head of claim 69, wherein the at least one weighting element includes at least two weight- 20 ing elements, and the polymeric plug has a face contact surface in contact with the rear surface of the striking face, and the face contact surface is circular.

71. The iron-type golf club head of claim 70, wherein the polymeric plug has a tapering sidewall.

72. An iron-type golf club head comprising:

a body having a heel portion, a toe portion, a top-line 25 portion, a sole portion, a striking face joining the top-line portion to the sole portion, and a rear portion joined to the striking face by the sole portion;

a badge attached to the body;

a polymeric plug in contact with a rear surface of the striking face and a portion of the body;

wherein the rear portion extends upward from the sole 30 portion toward the top-line portion to create an enclosed cavity bounded at least in part by a portion of the rear portion, a portion of the sole portion, a portion of the striking face, and a portion of the badge, wherein the enclosed cavity has a cavity volume;

wherein a first portion of the sole portion, located closer 35 to the striking face than the rear portion, and bounding the enclosed cavity has a first portion sole thickness of less than 3 mm;

wherein the top-line portion has a total top line thickness of less than 9 mm;

wherein a portion of striking face has a face thickness of 40 less than 2.5 mm;

wherein (a) the striking face has a center point, (b) an upper portion of the enclosed cavity is located at an elevation above the center point and has an upper 45 portion cavity depth measured from an interior surface of the striking face to an interior surface of the enclosed cavity in a direction perpendicular to an exterior surface of the striking face, (c) a lower portion of the enclosed cavity is located at an elevation below the center point and has a lower portion cavity depth 50 measured from the interior surface of the striking face to the interior surface of the enclosed cavity in a direction perpendicular to the exterior surface of the striking face, and (d) the enclosed cavity has a cavity depth measured from the interior surface of the striking 55 face to the interior surface of the enclosed cavity in a direction perpendicular to the exterior surface of the striking face, and the cavity depth varies;

wherein at least a portion of the polymeric plug is located in the upper portion;

22

wherein the striking face has an unsupported face surface area within a range of between 450 mm<sup>2</sup> to 3500 mm<sup>2</sup>; wherein the club head has a center of gravity located at an elevation between 12 mm and 25 mm above the 5 ground plane; and

wherein the rear portion includes a back wall surface extending upward from the rear portion to the top-line 10 portion, the polymeric plug contacts the back wall surface and the rear surface of the striking face, at least a portion of the back wall surface is separated from the toe portion by a toe hole, at least a portion of the back wall surface is separated from the heel portion by a heel hole, and the badge covers the polymeric plug, the 15 back wall surface, the toe hole, and the heel hole.

73. The iron-type golf club head of claim 72, wherein the enclosed cavity extends to the top-line portion, the poly- 20 meric plug has a plug volume that is no more than 20% of the cavity volume, and the polymeric plug has a shore D hardness of 40 or less.

74. The iron-type golf club head of claim 73, wherein the cavity volume is at least 10 cc, and the badge has a badge 25 thickness that varies.

75. The iron-type golf club head of claim 74, wherein a coefficient of restitution of the club head is greater than 0.79.

76. The iron-type golf club head of claim 75, wherein the first portion sole thickness is less than 2 mm.

77. The iron-type golf club head of claim 75, wherein the face thickness of a portion of striking face is less than 2 mm. 30

78. The iron-type golf club head of claim 75, wherein the polymeric plug has a density of less than 1.75 g/cc.

79. The iron-type golf club head of claim 75, wherein the unsupported face surface area is greater than 2000 mm<sup>2</sup>.

80. The iron-type golf club head of claim 75, wherein the cavity volume is 20 cc or less.

81. The iron-type golf club head of claim 75, wherein the lower portion cavity depth is different at two elevations 35 above the ground plane, and the upper portion cavity depth is different at two elevations above the ground plane.

82. The iron-type golf club head of claim 75, wherein the striking face thickness varies, and the coefficient of restitu- 40 tion of the club head is greater than 0.8.

83. The iron-type golf club head of claim 75, wherein the striking face comprises a striking plate welded to a portion of the heel portion, a portion of the toe portion, and a 45 portion of the top-line portion, with the striking plate formed of a striking plate material different than a material forming a portion of the sole portion, at least one weighting element is attached to the body portion, and at least a portion of the 50 polymeric plug is located in the lower portion.

84. The iron-type golf club head of claim 83, wherein the coefficient of restitution of the club head is greater than 0.8, the at least one weighting element includes at least two 55 weighting elements, and the face thickness of a portion of striking face is less than 2 mm.

85. The iron-type golf club head of claim 84, wherein the polymeric plug has a face contact surface in contact with the rear surface of the striking face, the face contact surface is circular, and the first portion sole thickness is less than 2 60 mm.

86. The iron-type golf club head of claim 85, wherein the polymeric plug has a tapering sidewall, and the badge has a plurality of ridges that intersect.

\* \* \* \* \*