

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 April 2001 (05.04.2001)


PCT

(10) International Publication Number
WO 01/23239 A1

- (51) International Patent Classification⁷: **B62B 3/14**
- (21) International Application Number: PCT/NO00/00319
- (22) International Filing Date:
28 September 2000 (28.09.2000)
- (25) Filing Language: Norwegian
- (26) Publication Language: English
- (30) Priority Data:
19994728 29 September 1999 (29.09.1999) NO
- (71) Applicants and
(72) Inventors: SANDVIK, Dag, Harald [NO/NO]; Trollvik, N-9300 Finnsnes (NO). CRUICKSHANK, Arve [NO/NO]; Trollvik, N-9300 Finnsnes (NO).
- (74) Agents: HÅMSØ, Eivind et al.; Håmsø Patentbyrå ANS, P.O. Box 171, N-4302 Sandnes (NO).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.

[Continued on next page]

(54) Title: DEVICE FOR CHILD SEAT IN A SHOPPER TROLLEY

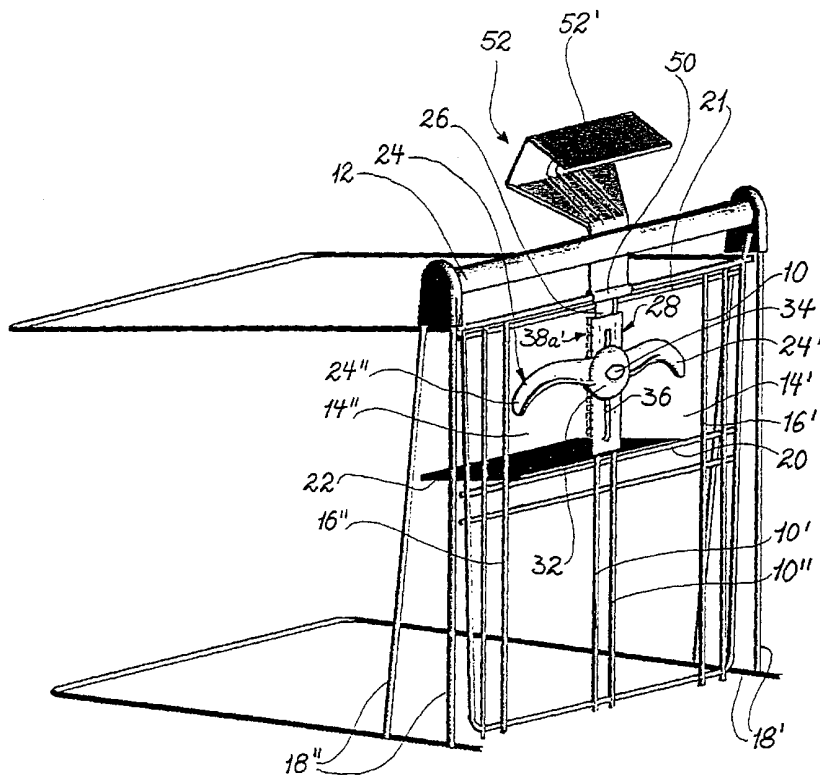

(57) Abstract: A safety device in connection with a child seat in a shopper trolley. The safety device prevents a child, placed on the seat (22), from being able to pull its legs out of the openings formed through the end wall (10) of the shopper trolley. The child seat (22) is pivotally suspended from the end wall (10), which can preferably be swung inwards/upwards in the shopper trolley about a horizontal axis, when shopper trolleys are being stacked horizontally. The child seat (22) is placed adjacent to said through openings (14', 14'') for the child's legs. At their bottoms and sides the openings are defined by elements (10', 10'', 16', 16'', 20) included in said end wall (10). To said openings (14', 14'') for the child's legs through the end wall (10) there is arranged an above-lying safety element (24), adjustable heightways, which is included in said safety device, and can restrict said openings (14', 14'') when being lowered, after the child's legs have been put through

said openings (14', 14'') and are outside the shopper trolley, to the rear of said end wall (10). The stationary part (28) of the height-adjusting device of the safety element (24) may carry, at its top, an angled or bent plate-like support (52), known in itself, for information/advertisements etc.

WO 01/23239 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DEVICE FOR CHILD SEAT IN A SHOPPER TROLLEY

This invention relates to a device for the child seat in a shopper trolley, where the child seat is pivotally supported in the area of the handle bar of the trolley, so that the openings through the adjacent end piece form passages for the child's legs when the child seat has been pivoted into the trolley, into an approximately horizontal position, the shopper trolley preferably being of the type, which can be inserted partially into other shopper trolleys through an end wall, which can be swung up, to allow stacking in the horizontal direction.

Child seats of the kind in question are not safe, since, by turning itself, the child can easily bring one foot up on the seat, from where it is easy to get up into a standing position, or the child can remain lying on its knees on the seat. Such situations may easily result in the child falling to the floor. Fatal accidents and serious accidents resulting in permanent injuries have happened, caused by falls from the child seat of the shopper trolley.

The passages through the end piece of the shopper trolley nearest to the push handle bar/cross-bar cannot be restricted as such, because this would make it difficult, possibly impossible, to place a child's legs through the openings.

5 Therefore, these permanent passages should be wide and spacious insertion openings, which the child's legs can easily be put through and pulled out of later.

According to the present invention there has therefore been provided a safety device in the form of a transversal body adjustable heightways, which is lowered, when the child's
10 legs have been put through the passage openings of the end piece of the shopper trolley, from an upper idle stand-by position to a lower active securing position, wherein the safety body restricts the passage openings for the child's
15 legs heightways from the top. When this safety body is in one active lower securing position, this position may correspond to one of a number of different height positions depending on the thickness of the child's thighs. The safety body can thus be adjusted heightways and be fixed at the level set.

20 According to a particularly advantageous embodiment of the invention, the frame for the support of the safety bar has a plate-like holder at the top, which may be bent into shape from transparent plastic material, for example. In its active position, i.e. when the shopper trolley is not in the stacked
25 position, the upper surface of this plate-like holder element will face the person pushing the shopper trolley, and in a known manner the holder may contain information and/or advertisement and be provided with a clamp for the temporary fastening of a shopping list.

30 This information carrier may alternatively be directly

connected to the inwards/upwards pivotal end wall of the
shopper trolley, and may be angled so at its top that its
plate-shaped main element (the information-carrying part),
sloping downwards/rearwards in the position of use, comes to
5 rest, as the end wall is pivoted inwards/upwards, on or above
the transversal handle.

The safety element, which may have a shape resembling a
clothes' hanger, which can be adjusted heightways and can be
fixed at different levels, may with advantage be secured to a
10 vertically displaceable slide, which can be fixed in
different positions of height, and which may have one or more
projections or similar engagement means releasably engaging
at least one rack oriented vertically, which engagement can
be temporarily released when the slide with the safety
15 element is moved upwards or downwards for the purpose of
height adjustment. The slide with the safety element and the
projection/projections/engagement means are preferably biased
towards a position in order to establish and maintain the
engagement of the rack(s) in the height position set,
20 preferably by means of a helical spring inserted between the
slide and a counter means, which is immovable in the
cushioning directions (axial direction) of the spring, but
displaceable upwards and downwards in the directions of
displacement of the slide, said helical spring extending
25 perpendicularly to the longitudinal direction of the rack(s).
By subjecting the slide with the safety element to a pressure
force centrally, directed opposite the back-springing
direction of the helical spring, and in the axial direction
of the spring, the spring is compressed and tightened, while
30 at the same time the one or more protrusions of the slide are
disengaged sideways from the respective tooth notch or
notches of the rack(s), whereby at least one projection lands

in a vertical guide groove.

With the projection of the slide gliding displaceably in the guide groove, the slide with the safety element may be displaced up or down, with the slide in the condition pushed
5 in against the action of the compression spring, until the wanted height position of the safety element is reached.

The effective height position of the safety element will normally depend on the thickness of the child's thighs. When the child is to be removed from the child seat, the slide
10 with the safety element is pressed in against the action of the compression spring, so that said projection is brought out of engagement from a rack notch of the respective rack(s) and lands in the vertical guide groove, in order for the slide with the safety element to be pushed upwards into an
15 idle stand-by position.

Further objects, advantages and features of the invention will appear from the following description of a non-limiting example of a preferred embodiment, which is illustrated in the accompanying drawings, in which:

20 Fig. 1 shows a perspective view of a shopper trolley, in which the safety bar is shown, drawn in full lines, in its upper idle stand-by position, and in dotted lines, in one lower, active position;

Fig. 2 shows, in perspective, three stackable shopper
25 trolleys, stacked partly into one another in the horizontal direction;

Fig. 3 shows a partial perspective view of a shopper trolley, in which the "basket" of the shopper trolley is highly simplified;

5 Fig. 4 shows a front view of the safety device separately, the transversal safety element having rounded, downward end portions;

Fig. 5, 5A and 6, 6A show partial perspective views and illustrate, seen at an angle from above, a simple height-adjusting device for the safety element (not shown),

10 Fig. 5 showing the projections of the slide, carrying the safety element, engaged in stationary vertical racks, which fix the position of the safety element, and have an intermediate guide groove for glidably receiving the projections of the slide carrying the safety element, for the
15 displacement of the safety element heightways;

Fig. 5A being a cross-section along the line V - V in Fig. 5;

Fig. 6 corresponds to Fig. 5 in all essentials, but here the projections of the slide have been disengaged from the notches of the vertical racks, one of the visible projections
20 thereby being positioned in the vertical guide groove located between the two racks forming a pair of racks, in order for the slide to be moved up or down relative to the position shown in Fig. 6; and

Fig. 6A is a section along the line VI - VI in Fig. 6.

25 Reference is made to Figs. 1 - 3, in which the shopper

trolley shown has an end wall 10 at a transversal handle bar 12. As appears more clearly from Fig. 3, the end wall 10 comprises two middle elements 10', 10", essentially vertical, rod-shaped or tubular, each defining, together with an adjacent element 16', 16" parallel therewith, near the side walls of the shopper trolley, represented by elements 18', 18", and a horizontal element 20 included in the end wall 10, a through opening 14' and 14" for the insertion of a child's leg.

In connection with these through insertion openings 14' and 14" for a child's legs, there is pivotally suspended from the end wall 10 and a frame 23 movable relatively thereto, see in particular Fig. 1, a known child seat 22, which has an essentially horizontal position in its active position, as shown, and an essentially vertical idle position, not shown, when the frame 23 is pivoted to the end wall 10. The pivotal suspension of this child seat 22 is well known and therefore not shown in detail.

At its upper edge, the end wall 10 is pivotally supported on a horizontal axis (suggested through the longitudinal axis A-A of the transversal rod 21 in Fig. 1), so that it may swing up when shopper trolleys are being stacked, inserted partially one into the other horizontally, Fig. 2. By the preceding pivoting of the frame 23 towards the end wall 10, the child seat 22 is pivoted into its idle position parallel to the frame 23 and the end wall 10, so that it does not interfere with the stacking.

Centrally in the upper portion of the end wall in question there is arranged, in accordance with the present invention, a child-securing device 24, which shall cooperate, in

principle, in an opening-restricting manner with the transversal element 20 of the end wall 10 in order to restrict these through openings 14', 14" after the child has put its legs through the openings, and is safely seated on
5 the seat 22.

The active element 24 of the child-securing device is bar shaped and extends essentially parallel with the end wall of the shopper trolley, and has downward end portions 24', 24", each joining the transversal main body at a transition
10 portion rounded convexly upwards/outwards.

The bar-shaped safety element 24 is suspended from the upper portion of the end wall 10, for example from the transversal rod 21.

To the middle rod-shaped/tubular elements 10', 10" of the end
15 wall, the stationary part 28 of the height-adjusting device of the safety element 24 is rigidly secured.

To the top of the frame tubes or similar of the shopper trolley, centrally at the end wall, there is attached, in a manner not shown in further detail, a depending narrow oblong
20 plate 26.

This stationary part 28 of the height-adjusting device for the safety element 24 cooperates with the vertically displaceable element of the height-adjusting device, which carries the safety element, and which can be fixed in the
25 set, adjusted height, and has the form of a slide 30 in the shape of a right-angled U, viewed horizontally.

The reference numeral 32 identifies a securing head for the safety element 24, 34 identifying an operating knob arranged in a central hole 32' in the securing head 32.

Fig. 4 shows that the stationary part 28 of the height-
5 adjusting device 28, 30 of the safety element has racks 38a, 38b facing in opposite directions. From Figs. 5, 5A and 6, 6A it appears that each of these racks comprises a pair 38a, 38a' and 38b, 38b' of racks.

The operating knob 34 of the head 32 of the safety element is
10 connected to one end of a compression spring in the form of a helical spring 40 arranged centrally, whose other end is secured centrally in a bowl-shaped slide piece 41 with securing means in the form of two sleeves 41' with internal threads for the reception of screws (not shown), which are
15 screwed into the sleeves 41' through holes 32'' in the securing head 32, so that the parts 32 and 41 are immovable perpendicularly to the length of the tubes 10', 10'' of the end wall, but can be displaced along said length, so that said bowl-shaped slide piece 41 will form a counter element
20 for the spring 40 by its compression, as a consequence of the pushing in of the operating knob 34.

From Figs. 4, 5, 5A, 6, 6A it will appear that the slide 30 is provided with four projections 42a, 42a' and 42b, 42b', facing each other in pairs, engaging respective notches of
25 the racks 38a, 38a', 38b, 38b' in the fixed height position of the safety element 24, Figs. 4 and 5,.

By the pushing in of the operating knob 34 of the safety element 24 in the central hole 32' of the securing head 32 for the compression and tightening of the spring 40, whereby

the glide piece 41 of the spring 40 works as a counter element, thereby allowing the compression of the spring 40, the projections 42a, 42a', 42b, 42b' of the slide 30 are brought out of engagement from the notches of the racks 38a, 38a', 38b, 38b', Figs. 5A, 6 and 6A, whereby the slide piece
5 41 of the compression spring 40 together with the securing head 32 and the slide 30 can be displaced heightways up or down.

The push-in direction of the operating knob 34 is suggested
10 by B in Fig. 5A. The push-in depth essentially corresponds to the width of one tooth or a projection 42a, 42a', 42b, 42b', which appears from Figs. 5A and 6A seen together.

According to Figs. 5 and 6, the part 28 of the height-adjusting and fixing device 28,30 of the safety element 24,
15 which is stationary in the connected position of use, is formed like a U-clamp, i.e. with an elongate cross-section squeezed flat horizontally, which has an insertion opening 44 between the vertical racks 38a, 38a', from where a slot 46 extends vertically through and across most of the horizontal
20 dimension of the part 28, ending in a rounded inner portion 46'. Such a part 28, shaped like a U-clamp, may be slipped over/clamped onto the two middle rod-shaped or tubular elements 10', 10" of the shopper trolley end wall 10, and be secured thereto.

25 Between the racks 38b and 38b' of the pair 38b,38' of racks, there is formed a vertical guide groove 48 for one projection 42b' of the slide 30, whereas the second projection 42b slides, bearing externally on the rack 38b, when the slide 30 with the safety element 24 is displaced up or down, and the
30 spring 40 is compressed. In their secured position in the

position of use, the racks 38a and 38a' of the pair 38a,38a' of racks will enclose a corresponding vertical guide groove formed by the insertion opening 44.

5 The safety element 24 shaped like a clothes hanger with two arms 24', 24" of a downward concave shape, will essentially come to bear lightly on the child's thighs, so that the child cannot get up when the safety element 24 has been set in the correct position heightways.

10 The upper end of said upper plate 26 is connected to a support element 50 attached round the upper rod-shaped/tubular element 21 of the end wall 10 of the shopper trolley. The support element 50 carries a so-called information carrier 52 for advertisements etc., whose effective face 52' is oriented in a slope from its top
15 downwards, rearwards, i.e. towards the person pushing the shopper trolley in front of himself/herself, so that he/she can easily see the information, advertisement etc., without having to look away from the child sitting on the seat 22, secured with the safety element 24 across its thighs, Fig. 3.

20 Fig. 2 shows three shopper trolleys pushed partially into one another, provided with safety elements 24 with height-adjusting and fixing device and information-carrier 52 which are pivoted together with the end wall 10 when this is influenced by another trolley being pushed in.

25 The plate-shaped main element 52' of the information carrier 52, extending downwards/rearwards from its top, forms a free, outer part of an angled or bent plate body consisting of three or four plate-shaped portions arranged at such angles relative to one another, that when the end wall 10 swings

up/in as the shopper trolleys are being stacked in a horizontal row, Fig. 2, the plate-shaped main element 52' of the information-carrier 52, comes from above to rest in front of the transversal handle 12. Such information-carriers 52
5 can be connected directly or indirectly to the pivotal end wall 10 of the shopper trolley through the safety device.

The invention is not limited to the particular height-adjusting/fixing device shown for the safety bar 24, as other interlockable/releasable, displaceable or telescopic devices
10 may be used, wherein the securing of the individual positions can be stepped or infinitely variable. A safety bar 24, with a spring or a telescopic cylinder arranged thereto, exerting a constant light pressure across the child's thighs, can also be used.

C l a i m s

1. A device for a child seat in a shopper trolley, wherein the child seat (22) is suspended from one side wall (10), which can preferably be swung into/up in the
5 shopper trolley about an upper horizontal axis, when shopper trolleys are being stacked horizontally, and wherein the child seat (22) is placed adjacent to openings (14', 14") for the child's legs through said
10 end wall (10), said openings (14', 14") being defined at the bottom and at the sides by elements (10', 10", 16', 16", 20) included in said end wall (10),
c h a r a c t e r i z e d i n that in the area of said openings (14', 14") through the side wall (10) for the child's legs, the child seat (22) has an over-lying
15 safety element (24) arranged thereto, which is adjustable heightways and can preferably be fixed in the set height position, and which is arranged to restrict the openings (14', 14") when lowered.

2. A device according to claim 1, c h a r a c t e r i z e d
20 i n that said safety element (24), which can be adjusted heightways and preferably be fixed/locked at the level set, has a shape resembling a clothes hanger consisting of a middle main body (24) essentially transversal, which merges through downward concave
25 intermediate portions into downward end portions (24', 24").

3. A device according to claim 1, wherein the trolley is provided with a plate-like information-carrier (52),
c h a r a c t e r i z e d i n that the plate-like

information-carrier (52), which is connected directly or indirectly to the pivotal end wall (10) of the shopper trolley, and which comprises in the position of use a main element (52') sloping from its top rearwards, and from the upper edge thereof, a plate section sloping forward and being connected to the carrying section, configured and positioned in such a manner that the angled upper part of the information carrier (52), consisting of said main element (52') and the plate section, is pivoted so, as the end wall (10) pivots when two or more shopper trolleys are being stacked into a horizontal row, that said plate-like main element (52') comes from above to rest on or above the transversal handle (12).

4. A device according to claim 3, characterized in that at its top the stationary part (28,26) of the height-adjusting/fixing device (28,26,30) of the safety element (24) is connected to the lower supporting part of said information-carrier (52).

5. A device according to claim 3, characterized in that the stationary part (28,26) of the height-adjusting and fixing device (28,26,30) of the safety element (24) comprises at least an essentially vertical rack (38a, 38a', 38b, 38b'), and that the safety element (24) is connected to a slide, carriage or similar (30) displaceable in the vertical direction between an upper, idle stand-by position, in which the safety element (24) does not restrict said through openings (14', 14") for the legs heightways, and several active positions below, these position depending on the thickness of the child's thighs, said slide (30) being formed with at least one

projection (42a, 42a', 42b, 42b'), arranged to engage, in one position of the slide/safety element in the longitudinal direction of the shopper trolley, a notch of said at least one rack (38a, 38a', 38b, 38b'),
5 whereas in another position of the slide/safety element in the longitudinal direction of the shopper trolley, it is pushed sideways out of said engagement, whereby nothing prevents the slide/safety element (30/24) from being displaced up or down essentially in the vertical
10 direction.

6. A device according to claim 5, characterized in that the slide (30) with the safety element (24) is spring-biased (40) towards their non-displaceable position, in which the projections (42a, 42a', 42b,
15 42b') of the slide (30) are engaged in a notch (notches) of said rack(s) (38a, 38a', 38b, 38b').

7. A device according to claim 6, characterized in that in the area of said rack, there is arranged a pair (38b, 38b') of racks with an intermediate guide
20 groove (48) for one projection (42b') of the slide (30), and that the slide (30) with the safety element (24) cooperates with a spring (40), which seeks to retain the slide (30) in a position conditioned by the projection (42a, 42a', 42b, 42b') thereof being engaged in a notch
25 of the racks (38a, 38a', 38b, 38b').

8. A device according to claim 7, characterized in that the stationary part (28) of the height-adjusting/fixing device of the safety element (24), carrying the racks (38a, 38a', 38b, 38b'), is formed
30 like a U-shaped clamp with a horizontally elongate

vertical slot (46) therethrough, which extends over more than half the width (horizontal extent) of the U-clamp (28), it being possible for said U-clamp (28) to be passed over/clamped onto the end wall elements (10', 10") of the shopper trolley.

9. A device according to any one of the preceding claims 7 and 8, characterized in that in the area of each pair (38a,38a' and 38b,38b') of racks the slide (30) has two parallel projections (42a, 42a', 42b, 42b') to be engaged in one rack each, and that the notches each have a length essentially corresponding to the corresponding width of the intermediate guide groove (44, 48), again corresponding to the distance of displacement of the slide (30) perpendicularly to the longitudinal direction of the racks.

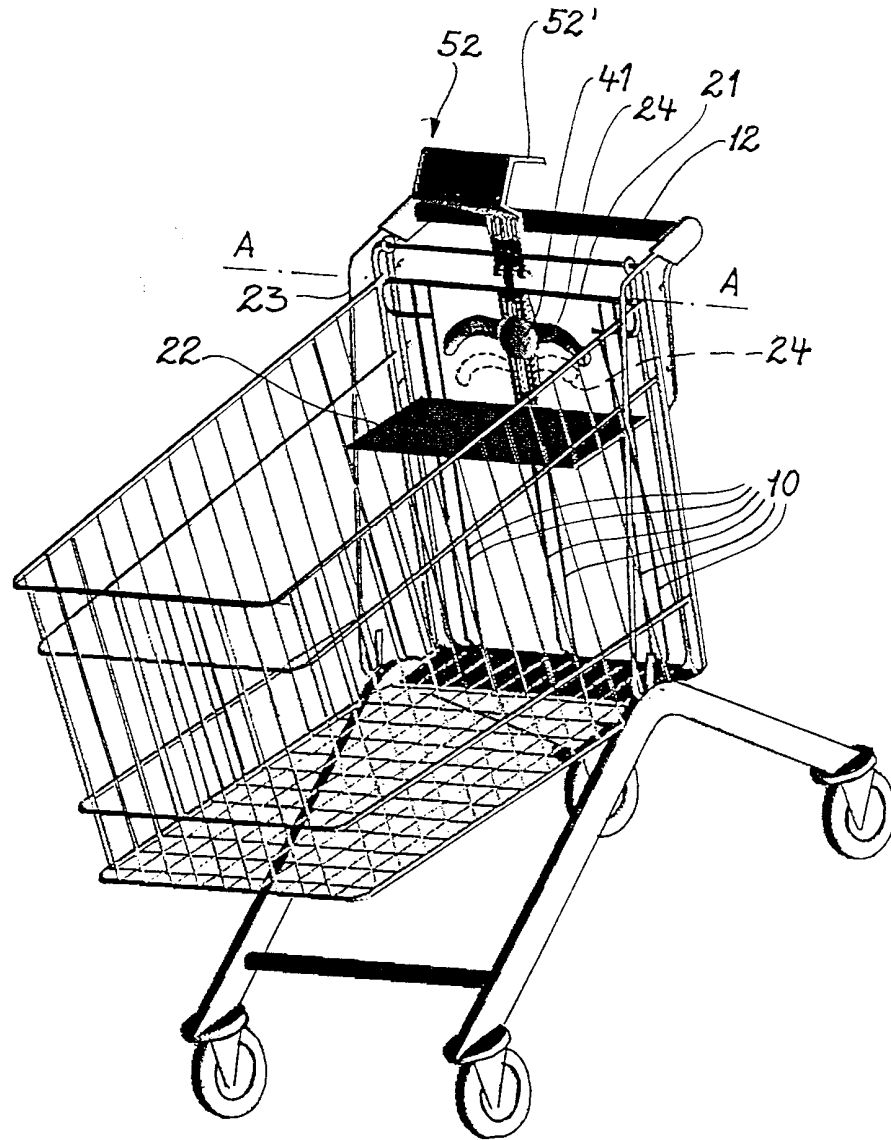


FIG. 1

2/6



FIG. 2

3/6

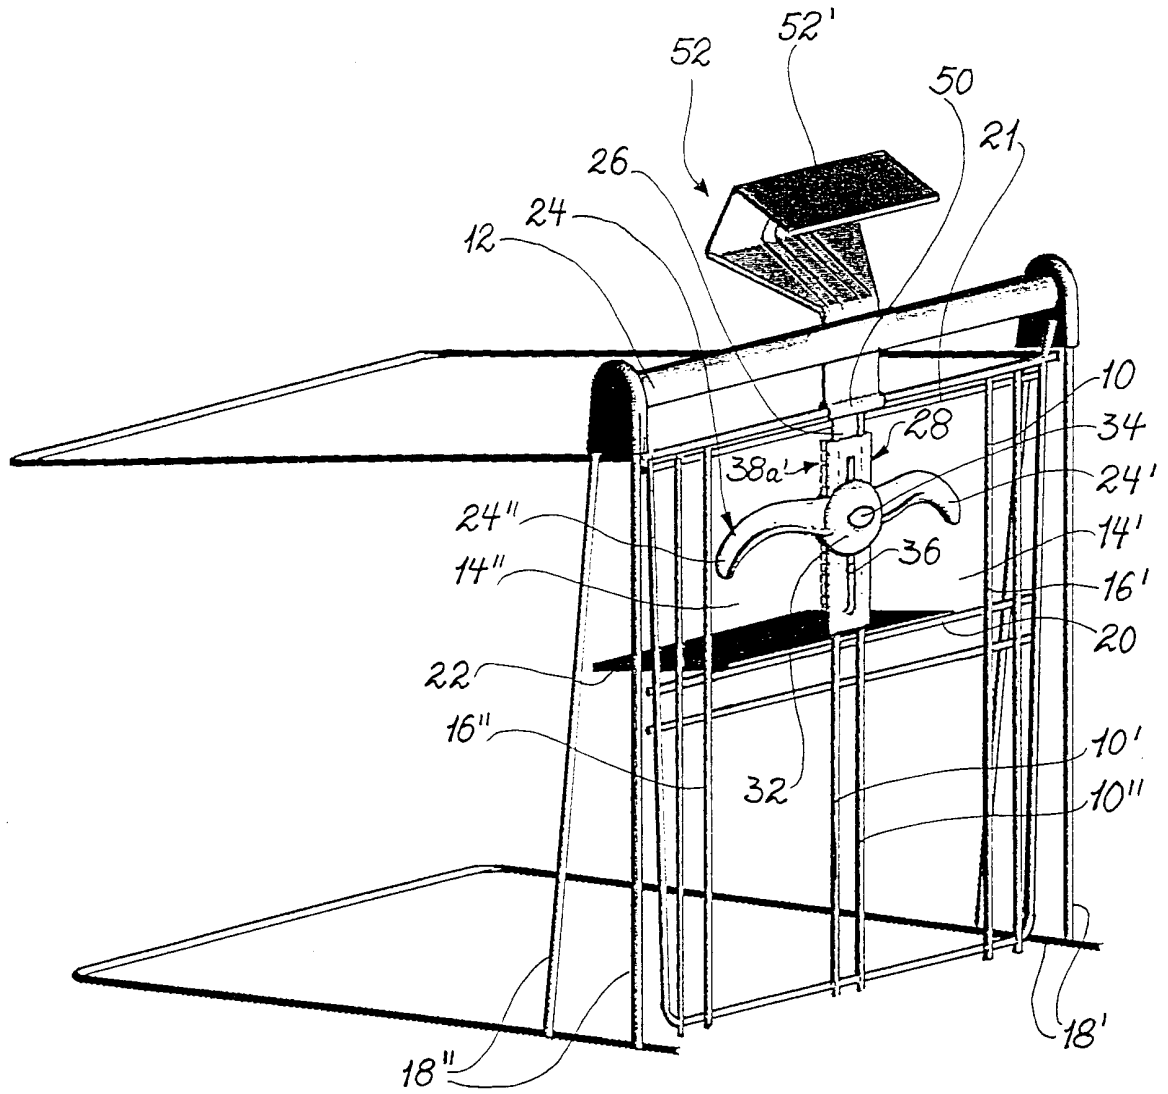


FIG. 3

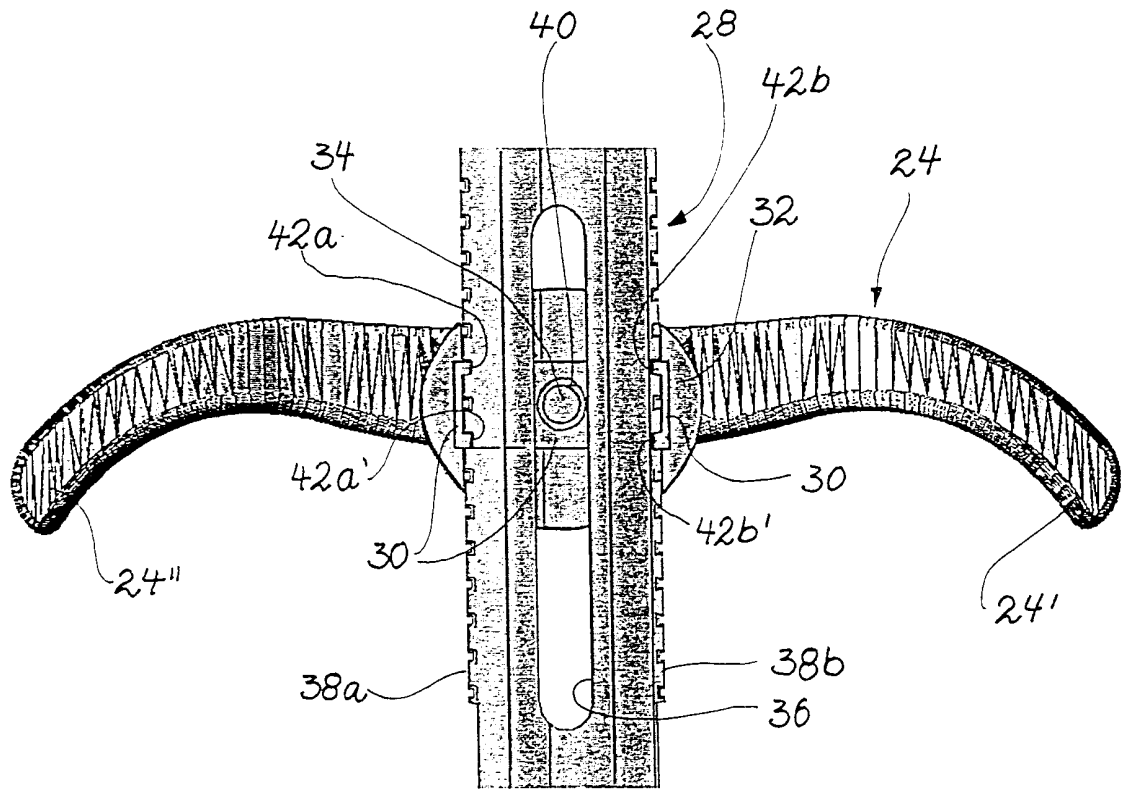


FIG. 4

5/6

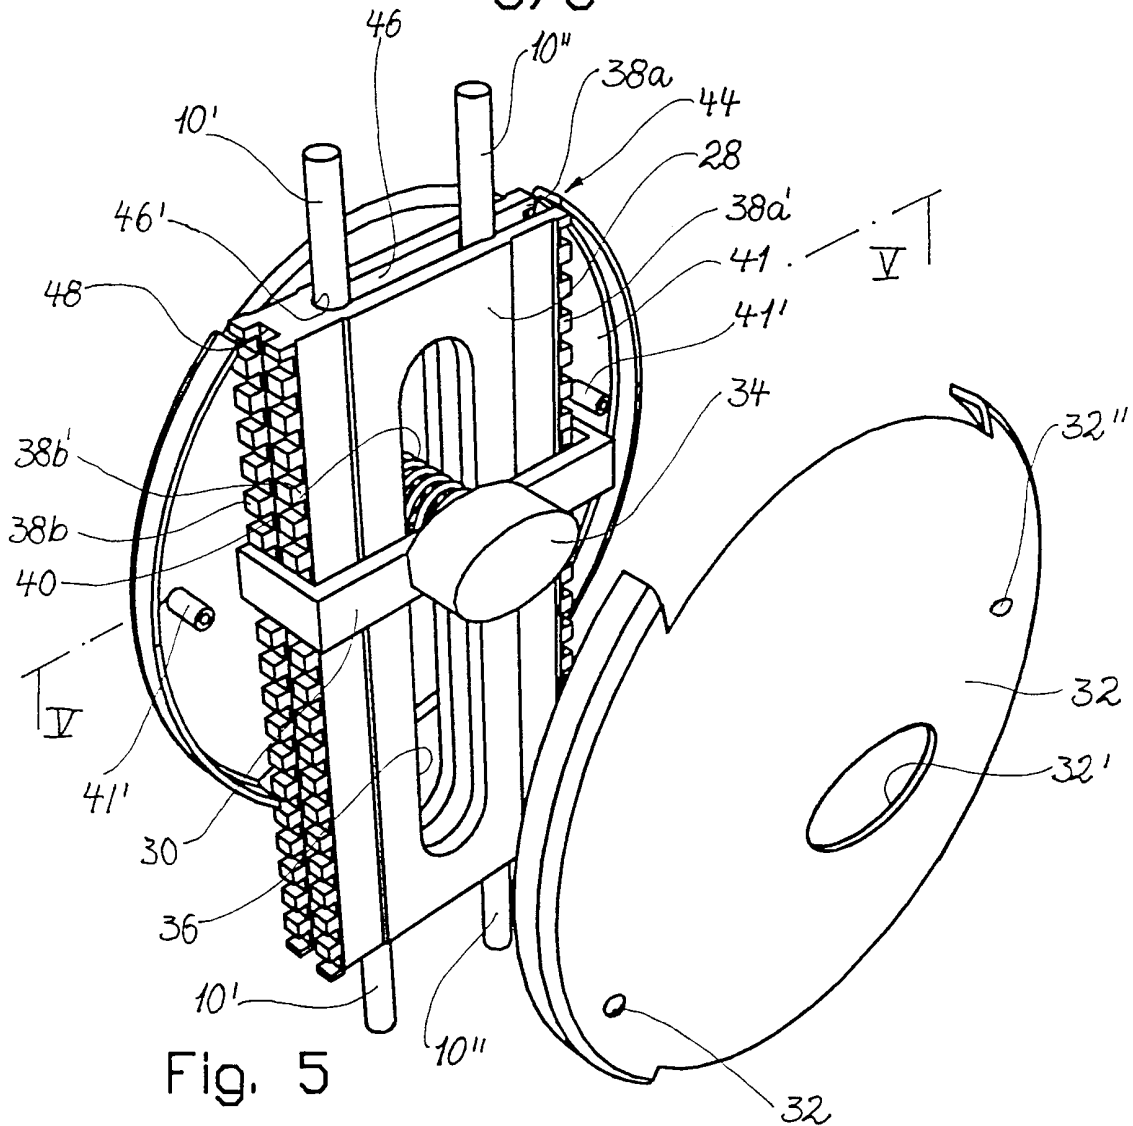
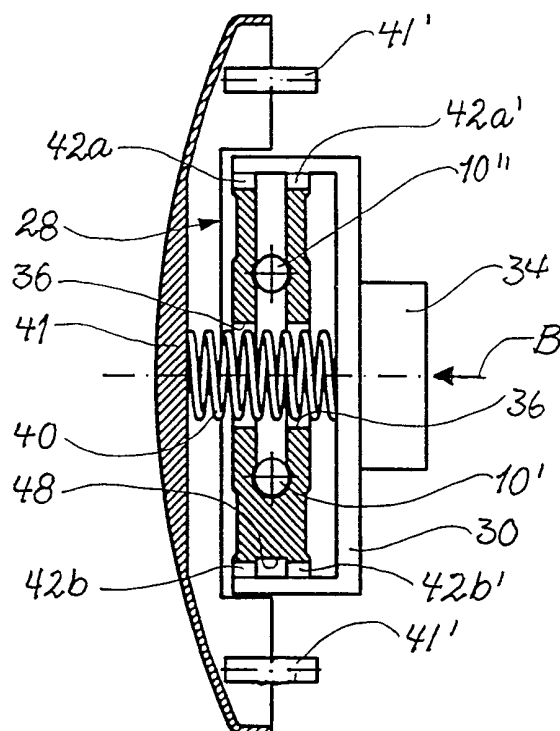


Fig. 5



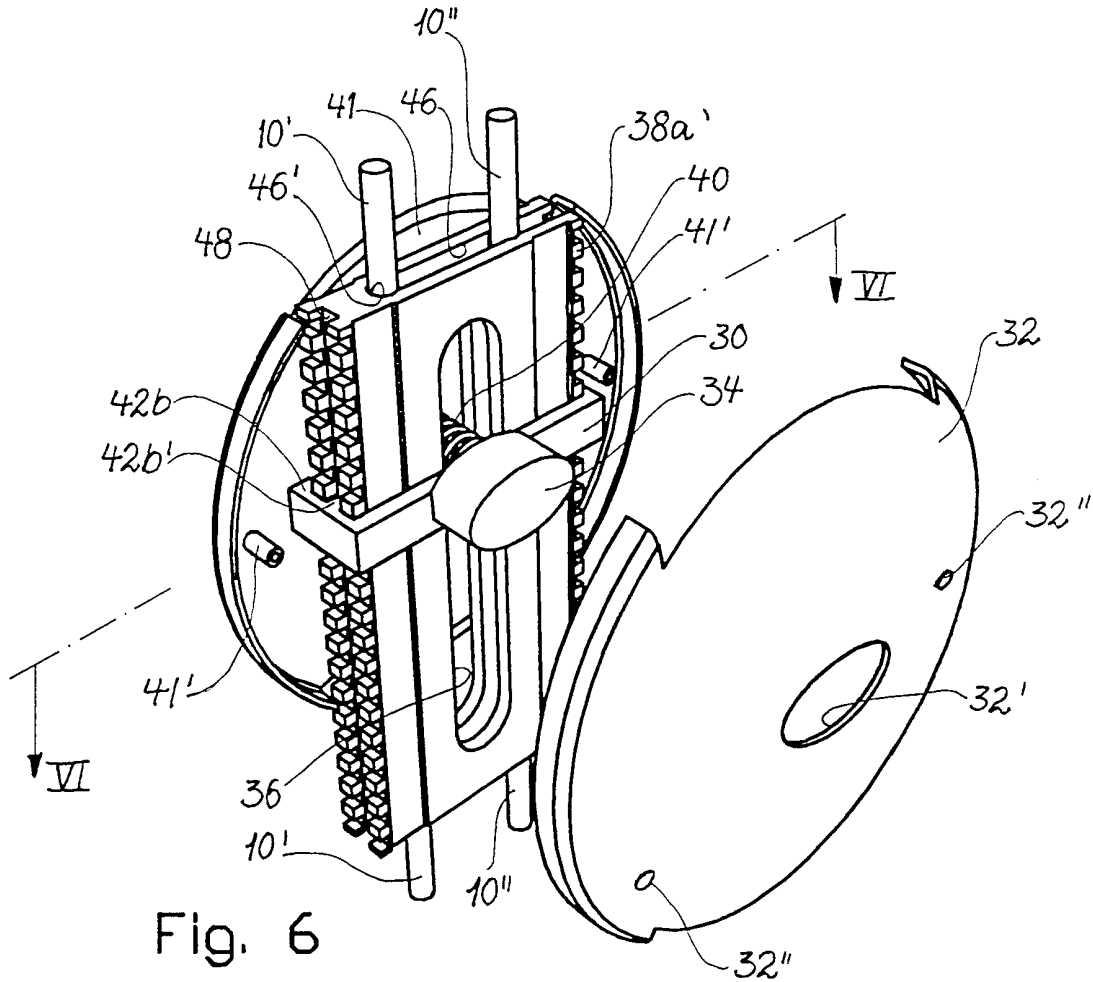


Fig. 6

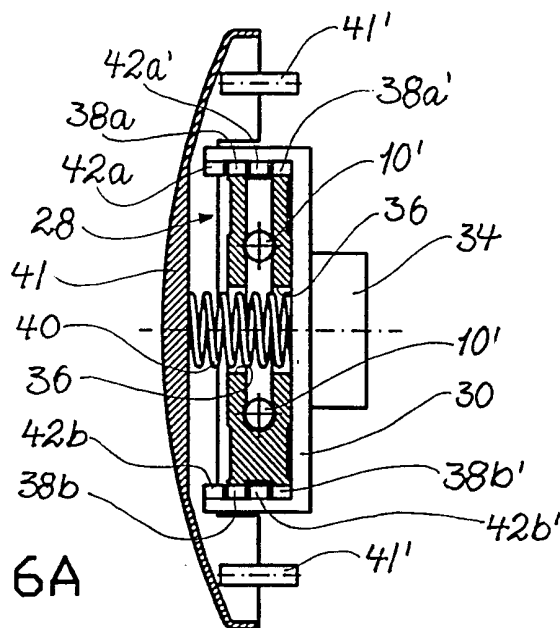


Fig. 6A

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 00/00319

A. CLASSIFICATION OF SUBJECT MATTER		
IPC7: B62B 3/14 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC7: B62B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5651557 A (DE STEFANO), 29 July 1997 (29.07.97) --	1
A	US 4867464 A (COOK), 19 Sept 1989 (19.09.89) --	1
A	GB 2282572 A (REGENT MOULDINGS LIMITED), 12 April 1995 (12.04.95) --	1
A	US 5636818 A (EDWARDS ET AL), 10 June 1997 (10.06.97) --	3
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
18 December 2000		10-01-2001
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Göran Carlström/js Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 00/00319

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5086960 A (SCHWIETZER), 11 February 1992 (11.02.92) -- -----	3

INTERNATIONAL SEARCH REPORT

Information on patent family members

04/12/00

International application No.

PCT/NO 00/00319

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5651557 A	29/07/97	NONE	
US 4867464 A	09/09/89	NONE	
GB 2282572 A	12/04/95	GB 9318351 D	00/00/00
US 5636818 A	10/06/97	NONE	
US 5086960 A	11/02/92	NONE	