




(86) Date de dépôt PCT/PCT Filing Date: 2005/06/29
(87) Date publication PCT/PCT Publication Date: 2006/01/12
(45) Date de délivrance/Issue Date: 2013/02/12
(85) Entrée phase nationale/National Entry: 2006/11/22
(86) N° demande PCT/PCT Application No.: US 2005/023180
(87) N° publication PCT/PCT Publication No.: 2006/004873
(30) Priorité/Priority: 2004/06/29 (US10/880,128)

(51) Cl.Int./Int.Cl. *A61F 13/49* (2006.01),
A61F 13/15 (2006.01)
(72) Inventeur/Inventor:
LAVON, GARY DEAN, US
(73) Propriétaire/Owner:
THE PROCTER & GAMBLE COMPANY, US
(74) Agent: DIMOCK STRATTON LLP


(54) Titre : ARTICLE ABSORBANT A JETER A BANDES REVERS FORMANT BARRIERE

(54) Title: DISPOSABLE ABSORBENT ARTICLE HAVING BARRIER CUFF STRIPS

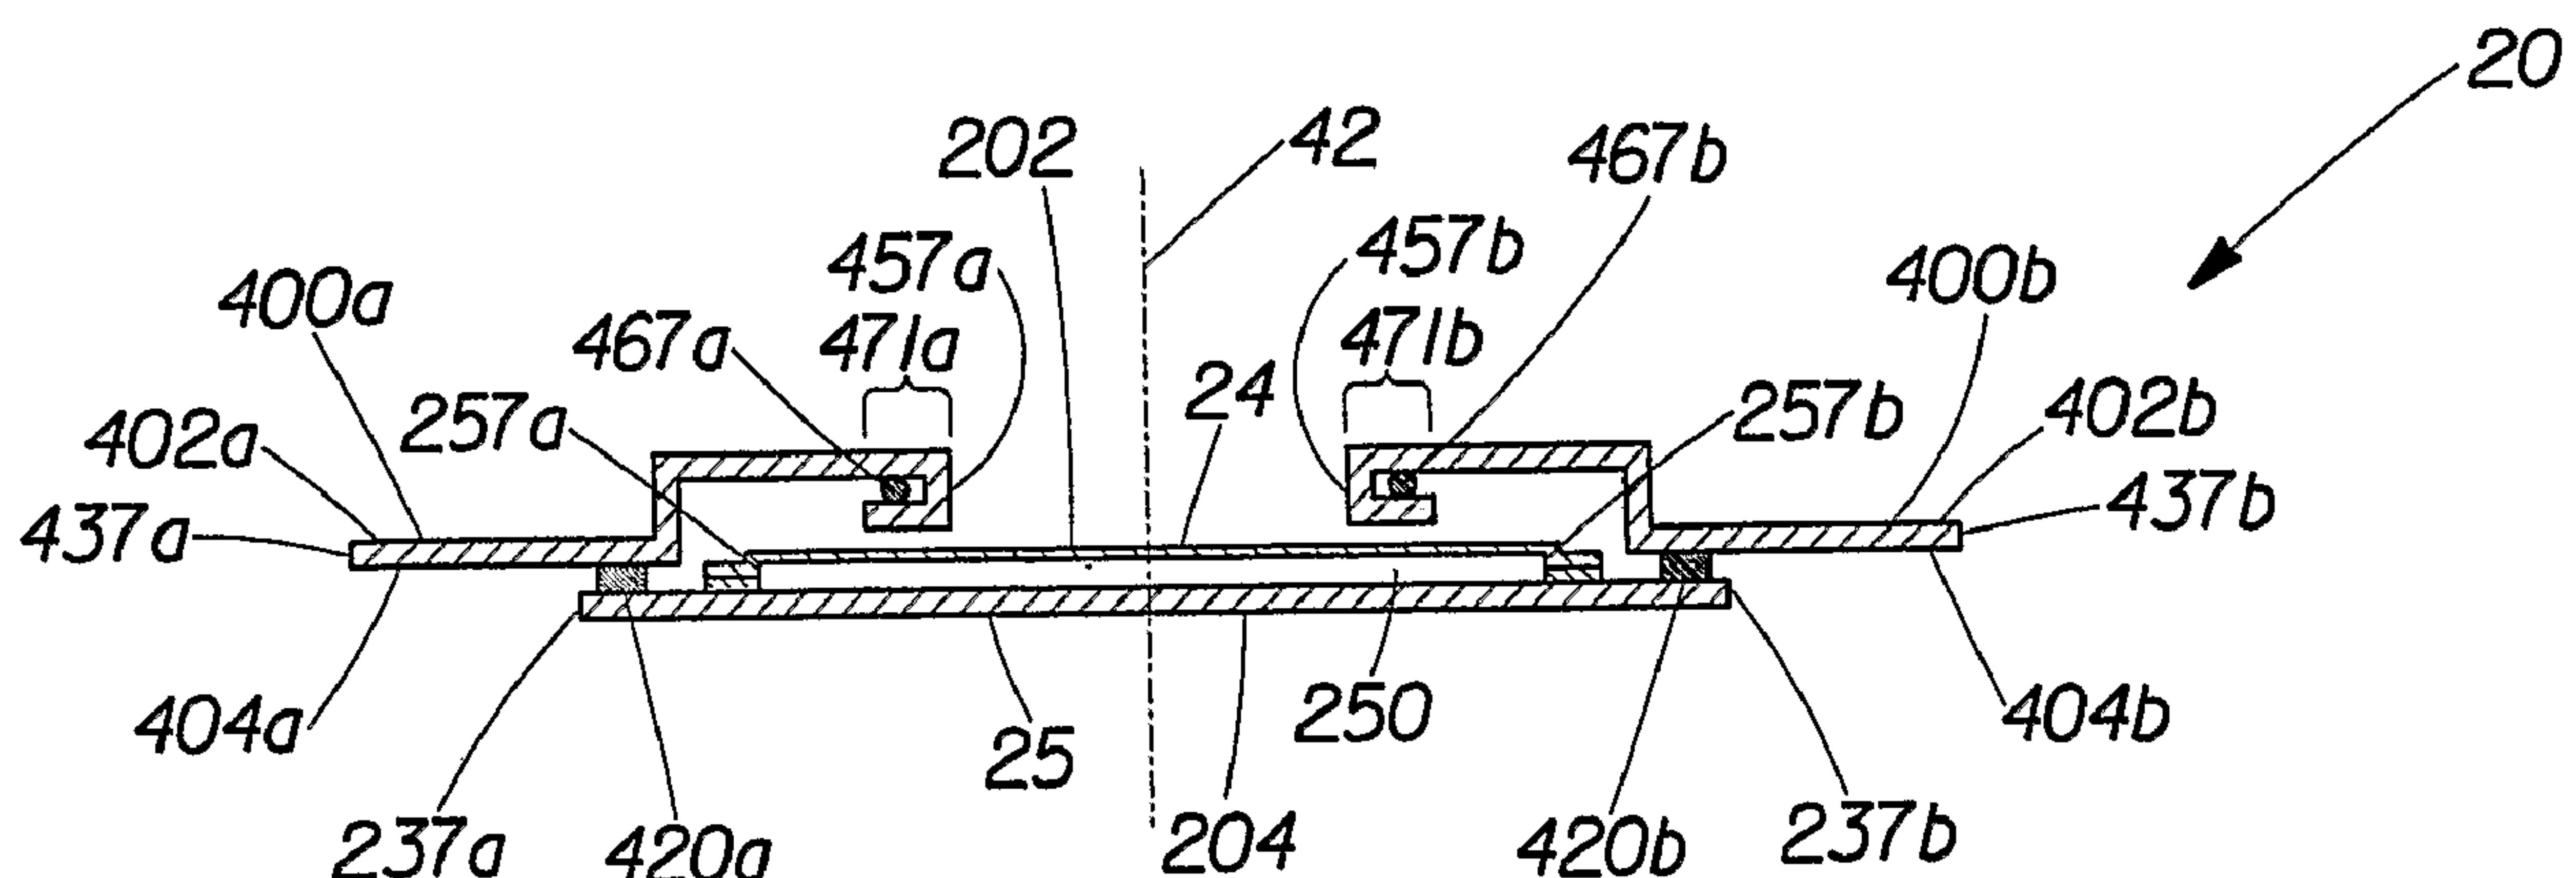

(57) Abrégé/Abstract:

A disposable absorbent article includes two laterally opposing longitudinally extending barrier cuff strips attached to an interior surface of an absorbent assembly in laterally opposing attachment zones. Each barrier cuff strip may include a water-impermeable layer and may be extensible. A longitudinally extending elastic gathering member is attached to each barrier cuff strip adjacent to its proximal edge. When the article is worn, the elastic gathering members contract and raise the barrier cuff strips to form side barriers. The absorbent assembly includes an absorbent core that may contain superabsorbent particles, which may be contained inside pockets. A portion of the absorbent assembly such as the portion that lies between the barrier cuff strip attachment zones may be extensible and may include a water-impermeable layer. The laterally opposing attachment zones may act as dams preventing a lateral flow of liquid bodily waste.

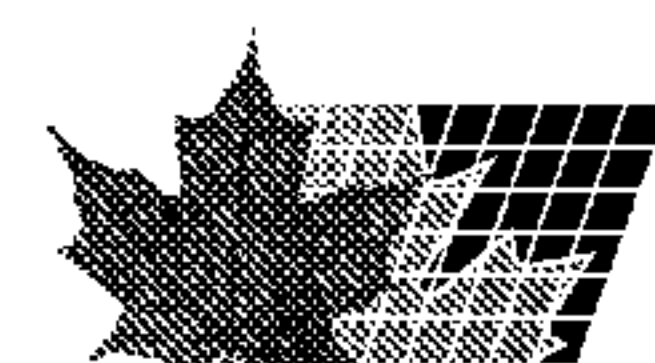

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 January 2006 (12.01.2006)

PCT

(10) International Publication Number
WO 2006/004873 A3

(51) International Patent Classification:

A61F 13/49 (2006.01) A61F 13/15 (2006.01)

(21) International Application Number:

PCT/US2005/023180

(22) International Filing Date: 29 June 2005 (29.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

10/880,128 29 June 2004 (29.06.2004) US

(71) Applicant (for all designated States except US): **THE PROCTER & GAMBLE COMPANY** [US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LAVON, Gary, Dean** [US/US]; 7071 Darcie Drive, Hamilton, Ohio 45011 (US).

(74) Common Representative: **THE PROCTER & GAMBLE COMPANY**; c/o T. David Reed, The Procter & Gamble Company, Winton Hill Business Center, 6110 Center Hill Road, Cincinnati, Ohio 45224 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

(88) Date of publication of the international search report:

13 July 2006

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DISPOSABLE ABSORBENT ARTICLE HAVING BARRIER CUFF STRIPS

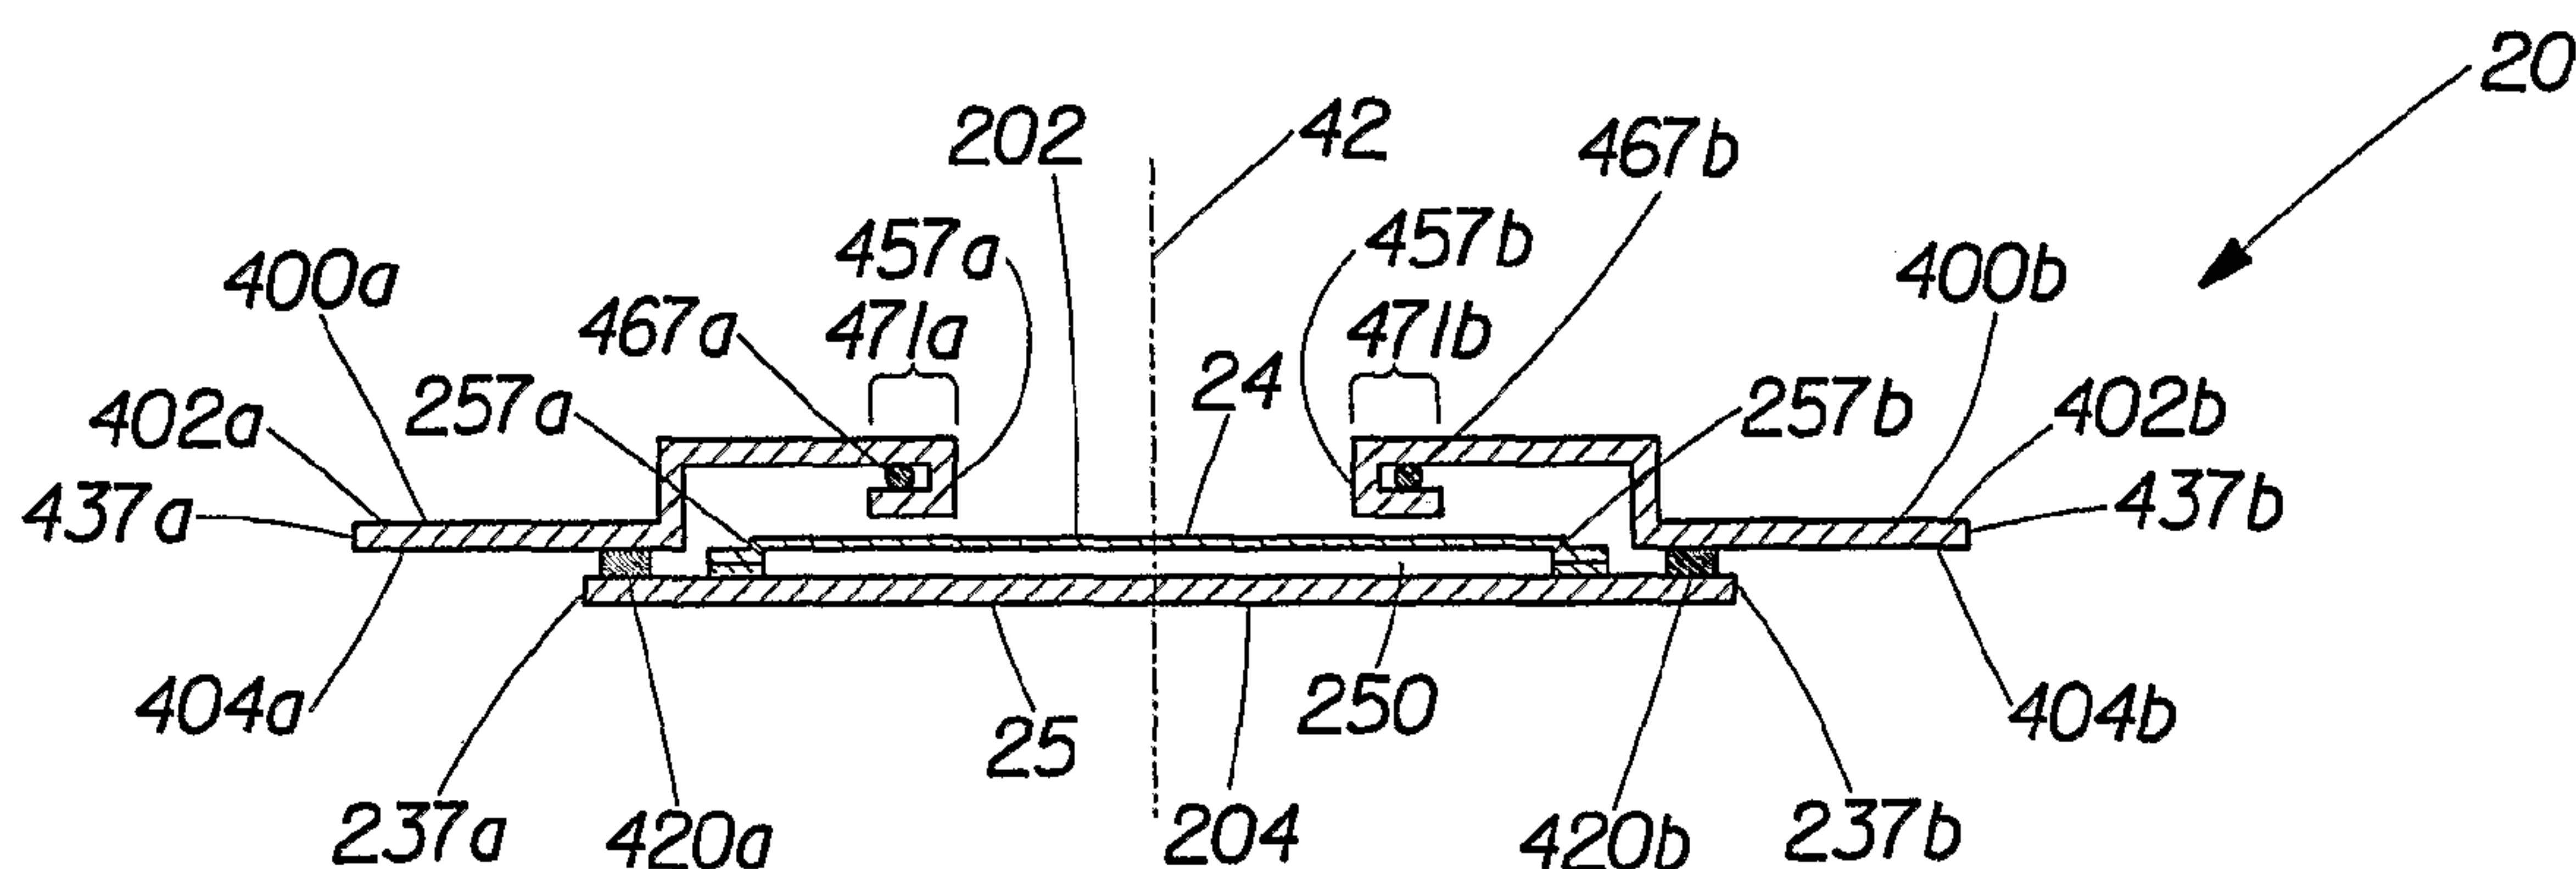

(57) Abstract: A disposable absorbent article includes two laterally opposing longitudinally extending barrier cuff strips attached to an interior surface of an absorbent assembly in laterally opposing attachment zones. Each barrier cuff strip may include a water-impermeable layer and may be extensible. A longitudinally extending elastic gathering member is attached to each barrier cuff strip adjacent to its proximal edge. When the article is worn, the elastic gathering members contract and raise the barrier cuff strips to form side barriers. The absorbent assembly includes an absorbent core that may contain superabsorbent particles, which may be contained inside pockets. A portion of the absorbent assembly such as the portion that lies between the barrier cuff strip attachment zones may be extensible and may include a water-impermeable layer. The laterally opposing attachment zones may act as dams preventing a lateral flow of liquid bodily waste.

WO 2006/004873 A3

DISPOSABLE ABSORBENT ARTICLE HAVING BARRIER CUFF STRIPS

FIELD OF THE INVENTION

This invention relates to disposable absorbent articles such as disposable diapers and other articles intended for use on incontinent persons.

BACKGROUND OF THE INVENTION

Disposable absorbent articles are designed to absorb and contain bodily waste in order to prevent soiling of the body and clothing of the wearer, as well as bedding or other objects with which the wearer comes into contact.

As the usage of disposable absorbent articles has expanded, their complexity has increased with the incorporation of additional features serving to enhance their performance and appearance. The costs of the materials and the costs of the manufacturing processes have also increased in conjunction with the increase in complexity. As a result, the prices at which these articles are sold have risen to levels that many potential purchasers around the world cannot afford to pay. Thus, a need exists for a simple disposable absorbent article.

SUMMARY OF THE INVENTION

The present invention provides a disposable absorbent article including two laterally opposing longitudinally extending barrier cuff strips attached to an interior surface of an absorbent assembly in laterally opposing attachment zones. Each barrier cuff strip may include a water-impermeable layer and may be extensible. A longitudinally extending elastic gathering member is attached to each barrier cuff strip adjacent to its proximal edge. When the article is worn, the elastic gathering members contract and raise the barrier cuff strips to form side barriers. The absorbent assembly includes an absorbent core that may contain superabsorbent particles, which may be contained inside pockets. A portion of the absorbent assembly such as the portion that lies between the barrier cuff strip attachment zones may be extensible and may include a water-impermeable layer. The laterally opposing attachment zones may act as dams preventing a lateral flow of liquid bodily waste.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawing figures, like reference numerals identify structurally corresponding elements, which may or may not be identical in the several exemplary embodiments that are depicted. Some of the figures may have been simplified by the omission of selected elements for the purpose of more clearly showing other elements. Such omissions of elements in some figures are not necessarily indicative of the presence or absence of particular elements in any

of the exemplary embodiments, except as may be explicitly delineated in the corresponding written description.

In the drawing figures and in the written description, lowercase letters appended to reference numerals indicate generally symmetric elements, *e.g.*, the left and right side edges of the absorbent assembly **200** are respectively identified by the reference numerals **237a** and **237b**. A reference numeral without an appended lowercase letter identifies all of the elements to which that particular reference numeral applies, *e.g.*, a structural element formed of individual left and right portions may be identified in its entirety by the reference numeral **X**, while the left and right portions are individually identified by the respective reference numerals **Xa** and **Xb**; thus, textual reference to a structure identified by **X** includes elements **Xa**, **Xb**, and so on.

Figure 1 is a plan view of an exemplary disposable absorbent article in the form of a diaper **20**, which is shown in its flat, uncontracted state, *i.e.*, without the contraction induced by elastic members. In **Figure 1**, the interior portion of the diaper **20** that faces inwardly toward the wearer and contacts the wearer is shown facing the viewer.

Figure 2 is a plan view of the diaper **20** of **Figure 1** in its flat, uncontracted state, with the exterior portion of the diaper **20** that faces outwardly away from the wearer shown facing the viewer.

Figure 3, **Figure 4**, and **Figure 5** are section views of the diaper **20** of **Figure 1** and **Figure 2** taken at the respective section lines 3-3, 4-4, and 5-5. In these section views, the interior portion of the diaper **20** that faces inwardly toward the wearer and contacts the wearer is shown facing upward.

Figure 6 is a simplified side elevation view of an exemplary diaper **20** being worn about a lower torso of a wearer.

Figure 7 is a front elevation view of the diaper **20** of **Figure 6** being worn about the lower torso of the wearer.

Figure 8 is a back elevation view of the diaper **20** of **Figure 6** being worn about the lower torso of the wearer.

Figure 9 is a plan view of an exemplary fragment of a formed web material.

Figure 10 is a simplified left side elevation view of an exemplary diaper **20** including cohesive fastening patches being worn about a lower torso of a wearer.

Figure 11 is a simplified right side elevation view of the diaper **20** of **Figure 10** including cohesive fastening patches being worn about the lower torso of the wearer.

Figure 12 is a simplified plan view of an exemplary disposable absorbent article in the form of a diaper **20**, which is shown in its flat, uncontracted state, *i.e.*, without the contraction induced by elastic members, having adhesive tape tabs **114a** and **114b** and fastening surfaces **116a** and **116b**.

In **Figure 12**, the interior portion of the diaper **20** that faces inwardly toward the wearer and contacts the wearer is shown facing the viewer.

Figure 13 is a simplified plan view of the diaper **20** of **Figure 12** in its flat, uncontracted state, with the exterior portion of the diaper **20** that faces outwardly away from the wearer shown facing the viewer.

Figure 14 is a perspective view of an exemplary diaper **20**, which is shown in its relaxed, contracted state, *i.e.*, with the contraction induced by elastic members. In **Figure 14**, the interior portion of the diaper **20** that faces inwardly toward the wearer and contacts the wearer is shown facing upward.

Figure 15 is a plan view of an exemplary absorbent assembly **200**. In **Figure 15**, the absorbent assembly **200** is shown separately from the other portions of an exemplary diaper **20** and the interior portion of the absorbent assembly **200** that faces inwardly toward the wearer and contacts the wearer is shown facing the viewer.

Figure 16 is a section view of the absorbent assembly **200** of **Figure 15** taken at the section line 16-16.

Figure 17 is a section view of the absorbent assembly **200** of **Figure 15** taken at the section line 17-17.

Figure 18 is a section view of an exemplary absorbent assembly **200** showing details of an exemplary absorbent core having particles of superabsorbent material contained inside pockets

Figure 19 is a section view of an exemplary absorbent assembly **200** having an additional bottom sheet **226**. In **Figure 19**, the section is taken at a section line corresponding to the section line 4-4 in **Figure 1**.

Figure 20 is a plan view of another exemplary disposable absorbent article in the form of a diaper **20**, which is shown in its flat, uncontracted state and with its interior portion facing the viewer.

DETAILED DESCRIPTION OF THE INVENTION

In this description, the following terms have the following meanings:

The term “absorbent article” refers to a device that absorbs and contains liquid, and more specifically, refers to a device that is placed against or in proximity to the body of the wearer to absorb and contain the various exudates discharged from the body.

The term “diaper” refers to an absorbent article that is generally worn by infants and incontinent persons about the lower torso so as to encircle the waist and the legs of the wearer and that is specifically adapted to receive and contain urinary and fecal waste.

The term “disposable” refers to the nature of absorbent articles that generally are not intended to be laundered or otherwise restored or reused as an absorbent article, *i.e.*, they are intended to be discarded after a single use and, preferably, to be recycled, composted or otherwise disposed of in an environmentally compatible manner.

The term “longitudinal” refers to a direction running from a waist edge to an opposing waist edge of the article and generally parallel to the maximum linear dimension of the article. Directions within $\pm 45^\circ$ of the longitudinal direction are considered to be “longitudinal”.

The term “lateral” refers to a direction running from a side edge to an opposing side edge of the article and generally at a right angle to the longitudinal direction. Directions within $\pm 45^\circ$ of the lateral direction are considered to be “lateral”.

The term “disposed” refers to an element being attached and positioned in a particular place or position in a unitary structure with other elements.

The term “attached” refers to elements being connected or united by fastening, adhering, bonding, *etc.* by any method suitable for the elements being attached together and their constituent materials. Many suitable methods for attaching elements together are well-known, including adhesive bonding, pressure bonding, thermal bonding, mechanical fastening, *etc.* Such attachment methods may be used to attach elements together over a particular area either continuously or intermittently.

The term “cohesive” refers to the property of a material that, once set, sticks to itself but does not to any significant degree stick to other materials.

The terms “water-permeable” and “water-impermeable” refer to the penetrability of materials in the context of the intended usage of disposable absorbent articles. Specifically, the term “water-permeable” refers to a layer or a layered structure having pores, openings, and/or interconnected void spaces that permit liquid water to pass through its thickness in the absence of a forcing pressure. Conversely, the term “water-impermeable” refers to a layer or a layered structure through the thickness of which liquid water cannot pass in the absence of a forcing pressure. A layer or a layered structure that is water-impermeable according to this definition may be permeable to water vapor, *i.e.*, may be “water vapor-permeable”. Such a water vapor-permeable layer or layered structure is commonly known in the art as “breathable”. As is well known in the art, a common method for measuring the permeability to water of the materials typically used in absorbent articles is a hydrostatic pressure test, also called a hydrostatic head test or simply a “hydrohead” test. Suitable well known compendial methods for hydrohead testing are approved by INDA (formerly the International Nonwovens and Disposables Association, now The Association of the Nonwoven Fabrics Industry) and EDANA (European Disposables And Nonwovens Association).

The terms “proximal” and “distal” refer respectively to the location of an element relatively near to or far from the center of a structure, *e.g.*, the proximal edge of a longitudinally extending element is located nearer to the longitudinal axis than the distal edge of the same element is located relative to the same longitudinal axis.

The terms “interior” and “exterior” refer respectively to the location of an element that is intended to be placed against or toward the body of a wearer when an absorbent article is worn and the location of an element that is intended to be placed against or toward any clothing that is worn over the absorbent article. Synonyms for “interior” and “exterior” include, respectively, “inner” and “outer”, as well as “inside” and “outside”. Also, when the absorbent article is oriented such that its interior faces upward, *e.g.*, when it is laid out in preparation for setting the wearer on top of it, synonyms include “upper” and “lower” and “top” and “bottom”, respectively.

Description of Exemplary Diaper Embodiments

As shown in **Figure 1**, **Figure 2**, **Figure 3**, **Figure 4**, and **Figure 5**, one end portion of the exemplary diaper **20** is configured as a front waist region **36**, the longitudinally opposing end portion is configured as a back waist region **38**, and an intermediate portion is configured as a crotch region **37**.

The basic structure of the diaper **20** includes an absorbent assembly **200**, which has a front edge **236**, a back edge **238**, a left side edge **237a**, a right side edge **237b**, an interior surface **202**, and an exterior surface **204**. A longitudinal axis **42** extends through the midpoints of the front edge **236** and the back edge **238** and a lateral axis **44** extends through the midpoints of the left side edge **237a** and the right side edge **237b**.

The basic structure of the diaper **20** also includes two laterally opposing longitudinally extending barrier cuff strips designated the left barrier cuff strip **400a** and the right barrier cuff strip **400b**. The barrier cuff strips have respective left front waist edge **436a** and right front waist edge **436b**, left back waist edge **438a** and right back waist edge **438b**, left strip proximal edge **457a** and right strip proximal edge **457b**, left strip distal edge **437a** and right strip distal edge **437b**, left interior surface **402a** and right interior surface **402b**, left exterior surface **404a** and right exterior surface **404b**. The barrier cuff strip distal edges **437a** and **437b** form the respective side edges **137a** and **137b** of the diaper **20**.

As shown in **Figure 2**, **Figure 3**, **Figure 4**, and **Figure 5**, the barrier cuff strips **400a** and **400b** and the lower covering sheet **25** of the absorbent assembly **200** are attached together in laterally opposing longitudinally extending attachment zones such as the exemplary attachment zones **420a** and **420b**.

As shown in **Figure 6**, **Figure 7**, and **Figure 8**, when the diaper **20** is worn on the lower torso of a wearer, the front waist edges **436a** and **436b** of the barrier cuff strips, the front edge **236** of the absorbent assembly, the back waist edges **438a** and **438b** of the barrier cuff strips, and the back edge **238** of the absorbent assembly encircle the waist of the wearer, the side edges **137a** and **137b** of the diaper encircle the legs of the wearer, the crotch region **37** is generally positioned between the legs of the wearer, and the absorbent assembly **200** extends from the front waist region **36** through the crotch region **37** to the back waist region **38**.

A portion or the whole of each of the barrier cuff strips may be formed of an elastically extensible material or materials. Alternatively or in addition, a portion or the whole of each of the barrier cuff strips may be made extensible to a degree greater than the inherent extensibility of the material or materials from which the barrier cuff strip is made. Similarly, a portion or the whole of the absorbent assembly may be formed of an elastically extensible material or materials. Alternatively or in addition, a portion or the whole of the absorbent assembly may be made extensible to a degree greater than the inherent extensibility of the material or materials from which the absorbent assembly is made. The additional extensibility may be desirable in order to allow the diaper **20** to conform to the body of a wearer during movement by the wearer. Additional lateral extensibility may be particularly desirable to allow the user of a diaper to extend the front waist region and/or the back waist region to encircle the waist of a wearer, *i.e.*, to tailor the waist size and fit of a diaper to the individual wearer. Such a lateral extension of the waist region or regions may give the diaper a generally hourglass shape and may impart a tailored appearance to the diaper when it is worn. In addition, the additional extensibility may be desirable in order to minimize the cost of the diaper, because a relatively lesser amount of material is needed when the material is made extensible as described.

For the purpose of fitting to the waist of the wearer, in some embodiments additional lateral extensibility in the absorbent assembly **200** is provided only between the laterally opposing attachment zones **420a** and **420b** where the absorbent assembly **200** and the barrier cuff strips **400a** and **400b** are attached together, rather than in the entire absorbent assembly.

Additional extensibility in the barrier cuff strips and/or the absorbent assembly may be provided in a variety of ways. For example, a material or materials from which the barrier cuff strips and/or the absorbent assembly is/are made may be pleated by any of many known methods. Alternatively, all or a portion of the barrier cuff strips and/or the absorbent assembly may be made of a formed web material or a formed laminate of web materials like those described in U.S. Patent No. 5,518,801 issued on 21 May 1996 in the name of Chappell *et al.* An exemplary fragment **300** of such a formed web material **305** is shown in **Figure 9**. This formed web material **305** includes distinct laterally extending regions **310** in which the original material has been altered by embossing

or another method of deformation to create a pattern of generally longitudinally oriented alternating ridges 312 and valleys 314. The formed web material 305 also includes laterally extending unaltered regions 316 located between the laterally extending altered regions 310.

Such a formed web material 305 can be laterally extended beyond its original dimension with the application of relatively less force than that required to extend the same material to the same extent when undeformed. In particular, the application of opposing divergent forces directed generally perpendicular to the ridges 312 and valleys 314 extends such a formed web material along an axis between the opposing forces and generates a resistive contractive force, primarily in the unaltered regions 316. This resistive force is relatively smaller than the resistive force that is generated by the same material in its unaltered form when extended to the same extent, at least up to an extension at which the ridges and valleys in the altered regions flatten and begin to contribute to the resistive force. Thus, such formed web materials exhibit an extensible behavior resembling that of traditional elastic materials in the range of extensibility that is useful in absorbent articles, but may be made of relatively less expensive materials that are not inherently elastic and, thus, their use may provide an advantage in terms of the cost of manufacturing the absorbent articles.

In addition, different portions of the barrier cuff strips and/or the absorbent assembly may be formed to have different ranges of extensibility and/or to be extensible to a greater or lesser degree when subjected to a given level of opposing tensile forces, *i.e.*, to be relatively more easily or less easily extensible. Such differential extensibility may be desirable so that, for example, one or both of the waist regions may be laterally extended relatively farther or relatively more easily than the crotch region.

Description of the Barrier Cuff Strips

The diaper 20 includes two laterally opposing longitudinally extending barrier cuff strips designated the left barrier cuff strip 400a and the right barrier cuff strip 400b as shown in **Figure 1**, **Figure 2**, **Figure 3**, **Figure 4**, and **Figure 5**. The barrier cuff strips may be formed of a nonwoven material, for example a synthetic nonwoven such as spunbonded or carded polyethylene, polypropylene, polyester, or rayon.

Alternatively or in addition, each barrier cuff strip may include a water-impermeable layer that is formed of a suitable material, for example a film of polyethylene or another polyolefin, a microporous breathable film, a hydrophobic nonwoven, or a film formed of coextruded polyolefin layers. For example, a suitable coextruded film is available from Clopay Plastic Products Co. of Mason, Ohio, U.S.A. under the designation of M18-327. A multi-layer barrier cuff strip, such as a laminate of a film and a nonwoven, may also be suitable and may be oriented with the nonwoven disposed exteriorly to provide the feel and appearance of a cloth-like outermost layer, with the

nonwoven disposed interiorly to separate the film from the skin of the wearer, or with nonwovens disposed both exteriorly and interiorly.

The barrier cuff strips may overlap the absorbent core 250, *i.e.*, the proximal edges 457a and 457b of the barrier cuff strips may lie laterally inward of the respective left side edge 257a and right side edge 257b of the absorbent core 250. Alternatively, the barrier cuff strips may not overlap the absorbent core. The barrier cuff strips preferably are water vapor-permeable, *i.e.*, breathable, at least in the crotch region 37 where they form side barriers when the diaper is worn, as described in detail below.

Each of the barrier cuff strips 400a and 400b is attached to the interior surface 202 of the absorbent assembly 200 in attachment zones located at or adjacent to the front edge 236 and the back edge 238. For example, in the diaper 20 shown in Figure 1, the left barrier cuff strip 400a is attached to the interior surface 202 of the absorbent assembly 200 in attachment zones 451a and 451c, while the right barrier cuff strip 400b is attached to the interior surface 202 in attachment zones 451b and 451d. The attachment zones may have equal areas or may be unequal in area.

Between the attachment zones, the proximal edges 457a and 457b of the barrier cuff strips 400a and 400b remain free, *i.e.*, are not attached to the interior surface 202 of the absorbent assembly 200. Also between the attachment zones, each barrier cuff strip preferably includes a longitudinally extensible cuff elastic member that is attached adjacent to the proximal edge of the barrier cuff strip. For example, in the exemplary diaper 20 shown in Figure 1, elastic strands 467a and 467b are attached adjacent to the respective proximal edge 457a and 457b of the barrier cuff strips. The cuff elastic member may be enclosed inside folded hems, such as the hems 471a and 471b shown in Figure 4. Alternatively, the cuff elastic member may be sandwiched between two layers of the barrier cuff strip or may be attached on a surface of the barrier cuff strip and remain exposed.

When stretched, the cuff elastic members allow the proximal edges of the barrier cuff strips to extend to the flat uncontracted length of the absorbent assembly, as shown in Figure 1. When allowed to relax, the cuff elastic members contract to gather the portions of the proximal edges along which the cuff elastic members are attached. For example, when the exemplary diaper 20 is in a relaxed condition as shown in Figure 14, the elastic strands 467a and 467b contract to gather the proximal edges 457a and 457b of the barrier cuff strips 400a and 400b. The contractive forces of the elastic strands pull the front waist region 36 and the back waist region 38 toward each other and thereby bend the absorbent assembly 200 and the entire diaper 20 into a "U" shape in which the interior of the "U" shape is formed by the interior portions of the diaper. Because the proximal edges remain free between the attachment zones, the contractive forces of the elastic strands lift the proximal edges 457a and 457b of the barrier cuff strips 400a and 400b away from the interior

surface **202** of the absorbent assembly and thereby raise the barrier cuff strips into position to serve as side barriers. The lateral spacing of the lifted proximal edges is selected to allow the deposit of bodily wastes from the lower torso of the wearer into the space between the raised barrier cuff strips. The width of each of the barrier cuff strips **400a** and **400b** preferably is selected to allow the lifted proximal edges **457a** and **457b** to fit into the leg creases of the body of the wearer to form seals to help prevent the leakage of deposited bodily waste out of the diaper.

The front waist region and the back waist region can be fastened together to encircle the waist and the legs of the wearer in many ways. For example, separate fastening devices such as safety pins, separate tapes, a separate tie strap or straps, and/or a separate belt can be used for this purpose. Alternatively or in addition, fastening elements can be incorporated into the disposable absorbent article to enable a user to apply the diaper to the body of the wearer without, or in conjunction with, any separate fastening devices. Many suitable types of such incorporated fastening elements are well-known, including, for example, tapes, adhesives, adhesive tape tabs, ties, buttons, hooks, loops, snap fasteners, other forms of mechanical fasteners, cohesive patches, *etc.* Some suitable mechanical fasteners may be adapted to engage with a nonwoven layer of a diaper. For example, a mechanical fastener may engage with a nonwoven layer of a barrier cuff strip.

The fastening of the front waist region and the back waist region together may be openable and refastenable to allow for the adjustment of the fit of the diaper on the wearer and for the inspection of the interior of the diaper without fully removing it from the wearer. Alternatively, the fastening may be permanent, *i.e.*, its opening may require the destruction of a portion of the diaper, *e.g.*, the tearing of a portion of the diaper or the breaking of fused side seams.

Cohesive fastening patches may be formed by the application of a cohesive material onto a substrate. The cohesive material may be applied in any of a variety of patterns, such as a continuous film, discrete dots, stripes, polygons, *etc.*, and/or spaced and interconnected geometric elements describing a grid. Suitable synthetic cohesive products are available from Andover Coated Products, Incorporated, of Salisbury, Massachusetts, U.S.A. and are described in U.S. Patent No. 6,156,424 issued on 5 December 2000 in the name of Taylor.

Such cohesive fastening patches may be disposed on the exterior of the diaper **20**. For example, as shown in **Figure 1**, **Figure 2**, **Figure 3**, **Figure 5**, **Figure 10**, and **Figure 11**, cohesive fastening patches **110a** and **110b** may be disposed on the exterior surfaces of the respective barrier cuff strips **400a** and **400b** in the front waist region **36**. In this exemplary embodiment, functionally complementary cohesive fastening patches **120a** and **120b** are disposed on the interior surfaces of the respective barrier cuff strips **400a** and **400b** in the back waist region **38**. When the diaper **20** is worn as shown in **Figure 10** and **Figure 11**, the cohesive fastening patches on the interior overlap the cohesive fastening patches on the exterior and the cohesion of the overlapped cohesive fastening

patches fastens the front waist region 36 and the back waist region 38 together at the sides of the diaper 20. The configuration shown in these figures is adapted for back-over-front fastening.

Alternatively, the front cohesive fastening patches may be disposed on the interior of the diaper 20 and the back cohesive fastening patches may be disposed on the exterior of the diaper 20 in order to adapt the configuration for front-over-back fastening. Alternatively, the cohesive fastening patches may be disposed in a reversible configuration that is adapted to provide the user of the diaper with both options for fastening, *i.e.*, either back-over-front or front-over-back, according to personal preference. For example, cohesive fastening patches that are disposed on both the exterior and the interior of the diaper 20 may allow a back cohesive fastening patch to overlap a front cohesive fastening patch or the front cohesive fastening patch to overlap the back cohesive fastening patch.

When the underlying portion of the diaper is extensible, it is preferable that the cohesive fastening patches be similarly extensible such that the underlying extensible portion of the diaper is not restrained.

Alternatively, adhesive tape tabs may be attached to the diaper 20 and may be used to fasten the back waist region 38 and the front waist region 36 together. For example, as shown in **Figure 12** and **Figure 13**, laterally opposing adhesive tape tabs 114a and 114b may be attached to the respective barrier cuff strips 400a and 400b at or adjacent to their distal edges 437a and 437b. Suitable adhesive tapes are available from the 3M Corporation of St. Paul, Minnesota, U.S.A., under the designation of XMF99121, and from the Avery Dennison Corporation, Specialty Tape Division, Mentor, Ohio, U.S.A., under the designation of F4416.

Optionally, fastening sheets may also be attached to the diaper 20 and used in conjunction with such adhesive tape tabs. For example, fastening sheets 116a and 116b may be attached onto the exterior surfaces 404a and 404b of the respective barrier cuff strips 400a and 400b as shown in **Figure 12** and **Figure 13**. When a fastening sheet is provided, the adhesive tape tabs may be adhered to the fastening sheet to fasten the back waist region 38 and the front waist region 36 together. The fastening sheet serves to distribute the tensile force transmitted by each of the adhesive tape tabs over an area larger than the adhered area of the adhesive tape tab and may, itself, bear a portion of the tensile force and thereby relieve a portion of the force exerted on the underlying portion of the diaper, such as the barrier cuff strips. Thus, for example, the incorporation of such a fastening sheet may make it possible to use a relatively inexpensive and relatively weak material for the underlying portion of the diaper. When mechanical fasteners are used instead of adhesive tape tabs, a fastening sheet can have a surface and/or elements that engage with the mechanical fastener, *e.g.*, loops with which hooks may engage. When the underlying portion of the diaper is extensible,

it is preferable that the fastening sheet be similarly extensible such that the underlying extensible portion of the diaper is not restrained.

Description of the Absorbent Assembly

In the exemplary diaper 20 shown in **Figure 1**, the absorbent assembly 200 extends the full length of the barrier cuff strips 400a and 400b between the front waist edges 436a and 436b and the back waist edges 438a and 438b. Such a full length configuration may be desirable in order to minimize the amount of waste material and the difficulty associated with the manufacture of the diaper 20, especially when the method used to manufacture the diaper 20 requires the introduction of the material or materials for the absorbent assembly 200 in the form of a continuous web or multiple continuous webs. Alternatively, the absorbent assembly 200 may be shorter and extend less than the full length of the barrier cuff strips. Such a shorter configuration may be desirable in order to minimize the total amount of material used and the cost of the diaper 20.

As shown in **Figure 15**, **Figure 16**, and **Figure 17**, the absorbent assembly 200 includes an absorbent core 250 that serves to absorb and retain liquid bodily waste materials. The absorbent core 250 has a front edge 256, a back edge 258, a left side edge 257a, a right side edge 257b, an interior surface 252, and an exterior surface 254.

The absorbent assembly 200 may include an upper covering sheet that is disposed in a face-to-face arrangement with the interior surface 252 of the absorbent core 250 in addition to a lower covering sheet that is disposed in a face-to-face arrangement with the exterior surface 254 of the absorbent core 250 and the interior surfaces 402a and 402b of the respective barrier cuff strips 400a and 400b. If both are present, such an upper covering sheet and lower covering sheet may be attached together to contain the absorbent core 250 between them and thereby form the absorbent assembly 200. For example, in the exemplary absorbent assembly 200 shown in **Figure 15**, **Figure 16**, and **Figure 17**, an upper covering sheet 24 and a lower covering sheet 25 are attached together at or adjacent to the side edges 237a and 237b of the absorbent assembly 200 in attachment zones 29a and 29b.

The upper covering sheet is water-permeable and allows liquid bodily waste to pass through its thickness to the absorbent core. The upper covering sheet preferably is formed of a soft material that will not irritate the skin of the wearer, for example a synthetic nonwoven such as spunbonded or carded polyethylene, polypropylene, polyester, or rayon.

The lower covering sheet may include a water-permeable layer of any suitable material, for example the same material as the upper covering sheet. A portion or the whole of either or both of the upper covering sheet and the lower covering sheet may be water vapor-permeable, *i.e.*, breathable.

Alternatively or in addition, the lower covering sheet may include a water-impermeable layer that is formed of a suitable material, for example a film of polyethylene or another polyolefin, a microporous breathable film, a hydrophobic nonwoven, or a film formed of coextruded layers of polypropylene-polyethylene-polypropylene. For example, a suitable coextruded film is available from Clopay Plastic Products Co. of Mason, Ohio, U.S.A. under the designation of M18-327. A multi-layer lower covering sheet, such as a laminate of a film and a nonwoven, may also be suitable and may be oriented with the nonwoven disposed exteriorly to provide the feel and appearance of a cloth-like outermost layer, with the nonwoven disposed interiorly to separate the film from the skin of the wearer, or with nonwovens disposed both exteriorly and interiorly.

The upper covering sheet and the lower covering sheet may extend to the same width and the same length. Alternatively, one or more of the edges of one of the covering sheets may lie distally relative to the respective edge or edges of the other covering sheet. For example, the upper covering sheet may extend longitudinally only to an extent sufficient to cover the absorbent core and to be attached to the lower covering sheet adjacent to either the front or the back edge of the absorbent core, while the lower covering sheet may extend longitudinally beyond the upper covering sheet toward or to the adjacent waist edges of the barrier cuff strips. Similarly, the upper covering sheet may extend laterally only to an extent sufficient to cover the absorbent core and to be attached to the lower covering sheet adjacent to either the left or the right side edge of the absorbent core and the lower covering sheet may extend laterally beyond the upper covering sheet. For example, in the exemplary absorbent assembly **200** shown in **Figure 4**, the upper covering sheet **24** extends laterally only a relatively small distance beyond the side edges **257a** and **257b** of the absorbent core **250** and is attached to the lower covering sheet **25** in this area. The lower covering sheet **25** in this exemplary absorbent assembly extends laterally beyond the upper covering sheet **24** and is attached to the barrier cuff strips **400a** and **400b**.

The absorbent assembly and the barrier cuff strips may be attached together over any part or the whole of the length of the absorbent assembly. Preferably, the absorbent assembly is attached on its interior surface to the barrier cuff strips in laterally opposing longitudinally extending attachment zones such as the exemplary attachment zones **420a** and **420b** shown in **Figure 2**, **Figure 3**, **Figure 4**, **Figure 5**, **Figure 13**, **Figure 15**, **Figure 16**, **Figure 17**, and **Figure 19**. The portions of the barrier cuff strips that lie outside such an attachment pattern are not restrained by attachment to the absorbent assembly and therefore remain extensible. For example, a relatively narrow longitudinally extending attachment zone such as left attachment zone **420a** leaves the majority of the width of the left barrier cuff strip **400a** freely extensible and thereby allows extension of the left barrier cuff strip **400a** in the lateral direction.

Within the extent of the attachment zones, the absorbent assembly may be attached to the barrier cuff strips continuously or intermittently. For example, a film of an adhesive may be applied continuously over the entire area of the attachment zones and then used to continuously attach the absorbent assembly to the barrier cuff strips. As an alternative example, an adhesive may be applied discontinuously at and inside the boundaries of the attachment zones, such as in the form of dots, stripes, beads, spirals, *etc.*, and then used to attach the absorbent assembly and the barrier cuff strips together.

In some embodiments, one or both of the longitudinally extending attachment zones **420a** and **420b** may act as a dam that prevents the lateral flow of liquid bodily waste in a direction away from the absorbent core toward the adjacent side edge **137a** or **137b** of the diaper. For example, in an embodiment in which the lower covering sheet **25** extends laterally beyond the upper covering sheet **24**, as in the exemplary embodiment of **Figure 4**, and in which both the lower covering sheet **25** and each of the barrier cuff strips **400a** and **400b** includes a water-impermeable layer, as described above, such a longitudinally extending attachment zone acting as a dam may effectively trap liquid bodily waste materials between the lower covering sheet, the barrier cuff strips, and the body of the wearer of the diaper.

The absorbent core may be attached to the lower covering sheet over any part or the whole of the area of the absorbent core. Preferably, the absorbent core is attached on its exterior surface to the lower covering sheet in a cruciform attachment pattern, *i.e.*, in an attachment pattern that forms or is arranged in a cross or “+” shape. The cruciform attachment pattern may be contiguous, *i.e.*, all of its portions may be touching or connected throughout the pattern in an unbroken sequence, or may include detached portions and thereby lack contiguity but still be arranged such that the shape of the overall pattern is a cruciform. An exemplary contiguous cruciform attachment pattern **210** is shown in **Figure 15**, **Figure 16**, and **Figure 17**. When an adhesive is used for the attachment, less may be necessary in a cruciform attachment pattern than in a more extensive attachment pattern. In addition, the portions of the lower covering sheet that lie outside such a cruciform attachment pattern are not restrained by attachment to the absorbent core and therefore remain extensible. In particular, a relatively narrow longitudinally extending portion **212** of a cruciform attachment pattern **210** like that shown in **Figure 15** and **Figure 17** leaves the majority of the width of the lower covering sheet **25** in the front waist region **36** and in the back waist region **38** freely extensible and thereby allows extension of the lower covering sheet **25** in the lateral direction in these regions. A relatively wide laterally extending portion **214** of a cruciform attachment pattern **210** like that shown in **Figure 15** and **Figure 16** prevents the portion of the lower covering sheet **25** in the crotch region **37** to which the absorbent core **250** is attached from shifting relative to the absorbent core **250** in that region.

Within the extent of the cruciform attachment pattern, the absorbent core may be attached to the lower covering sheet continuously or intermittently. For example, a film of an adhesive may be applied continuously over the entire area of the cruciform attachment pattern and then used to continuously attach the absorbent core to the lower covering sheet. As an alternative example, an adhesive may be applied discontinuously at and inside the boundaries of the cruciform attachment pattern, such as in the form of dots, stripes, beads, spirals, *etc.*, and then used to attach the absorbent core to the lower covering sheet.

The absorbent core 250 includes a storage component 272 that serves to absorb and retain liquid bodily waste materials. Suitable known materials for the absorbent core storage component include cellulose fibers in the form of comminuted wood pulp, which is commonly known as "airfelt", layers or sheets of a natural or synthetic fibrous material or materials, a superabsorbent polymer or polymers, *etc.* These absorbent materials may be used separately or in combination. Many known absorbent materials may be used in a discrete form, *i.e.*, in the form of fibers, granules, particles, and the like. Such a discrete form of an absorbent material may be immobilized by an adhesive that attaches the discrete pieces together to form a coherent layer or that attaches the discrete pieces to a substrate layer or that attaches the discrete pieces both to each other and to the substrate layer.

The absorbent core may include an acquisition component in addition to one or more storage components. The absorbent core acquisition component serves to acquire deposited liquid bodily waste material and transfer it to the absorbent core storage component. Any porous absorbent material which will imbibe and partition liquid bodily waste material to the storage component or components may be used to form the acquisition component. Preferred materials for the acquisition component include synthetic fiber materials, open celled polymeric foam materials, fibrous nonwoven materials, cellulosic nonwoven materials, and various combination synthetic/cellulosic nonwoven materials. For example, the acquisition component may be formed of a nonwoven web or webs of synthetic fibers including polyester, polypropylene, and/or polyethylene, natural fibers including cotton and/or cellulose, blends of such fibers, or any equivalent materials or combinations of materials. Examples of such acquisition materials are more fully described in U.S. Patent No. 4,950,264 issued to Osborn on August 21, 1990. High loft nonwoven acquisition materials suitable for the acquisition component of the present invention can be obtained from Polymer Group, Inc., (PGI), 450 N.E. Blvd, Landisville, New Jersey 08326, U.S.A., under the material code designation of 98920.

Such an absorbent core acquisition component 290 is shown overlying the absorbent core storage component 272 in Figure 15, Figure 16, and Figure 17. A separation sheet 292 of, *e.g.*, a tissue or a nonwoven material, may be disposed between the absorbent core storage component 272

and the absorbent core acquisition component 290 to help ensure that none of the gel formed by a superabsorbent polymer reaches the skin of the wearer. This separation sheet 292 may extend laterally beyond the side edges 257a and 257b of the absorbent core 250 and the upper covering sheet 24 may be attached to the separation sheet 292. In this arrangement, the liquid bodily waste material that is deposited onto the upper covering sheet 24 will pass through the thickness of the upper covering sheet 24 to be absorbed by the absorbent core acquisition component 290, and some or all of it may then pass through the thickness of the separation sheet 292 and then be absorbed and retained by the absorbent core storage component 272.

As shown in Figure 18, in some exemplary embodiments, an absorbent core storage component 272 may include the discrete form of an absorbent material that is immobilized in pockets formed by a layer of a thermoplastic material, such as a hot melt adhesive, that intermittently contacts and adheres to a substrate sheet, while diverging away from the substrate sheet at the pockets. Absorbent core components having such structures and being suitable for the storage of liquid bodily wastes are described in co-pending and commonly assigned U.S.

Publication No:2004-0167486 and US. Publication No:2004-0162536, both filed on 11 February 2004 in the name of

Ehrnsperger *et al.* An exemplary absorbent core storage component 272 having such a structure is shown in Figure 18. In this absorbent core storage component 272, particles 270 of a superabsorbent polymer are contained inside pockets 280 formed by a layer 275 of a thermoplastic material. The absorbent core storage component may include both particles of a superabsorbent polymer and airfelt and both materials may be contained inside the pockets formed by the layer of the thermoplastic material. Alternatively, as shown in Figure 18, an exemplary absorbent core storage component may contain no airfelt and therefore the component can be made relatively thinner and more flexible for the comfort of the wearer. In addition, the particles of the superabsorbent polymer can be immobilized relatively more easily in the absence of airfelt. As shown in Figure 18, the layer 275 of the thermoplastic material intermittently contacts and adheres to a substrate sheet 274 at the areas of attachment 282. Between the areas of attachment 282, the layer 275 diverges away from the substrate sheet 274 to form the pockets 280. The layer 275 may have the form of a sheet of fibers of the thermoplastic material through which the liquid bodily waste may pass to be absorbed by the particles 270 of the superabsorbent polymer.

In Figure 18, a separate thermoplastic layer covering sheet 276 is shown overlying the layer 275 of the thermoplastic material. Alternatively, the separate thermoplastic layer covering sheet 276 may be omitted. As another alternative, two absorbent core storage components each like that shown in Figure 18 except for the omission of the thermoplastic layer covering sheet 276 may be superposed with one absorbent core storage component inverted such that the respective substrate sheets distally oppose each other. In such a combination of absorbent core storage components,

either or both of the distally opposing substrate sheets may serve respectively as either or both of an upper covering sheet and a lower covering sheet for the absorbent assembly. Alternatively, the absorbent assembly may include a separate lower covering sheet and/or a separate upper covering sheet.

The absorbent assembly may include an additional bottom sheet of a film or other water-impermeable material to enhance the protection against leakage. For example, as shown in **Figure 19**, an additional bottom sheet **226** of a film or other water-impermeable material may be attached inside the absorbent assembly between the lower covering sheet **25** and the absorbent core **250**. Alternatively, the additional bottom sheet may be attached to the absorbent assembly exteriorly of the lower covering sheet. This additional bottom sheet may extend laterally less far than either or both of the left side edge **237a** and the right side edge **237b** of the absorbent assembly **200**, as shown in **Figure 19**, or may extend laterally to overlap one or both of the side edges of the absorbent assembly.

When such an additional bottom sheet is attached inside the absorbent assembly between the lower covering sheet and the absorbent core, the additional bottom sheet may be attached to the lower covering sheet in a cruciform attachment pattern similar to that shown in **Figure 15**, thus leaving the portions of the lower covering sheet that lie outside the cruciform attachment pattern unrestrained by attachment to the additional bottom sheet and allowing these portions to be extensible. For example, a laterally extending portion **214** of such a cruciform attachment pattern is shown in **Figure 19**.

Alternatively or in addition, the additional bottom sheet in such an embodiment may be attached in such a cruciform attachment pattern to the absorbent core, thus leaving the portions of the additional bottom sheet that lie outside the cruciform attachment pattern unrestrained by attachment to the absorbent core and therefore allowing these portions to be extensible. In such an embodiment, even if the additional bottom sheet is attached to the lower covering sheet in a pattern other than a cruciform, the lower covering sheet is not indirectly restrained by the absorbent core and therefore is allowed to be extensible.

Description of Shape of Article

The finished diaper may have a generally rectangular shape, as in the exemplary diaper **20** shown in **Figure 1** and **Figure 2**. Such a generally rectangular configuration may be desirable in order to minimize the amount of waste material and the difficulty associated with the manufacture of the diaper **20**. Alternatively, the diaper may have side edges **137a** and **137b** that are not straight, but instead are curved and/or notched, thereby giving an overall shape in plan view of an hourglass or of an "I" to the diaper **20**. Such a non-rectangular configuration may be desirable in order to impart a

tailored appearance to the diaper 20 when it is worn. Such a non-rectangular configuration may also be desirable in order to impart an impression that the diaper 20 will fit comfortably between the legs of a wearer.

Any one of many well-known ways may be used to form a non-rectangular configuration of the diaper. For example, laterally distal portions may be removed from the diaper to make its lateral dimension at and adjacent to the lateral axis 44 smaller than its lateral dimension at and adjacent to the front waist edge 436 and smaller than its lateral dimension at and adjacent to the back waist edge 438, *i.e.*, to make the diaper narrower in the crotch region 37 than at the waist edges. An exemplary form of such a non-rectangular configuration of the diaper is shown in Figure 20. As shown in this figure, portions of the barrier cuff strips 400a and 400b may be removed to form laterally opposing side notches 111a and 111b.

While particular embodiments and/or individual features of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. Further, it should be apparent that all combinations of such embodiments and features are possible and can result in preferred executions of the invention. Therefore, the following claims are intended to cover all such changes and modifications that are within the scope of this invention.

CLAIMS:

1. A disposable diaper having a front waist region, a back waist region, and a crotch region between the waist regions, an interior surface and an exterior surface, and comprising:

an absorbent assembly having an interior surface and an exterior surface and laterally opposing longitudinally extending side edges, the absorbent assembly comprising an absorbent core having longitudinally extending side edges, a water-permeable upper covering sheet disposed interiorly of the absorbent core, and a lower covering sheet disposed exteriorly of the absorbent core, such that the absorbent core is sandwiched between the upper covering sheet and the lower covering sheet, each of the upper covering sheet and the lower covering sheet extending laterally beyond the side edges of the absorbent core, wherein the lower covering sheet forms a portion of the exterior surface;

two laterally opposing longitudinally extending barrier cuff strips attached to the interior surfaces of the lower covering sheet adjacent the distal side edges of the absorbent assembly, each barrier cuff strip having an interior surface, an exterior surface, longitudinally opposing ends, a longitudinally extending distal edge and a laterally opposing longitudinally extending proximal edge, each barrier cuff strip being attached to the upper covering sheet of the absorbent assembly at points adjacent to its ends and immediately adjacent its longitudinally extending proximal edge in the front and back waist regions, but not in the crotch region, each barrier cuff strip further comprising a longitudinally extending elastic gathering member attached adjacent to its proximal edge, the distal edge of each barrier cuff strip disposed laterally outboard of the respective side edge of the absorbent assembly over substantially the entire longitudinal extent of that side edge, the interior surface of each barrier cuff strip forming the interior surface of

the disposable diaper from the proximal edge of the barrier cuff strip to the distal edge of the diaper;

wherein the proximal edge of each barrier cuff strip is disposed laterally inward of the side edges of the absorbent core ;

wherein the distal edge of each barrier cuff strip is non-linear when the disposable diaper is in its flat, uncontracted state; and

wherein at least a portion of at least one of the barrier cuff strips is elastically stretchable in the lateral direction.

2. The disposable diaper of Claim 1 wherein the lower covering sheet comprises a web material including at least two distinct laterally extending altered regions each containing a pattern of generally longitudinally oriented alternating ridges and valleys created by a deformation of the web material and also containing an unaltered region located between the altered regions, such that the deformed web material is laterally extendable to a given extent with the application of relatively less force than that required to laterally extend the same web material to the same given extent before the deformation.
3. The disposable diaper of Claim 1 wherein at least a portion of the absorbent assembly between the barrier cuff strips is laterally extensible.
4. The disposable diaper of Claim 1 wherein at least a portion of one of the waist regions is laterally extensible to a greater degree than at least a portion of the crotch region.
5. The disposable diaper of Claim 1 wherein the lower covering sheet is water-impermeable.

6. The disposable diaper of Claim 1 wherein the absorbent assembly also includes a water-impermeable bottom sheet, at least a portion of which is disposed between the lower covering sheet and the absorbent core.
7. The disposable diaper of Claim 1 wherein the barrier cuff strips are attached to the absorbent assembly in laterally opposing longitudinally extending attachment zones.
8. The disposable diaper of Claim 7 wherein at least one of the longitudinally extending attachment zones acts as a water-impermeable dam preventing a lateral flow of water in a direction toward an adjacent side edge of the disposable diaper.
9. The disposable diaper of Claim 1 wherein the absorbent assembly includes an absorbent core storage component.
10. The disposable diaper of Claim 9 wherein the absorbent core storage component contains no airfelt.
11. The disposable diaper of Claim 9 wherein the absorbent assembly includes an absorbent core acquisition component.
12. The disposable diaper of Claim 1 further comprising at least one fastening element adapted for fastening the front waist region and the back waist region together to encircle a waist and a leg of a wearer.
13. The disposable diaper of Claim 1 further comprising cohesive fastening elements disposed on both an interior surface of the disposable diaper and an exterior

surface of the disposable diaper for fastening the front waist region over the back waist region or alternatively fastening the back waist region over the front waist region to encircle a waist and a leg of a wearer.

14. A disposable diaper having a front waist region, a back waist region, and a crotch region between the waist regions and comprising:

an absorbent assembly having an interior surface and an exterior surface and laterally opposing longitudinally extending side edges, the absorbent assembly comprising an absorbent core having longitudinally extending side edges, a water-permeable upper covering sheet disposed interiorly of the absorbent core, and a lower covering sheet disposed exteriorly of the absorbent core, such that the absorbent core is sandwiched between the upper covering sheet and the lower covering sheet, each of the upper covering sheet and the lower covering sheet extending laterally beyond the side edges of the absorbent core, wherein the lower covering sheet forms a portion of the exterior surface;

two laterally opposing longitudinally extending barrier cuff strips attached to the interior surfaces of the lower covering sheet adjacent the distal side edges of the absorbent assembly, each barrier cuff strip having an interior surface, an exterior surface, longitudinally opposing ends, a longitudinally extending distal edge and a laterally opposing longitudinally extending proximal edge, each barrier cuff strip being attached adjacent to its ends to the interior surface of the absorbent assembly in the front and back waist regions, but not in the crotch region, and having a longitudinally extending elastic gathering member attached adjacent to its proximal edge, no portion of the distal edge of each barrier cuff strip disposed laterally inboard of the respective side edge of the absorbent assembly, the interior surface of each barrier cuff strip forming the interior surface of the disposable diaper from the proximal edge of the barrier cuff strip to the distal edge of the diaper;

wherein the proximal edge of each barrier cuff strip is disposed laterally inward of the side edges of the absorbent core;
wherein the distal edge of each barrier cuff strip is non-linear when the disposable diaper is in its flat, uncontracted state; and
wherein at least a portion of at least one of the barrier cuff strips is elastically stretchable in the lateral direction.

15. The disposable diaper of Claim 14 further comprising a fastening element adapted for fastening the front waist region and the back waist region together to encircle a waist and a leg of a wearer and including an adhesive tape tab.
16. The disposable diaper of Claim 14 further comprising a fastening element adapted for fastening the front waist region and the back waist region together to encircle a waist and a leg of a wearer and including a cohesive fastening element.
17. The disposable diaper of Claim 14 further comprising a fastening element adapted for fastening the front waist region and the back waist region together to encircle a waist and a leg of a wearer and including a mechanical fastener adapted to engage a nonwoven.
18. A disposable diaper having a front waist region, a back waist region, and a crotch region between the waist regions and comprising:
an absorbent assembly having an interior surface and an exterior surface, the absorbent assembly comprising an absorbent core having longitudinally extending side edges, a water-permeable upper covering sheet disposed interiorly of the absorbent core, and a lower covering sheet disposed exteriorly of the absorbent core, such that the absorbent core is sandwiched between the upper covering sheet and the lower covering sheet, each of the

upper covering sheet and the lower covering sheet extending laterally beyond the side edges of the absorbent core, wherein the lower covering sheet forms a portion of the exterior surface;

two laterally opposing longitudinally extending barrier cuff strips attached to the interior surfaces of the lower covering sheet adjacent the distal side edges of the absorbent assembly, each barrier cuff strip having an interior surface, an exterior surface, longitudinally opposing ends and a longitudinally extending proximal edge, each barrier cuff strip being attached to the interior surface of the absorbent assembly at points adjacent to its ends and immediately adjacent its longitudinally extending proximal edge in the front and back waist regions, but not in the crotch region, each barrier cuff strip further comprising a longitudinally extending elastic gathering member attached adjacent to its proximal edge, the interior surface of each barrier cuff strip forming the interior surface of the disposable diaper from the proximal edge of the barrier cuff strip to the distal edge of the diaper;

at least one fastening element disposed on one of the barrier cuff strips and adapted for fastening the front waist region and the back waist region together to encircle a waist and a leg of a wearer;

wherein the distal edge of each barrier cuff strip is non-linear when the disposable diaper is in its flat, uncontracted state; and

wherein at least a portion of at least one of the barrier cuff strips is elastically stretchable in the lateral direction.

2/11

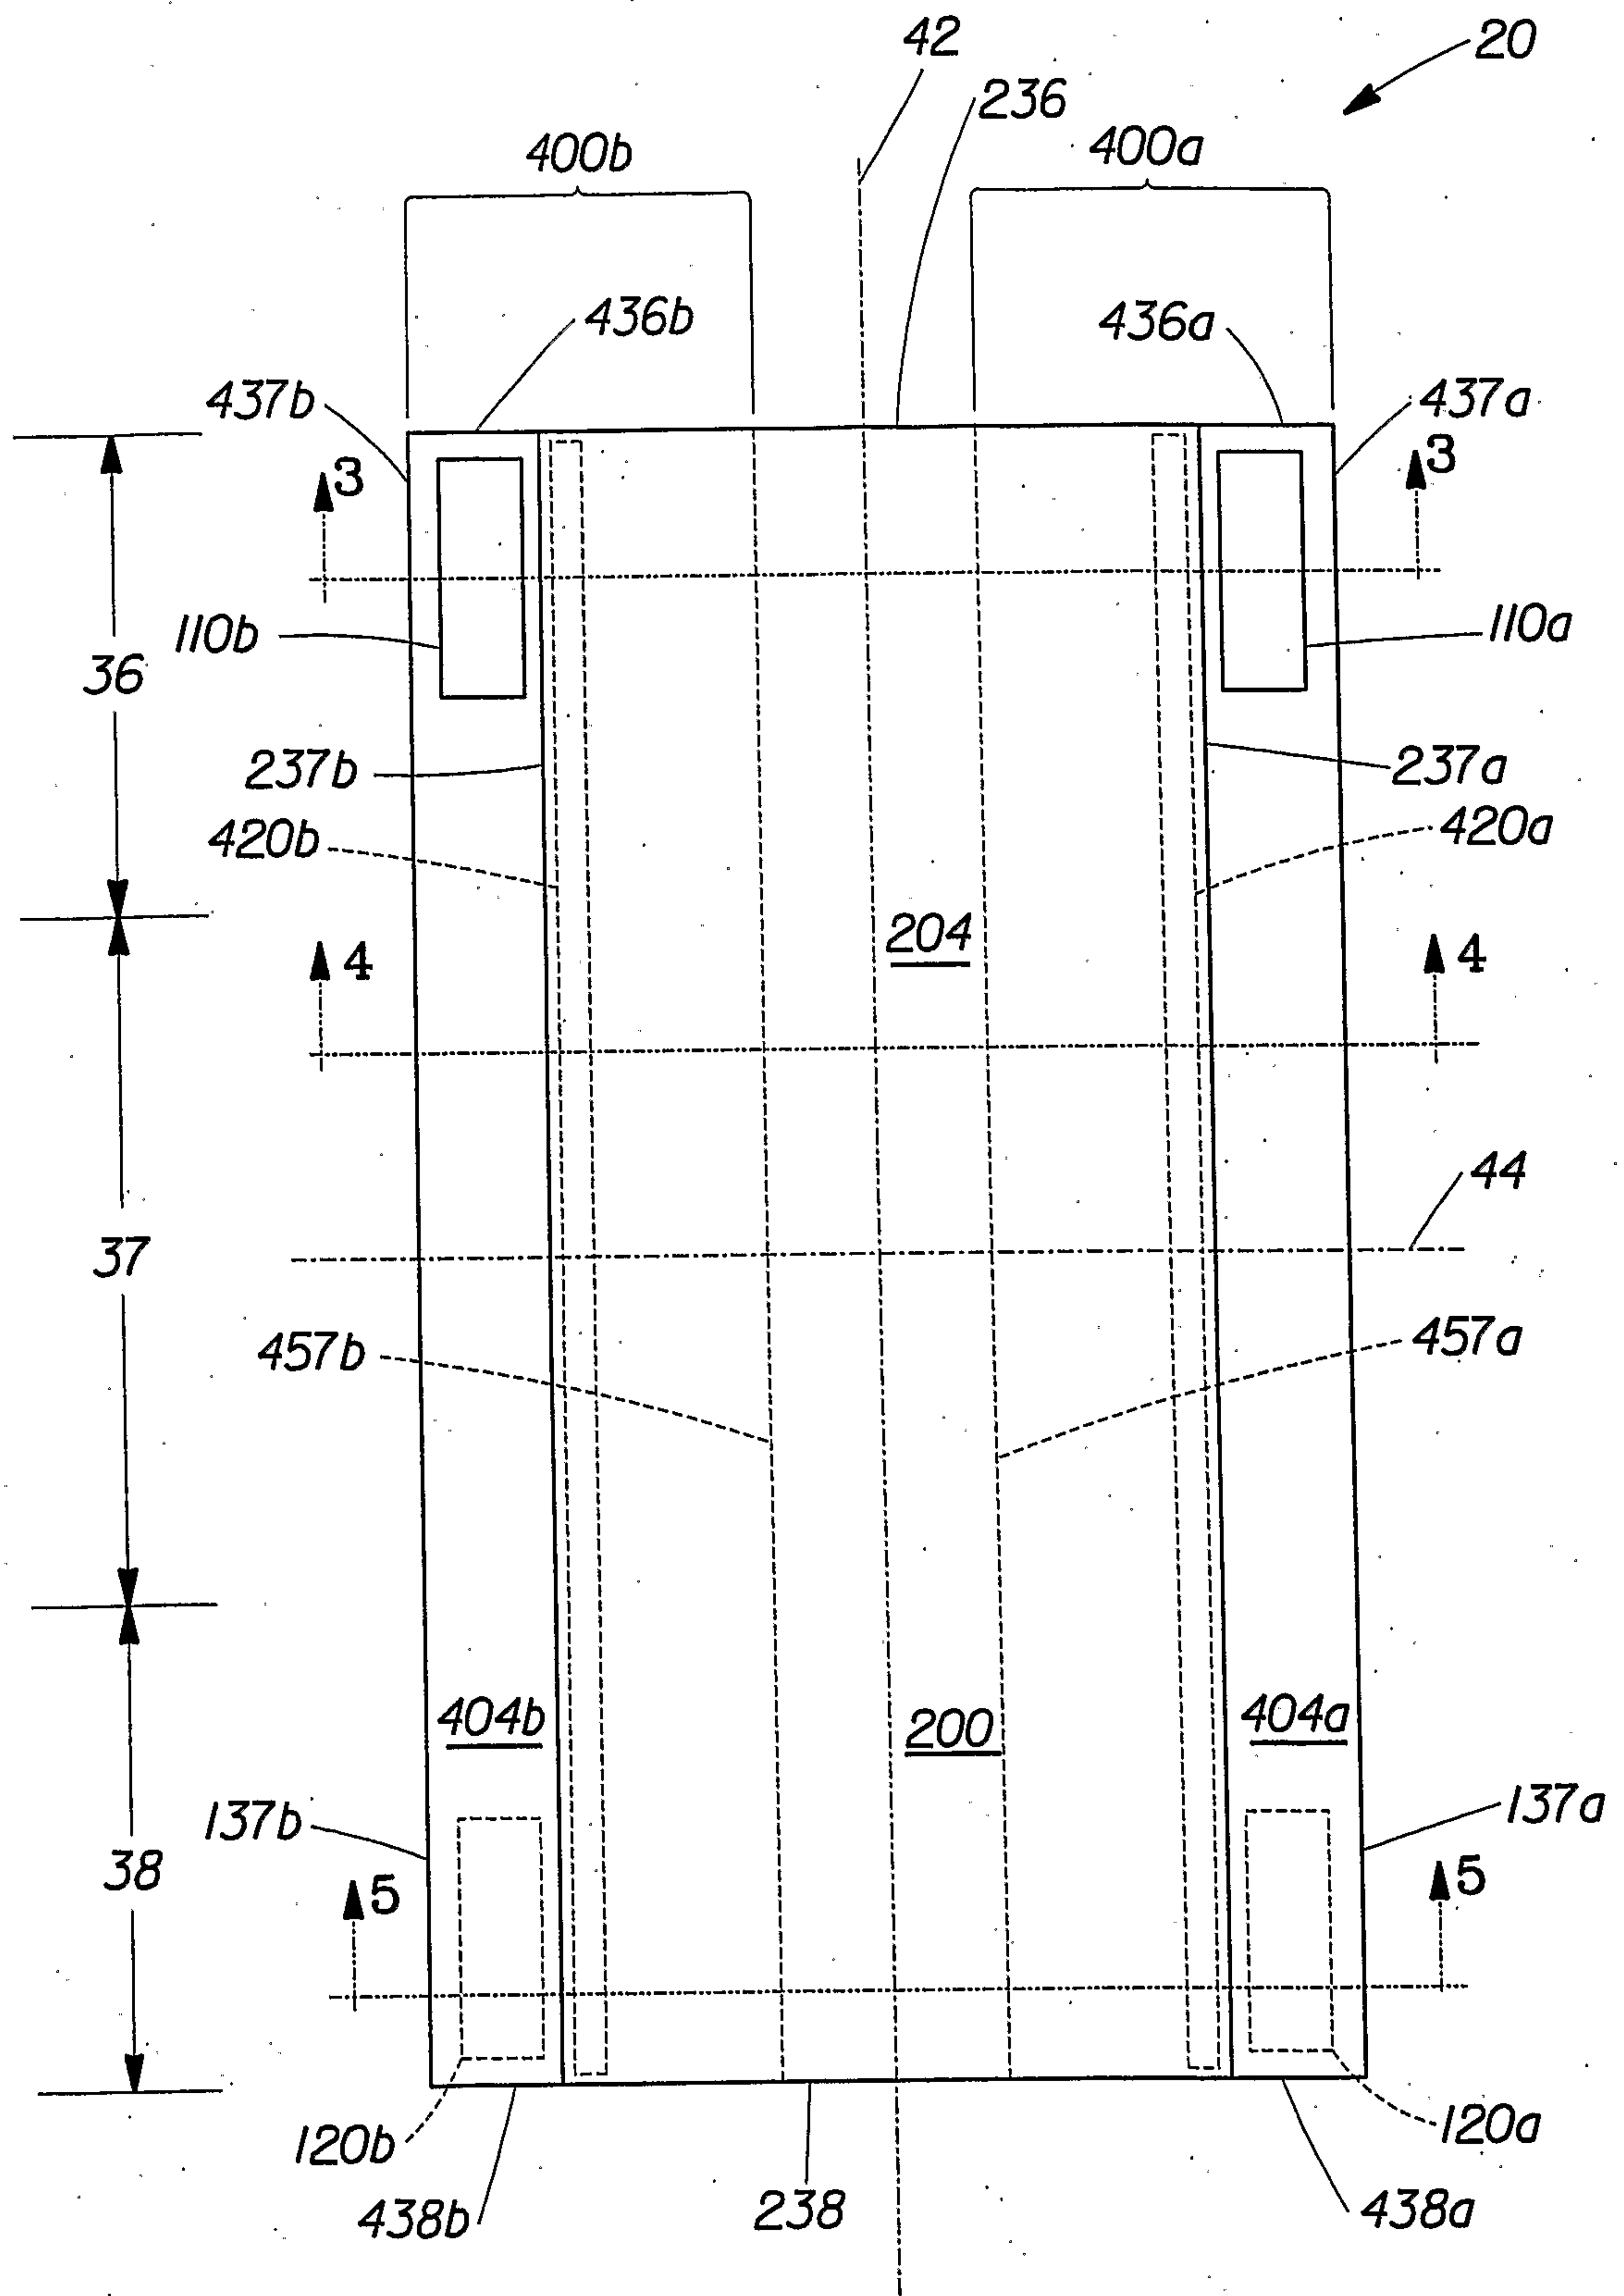


Fig. 2

3/11

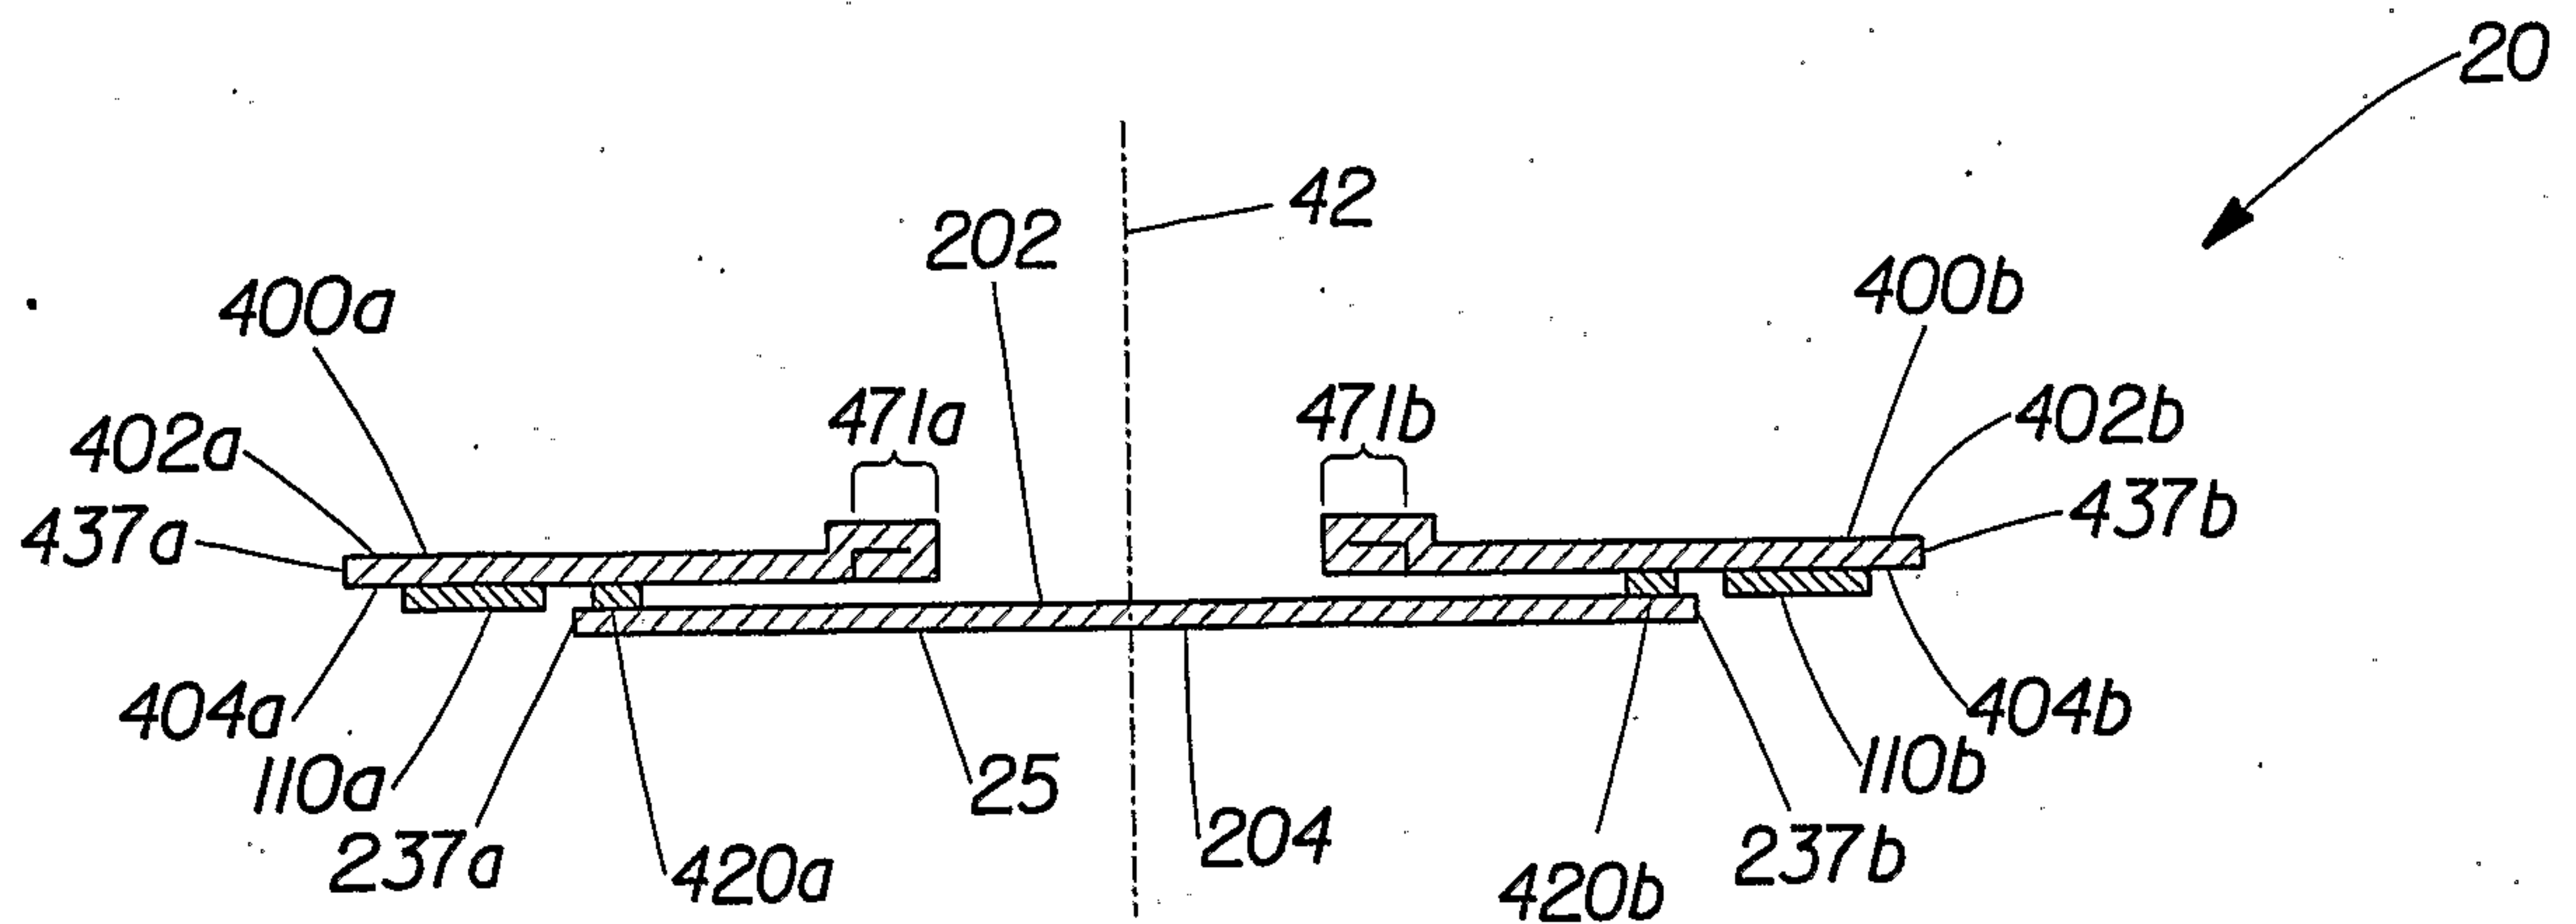


Fig. 3

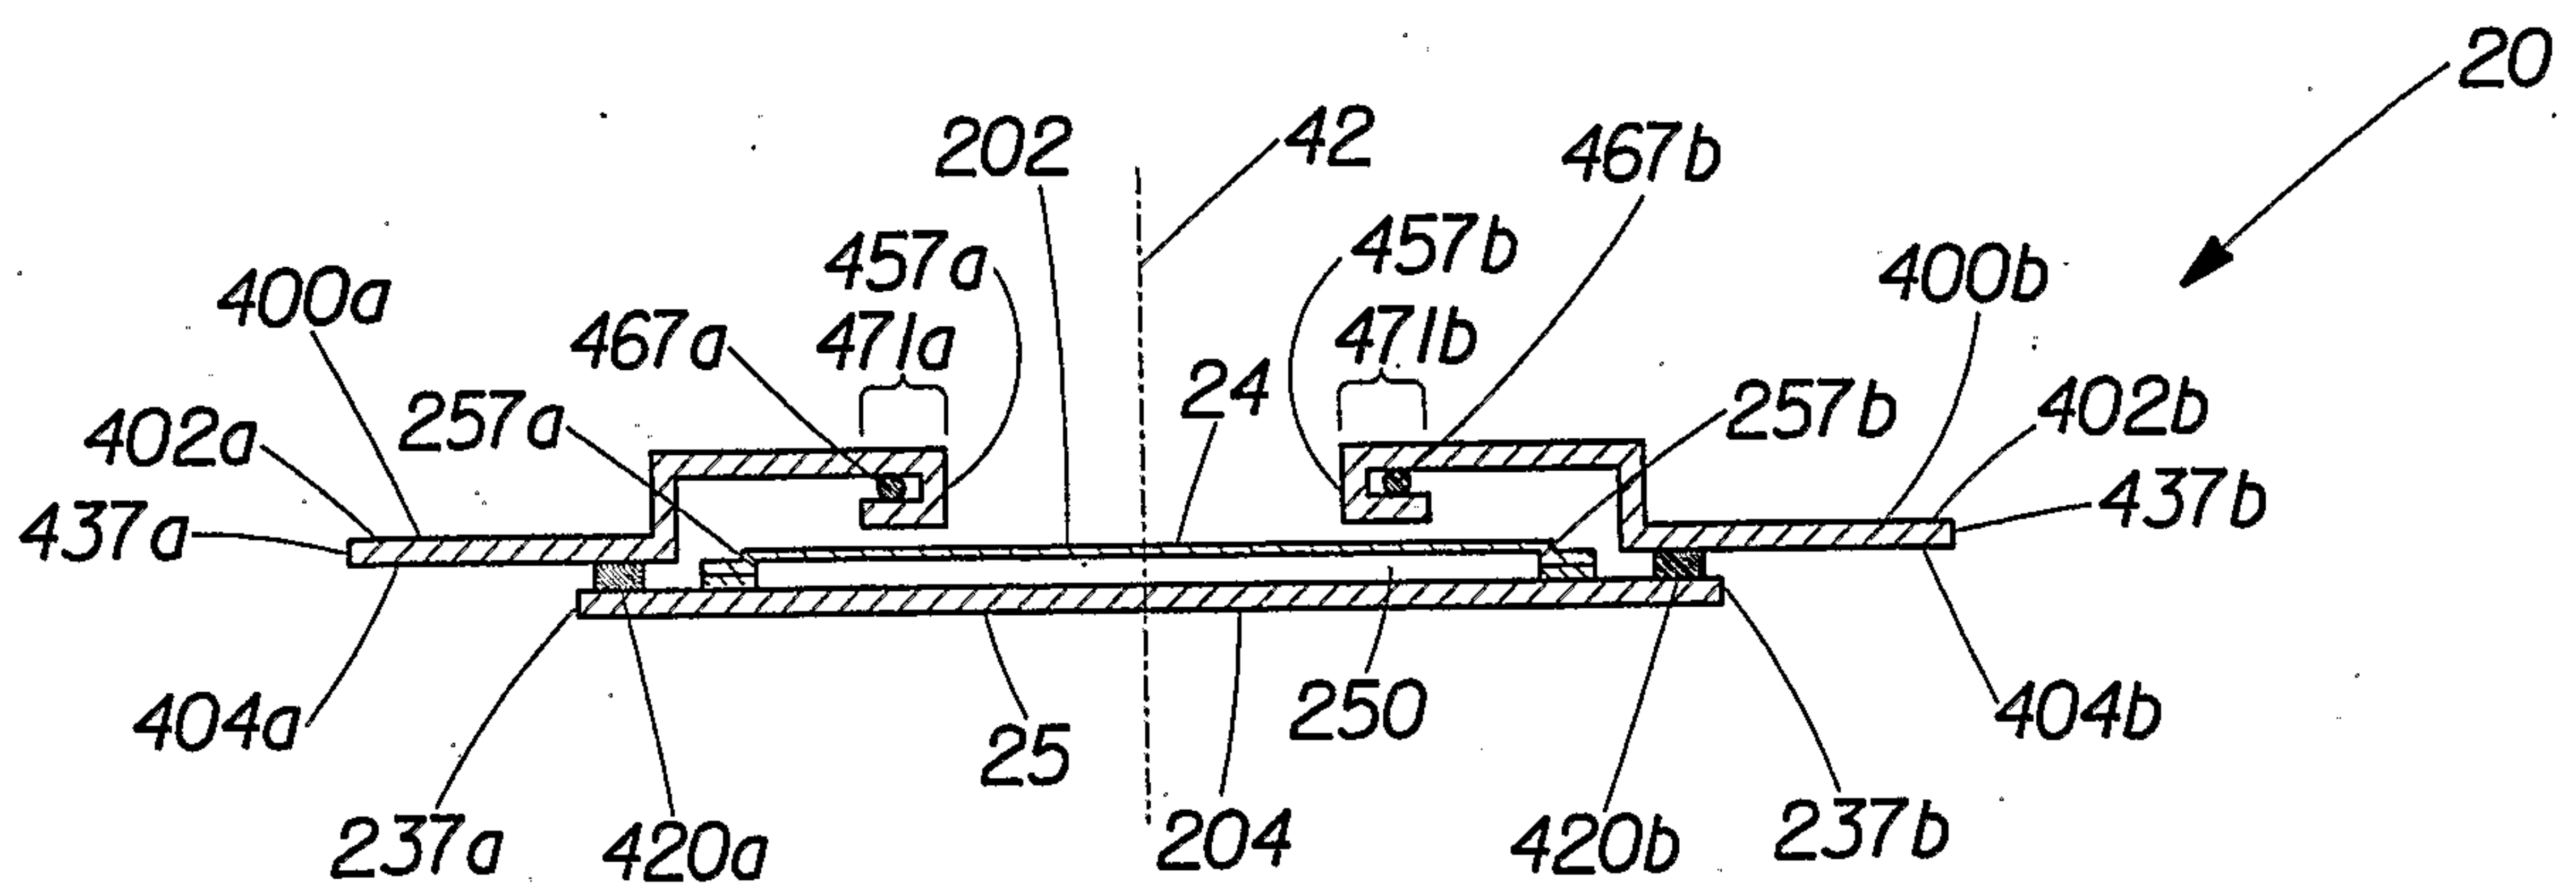


Fig. 4




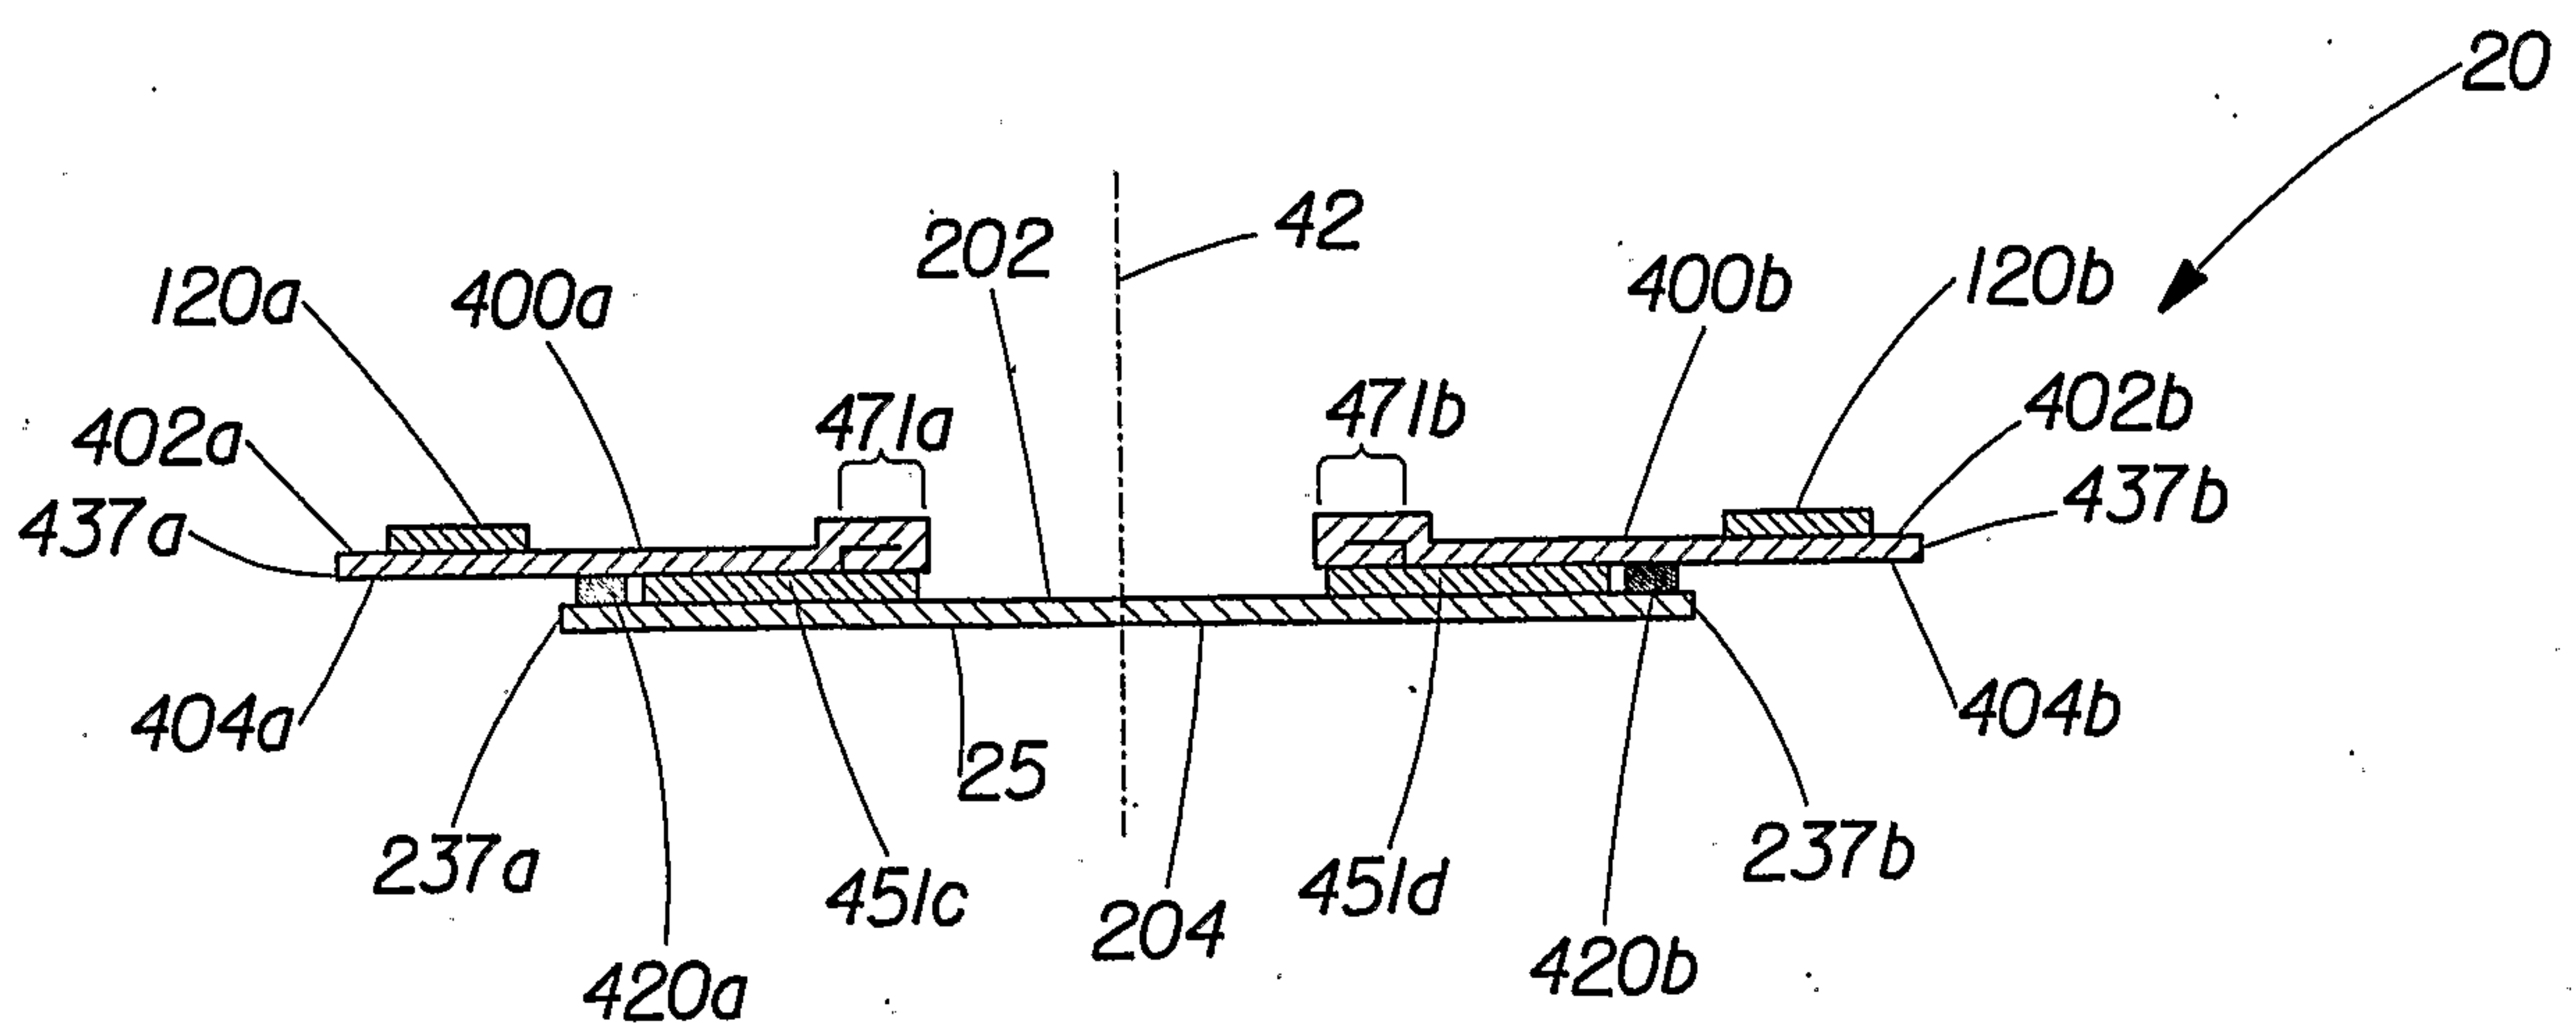


Fig. 5

4/11

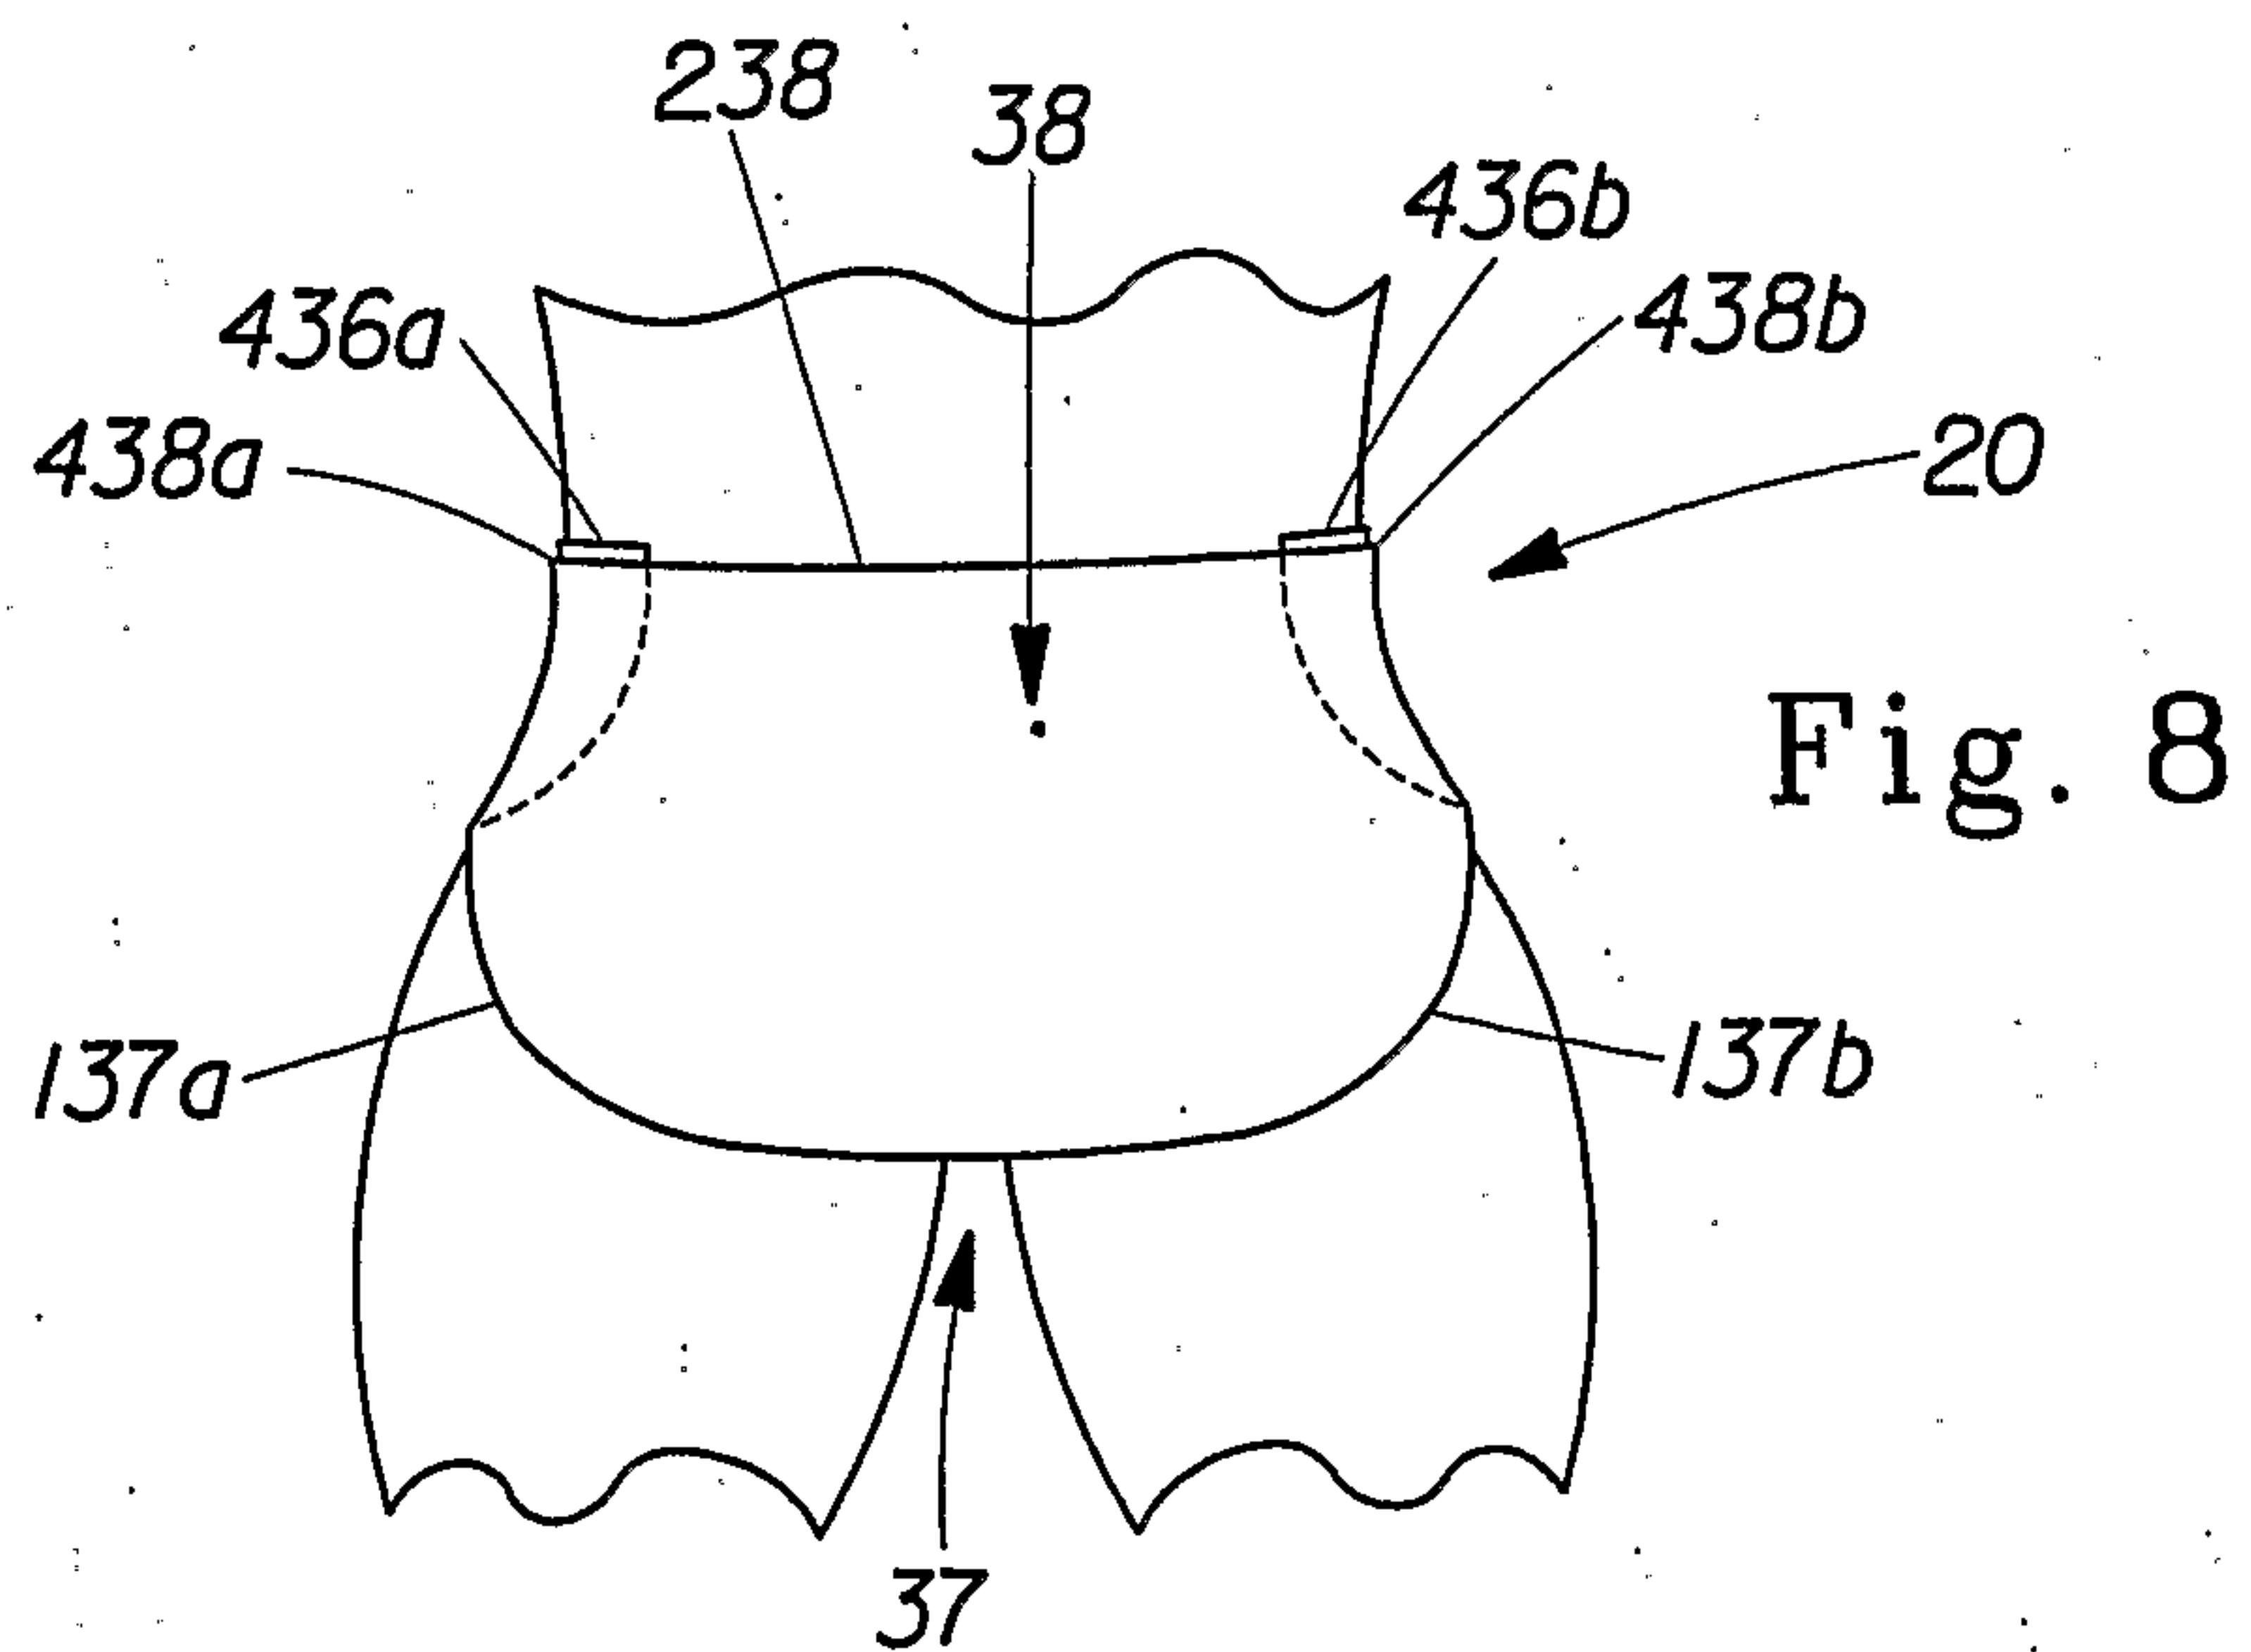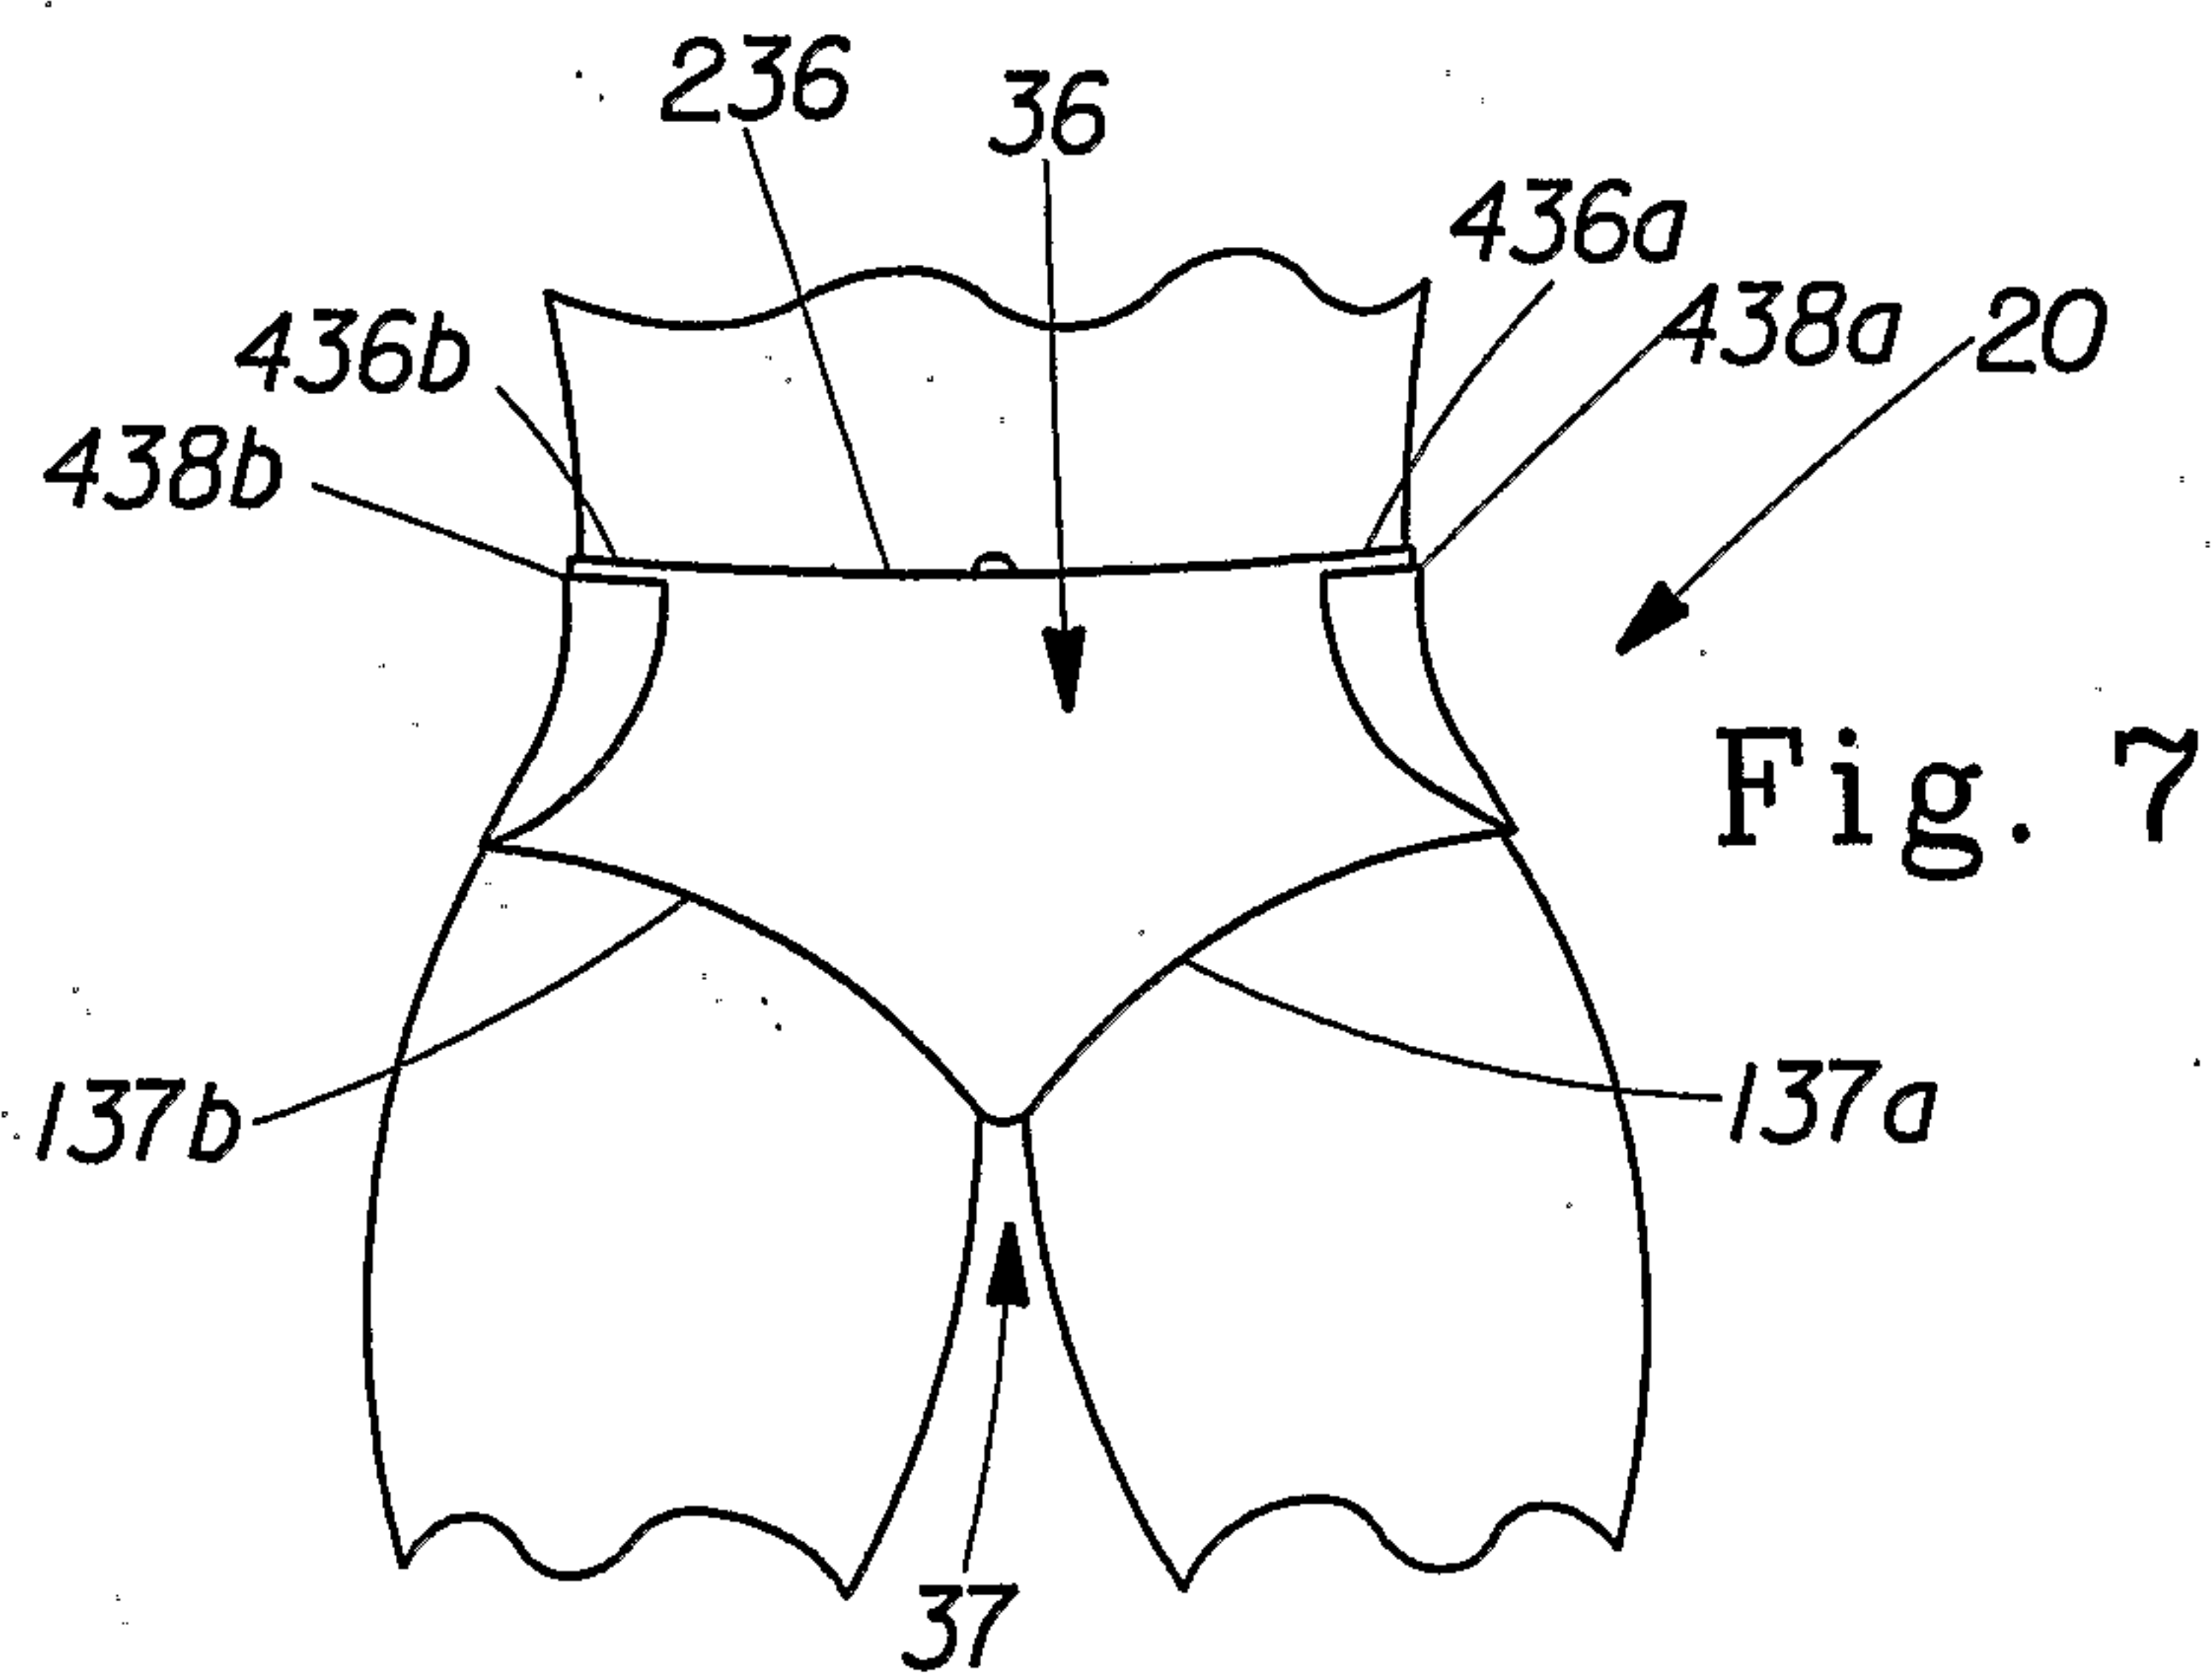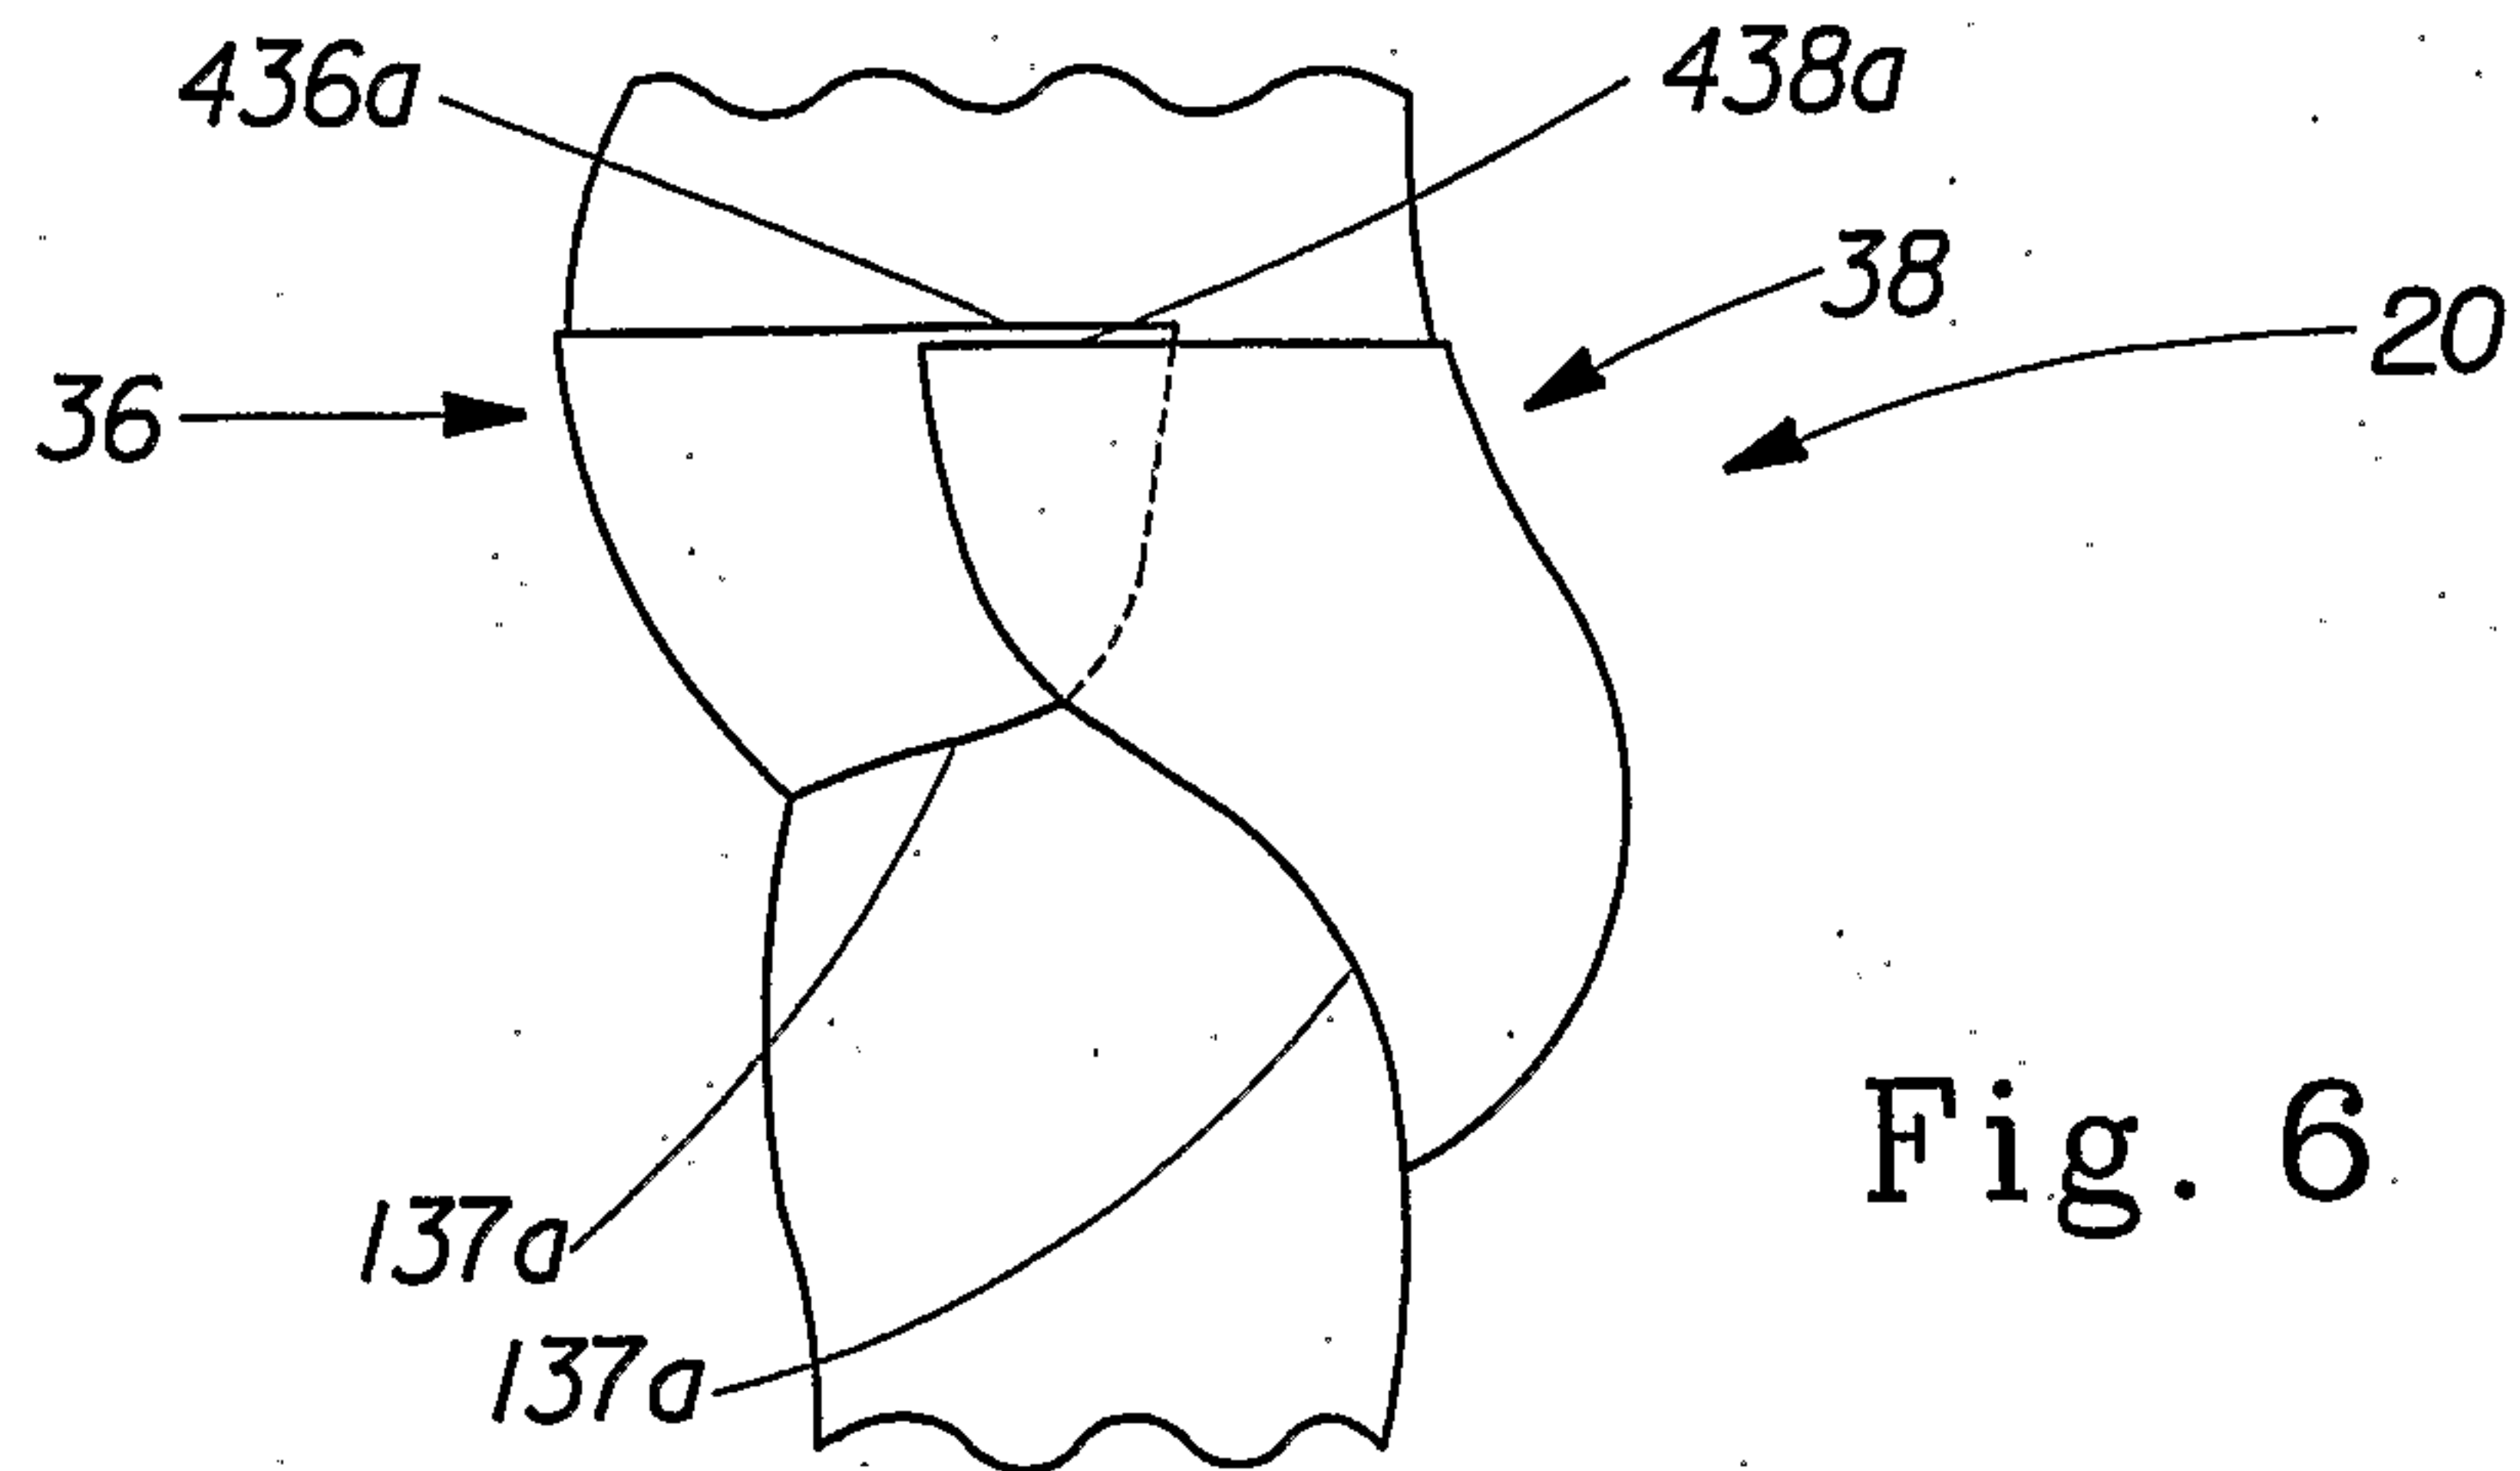

5/11

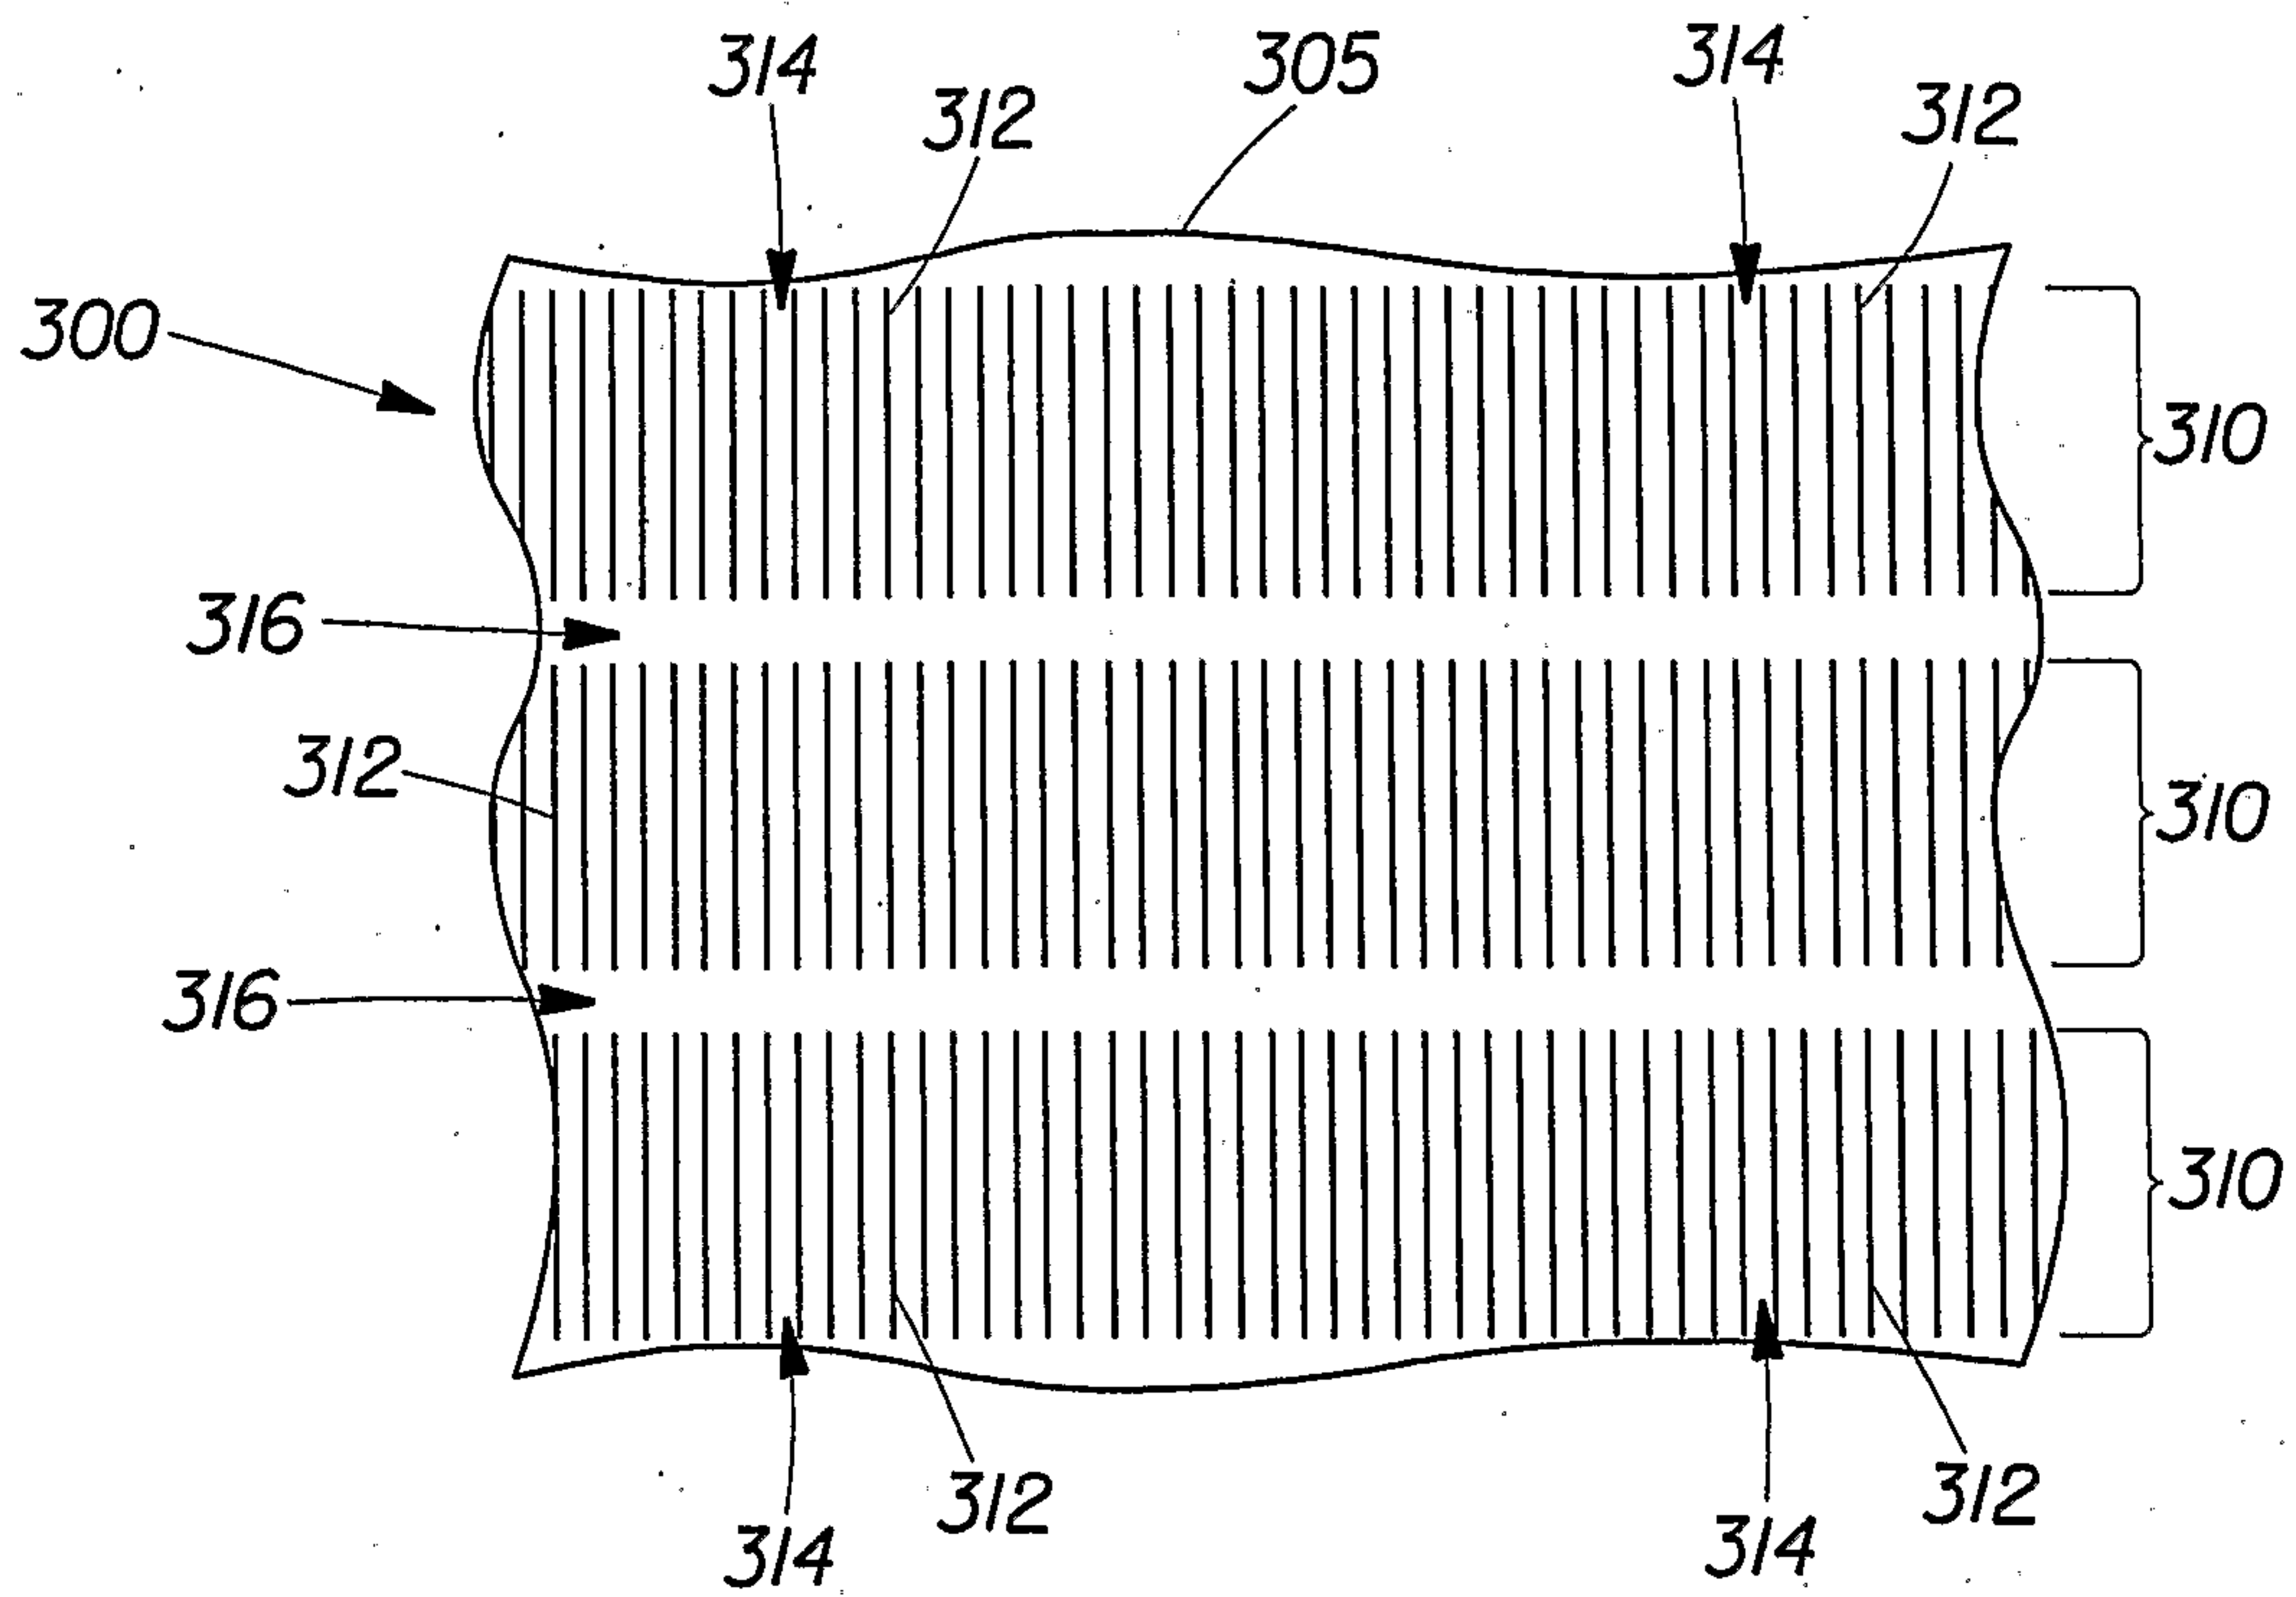


Fig. 9

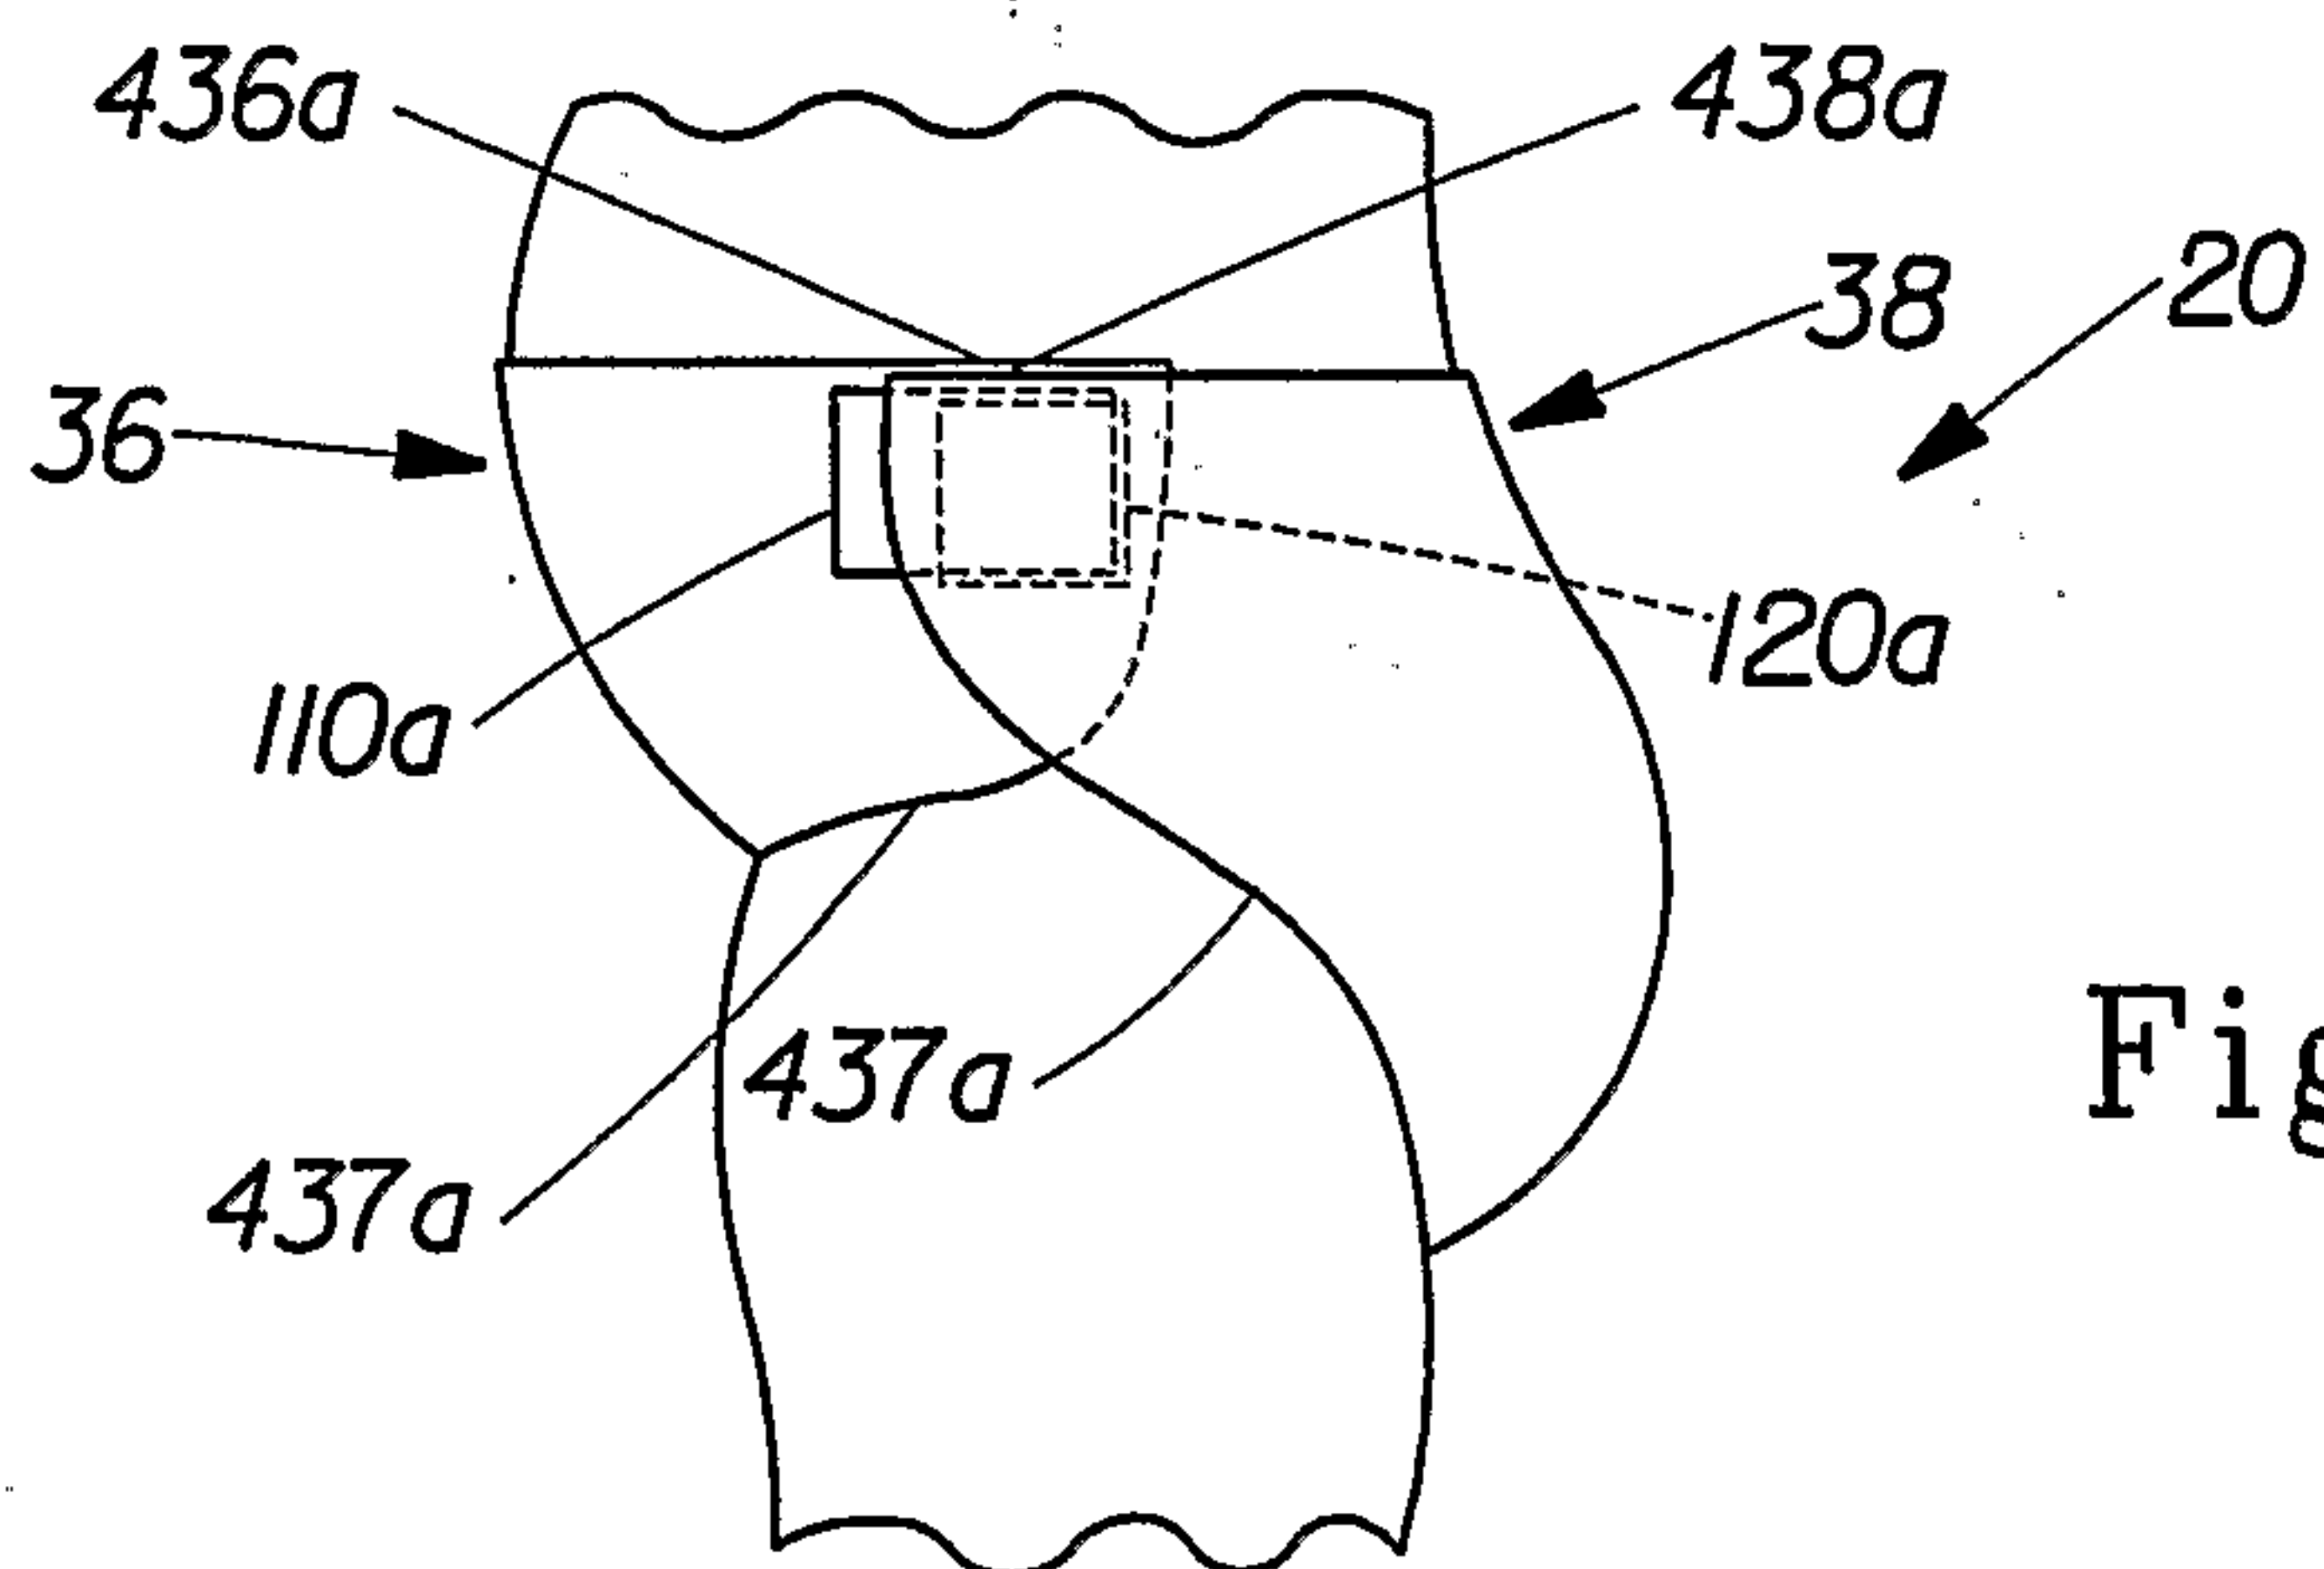


Fig. 10

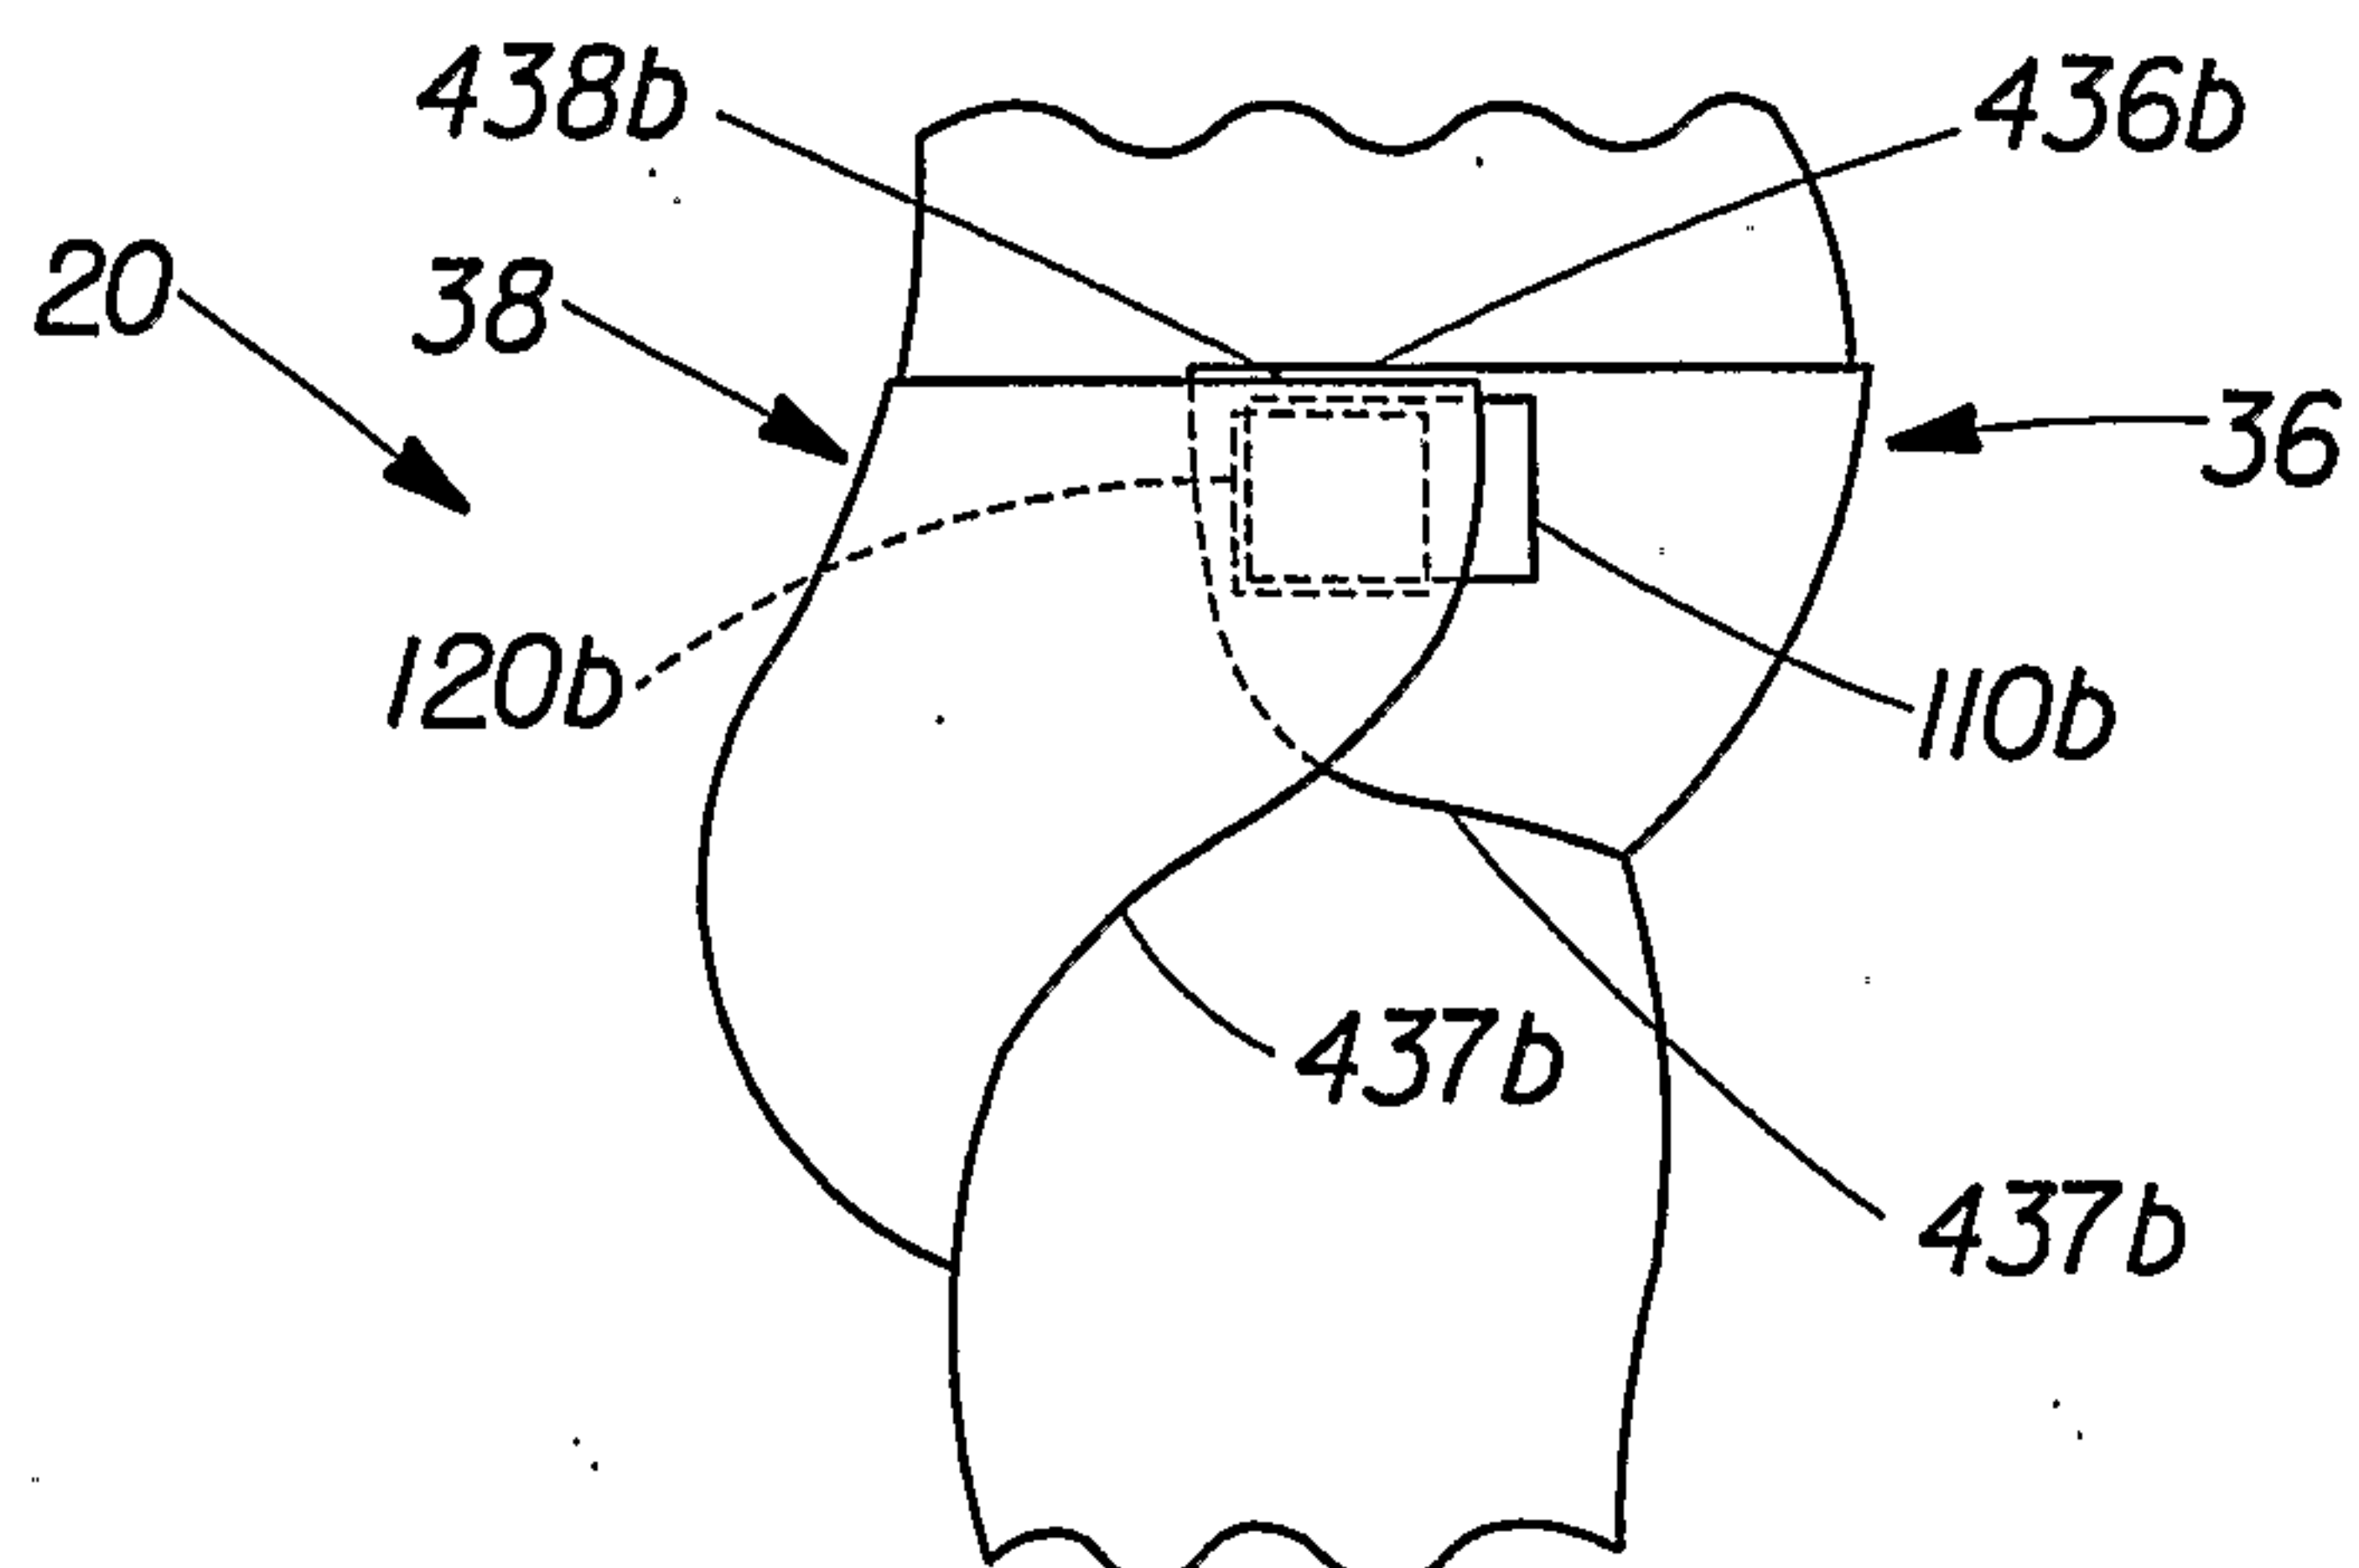


Fig. 11

6/11

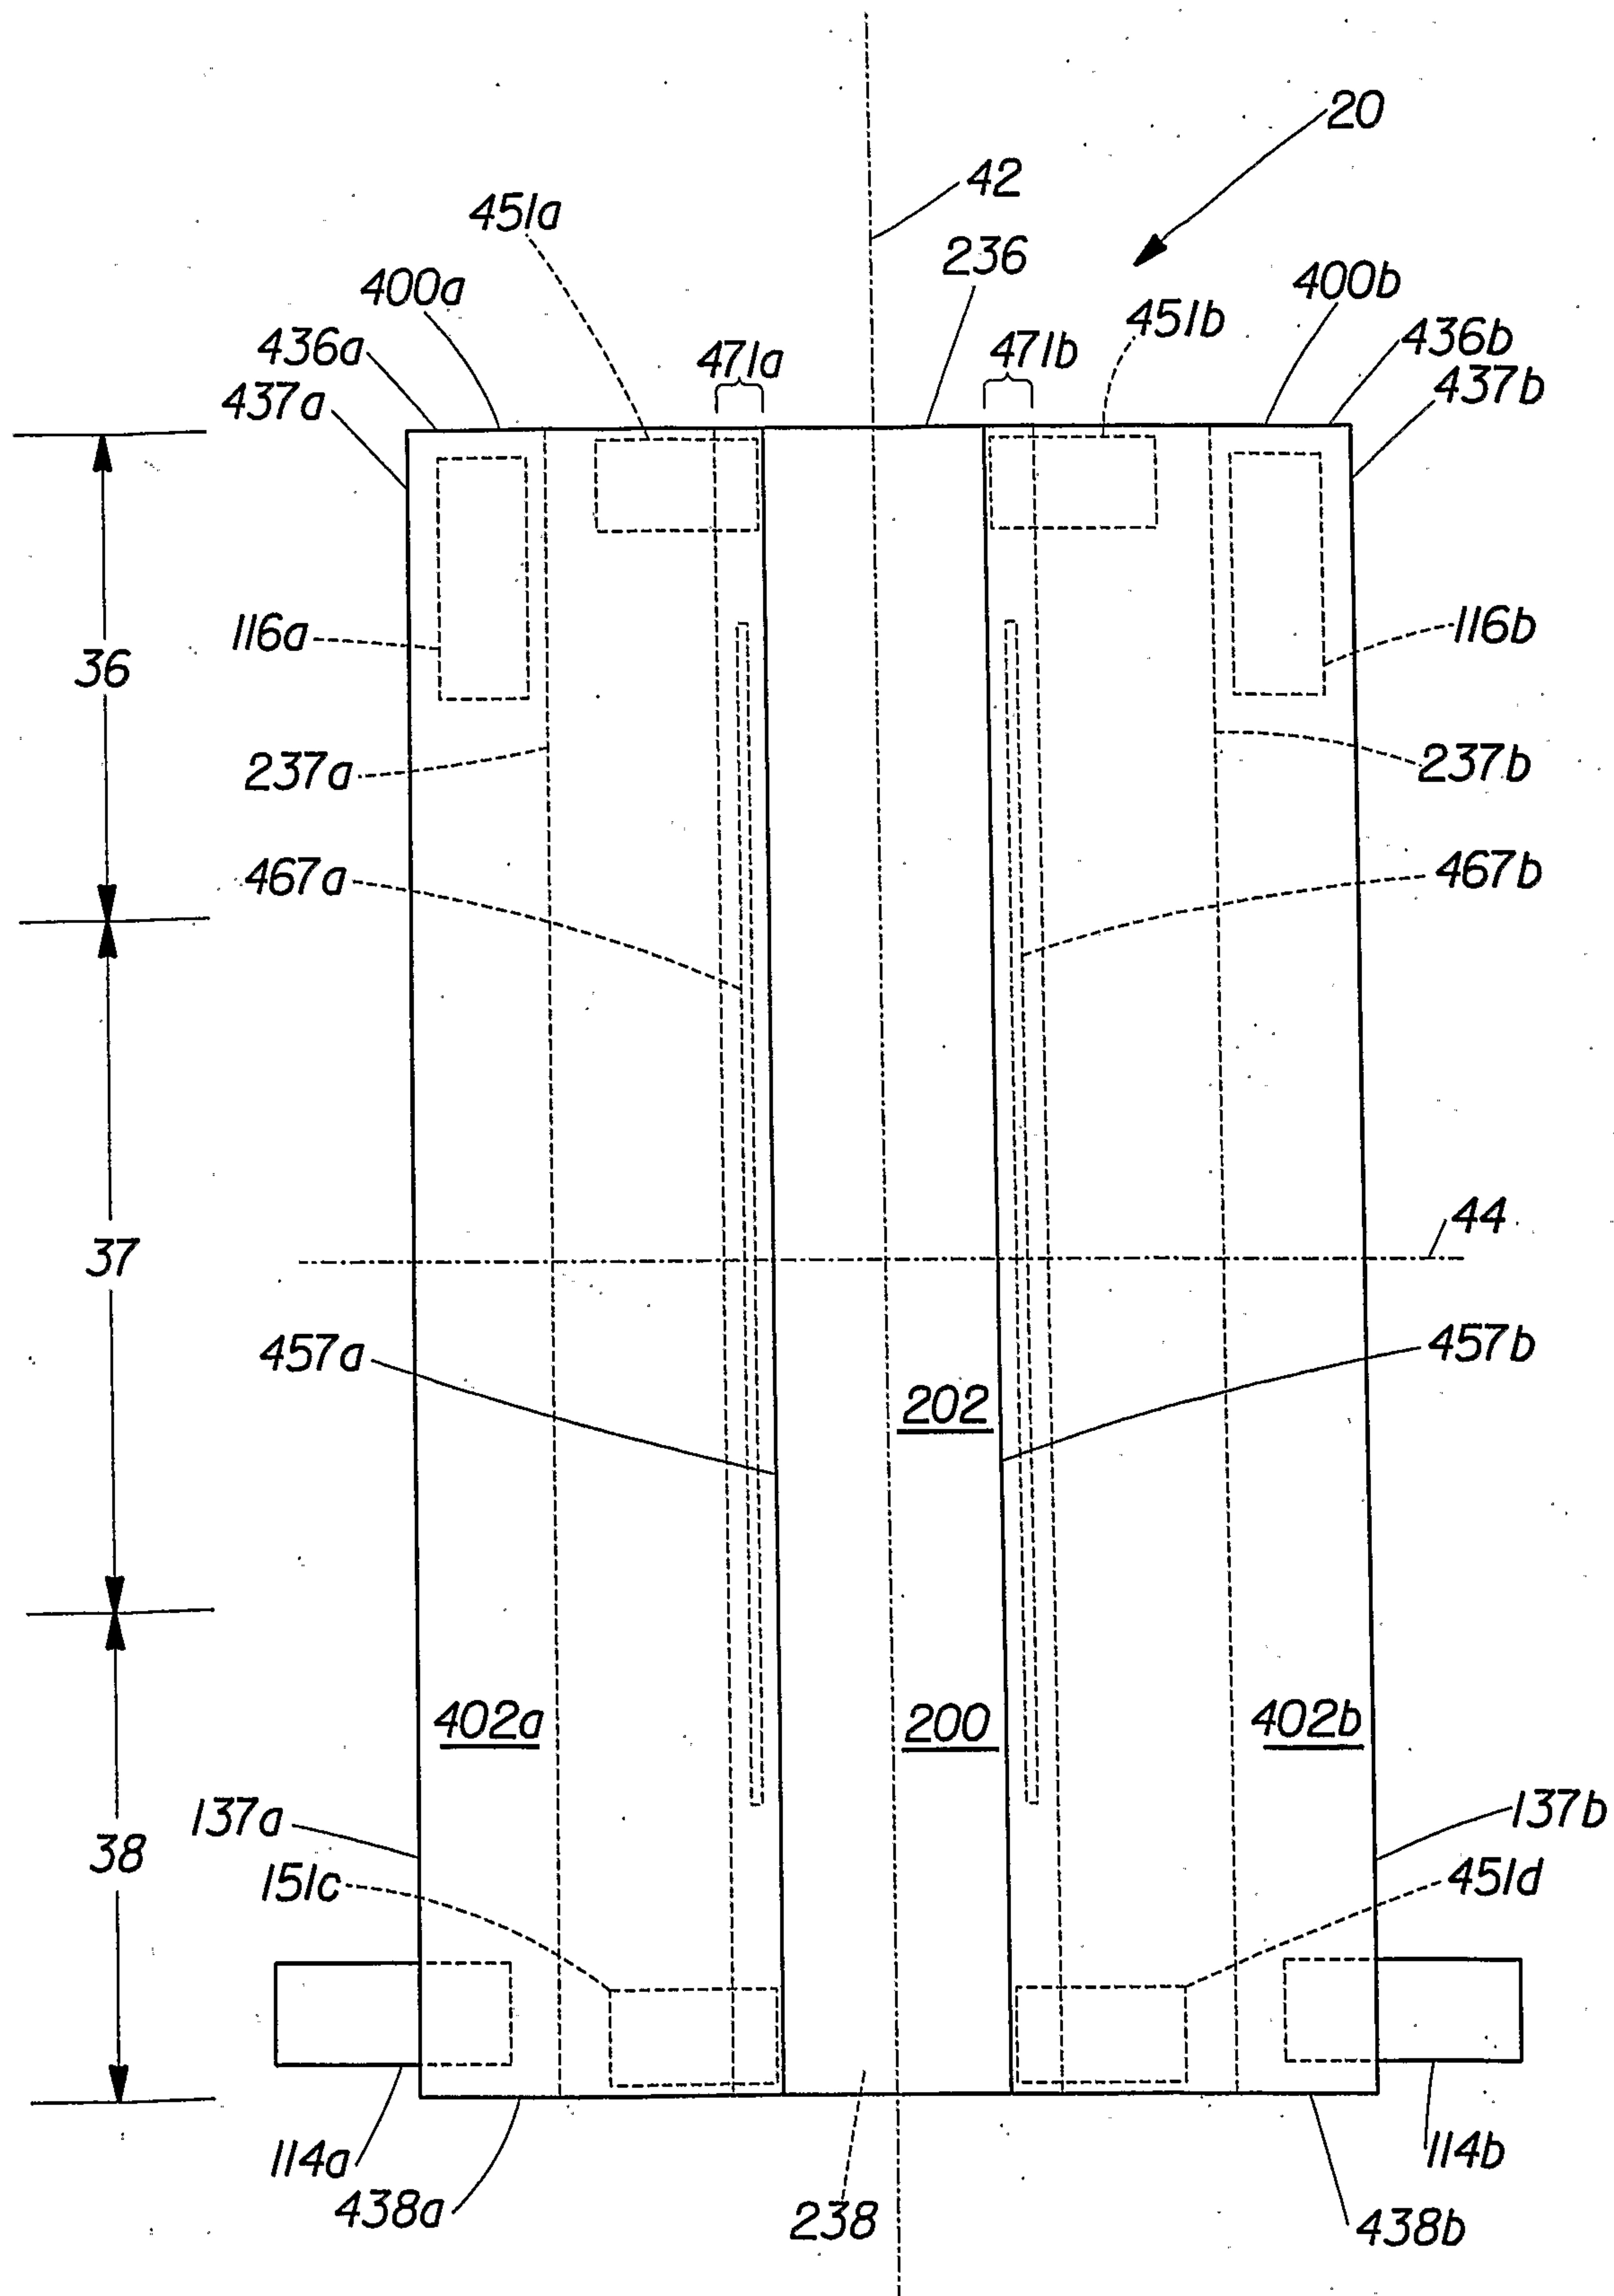


Fig. 12

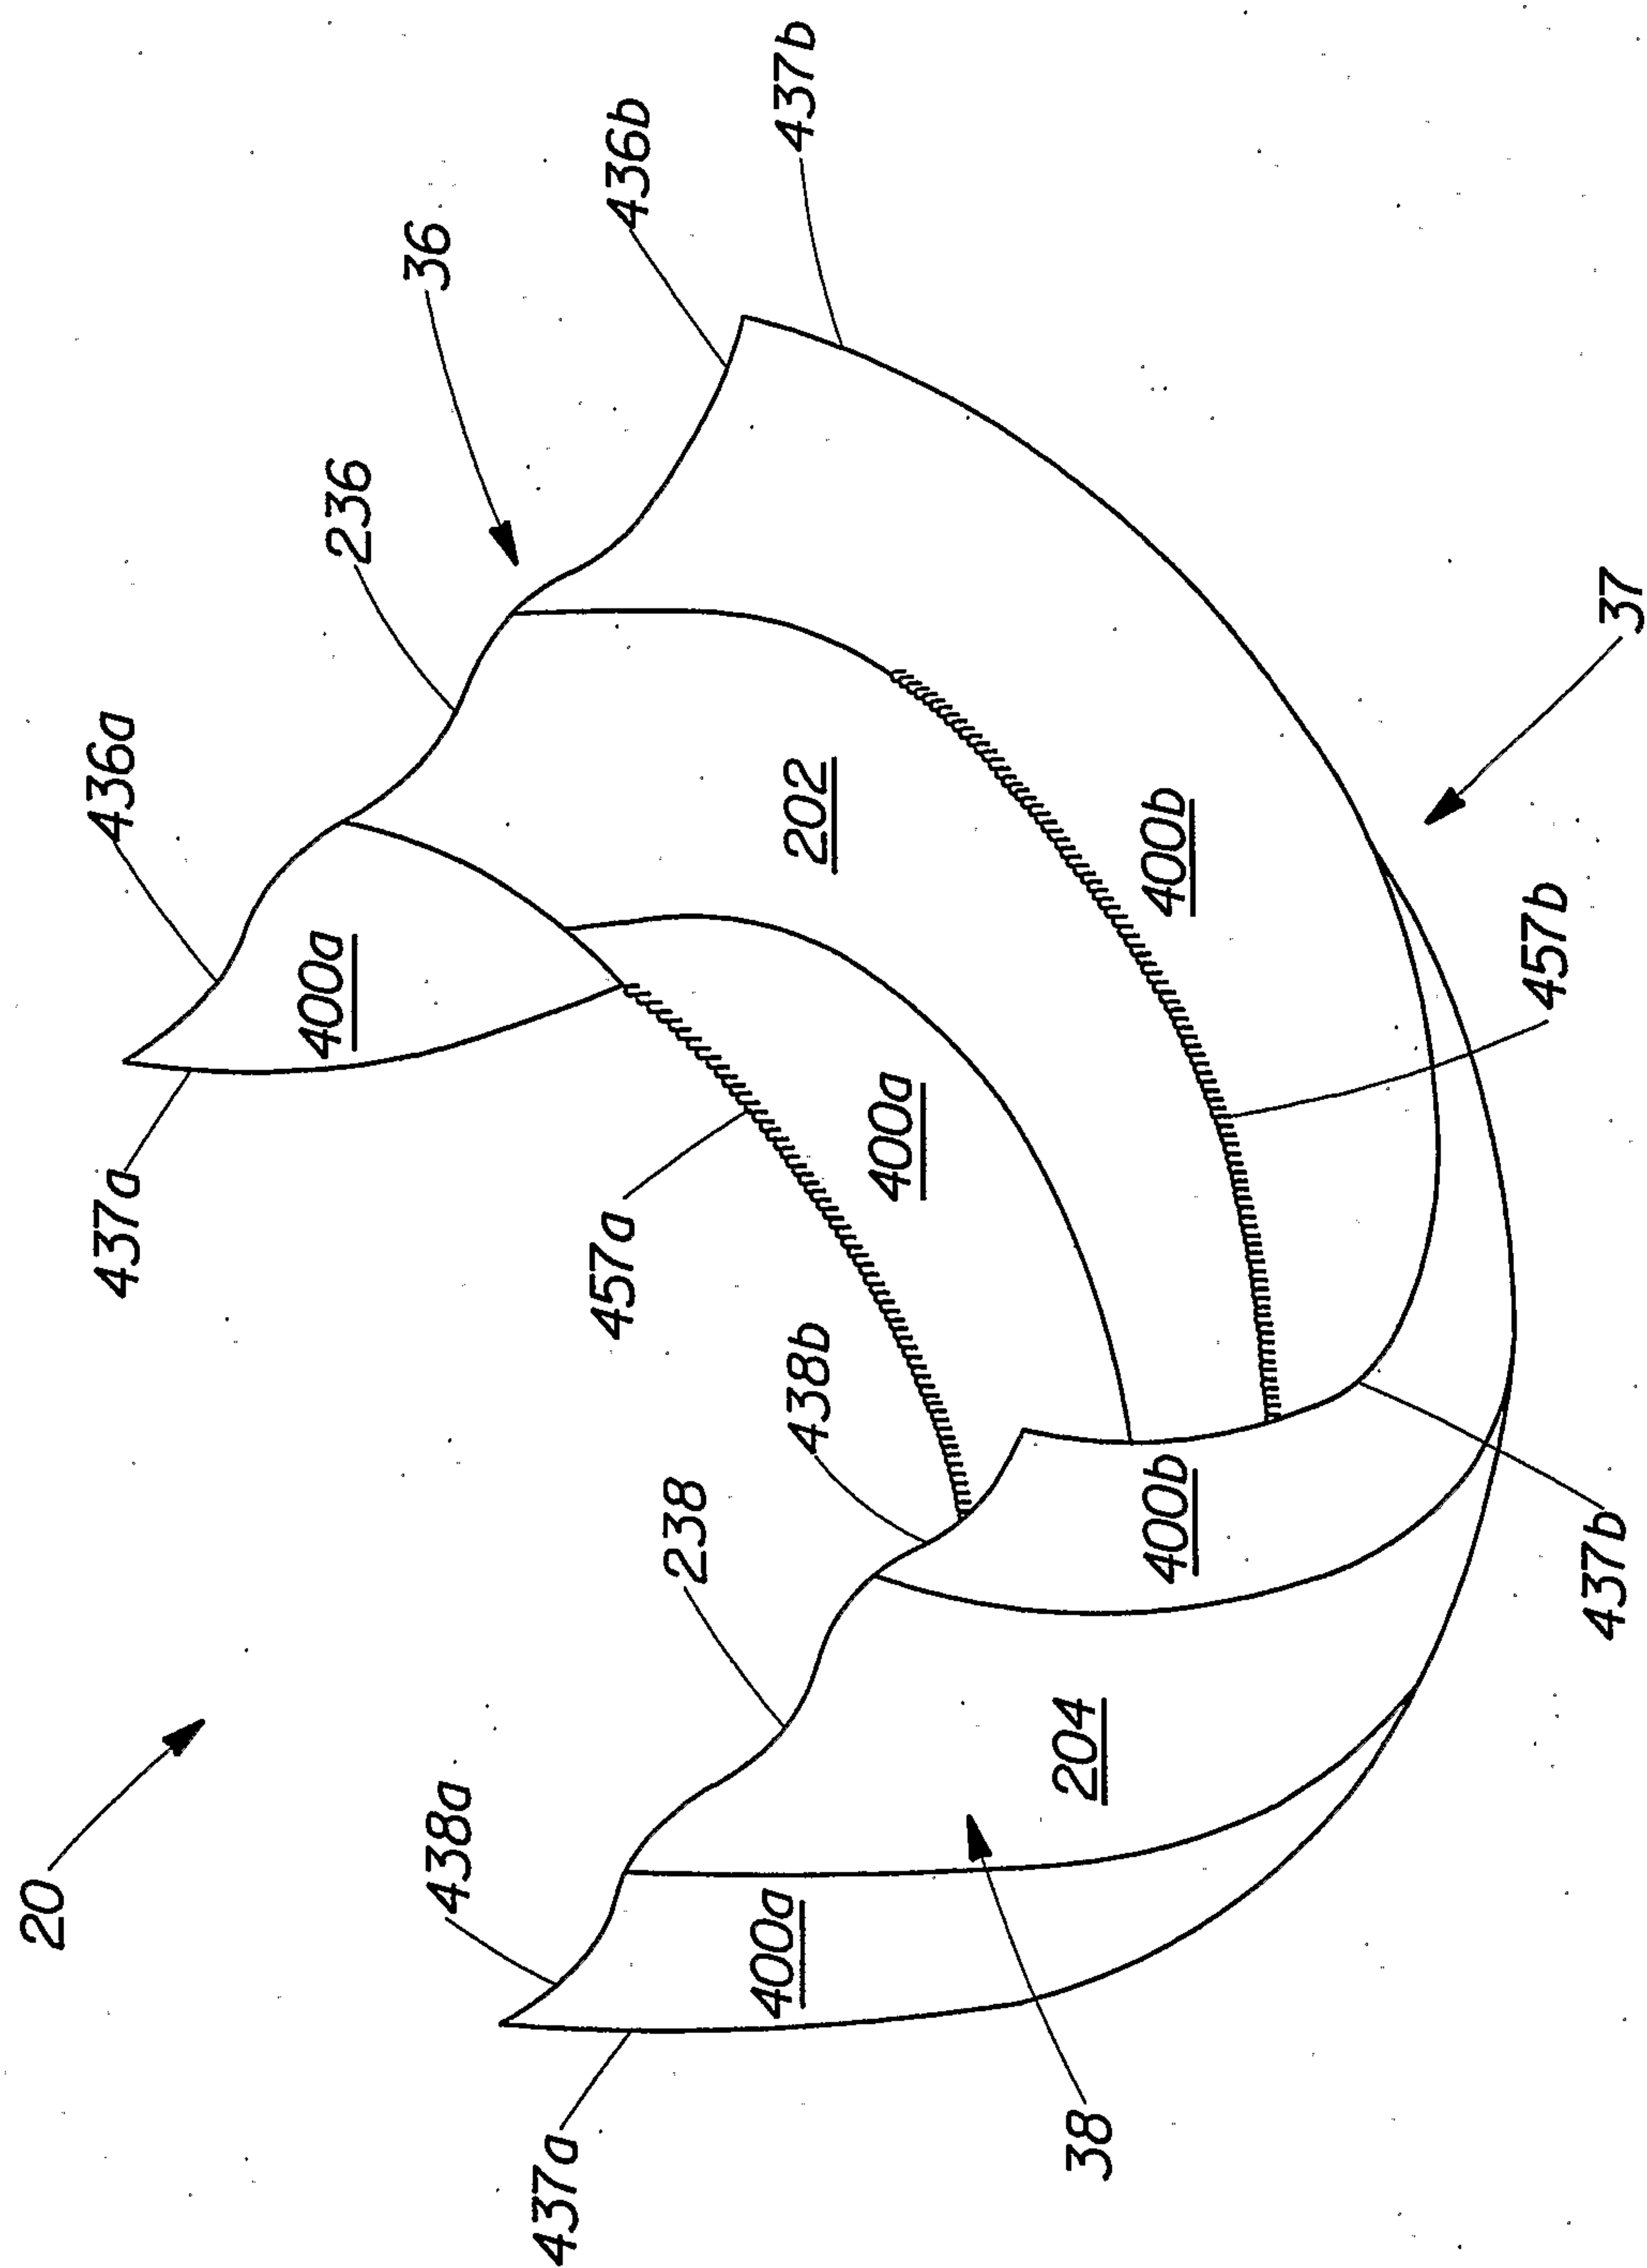


Fig. 14

9/11

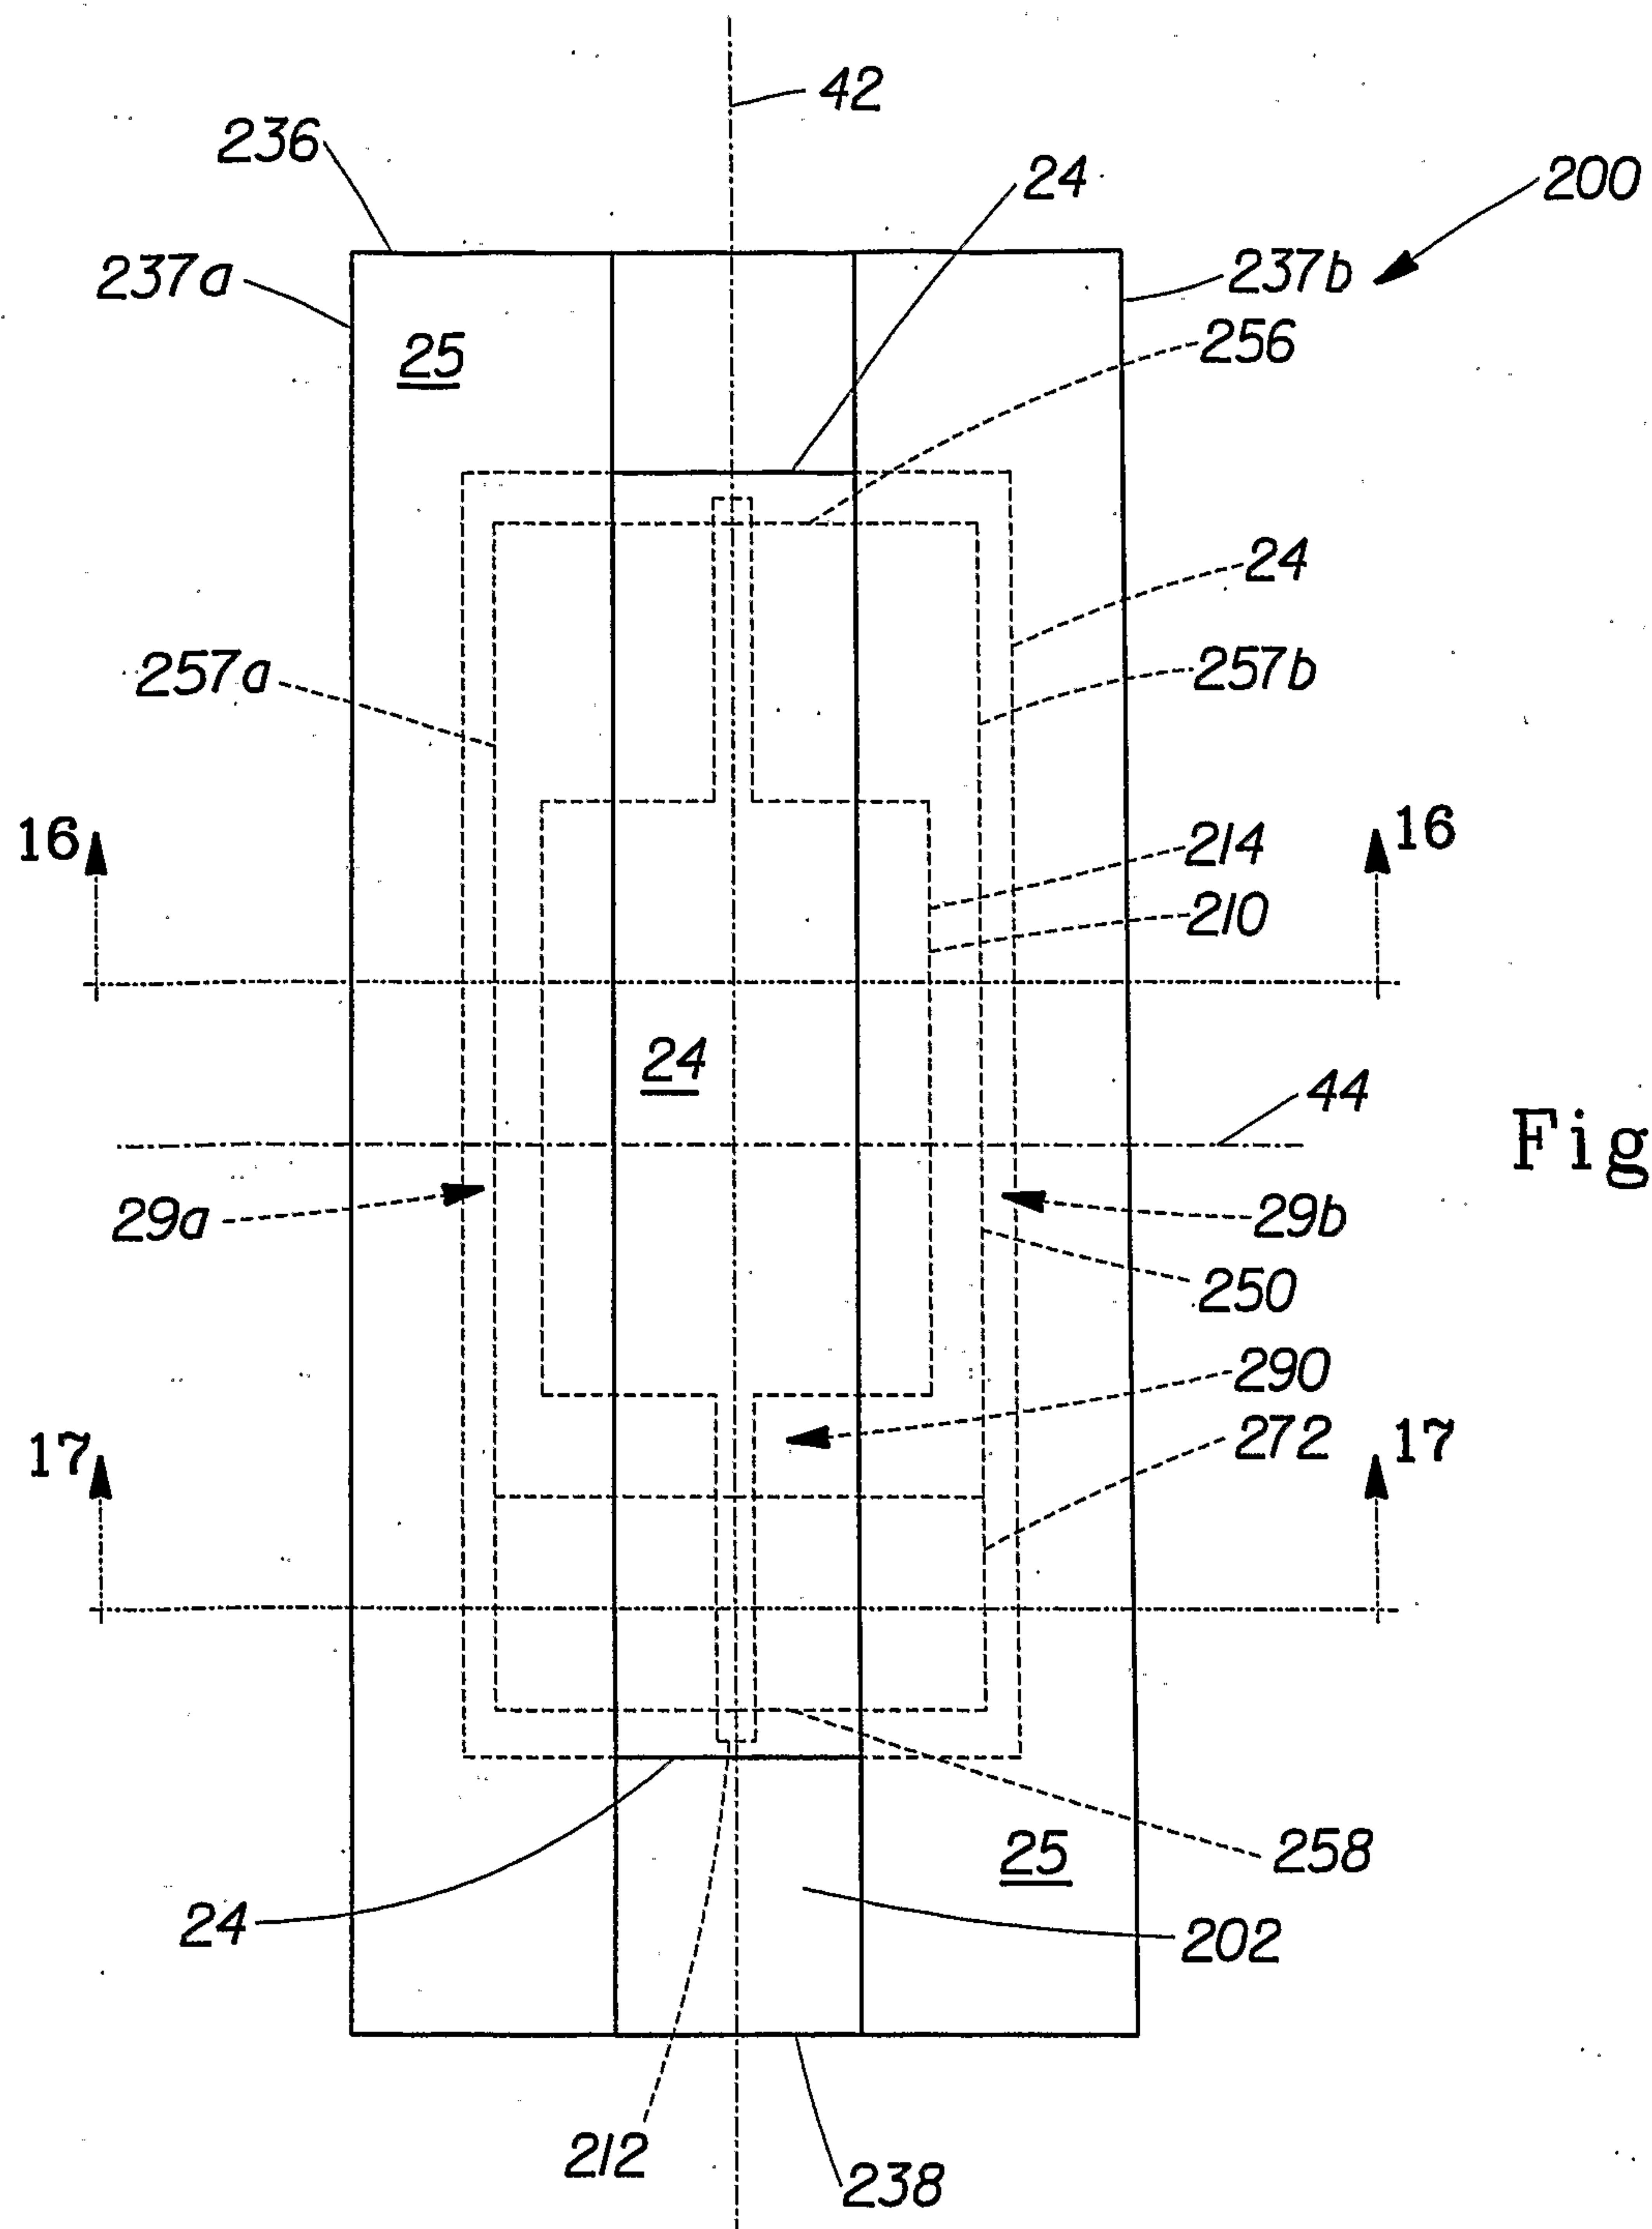


Fig. 15

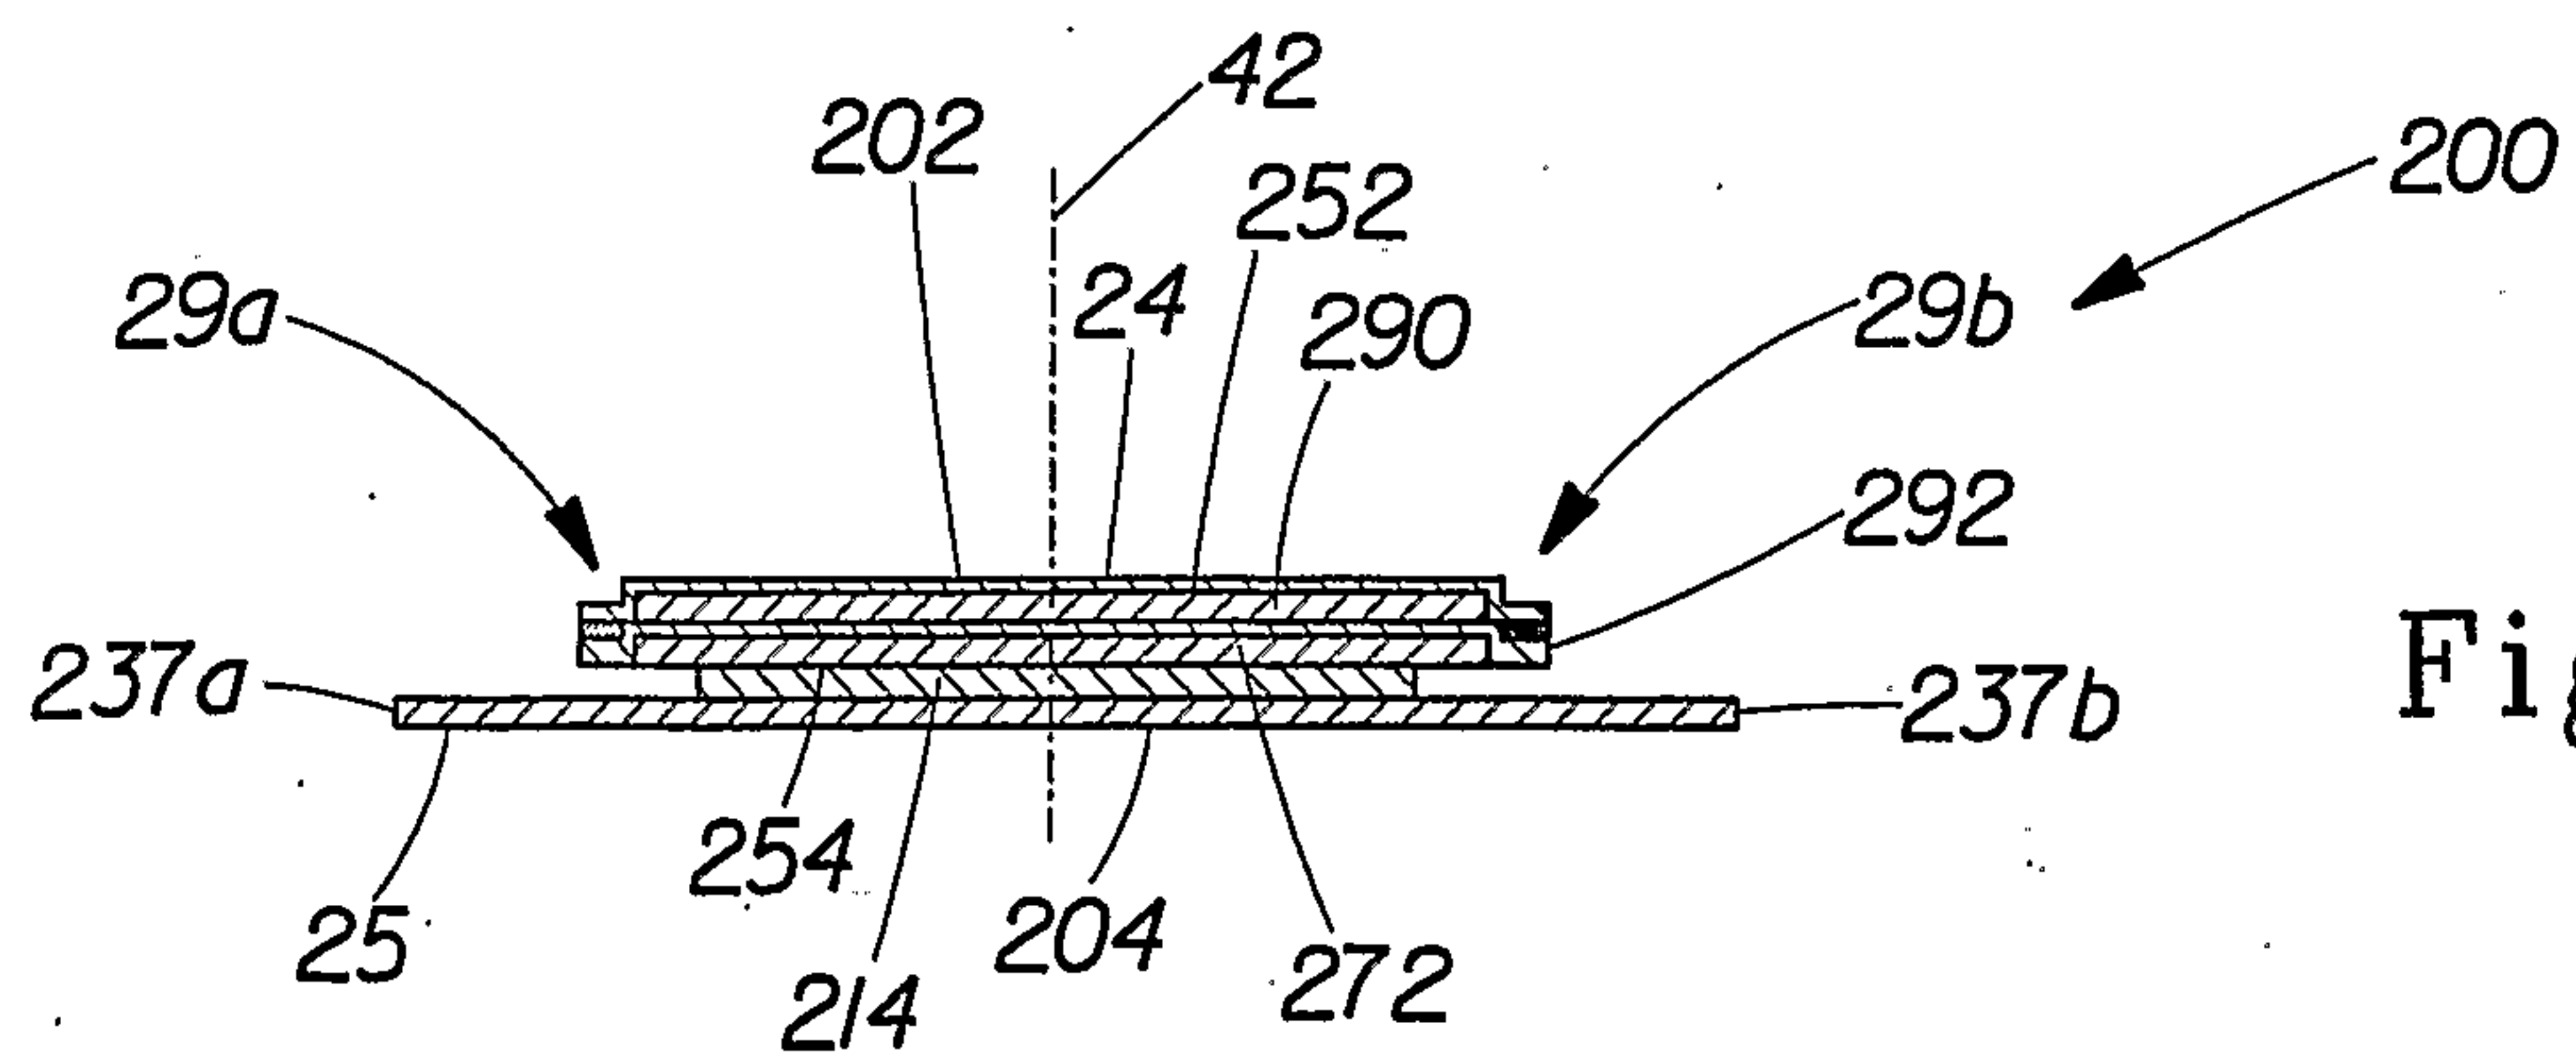


Fig. 16

10/11

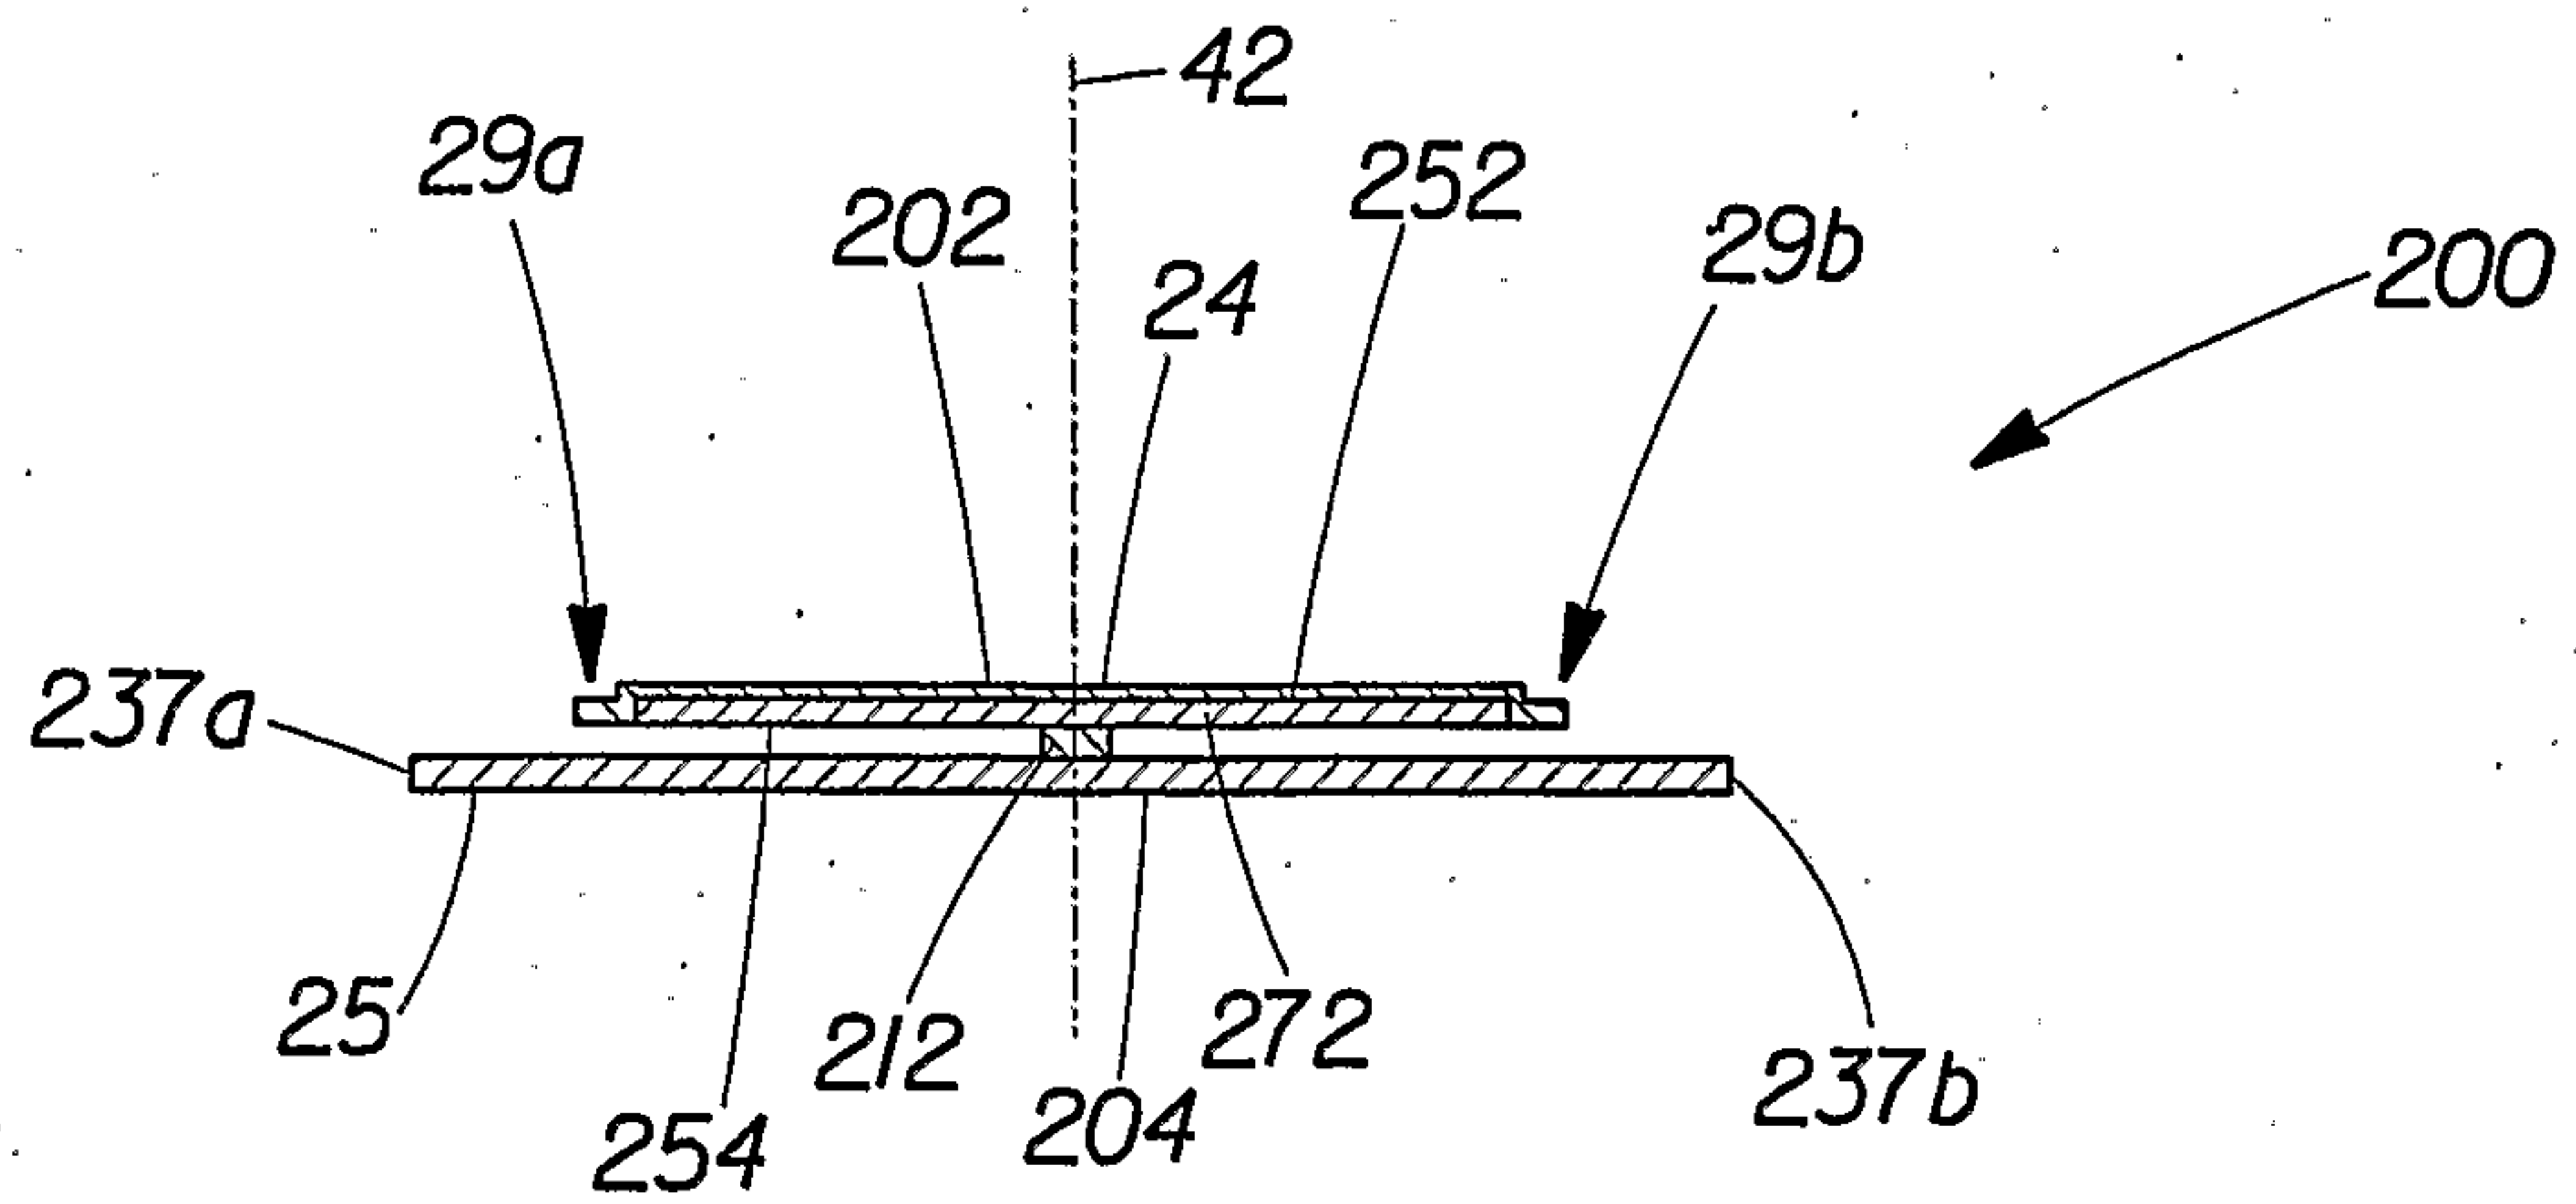


Fig. 17

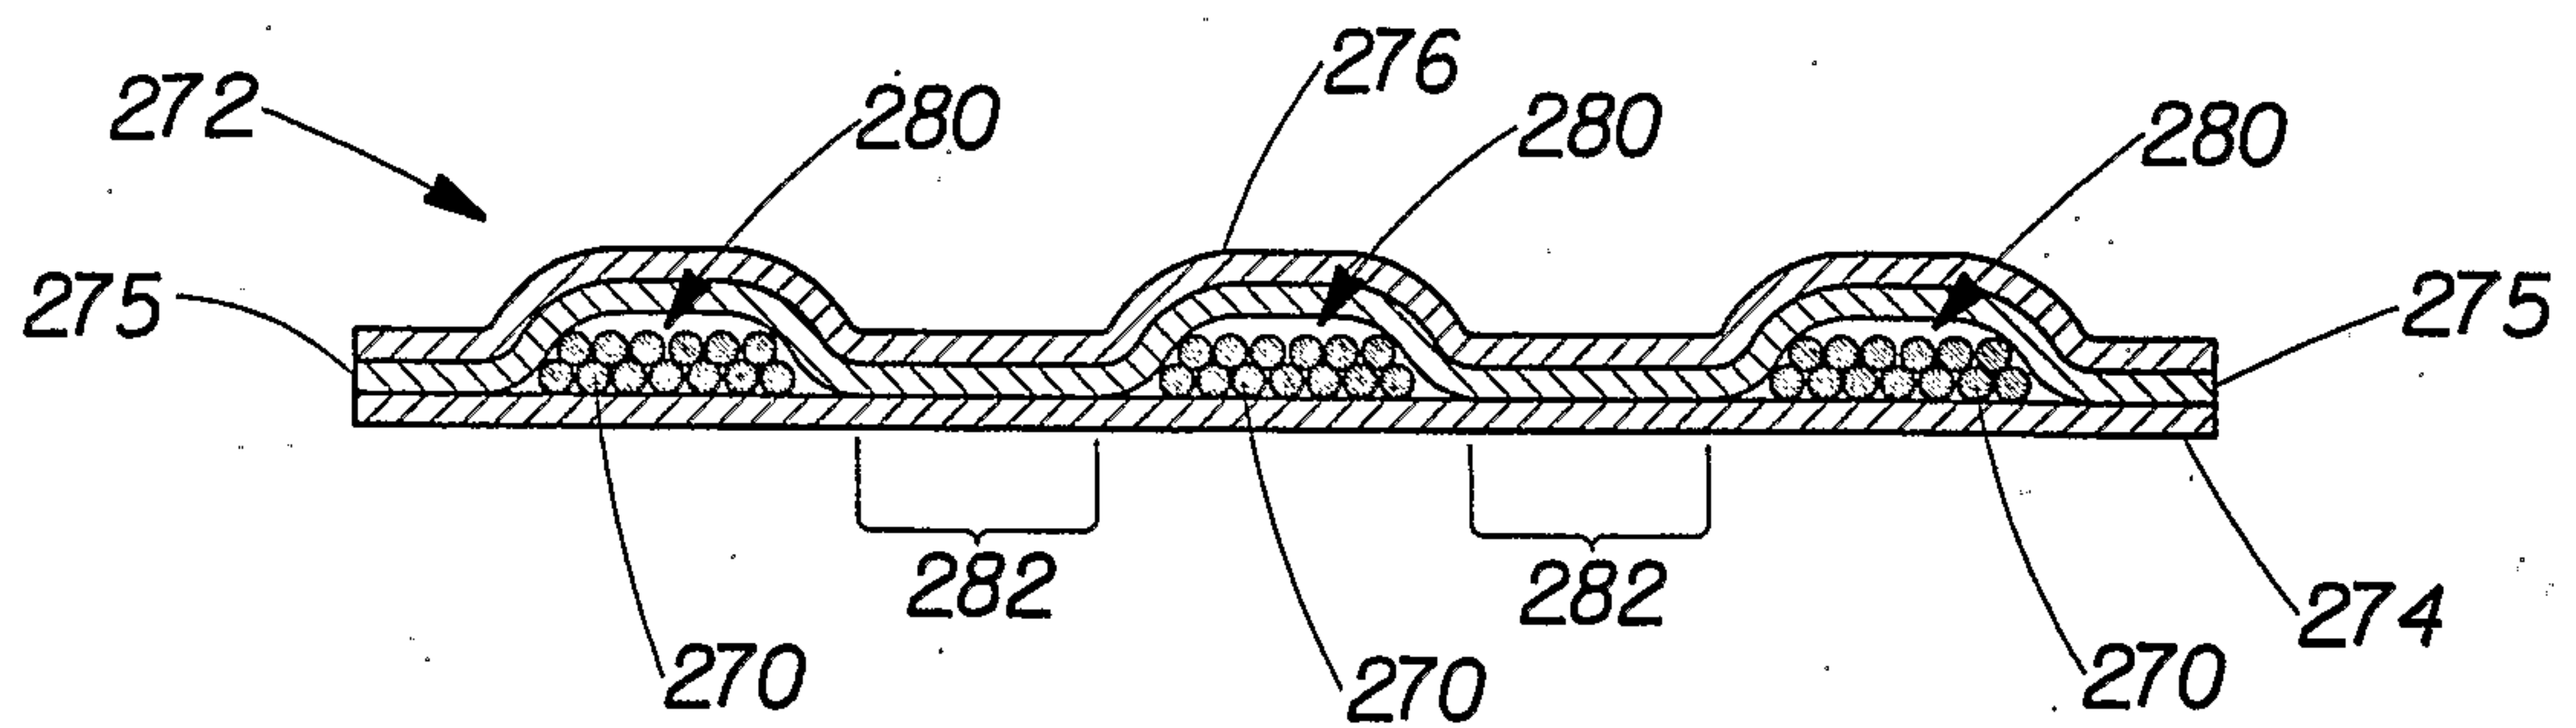


Fig. 18

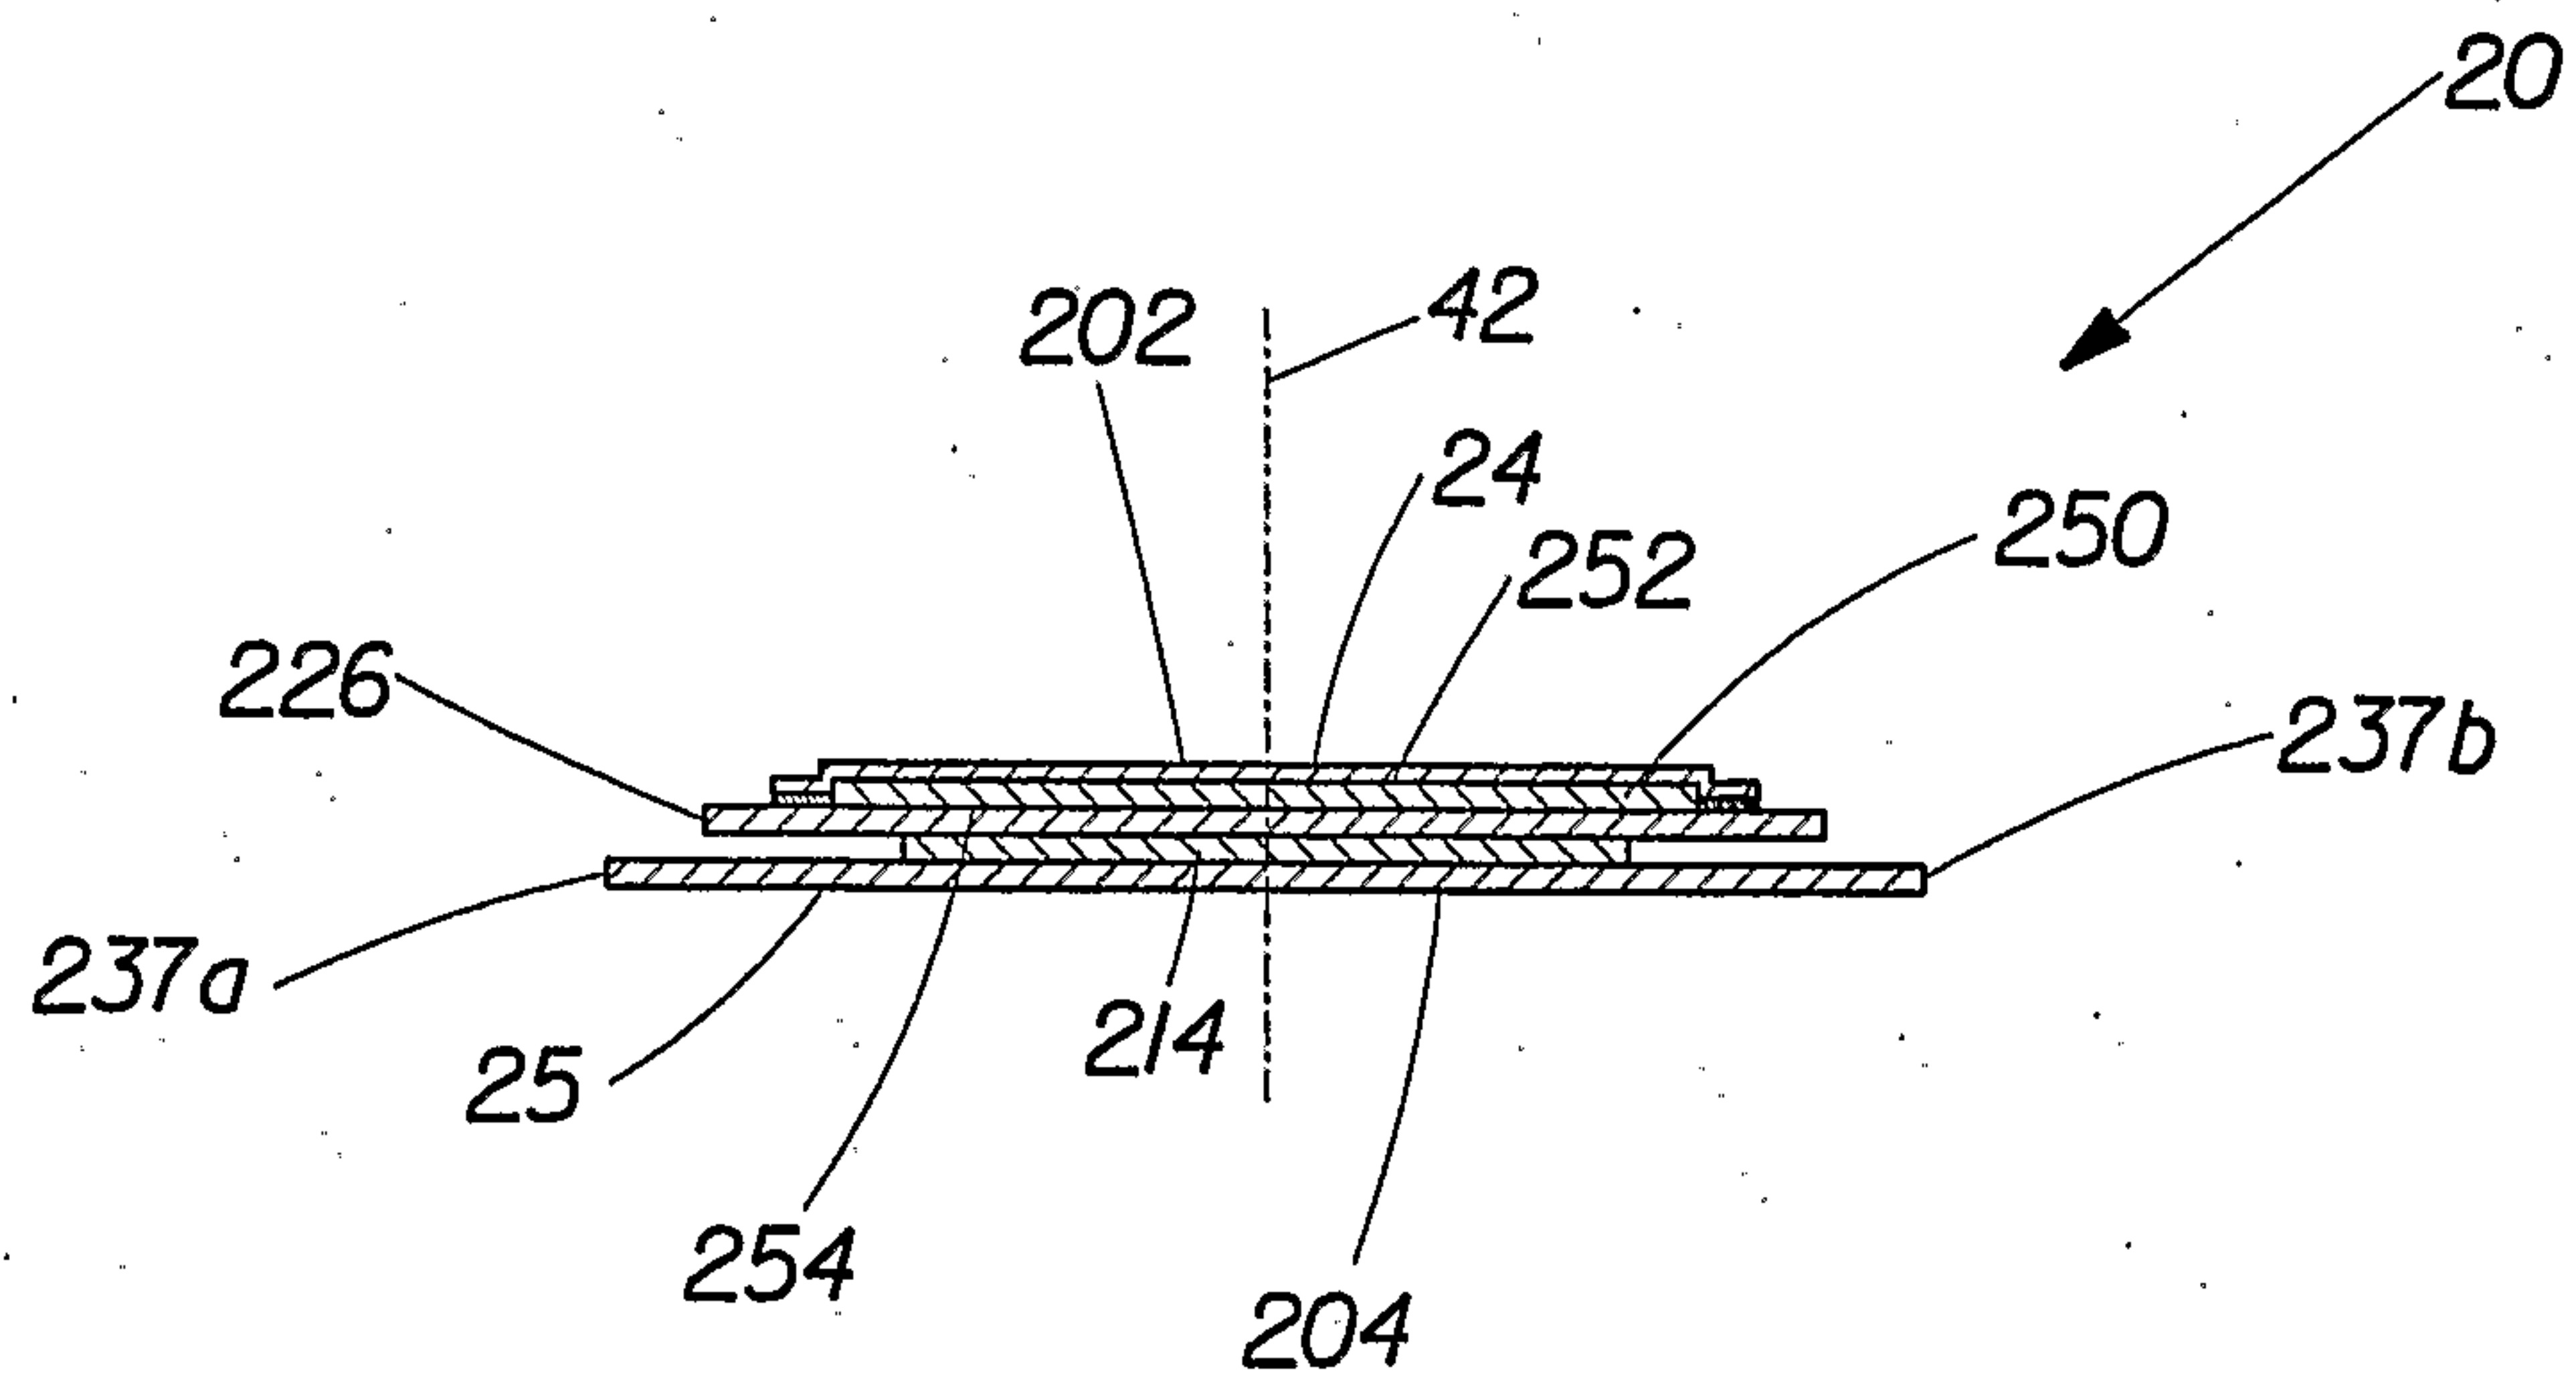


Fig. 19

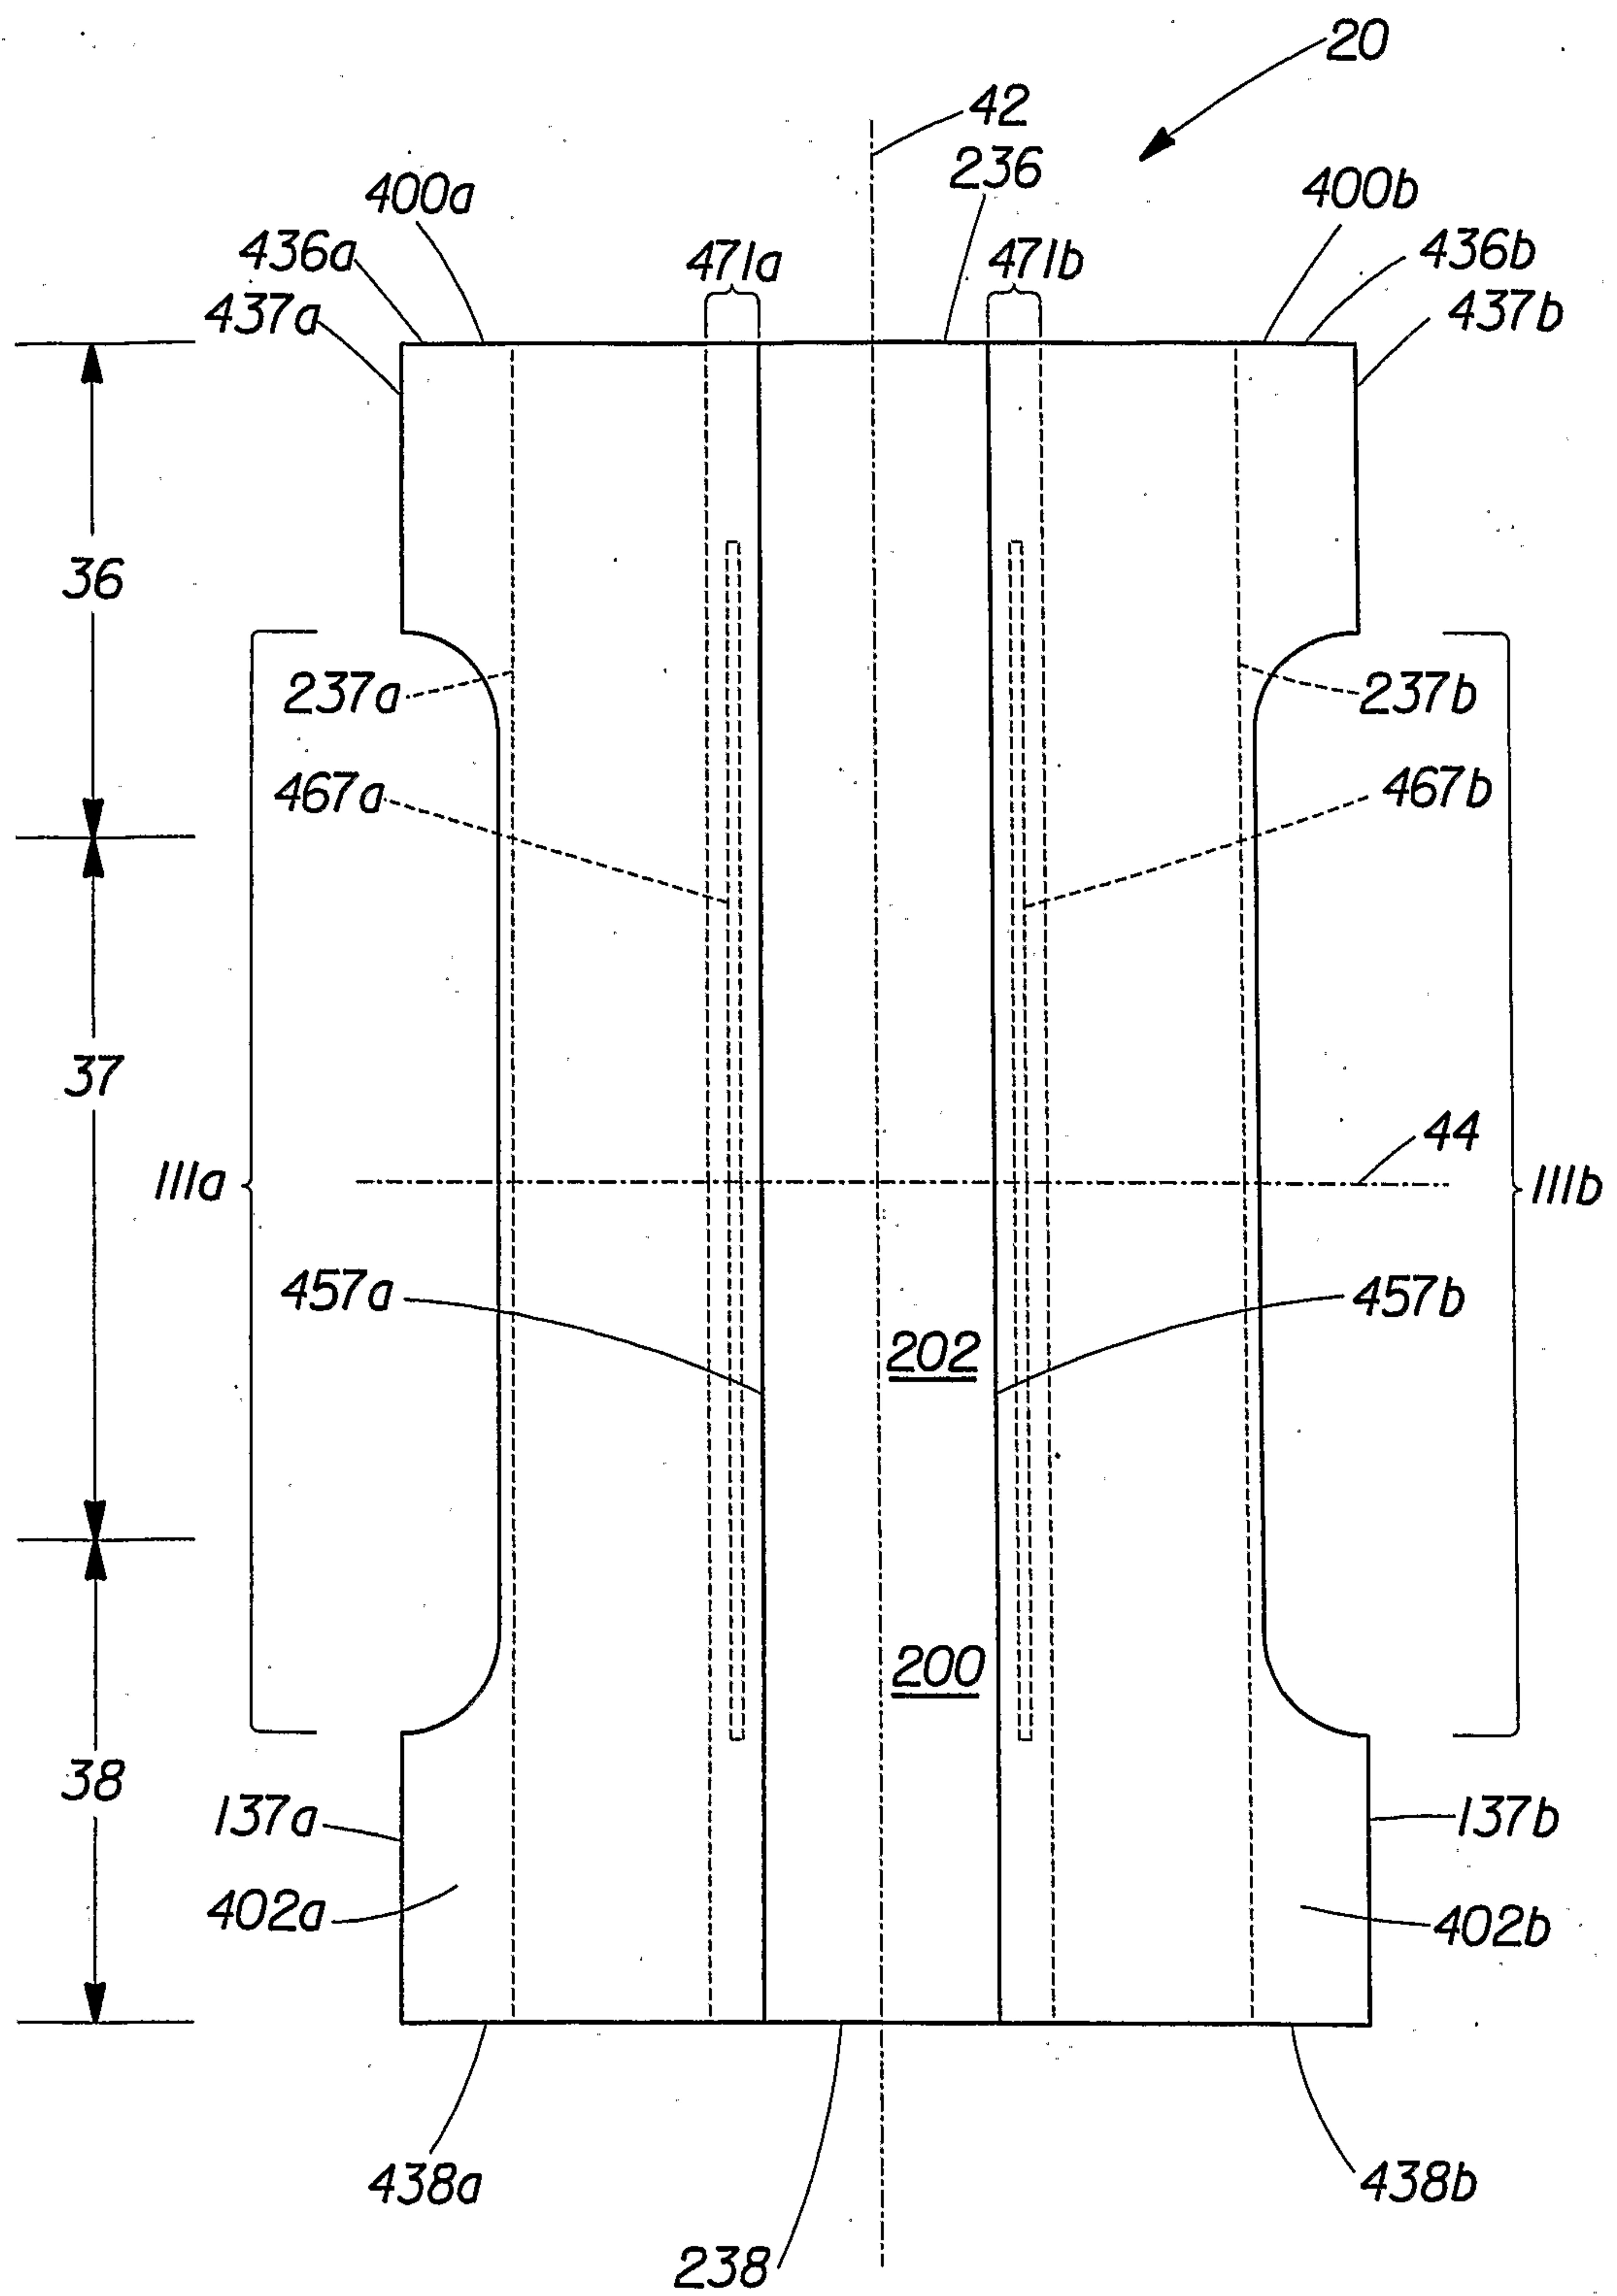


Fig. 20

